

Appendix M.1

Preliminary Drainage Study

PRELIMINARY DRAINAGE STUDY

FOR

SAGE STETSON HEMET
COMMERCIAL DEVELOPMENT

TENTATIVE PARCEL MAP 37779

CITY OF HEMET, CALIFORNIA

PREPARED BY:

BLAINE A. WOMER CIVIL ENGINEERING
41555 East Florida Avenue, Suite G
Hemet, CA 92544

July 10, 2019

Table of Contents

I.	Study Narrative and Runoff Summary
Appendix A:	Vicinity Map, Soils Group Map, Precipitation Plate
Appendix B:	10-Year Rational Hydrology Calculations – Existing Conditions 100-Year Rational Hydrology Calculations – Existing Conditions
Appendix C:	10-Year Rational Hydrology Calculations – Proposed Conditions 100-Year Rational Hydrology Calculations – Proposed Conditions
Appendix D:	Hydrology Exhibit – Existing Conditions Hydrology Exhibit – Proposed Conditions

Sage Stetson Hemet Drainage Report Narrative

The Sage Stetson Hemet retail project is a proposal to develop approximately 2.3 acres located on the west side of the existing McCrometer facility into a 7-11 convenience store, automated car wash and drive thru restaurant. The property is located at the southeast corner of Sanderson Avenue and Stetson Avenue in Hemet, California. .

The site proposed for development has a natural topographic gradient to the northwest. Proposed grading on the site perpetuates the natural gradient. The aforementioned commercial uses drain to water quality BMPs located at the downstream end of each drainage area. See the project specific Preliminary WQMP for BMP details.

This report includes rational hydrology calculations for both the 10-year and 100-year recurrence intervals. Calculations were performed for the existing condition; McCrometer facility and undeveloped areas. Peak flows were calculated to existing catch basins and drainage area low points. Calculations were also performed for the proposed condition: McCrometer facility and proposed development of the commercial uses.

Hydrology calculations were based on the Rational Method as stipulated in the Riverside County Flood Control and Water Conservation District Hydrology Manual dated 1978. Calculations were performed using CIVILCADD/CIVILDESIGN Engineering software. Onsite soils were categorized as B and BC per the manual.

RUNOFF SUMMARY


EXISTING CONDITIONS

Drainage Area Designation	Area (Ac)	Q ₁₀ (cfs)	Q ₁₀₀ (cfs)
A	2.3	2.3	3.8
B	0.4	0.7	1.1
C	0.3	0.7	1.1
D	0.3	0.7	1.1
E	5.4	8.6	13.4

PROPOSED CODITIONS


Drainage Area Designation	Area (Ac)	Q ₁₀ (cfs)	Q ₁₀₀ (cfs)
F	1.2	2.2	3.4
G	0.6	1.3	2.0
H	0.4	0.8	1.2
I	2.9	5.0	7.8

APPENDIX 'A'

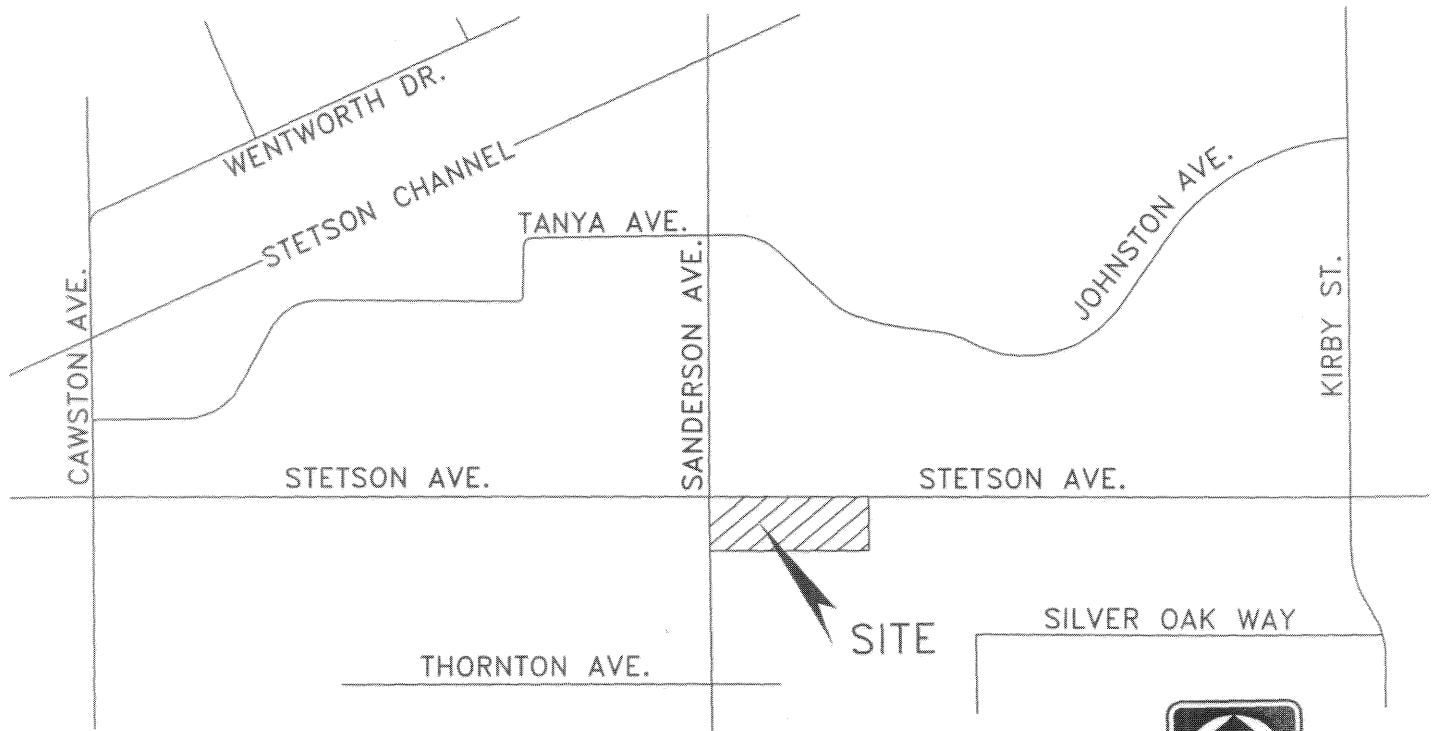

VICINITY MAP



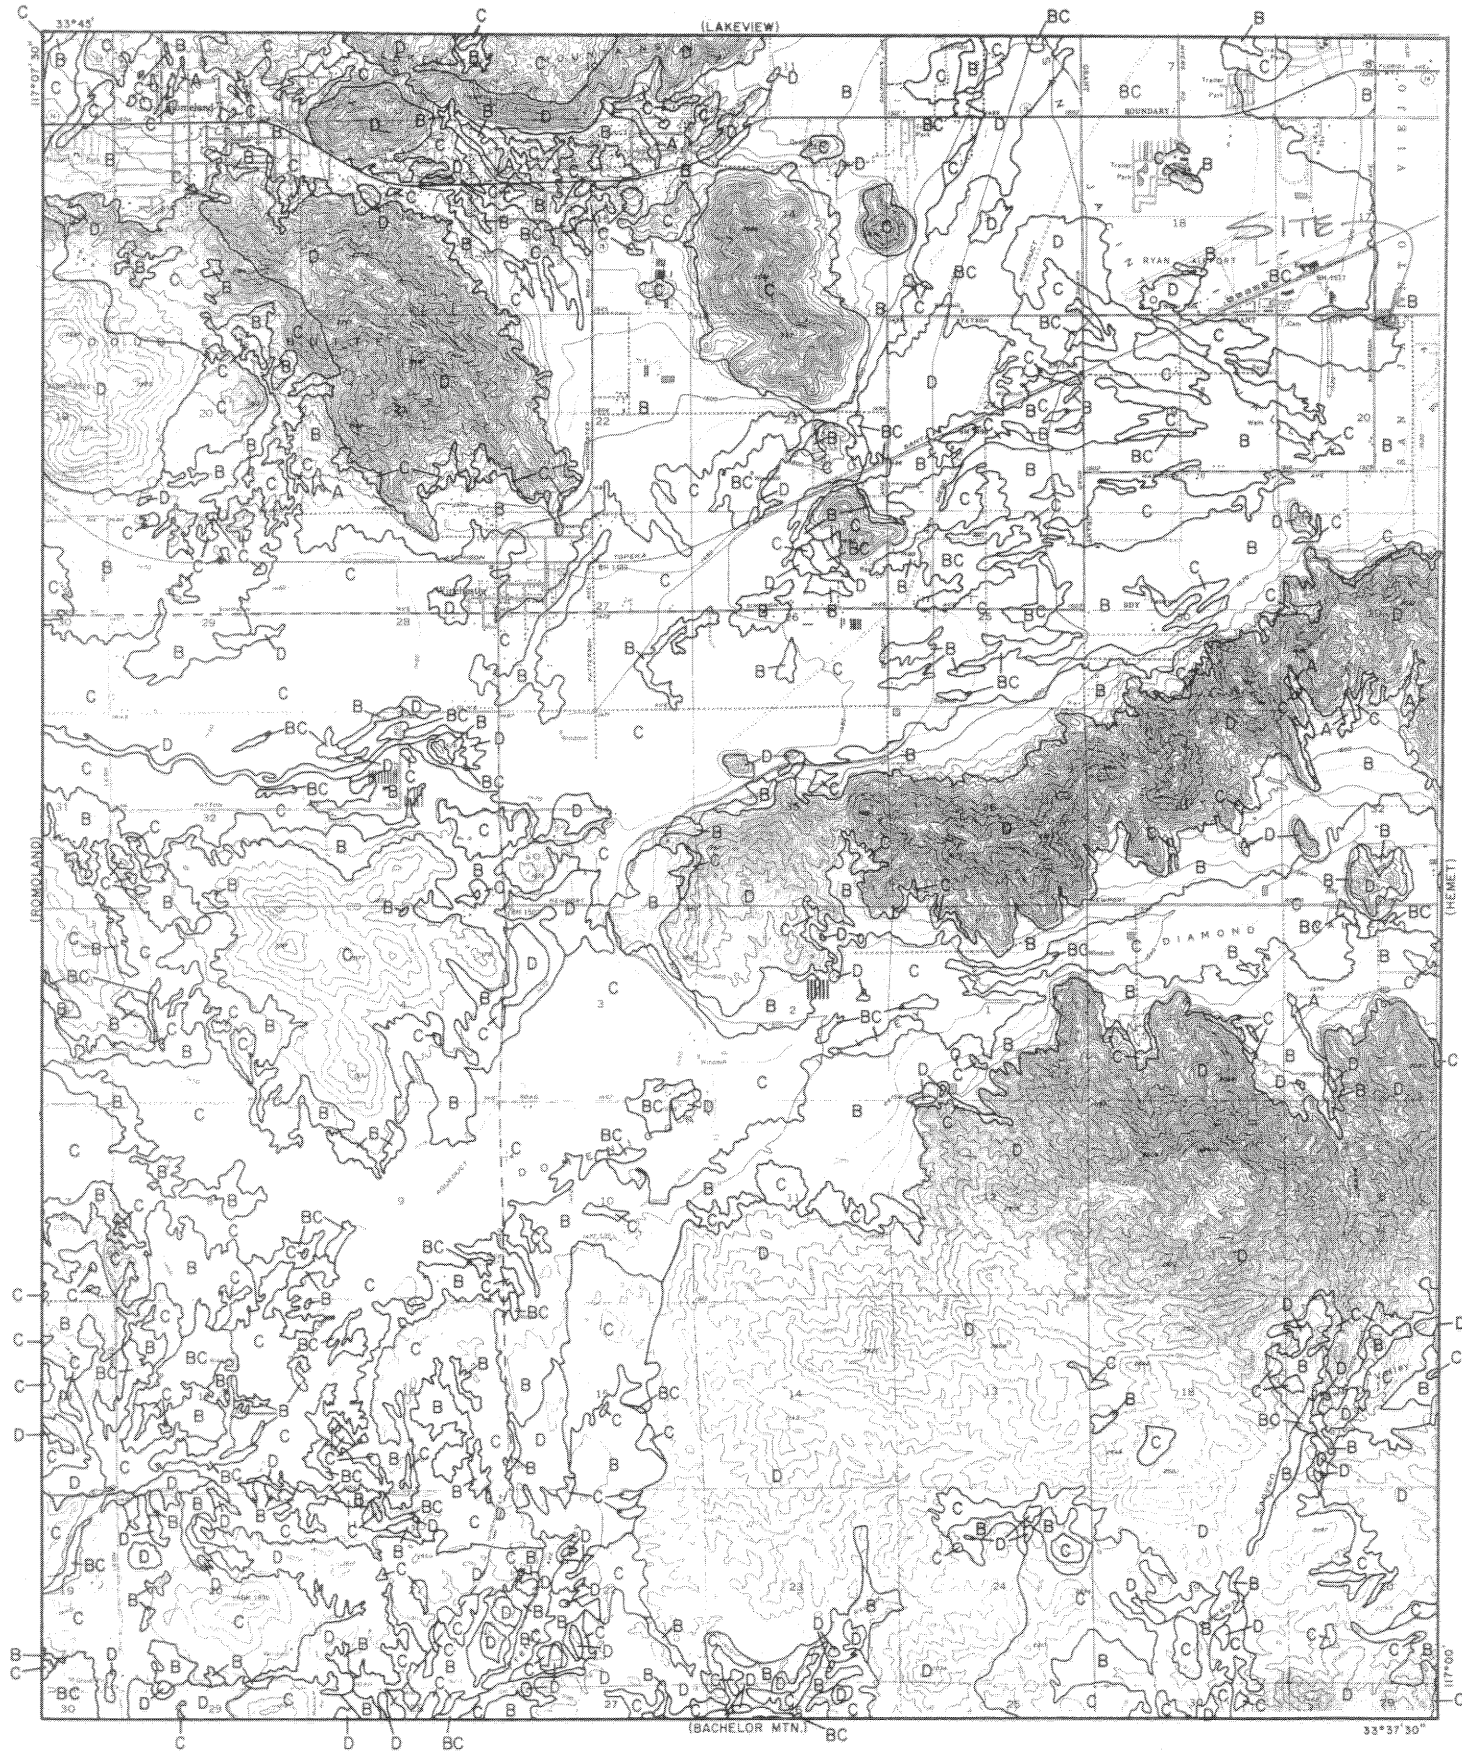


LEGEND

- SOILS GROUP BOUNDARY
- A SOILS GROUP DESIGNATION

RCFC&WCD

HYDROLOGY MANUAL



**HYDROLOGIC SOILS GROUP MAP
FOR
WINCHESTER**

RAINFALL INTENSITY—INCHES PER HOUR

HEMET				HIGHGROVE				HOMELAND—WINCHESTER				IDYLLWILD				LAKEVIEW			
DURATION MINUTES	FREQUENCY 10 YEAR	100 YEAR		DURATION MINUTES	FREQUENCY 10 YEAR	100 YEAR		DURATION MINUTES	FREQUENCY 10 YEAR	100 YEAR		DURATION MINUTES	FREQUENCY 10 YEAR	100 YEAR		DURATION MINUTES	FREQUENCY 10 YEAR	100 YEAR	
5	2.04	4.40		5	3.02	4.37		5	2.91	4.37		5	4.91	7.28		5	2.77	4.16	
6	2.58	4.00		6	2.75	3.97		6	2.65	3.97		6	4.47	6.62		6	2.53	3.79	
7	2.37	3.68		7	2.54	3.67		7	2.44	3.67		7	4.13	6.11		7	2.34	3.51	
8	2.21	3.43		8	2.37	3.42		8	2.28	3.42		8	3.85	5.70		8	2.19	3.29	
9	2.08	3.23		9	2.23	3.22		9	2.15	3.22		9	3.62	5.36		9	2.07	3.10	
10	1.96	3.05		10	2.11	3.05		10	2.03	3.05		10	3.43	5.08		10	1.96	2.94	
11	1.87	2.90		11	2.01	2.90		11	1.93	2.90		11	3.26	4.83		11	1.87	2.80	
12	1.78	2.77		12	1.92	2.77		12	1.85	2.77		12	3.12	4.62		12	1.79	2.68	
13	1.71	2.65		13	1.84	2.66		13	1.77	2.66		13	2.99	4.43		13	1.72	2.58	
14	1.64	2.55		14	1.77	2.56		14	1.71	2.56		14	2.88	4.26		14	1.66	2.48	
15	1.58	2.46		15	1.71	2.47		15	1.64	2.47		15	2.78	4.11		15	1.60	2.40	
16	1.53	2.38		16	1.65	2.39		16	1.59	2.39		16	2.68	3.98		16	1.55	2.32	
17	1.48	2.30		17	1.60	2.31		17	1.54	2.31		17	2.60	3.85		17	1.50	2.25	
18	1.44	2.23		18	1.55	2.24		18	1.50	2.24		18	2.52	3.74		18	1.46	2.19	
19	1.40	2.17		19	1.51	2.18		19	1.45	2.18		19	2.45	3.64		19	1.42	2.13	
20	1.36	2.11		20	1.47	2.12		20	1.42	2.12		20	2.39	3.54		20	1.39	2.08	
22	1.29	2.01		22	1.40	2.02		22	1.35	2.02		22	2.27	3.37		22	1.32	1.98	
24	1.24	1.92		24	1.34	1.93		24	1.29	1.93		24	2.17	3.22		24	1.26	1.90	
26	1.18	1.84		26	1.28	1.85		26	1.24	1.85		26	2.09	3.09		26	1.22	1.82	
28	1.14	1.77		28	1.23	1.78		28	1.19	1.78		28	2.01	2.97		28	1.17	1.76	
30	1.10	1.70		30	1.19	1.72		30	1.15	1.72		30	1.94	2.87		30	1.13	1.70	
32	1.06	1.65		32	1.15	1.66		32	1.11	1.66		32	1.87	2.77		32	1.10	1.64	
34	1.03	1.59		34	1.12	1.61		34	1.07	1.61		34	1.81	2.69		34	1.06	1.59	
36	1.00	1.55		36	1.08	1.57		36	1.04	1.57		36	1.76	2.61		36	1.03	1.55	
38	.97	1.50		38	1.05	1.52		38	1.01	1.52		38	1.71	2.54		38	1.01	1.51	
40	.94	1.46		40	1.02	1.48		40	.99	1.48		40	1.67	2.47		40	.98	1.47	
45	.89	1.37		45	.96	1.39		45	.93	1.39		45	1.57	2.32		45	.92	1.39	
50	.84	1.30		50	.91	1.32		50	.88	1.32		50	1.48	2.20		50	.88	1.31	
55	.80	1.24		55	.87	1.26		55	.84	1.26		55	1.41	2.09		55	.84	1.25	
60	.76	1.18		60	.83	1.20		60	.80	1.20		60	1.35	2.00		60	.80	1.20	
65	.73	1.13		65	.80	1.15		65	.77	1.15		65	1.29	1.92		65	.77	1.15	
70	.70	1.09		70	.77	1.11		70	.74	1.11		70	1.25	1.85		70	.74	1.11	
75	.68	1.05		75	.74	1.07		75	.71	1.07		75	1.20	1.78		75	.72	1.07	
80	.65	1.01		80	.71	1.03		80	.69	1.03		80	1.16	1.72		80	.69	1.04	
85	.63	.98		85	.69	1.00		85	.67	1.00		85	1.13	1.67		85	.67	1.01	
SLOPE = .530				SLOPE = .520				SLOPE = .520				SLOPE = .520				SLOPE = .500			

RCFC & WCD
HYDROLOGY MANUAL

STANDARD
INTENSITY—DURATION
CURVES DATA

APPENDIX 'B'

RATIONAL HYDROLOGY CALCULATIONS

**10-YEAR STORM
100-YEAR STORM
EXISTING CONDITIONS**

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRUNDEVAREAA.out

SAGE STETSON HEMET
AREA A
UNDEVELOPED CONDITION
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 1.000 to Point/Station 2.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 480.000 (Ft.)

Top (of initial area) elevation = 29.300 (Ft.)

Bottom (of initial area) elevation = 27.500 (Ft.)

Difference in elevation = 1.800 (Ft.)

Slope = 0.00375 s(percent) = 0.38

$TC = k(0.530) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 19.141 min.

Rainfall intensity = 1.392 (In/Hr) for a 10.0 year storm

UNDEVELOPED (poor cover) subarea

Runoff Coefficient = 0.709

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 1.000

Decimal fraction soil group C = 0.000

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 78.00
Pervious area fraction = 1.000; Impervious fraction = 0.000
Initial subarea runoff = 2.270(CFS)
Total initial stream area = 2.300(Ac.)
Pervious area fraction = 1.000
End of computations, total study area = 2.30 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 1.000
Area averaged RI index number = 78.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1

Rational Hydrology Study

Date: 07/09/19

File: SAGESTETSON10YRUNDEVAREAB.out

SAGE STETSON HEMET

AREA B

MCCROMETER SITE

10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on

Riverside County Flood Control & Water Conservation District

1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++

Process from Point/Station 3.000 to Point/Station 4.000

**** INITIAL AREA EVALUATION ****

Initial area flow distance = 230.000 (Ft.)

Top (of initial area) elevation = 28.200 (Ft.)

Bottom (of initial area) elevation = 27.900 (Ft.)

Difference in elevation = 0.300 (Ft.)

Slope = 0.00130 s(percent) = 0.13

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 9.971 min.

Rainfall intensity = 1.967 (In/Hr) for a 10.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.869

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 1.000

Decimal fraction soil group C = 0.000

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 0.684(CFS)
Total initial stream area = 0.400(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.40 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRUNDEVAREAC.out

SAGE STETSON HEMET
AREA C
MCCROMETER SITE
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)
10 year storm 60 minute intensity = 0.760(In/Hr)
100 year storm 10 minute intensity = 3.050(In/Hr)
100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 5.000 to Point/Station 6.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 110.000(Ft.)
Top (of initial area) elevation = 28.100(Ft.)
Bottom (of initial area) elevation = 27.800(Ft.)
Difference in elevation = 0.300(Ft.)
Slope = 0.00273 s(percent)= 0.27
 $TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$
Initial area time of concentration = 6.405 min.
Rainfall intensity = 2.488(In/Hr) for a 10.0 year storm
COMMERCIAL subarea type
Runoff Coefficient = 0.873
Decimal fraction soil group A = 0.000
Decimal fraction soil group B = 1.000
Decimal fraction soil group C = 0.000
Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 0.652(CFS)
Total initial stream area = 0.300(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.30 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRUNDEVAREAD.out

SAGE STETSON HEMET
AREA D
MCCROMETER SITE
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)
10 year storm 60 minute intensity = 0.760(In/Hr)
100 year storm 10 minute intensity = 3.050(In/Hr)
100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 7.000 to Point/Station 8.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 115.000(Ft.)
Top (of initial area) elevation = 28.000(Ft.)
Bottom (of initial area) elevation = 27.500(Ft.)
Difference in elevation = 0.500(Ft.)
Slope = 0.00435 s(percent) = 0.43
 $TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$
Initial area time of concentration = 5.939 min.
Rainfall intensity = 2.589(In/Hr) for a 10.0 year storm
COMMERCIAL subarea type
Runoff Coefficient = 0.874
Decimal fraction soil group A = 0.000
Decimal fraction soil group B = 1.000
Decimal fraction soil group C = 0.000
Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 0.679(CFS)
Total initial stream area = 0.300(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.30 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRUNDEVAREAE.out

SAGE STETSON HEMET
AREA E
MCCROMETER SITE
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)

10 year storm 60 minute intensity = 0.760(In/Hr)

100 year storm 10 minute intensity = 3.050(In/Hr)

100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 9.000 to Point/Station 10.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 670.000(Ft.)

Top (of initial area) elevation = 28.000(Ft.)

Bottom (of initial area) elevation = 24.500(Ft.)

Difference in elevation = 3.500(Ft.)

Slope = 0.00522 s(percent) = 0.52

$TC = k(0.300) * [(length^3)/(elevation\ change)]^{0.2}$

Initial area time of concentration = 11.587 min.

Rainfall intensity = 1.817(In/Hr) for a 10.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.872

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 8.560(CFS)

Total initial stream area = 5.400(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 5.40 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 62.5

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRUNDEVAREAA.out

SAGE STETSON HEMET
AREA A
UNDEVELOPED CONDITION
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)
10 year storm 60 minute intensity = 0.760(In/Hr)
100 year storm 10 minute intensity = 3.050(In/Hr)
100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 1.000 to Point/Station 2.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 480.000(Ft.)
Top (of initial area) elevation = 29.300(Ft.)
Bottom (of initial area) elevation = 27.500(Ft.)
Difference in elevation = 1.800(Ft.)
Slope = 0.00375 s(percent)= 0.38
 $TC = k(0.530)*[(length^3)/(elevation\ change)]^{0.2}$
Initial area time of concentration = 19.141 min.
Rainfall intensity = 2.162(In/Hr) for a 100.0 year storm
UNDEVELOPED (poor cover) subarea
Runoff Coefficient = 0.767
Decimal fraction soil group A = 0.000
Decimal fraction soil group B = 1.000
Decimal fraction soil group C = 0.000
Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 78.00
Pervious area fraction = 1.000; Impervious fraction = 0.000
Initial subarea runoff = 3.812(CFS)

Total initial stream area = 2.300(Ac.)
Pervious area fraction = 1.000
End of computations, total study area = 2.30 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 1.000
Area averaged RI index number = 78.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRUNDEVAREAB.out

SAGE STETSON HEMET
AREA B
MCCROMETER SITE
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)

10 year storm 60 minute intensity = 0.760(In/Hr)

100 year storm 10 minute intensity = 3.050(In/Hr)

100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 3.000 to Point/Station 4.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 230.000(Ft.)

Top (of initial area) elevation = 28.200(Ft.)

Bottom (of initial area) elevation = 27.900(Ft.)

Difference in elevation = 0.300(Ft.)

Slope = 0.00130 s(percent)= 0.13

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 9.971 min.

Rainfall intensity = 3.055(In/Hr) for a 100.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.877

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 1.000

Decimal fraction soil group C = 0.000

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 1.072(CFS)
Total initial stream area = 0.400(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.40 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRUNDEVAREAC.out

SAGE STETSON HEMET
AREA C
MCCROMETER SITE
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)
10 year storm 60 minute intensity = 0.760(In/Hr)
100 year storm 10 minute intensity = 3.050(In/Hr)
100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 5.000 to Point/Station 6.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 110.000(Ft.)
Top (of initial area) elevation = 28.100(Ft.)
Bottom (of initial area) elevation = 27.500(Ft.)
Difference in elevation = 0.600(Ft.)
Slope = 0.00545 s(percent)= 0.55
 $TC = k(0.300)*[(length^3)/(elevation\ change)]^{0.2}$
Initial area time of concentration = 5.576 min.
Rainfall intensity = 4.157(In/Hr) for a 100.0 year storm
COMMERCIAL subarea type
Runoff Coefficient = 0.882
Decimal fraction soil group A = 0.000
Decimal fraction soil group B = 1.000
Decimal fraction soil group C = 0.000
Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 1.100(CFS)

Total initial stream area = 0.300(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.30 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRUNDEVAREAD.out

SAGE STETSON HEMET
AREA D
MCCROMETER SITE
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)

10 year storm 60 minute intensity = 0.760(In/Hr)

100 year storm 10 minute intensity = 3.050(In/Hr)

100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180(In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 7.000 to Point/Station 8.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 115.000(Ft.)

Top (of initial area) elevation = 28.000(Ft.)

Bottom (of initial area) elevation = 27.500(Ft.)

Difference in elevation = 0.500(Ft.)

Slope = 0.00435 s(percent) = 0.43

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 5.939 min.

Rainfall intensity = 4.020(In/Hr) for a 100.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.881

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 1.000

Decimal fraction soil group C = 0.000

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 1.063(CFS)
Total initial stream area = 0.300(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.30 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRUNDEVAREAE.out

SAGE STETSON HEMET
AREA E
MCCROMETER SITE
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)
10 year storm 60 minute intensity = 0.760(In/Hr)
100 year storm 10 minute intensity = 3.050(In/Hr)
100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 9.000 to Point/Station 10.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 670.000(Ft.)
Top (of initial area) elevation = 28.000(Ft.)
Bottom (of initial area) elevation = 24.500(Ft.)
Difference in elevation = 3.500(Ft.)
Slope = 0.00522 s(percent) = 0.52
 $TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$
Initial area time of concentration = 11.587 min.
Rainfall intensity = 2.821(In/Hr) for a 100.0 year storm
COMMERCIAL subarea type
Runoff Coefficient = 0.880
Decimal fraction soil group A = 0.000
Decimal fraction soil group B = 0.500
Decimal fraction soil group C = 0.500
Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 13.407(CFS)
Total initial stream area = 5.400(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 5.40 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 62.5



APPENDIX 'C'

RATIONAL HYDROLOGY CALCULATIONS

**10-YEAR STORM
100-YEAR STORM
PROPOSED CONDITIONS**

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRDEVAREAF.out

SAGE STETSON HEMET
AREA F
DEVELOPED CONDITION
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 1.000 to Point/Station 2.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 380.000 (Ft.)

Top (of initial area) elevation = 28.800 (Ft.)

Bottom (of initial area) elevation = 26.800 (Ft.)

Difference in elevation = 2.000 (Ft.)

Slope = 0.00526 s(percent) = 0.53

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 9.221 min.

Rainfall intensity = 2.051 (In/Hr) for a 10.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.875

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 2.153(CFS)
Total initial stream area = 1.200(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 1.20 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 62.5

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRDEVAREAF.out

SAGE STETSON HEMET
AREA F
DEVELOPED CONDITION
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 1.000 to Point/Station 2.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 380.000 (Ft.)

Top (of initial area) elevation = 28.800 (Ft.)

Bottom (of initial area) elevation = 26.800 (Ft.)

Difference in elevation = 2.000 (Ft.)

Slope = 0.00526 s(percent) = 0.53

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 9.221 min.

Rainfall intensity = 3.184 (In/Hr) for a 100.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.882

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 3.370(CFS)

Total initial stream area = 1.200(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 1.20 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 62.5

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRDEVAREAG.out

SAGE STETSON HEMET
AREA G
DEVELOPED CONDITION
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 3.000 to Point/Station 4.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 200.000 (Ft.)

Top (of initial area) elevation = 29.300 (Ft.)

Bottom (of initial area) elevation = 27.900 (Ft.)

Difference in elevation = 1.400 (Ft.)

Slope = 0.00700 s(percent) = 0.70

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 6.738 min.

Rainfall intensity = 2.422 (In/Hr) for a 10.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.873

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 1.000

Decimal fraction soil group C = 0.000

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 1.268(CFS)
Total initial stream area = 0.600(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.60 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRDEVAREAG.out

SAGE STETSON HEMET
AREA G
DEVELOPED CONDITION
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)
For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)
10 year storm 60 minute intensity = 0.760 (In/Hr)
100 year storm 10 minute intensity = 3.050 (In/Hr)
100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 100.0
Calculated rainfall intensity data:
1 hour intensity = 1.180 (In/Hr)
Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 3.000 to Point/Station 4.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 200.000 (Ft.)
Top (of initial area) elevation = 29.300 (Ft.)
Bottom (of initial area) elevation = 27.900 (Ft.)
Difference in elevation = 1.400 (Ft.)
Slope = 0.00700 s(percent) = 0.70
 $TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$
Initial area time of concentration = 6.738 min.
Rainfall intensity = 3.760 (In/Hr) for a 100.0 year storm
COMMERCIAL subarea type
Runoff Coefficient = 0.880
Decimal fraction soil group A = 0.000
Decimal fraction soil group B = 1.000
Decimal fraction soil group C = 0.000
Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 56.00
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 1.986(CFS)
Total initial stream area = 0.600(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.60 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 56.0

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRDEVAREAH.out

SAGE STETSON HEMET
AREA H
DEVELOPED CONDITION
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)

10 year storm 60 minute intensity = 0.760(In/Hr)

100 year storm 10 minute intensity = 3.050(In/Hr)

100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 1.000 to Point/Station 5.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 300.000(Ft.)

Top (of initial area) elevation = 28.800(Ft.)

Bottom (of initial area) elevation = 27.000(Ft.)

Difference in elevation = 1.800(Ft.)

Slope = 0.00600 s(percent) = 0.60

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 8.172 min.

Rainfall intensity = 2.186(In/Hr) for a 10.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.876

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 0.766(CFS)

Total initial stream area = 0.400 (Ac.)

Pervious area fraction = 0.100

End of computations, total study area = 0.40 (Ac.)

The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100

Area averaged RI index number = 62.5

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRDEVAREAH.out

SAGE STETSON HEMET
AREA H
DEVELOPED CONDITION
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 1.000 to Point/Station 5.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 300.000 (Ft.)

Top (of initial area) elevation = 28.800 (Ft.)

Bottom (of initial area) elevation = 27.000 (Ft.)

Difference in elevation = 1.800 (Ft.)

Slope = 0.00600 s(percent) = 0.60

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 8.172 min.

Rainfall intensity = 3.394 (In/Hr) for a 100.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.883

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 1.199(CFS)
Total initial stream area = 0.400(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 0.40 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 62.5

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON10YRDEVAREAI.out

SAGE STETSON HEMET
AREA I
DEVELOPED CONDITION
10 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 10.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960 (In/Hr)

10 year storm 60 minute intensity = 0.760 (In/Hr)

100 year storm 10 minute intensity = 3.050 (In/Hr)

100 year storm 60 minute intensity = 1.180 (In/Hr)

Storm event year = 10.0

Calculated rainfall intensity data:

1 hour intensity = 0.760 (In/Hr)

Slope of intensity duration curve = 0.5300

+++++
Process from Point/Station 6.000 to Point/Station 7.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 415.000 (Ft.)

Top (of initial area) elevation = 28.000 (Ft.)

Bottom (of initial area) elevation = 26.300 (Ft.)

Difference in elevation = 1.700 (Ft.)

Slope = 0.00410 s(percent) = 0.41

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 10.043 min.

Rainfall intensity = 1.960 (In/Hr) for a 10.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.874

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 4.967(CFS)
Total initial stream area = 2.900(Ac.)
Pervious area fraction = 0.100
End of computations, total study area = 2.90 (Ac.)
The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100
Area averaged RI index number = 62.5

Riverside County Rational Hydrology Program

CIVILCADD/CIVILDESIGN Engineering Software, (c) 1989 - 2005 Version 7.1
Rational Hydrology Study Date: 07/09/19 File: SAGESTETSON100YRDEVAREAI.out

SAGE STETSON HEMET
AREA I
DEVELOPED CONDITION
100 YEAR STORM

***** Hydrology Study Control Information *****

English (in-lb) Units used in input data file

Program License Serial Number 4061

Rational Method Hydrology Program based on
Riverside County Flood Control & Water Conservation District
1978 hydrology manual

Storm event (year) = 100.00 Antecedent Moisture Condition = 2

Standard intensity-duration curves data (Plate D-4.1)

For the [Hemet] area used.

10 year storm 10 minute intensity = 1.960(In/Hr)

10 year storm 60 minute intensity = 0.760(In/Hr)

100 year storm 10 minute intensity = 3.050(In/Hr)

100 year storm 60 minute intensity = 1.180(In/Hr)

Storm event year = 100.0

Calculated rainfall intensity data:

1 hour intensity = 1.180(In/Hr)

Slope of intensity duration curve = 0.5300

Process from Point/Station 6.000 to Point/Station 7.000
**** INITIAL AREA EVALUATION ****

Initial area flow distance = 415.000(Ft.)

Top (of initial area) elevation = 28.000(Ft.)

Bottom (of initial area) elevation = 26.300(Ft.)

Difference in elevation = 1.700(Ft.)

Slope = 0.00410 s(percent)= 0.41

$TC = k(0.300) * [(length^3) / (elevation\ change)]^{0.2}$

Initial area time of concentration = 10.043 min.

Rainfall intensity = 3.043(In/Hr) for a 100.0 year storm

COMMERCIAL subarea type

Runoff Coefficient = 0.881

Decimal fraction soil group A = 0.000

Decimal fraction soil group B = 0.500

Decimal fraction soil group C = 0.500

Decimal fraction soil group D = 0.000

RI index for soil(AMC 2) = 62.50
Pervious area fraction = 0.100; Impervious fraction = 0.900
Initial subarea runoff = 7.777(CFS)

Total initial stream area = 2.900(Ac.)

Pervious area fraction = 0.100


End of computations, total study area = 2.90 (Ac.)

The following figures may
be used for a unit hydrograph study of the same area.

Area averaged pervious area fraction(A_p) = 0.100


Area averaged RI index number = 62.5

APPENDIX 'D'

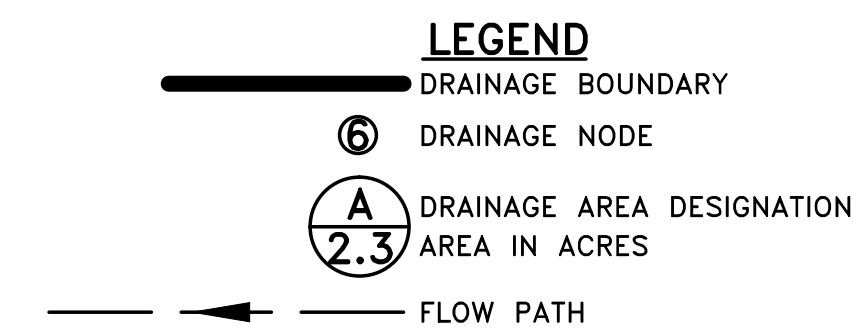

TWO WORKING DAYS BEFORE YOU DIG

REVISIONS:				
NO:	DATE:	BY:		APPROVED:
DESIGNED BY:		DRAWN BY:		CHECKED BY:



B
A
W

BLAINE A. WOMER

CIVIL ENGINEERING

- PLANNING
- SURVEYING
- CIVIL ENGINEERING
- PUBLIC WORKS

Hemet, Ca. 92544, 11505 E Florida Ave., Suite G, Phone (951)659-1777 Fax (951)658-9347

Park City, UT 84066, 5133 Cove Canyon Dr. #302, Phone/Fax (435)615-1499

PREPARED UNDER THE SUPERVISION OF:


DATE: _____

SCALE:	BENCHMARK:
--------	------------

DATE:


APPROVED BY:

DATE: _____



 City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. Florida Ave.
HEMET, CA 92543
(951) 765-2360

<u>City of Hemet</u>		<u>1</u>
SAGE STETSON HEMET HYDROLOGY EXHIBIT EXISTING CONDITIONS		OF <u>1</u> SHEET
W.O.		FILE NO.
F.N.		

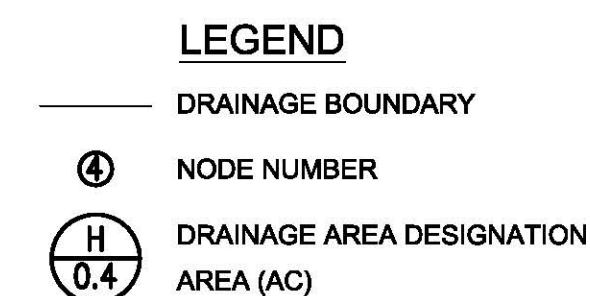

TWO WORKING DAYS BEFORE YOU DIG

REVISIONS:

NO:	DATE:	BY:		APPROVED:
DESIGNED BY:			DRAWN BY:	CHECKED BY:




PREPARED UNDER THE SUPERVISION OF:

DATE: _____	
SCALE:	BENCHMARK:
DATE:	

APPROVED BY:

ROBERT VESTAL, PE

DATE: _____

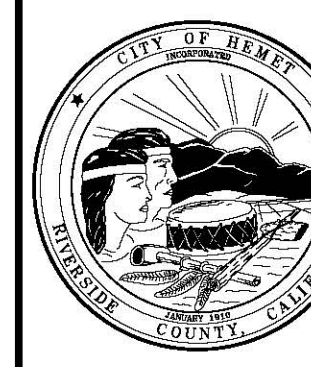

City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. Florida Ave.
HEMET, CA 92543
(951) 785-2360

City of Hemet
SAGE STETSON HEMET
HYDROLOGY EXHIBIT
DEVELOPED CONDITION

W.O.	F.N.
------	------

1
OF 1 SHEETS
FILE NO.