

DATE: September 30, 2024
TO: Robert D. Dalquest, Development Services Director
FROM: Haseeb Qureshi
Ali Dadabhoy
JOB NO: 14896-04 AQ & GHG Assesment

VILLA SERENA SPECIFIC PLAN AIR QUALITY & GREENHOUSE GAS ASSESSMENT

Robert D. Dalquest,

Urban Crossroads, Inc. is pleased to provide the following Air Quality & Greenhouse Gas Assessment for the Villa Serena Specific Plan (**Project**), which is located on the northeast corner of Fernando Avenue and 15th Street in the City of Upland.

PROJECT OVERVIEW

The Project is proposed to consist of the development of 65 single family detached residential dwelling units, the 15th Street extension and the basin trail. The proposed Project is anticipated to have an opening year of 2025. The Project's Tentative Tract Map is shown as Exhibit 1.

SUMMARY OF FINDINGS

Results of the assessment indicate that the Project would result in a less than significant with respect to air quality and greenhouse gases.

EXHIBIT 1: PROJECT'S TENTATIVE TRACT MAP



PROJECT AIR QUALITY IMPACTS

AIR QUALITY SETTING

SOUTH COAST AIR BASIN (SCAB)

The Project site is located in the SCAB within the jurisdiction of South Coast Air Quality Management District (SCAQMD) (3). The SCAQMD was created by the 1977 Lewis-Presley Air Quality Management Act, which merged four county air pollution control bodies into one regional district. Under the Act, the SCAQMD is responsible for bringing air quality in areas under its jurisdiction into conformity with federal and state air quality standards. As previously stated, the Project site is located within the SCAB, a 6,745-square mile subregion of the SCAQMD, which includes portions of Los Angeles, Riverside, and San Bernardino Counties, and all of Orange County.

The SCAB is bounded by the Pacific Ocean to the west and the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east. The Los Angeles County portion of the Mojave Desert Air Basin is bounded by the San Gabriel Mountains to the south and west, the Los Angeles / Kern County border to the north, and the Los Angeles / San Bernardino County border to the east. The Riverside County portion of the Salton Sea Air Basin is bounded by the San Jacinto Mountains in the west and spans eastward up to the Palo Verde Valley.

Regional Climate

The regional climate has a substantial influence on air quality in the SCAB. In addition, the temperature, wind, humidity, precipitation, and amount of sunshine influence the air quality.

The annual average temperatures throughout the SCAB vary from the low to middle 60s degrees Fahrenheit (°F). Due to a decreased marine influence, the eastern portion of the SCAB shows greater variability in average annual minimum and maximum temperatures. January is the coldest month throughout the SCAB, with average minimum temperatures of 47°F in downtown Los Angeles and 36°F in San Bernardino. All portions of the SCAB have recorded maximum temperatures above 100°F.

Although the climate of the SCAB can be characterized as semi-arid, the air near the land surface is quite moist on most days because of the presence of a marine layer. This shallow layer of sea air is an important modifier of SCAB climate. Humidity restricts visibility in the SCAB, and the conversion of sulfur dioxide (SO₂) to sulfates (SO₄) is heightened in air with high relative humidity. The marine layer provides an environment for that conversion process, especially during the spring and summer months. The annual average relative humidity within the SCAB is 71 percent (%) along the coast and 59% inland. Since the ocean effect is dominant, periods of heavy early morning fog are frequent and low stratus clouds are a characteristic feature. These effects decrease with distance from the coast.

More than 90% of the SCAB's rainfall occurs from November through April. The annual average rainfall varies from approximately nine inches in Riverside to fourteen inches in downtown Los Angeles. Monthly and yearly rainfall totals are extremely variable. Summer rainfall usually consists of widely scattered thunderstorms near the coast and slightly heavier shower activity in the eastern portion of the SCAB with frequency being higher near the coast.

Due to its generally clear weather, about three-quarters of available sunshine is received in the SCAB. The remaining one-quarter is absorbed by clouds. The ultraviolet portion of this abundant radiation is a key factor in photochemical reactions. On the shortest day of the year there are approximately 10 hours of possible sunshine, and on the longest day of the year there are approximately 14½ hours of possible sunshine.

The importance of wind to air pollution is considerable. The direction and speed of the wind determines the horizontal dispersion and transport of the air pollutants. During the late autumn to early spring rainy season, the SCAB is subjected to wind flows associated with the traveling storms moving through the region from the northwest. This period also brings five to ten periods of strong, dry offshore winds, locally termed "Santa Anas" each year. During the dry season, which coincides with the months of maximum photochemical smog concentrations, the wind flow is bimodal, typified by a daytime onshore sea breeze and a nighttime offshore drainage wind. Summer wind flows are created by the pressure differences between the relatively cold ocean and the unevenly heated and cooled land surfaces that modify the general northwesterly wind circulation over southern California. Nighttime drainage begins with the radiational cooling of the mountain slopes. Heavy, cool air descends the slopes and flows through the mountain passes and canyons as it follows the lowering terrain toward the ocean. Another characteristic wind regime in the SCAB is the "Catalina Eddy," a low level cyclonic (counterclockwise) flow centered over Santa Catalina Island which results in an offshore flow to the southwest. On most spring and summer days, some indication of an eddy is apparent in coastal sections.

In the SCAB, there are two distinct temperature inversion structures that control vertical mixing of air pollution. During the summer, warm high-pressure descending (subsiding) air is undercut by a shallow layer of cool marine air. The boundary between these two layers of air is a persistent marine subsidence/inversion. This boundary prevents vertical mixing which effectively acts as an impervious lid to pollutants over the entire SCAB. The mixing height for the inversion structure is normally situated 1,000 to 1,500 feet above mean sea level.

A second inversion-type forms in conjunction with the drainage of cool air off the surrounding mountains at night followed by the seaward drift of this pool of cool air. The top of this layer forms a sharp boundary with the warmer air aloft and creates nocturnal radiation inversions. These inversions occur primarily in the winter when nights are longer and onshore flow is weakest. They are typically only a few hundred feet above mean sea level. These inversions effectively trap pollutants, such as nitrogen oxides (NO_x) and carbon monoxide (CO) from vehicles, as the pool of cool air drifts seaward. Winter is therefore a period of high levels of primary pollutants along the coastline.

Wind Patterns and Project Location

The distinctive climate of the Project area and the SCAB is determined by its terrain and geographical location. The SCAB is located in a coastal plain with connecting broad valleys and low hills, bounded by the Pacific Ocean in the southwest quadrant with high mountains forming the remainder of the perimeter.

Wind patterns across the south coastal region are characterized by westerly and southwesterly onshore winds during the day and easterly or northeasterly breezes at night. Winds are characteristically light although the speed is somewhat greater during the dry summer months than during the rainy winter season.

Criteria Pollutants

Both the U.S. Environmental Protection Agency (EPA) and the California Air Resources Board (CARB) have established ambient air quality standards for common pollutants. These ambient air quality standards are levels of contaminants representing safe levels that avoid specific adverse health effects associated with each pollutant. The ambient air quality standards cover what are called "criteria" pollutants because the health and other effects of each pollutant are described in criteria documents. The six criteria pollutants are ozone (O₃) (precursor emissions include NO_x and reactive organic gases (ROG), CO, particulate matter (PM), nitrogen dioxide (NO₂), sulfur dioxide (SO₂), and lead. Areas that meet ambient air quality standards are classified as attainment areas, while areas that do not meet these standards are classified as nonattainment areas. The Riverside County portion of the SCAB is designated as a nonattainment area for the federal O₃ and PM_{2.5} standards and is also a nonattainment area for the state standards for O₃, PM₁₀, and PM_{2.5}.

Sensitive Receptor Locations

Some people are especially sensitive to air pollution and are given special consideration when evaluating air quality impacts from projects. These groups of people include children, the elderly, and individuals with pre-existing respiratory or cardiovascular illness. Structures that house these persons or places where they gather are defined as “sensitive receptors”. These structures typically include uses such as residences, hotels, and hospitals where an individual can remain for 24 hours. Consistent with the LST Methodology, the nearest land use where an individual could remain for 24 hours to the Project site has been used to determine construction and operational air quality impacts for emissions of PM₁₀ and PM_{2.5}, since PM₁₀ and PM_{2.5} thresholds are based on a 24-hour averaging time.

Receptors in the Project study area are described below. All distances are measured from the Project site boundary to the outdoor living areas (e.g., backyards) or at the building façade, whichever is closer to the Project site. Receptors in the Project study area are shown on Exhibit 2 under the Localized Construction Emissions section later in the report.

- Receptor R1 represents the existing residence at 1168 Upland Hills Dr S, approximately 187 feet north of the Project site.
- Receptor R2 represents the existing residence at 1246 Upland Hills Dr S, approximately 144 feet north of the Project site.
- Receptor R3 represents the existing residence at 1442 Upland Hills Dr S, approximately 179 feet north of the Project site.
- Receptor R4 represents the existing residence at 1512 Grove Ave, approximately 51 feet south of the Project site.
- Receptor R5 represents the existing residence at 1377 E 15th St, approximately 27 feet south of the Project site.
- Receptor R6 represents the existing residence at 1345 E 15th St, approximately 17 feet south of the Project site.
- Receptor R7 represents the existing residence at 1496 Carlos Way, approximately 59 feet south of the Project site.
- Receptor R8 represents the existing residence at 1497 Fernando Ave, approximately 28 feet south of the Project site.
- Receptor R9 represents the existing residence at 1030 Sawtooth Dr, approximately 29 feet north of the Project site.
- Receptor R10 represents the existing residence at 1540 N Himalayas Cir, approximately 12 feet northwest of the Project site.

REGULATORY BACKGROUND

FEDERAL REGULATIONS

The EPA is responsible for setting and enforcing the national ambient air quality standards (NAAQS) for O₃, CO, NO_x, SO₂, PM₁₀, and lead (Pb) (5). The EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside state waters (Outer Continental Shelf). The EPA also establishes emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of CARB.

The Federal Clean Air Act (CAA) was first enacted in 1955 and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance (6). The CAA also mandates that each state submit and implement state implementation plans (SIPs) for local areas not meeting these standards. These plans must include pollution control measures that demonstrate how the standards will be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions) (7) (8). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O₃, NO₂, SO₂, PM₁₀, CO, PM_{2.5}, and Pb. The NAAQS were amended in July 1997 to include an additional standard for O₃ and to adopt a NAAQS for PM_{2.5}.

Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and NO_x. NO_x is a collective term that includes all forms of NO_x which are emitted as byproducts of the combustion process.

CALIFORNIA REGULATIONS

CARB

The CARB, which became part of the California EPA (CalEPA) in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. AB 2595 mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the state ambient air quality standards by the earliest practical date. The CARB established the California ambient air quality standards (CAAQS) for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for SO₄, visibility, hydrogen sulfide (H₂S), and vinyl chloride (C₂H₃Cl). However, at this time, H₂S and C₂H₃Cl are not measured at any monitoring stations in the SCAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (1) (2).

Local air quality management districts, such as the SCAQMD, regulate air emissions from stationary sources such as commercial and industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare Air Quality Management Plans (AQMP) that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

- Application of Best Available Retrofit Control Technology to existing sources;
- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g. motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;
- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;
- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a 5% or more annual reduction in emissions or 15% or more in a period of three years for ROGs, NO_x, CO and PM₁₀. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than 5% per year under certain circumstances.

AQMP

Currently, the NAAQS and CAAQS are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMP to meet the state and federal ambient air quality standards (10). AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

APPLICABLE REGULATORY REQUIREMENTS

SCAQMD Rules that are currently applicable during construction activity for this Project include but are not limited to Rule 403 (Fugitive Dust), Rule 445 (Wood Burning Devices), and Rule 1113 (Architectural Coatings) (3) (4) (5).

SCAQMD Rule 403

This rule is intended to reduce the amount of particulate matter entrained in the ambient air as a result of anthropogenic (human-made) fugitive dust sources by requiring actions to prevent and reduce fugitive dust emissions. Rule 403 applies to any activity or human-made condition capable of generating fugitive dust and requires best available control measures to be applied to earth moving and grading activities. This rule is intended to reduce PM₁₀ emissions from any transportation, handling, construction, or storage activity that has the potential to generate fugitive dust. PM₁₀ suppression techniques are summarized below.

- Portions of a construction site to remain inactive longer than a period of three months will be seeded and watered until grass cover is grown or otherwise stabilized.
- All onsite roads will be paved as soon as feasible or watered periodically or chemically stabilized.
- All material transported offsite will be either sufficiently watered or securely covered to prevent excessive amounts of dust.
- The area disturbed by clearing, grading, earthmoving, or excavation operations will be minimized at all times.
- Where vehicles leave a construction site and enter adjacent public streets, the streets will be swept daily or washed down at the end of the workday to remove soil tracked onto the paved surface.

SCAQMD Rule 445

This rule is intended to reduce the emission of particulate matter from wood-burning devices. The Project is required to comply with SCAQMD Rule 445, which prohibits the use of wood burning stoves and fireplaces in new development.

SCAQMD Rule 1113

This rule serves to limit the volatile organic compound (VOC) content of architectural coatings used on projects in the SCAQMD. Any person who supplies, sells, offers for sale, or manufactures any architectural coating for use on projects in the SCAQMD must comply with the current VOC standards set in this rule.

METHODOLOGY

In May 2022, the California Air Pollution Control Officers Association (CAPCOA) in conjunction with other California air districts, including SCAQMD, released the latest version of the CalEEMod Version 2022.1. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NO_x, SO_x, CO, PM₁₀, and PM_{2.5}) and GHG emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from mitigation measures (6). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality and greenhouse gas emissions.

Standards of Significance

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the California Environmental Quality Act Guidelines (CEQA Guidelines) (14 CCR §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (7):

- **Threshold 1:** Conflict with or obstruct implementation of the applicable air quality plan.
- **Threshold 2:** Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.
- **Threshold 3:** Expose sensitive receptors to substantial pollutant concentrations.

- **Threshold 4:** Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

AIR QUALITY REGIONAL EMISSIONS THRESHOLDS

The SCAQMD has developed regional significance thresholds for criteria pollutants, as summarized at Table 1 (8). The SCAQMD’s CEQA Air Quality Significance Thresholds (March 2023) indicate that any projects in the South Coast Air Basin (SCAB) with daily emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact.

TABLE 1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS

| Pollutant | Construction | Operations |
|-------------------|--------------|-------------|
| NO _x | 100 lbs/day | 55 lbs/day |
| VOC | 75 lbs/day | 55 lbs/day |
| PM ₁₀ | 150 lbs/day | 150 lbs/day |
| PM _{2.5} | 55 lbs/day | 55 lbs/day |
| SO _x | 150 lbs/day | 150 lbs/day |
| CO | 550 lbs/day | 550 lbs/day |

lbs/day – Pounds Per Day

AIR QUALITY LOCALIZED EMISSIONS THRESHOLDS

For this Project, the appropriate SRA for the LST analysis is the SCAQMD Northwest San Bernardino Valley Area monitoring station (SRA 32). LSTs apply to CO, NO₂, PM₁₀, and PM_{2.5}. The SCAQMD produced look-up tables for projects less than or equal to 5 acres in size. The SCAQMD’s screening look-up tables are utilized in determining localized impacts. It should be noted that since the look-up tables identify thresholds at only 1 acre, 2 acres, and 5 acres, linear regression has been utilized to determine localized significance thresholds. Consistent with SCAQMD guidance, the thresholds presented in Table 2 were calculated by interpolating the threshold values for the Project’s disturbed acreage.

The acres disturbed is based on the equipment list and days in the site preparation and grading phase according to the anticipated maximum number of acres a given piece of equipment can pass over in an 8-hour workday. The equipment-specific grading rates are summarized in the CalEEMod user’s guide, Appendix A: Calculation Details for CalEEMod (9). It should be noted that the disturbed area per day is representative of a piece of equipment making multiple passes over the same land area. In other words, one Rubber Tired Dozer can make multiple passes over the same land area totaling 0.5 acres in a given 8-hour day. Appendix A of the CalEEMod User Manual only identifies equipment-specific grading rates for Crawler Tractors, Graders, Rubber Tired Dozers, and Scrapers; therefore, Tractors/Loaders/Backhoes equipment that was included in grading was replaced with crawler tractors. For analytical purposes, emissions associated with peak site preparation and grading activities are considered for purposes of localized significance thresholds (LSTs) since this phase represents the maximum localized emissions that would occur.

The Project’s construction activities could disturb a maximum of approximately 2.5 acres per day for site preparation and 3.5 acres per day for grading activities. Any other construction phases of development would result in lesser emissions and consequently lesser impacts than what is disclosed herein. As such, Table 2 presents thresholds for localized construction and operational emissions.

TABLE 2: MAXIMUM DAILY LOCALIZED EMISSIONS THRESHOLDS

| Source | Activity | Emissions (lbs/day) | | | |
|--------------|------------------|---------------------|---------------|------------------|-------------------|
| | | VOC | NOX | PM ₁₀ | PM _{2.5} |
| Construction | Site Preparation | 187 lbs/day | 1,392 lbs/day | 8 lbs/day | 6 lbs/day |
| | Grading | 220 lbs/day | 1,713 lbs/day | 11 lbs/day | 7 lbs/day |

¹Source of localized significance threshold (LSTs) is provided on page 14.

REGIONAL CONSTRUCTION EMISSIONS SUMMARY

The estimated maximum daily construction emissions without mitigation are summarized on Table 3. Detailed construction model outputs are presented in Attachment A. Under the assumed scenarios, emissions resulting from the Project construction will not exceed thresholds established by the SCAQMD for emissions of any criteria pollutant.

TABLE 3: OVERALL REGIONAL CONSTRUCTION EMISSIONS SUMMARY

| Source | Emissions (lbs/day) | | | | | |
|--------------------------------|---------------------|-----------------|--------------|-----------------|------------------|-------------------|
| | VOC | NO _x | CO | SO _x | PM ₁₀ | PM _{2.5} |
| Summer | | | | | | |
| 2024 | 1.42 | 12.50 | 16.30 | 0.03 | 0.91 | 0.59 |
| Winter | | | | | | |
| 2024 | 4.58 | 45.80 | 36.40 | 0.14 | 8.78 | 4.81 |
| 2025 | 39.90 | 7.53 | 10.90 | 0.01 | 0.54 | 0.37 |
| Maximum Daily Emissions | 39.90 | 45.80 | 36.40 | 0.14 | 8.78 | 4.81 |
| SCAQMD Regional Threshold | 75 | 100 | 550 | 150 | 150 | 55 |
| Threshold Exceeded? | NO | NO | NO | NO | NO | NO |

¹PM₁₀ and PM_{2.5} source emissions reflect 3x daily watering per SCAQMD Rule 403 for fugitive dust.

REGIONAL OPERATIONAL EMISSIONS

Operational activities associated with the Project would result in emissions of CO, VOCs, NO_x, SO_x, PM₁₀, and PM_{2.5}. Operational related emissions are expected from the following primary sources: area source emissions, energy source emissions, and mobile source emissions,

The Project related operational air quality impacts derive primarily from vehicle trips generated by the Project. Trip characteristics available from the *Villa Serena Specific Plan Traffic Analysis* report were utilized in this analysis (10).

The estimated operation-source emissions from the Project are summarized on Table 4. Detailed operation model outputs are presented in Attachment A. As shown on Table 4, operational-source emissions would not exceed the applicable SCAQMD regional thresholds for emissions of any criteria pollutant.

TABLE 4: TOTAL PROJECT REGIONAL OPERATIONAL EMISSIONS

| Source | Emissions (lbs/day) | | | | | |
|--------------------------------------|---------------------|-----------------|--------------|-----------------|------------------|-------------------|
| | VOC | NO _x | CO | SO _x | PM ₁₀ | PM _{2.5} |
| Summer | | | | | | |
| Mobile Source | 2.47 | 2.22 | 20.80 | 0.05 | 1.68 | 0.33 |
| Area Source | 3.32 | 1.01 | 4.09 | 0.01 | 0.08 | 0.08 |
| Energy Source | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | 0.04 |
| Total Maximum Daily Emissions | 5.82 | 3.74 | 25.11 | 0.06 | 1.80 | 0.45 |
| SCAQMD Regional Threshold | 55 | 55 | 550 | 150 | 150 | 55 |
| Threshold Exceeded? | NO | NO | NO | NO | NO | NO |
| Winter | | | | | | |
| Mobile Source | 2.29 | 2.38 | 17.50 | 0.05 | 1.68 | 0.33 |
| Area Source | 2.99 | 0.97 | 0.41 | 0.01 | 0.08 | 0.08 |
| Energy Source | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | 0.04 |
| Total Maximum Daily Emissions | 5.31 | 3.86 | 18.13 | 0.06 | 1.80 | 0.45 |
| SCAQMD Regional Threshold | 55 | 55 | 550 | 150 | 150 | 55 |
| Threshold Exceeded? | NO | NO | NO | NO | NO | NO |

LOCALIZED CONSTRUCTION EMISSIONS

The analysis makes use of methodology included in the SCAQMD *Final Localized Significance Threshold Methodology* (LST Methodology) (11). The SCAQMD has established that impacts to air quality are significant if there is a potential to contribute or cause localized exceedances of the federal and/or state ambient air quality standards (NAAQS/CAAQS). Collectively, these are referred to as Localized Significance Thresholds (LSTs). The SCAQMD established LSTs in response to the SCAQMD Governing Board's Environmental Justice Initiative I-4¹. LSTs represent

¹ The purpose of SCAQMD's Environmental Justice program is to ensure that everyone has the right to equal protection from air pollution and fair access to the decision-making process that works to improve the quality of air within their communities. Further, the SCAQMD defines Environmental Justice as "...equitable environmental policymaking and enforcement to protect the health of all residents, regardless of age, culture, ethnicity, gender, race, socioeconomic status, or geographic location, from the health effects of air pollution."


the maximum emissions from a project that will not cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard at the sensitive receptor. The SCAQMD states that lead agencies can use the LSTs as another indicator of significance in its air quality impact analyses.

The SCAQMD recommends that the nearest sensitive receptor be considered when determining the Project’s potential to cause an individual or cumulatively significant impact. The nearest land use where an individual could remain for 24 hours to the Project site has been used to determine localized construction and operational air quality impacts for emissions of PM₁₀ and PM_{2.5} (since PM₁₀ and PM_{2.5} thresholds are based on a 24-hour averaging time). The nearest receptor used for evaluation of localized impacts of PM₁₀ and PM_{2.5} is location R10 represented by the existing residence at 1540 N Himalayas Circle, approximately 12 feet northwest of the Project site. Receptors in the Project study area shown on Exhibit 2.

As previously stated, and consistent with LST Methodology, the nearest industrial/commercial use to the Project site is used to determine construction and operational LST air impacts for emissions of NO_x and CO as the averaging periods for these pollutants are shorter (8 hours or less) and it is reasonable to assume that an individual could be present at these sites for periods of one to 8 hours. It should be noted that the existing residence (R10) is located at a closer distance than the nearest industrial/commercial use. As such, the same receptor will be used for evaluation of localized NO_x and CO.

It should be noted that the *LST Methodology* explicitly states that “It is possible that a project may have receptors closer than 25 meters. Projects with boundaries located closer than 25 meters to the nearest receptor should use the LSTs for receptors located at 25 meters (11).” As such, for evaluation of localized PM₁₀, PM_{2.5}, NO_x and CO, a 25-meter distance will be used.

EXHIBIT 2: SENSITIVE RECEPTOR LOCATIONS

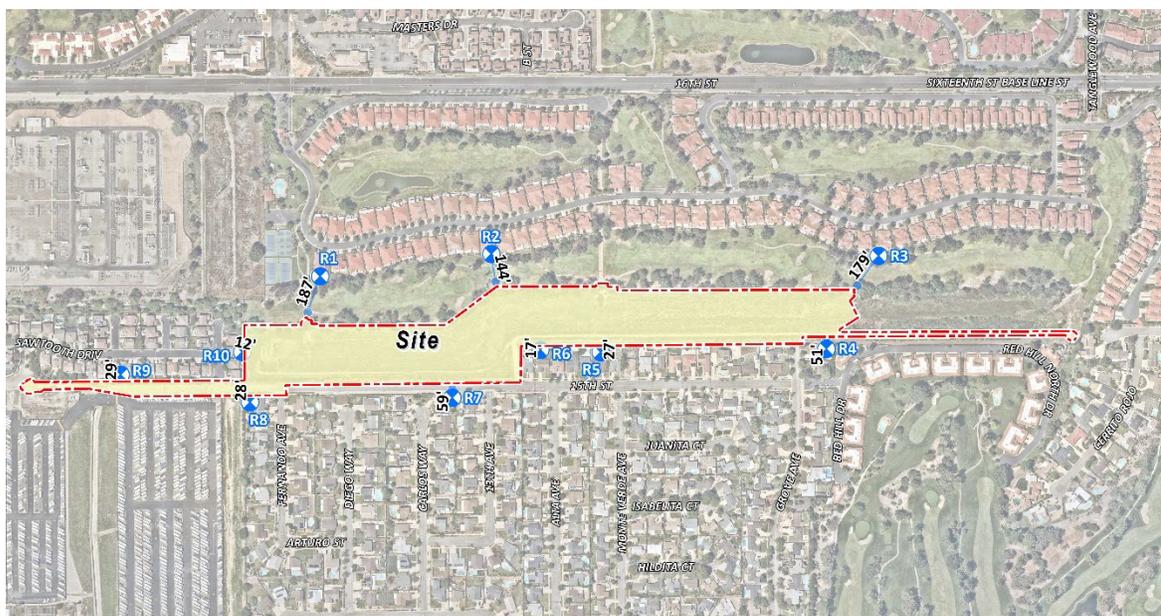

LEGEND:
 N [North Arrow] [Red dashed line] Site Boundary [Blue dot with crosshair] Receptor Locations [Blue line with dot] Distance from receptor to Project site boundary (in feet)

LOCALIZED OPERATIONAL EMISSIONS

Table 5 identifies the localized impacts at the nearest receptor location in the vicinity of the Project. Outputs from the model runs for construction LSTs are provided in Attachment A. For analytical purposes, emissions associated with peak demolition, site preparation and grading activities are considered for purposes of LSTs since these phases represents the maximum localized emissions that would occur. Any other construction phases of development that overlap would result in lesser emissions and consequently lesser impacts than what is disclosed herein. As shown in Table 5, emissions resulting from the Project construction will not exceed the numerical thresholds of significance established by the SCAQMD for any criteria pollutant. Thus, a less than significant impact would occur for localized Project-related construction-source emissions and no mitigation is required.

TABLE 5: PROJECT LOCALIZED CONSTRUCTION IMPACTS

| On-Site Emissions | Emissions (lbs/day) | | | |
|----------------------------|---------------------|-------|------------------|-------------------|
| | NO _x | CO | PM ₁₀ | PM _{2.5} |
| Site Preparation | | | | |
| Maximum Daily Emissions | 42.50 | 35.30 | 7.91 | 4.76 |
| SCAQMD Localized Threshold | 187 | 1,392 | 8 | 6 |
| Threshold Exceeded? | NO | NO | NO | NO |
| Grading | | | | |
| Maximum Daily Emissions | 23.10 | 20.60 | 3.62 | 2.16 |
| SCAQMD Localized Threshold | 220 | 1,713 | 11 | 7 |
| Threshold Exceeded? | NO | NO | NO | NO |

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 1

Would the Project conflict with or obstruct implementation of the applicable air quality plan?

The Project site is located within the SCAB, which is characterized by relatively poor air quality. The SCAQMD has jurisdiction over an approximately 10,743 square-mile area consisting of the four-county Basin and the Los Angeles County and Riverside County portions of what use to be referred to as the Southeast Desert Air Basin. In these areas, the SCAQMD is principally responsible for air pollution control, and works directly with the Southern California Association of Governments (SCAG), county transportation commissions, local governments, as well as state and federal agencies to reduce emissions from stationary, mobile, and indirect sources to meet state and federal ambient air quality standards.

Currently, these state and federal air quality standards are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMPs to meet the state and federal ambient air quality standards. AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

In December 2022, the SCAQMD released the Final 2022 AQMP (2022 AQMP). The 2022 AQMP continues to evaluate current integrated strategies and control measures to meet the CAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (12). Similar to the 2016 AQMP, the 2022 AQMP incorporates scientific and technological information and planning assumptions, including the 2020-2045 RTP/SCS, a planning document that supports the integration of land use and transportation to help the region meet the federal CAA requirements (13). The Project's consistency with the AQMP will be determined using the 2022 AQMP as discussed below.

Criteria for determining consistency with the AQMP are defined in Chapter 12, Section 12.2 and Section 12.3 of the 1993 CEQA Handbook (18). These indicators are discussed below.

The proposed Project will not result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMP.

The violations that under this criterion refer to are the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if regional or localized significance thresholds were exceeded.

CAAQS and NAAQS violations would occur if regional or localized significance thresholds were exceeded. As evaluated, the Project's regional and localized construction and operational-source emissions would not exceed applicable regional significance thresholds. As such, a less than significant impact is expected.

On the basis of the preceding discussion, the Project is determined to be consistent with the first criterion.

The Project will not exceed the assumptions in the AQMP based on the years of Project build-out phase.

The 2022 AQMP demonstrates that the applicable ambient air quality standards can be achieved within the timeframes required under federal law. Growth projections from local general plans adopted by cities in the district are provided to the SCAG, which develops regional growth forecasts, which are then used to develop future air quality forecasts for the AQMP. Development consistent with the growth projections in City of Upland General Plan is considered to be consistent with the AQMP.

Peak day emissions generated by construction activities are largely independent of land use assignments, but rather are a function of development scope and maximum area of disturbance. Irrespective of the site's land use designation, development of the site to its maximum potential would likely occur, with disturbance of the entire site occurring during construction activities. As such, when considering that no emissions thresholds will be exceeded, a less than significant impact would result.

The City of Upland General Plan designates the Project site for Public Utilities – Flood Control (PU-FC). The (PU) land use designation provides areas for landfills, flood control/recharge facilities, and public utilities including gas, electricity, and water (14).

As indicated, the proposed Project will consist of 65 single family residential dwelling units, the 15th Street extension and the basin trail, which would likely exceed the growth intensities. As the proposed Project is consistent with site's land use designation, would not exceed any applicable regional or local thresholds, and would not result in or cause NAAQS or CAAQS violations, the Project is therefore considered to be consistent with the AQMP and a less than significant impact is expected.

On the basis of the preceding discussion, the Project is determined to be consistent with the second criterion.

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 2

Would the Project result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard?

The CAAQS designate the Project site as nonattainment for O₃, PM₁₀, and PM_{2.5} while the NAAQS designates the Project site as nonattainment for O₃ and PM_{2.5}.

The SCAQMD has published a report on how to address cumulative impacts from air pollution: White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (15). In this report the SCAQMD clearly states (Page D-3):

“...the SCAQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or EIR. The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance threshold for TAC emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility-wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts.

Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant.”

Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which SCAB is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable.

Construction Impacts

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project construction-source air pollutant emissions would not result in

exceedances of regional thresholds. Therefore, proposed Project construction-source emissions would be considered less than significant on a project-specific and cumulative basis.

Operational Impacts

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that proposed Project operational-source air pollutant emissions would not result in exceedances of regional thresholds. Therefore, the proposed Project operational-source emissions would be considered less than significant on a project-specific and cumulative basis.

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 3

Would the expose sensitive receptors to substantial pollutant concentrations?

The potential impact of Project-generated air pollutant emissions at sensitive receptors has also been considered. Results of the LST analysis indicate that the Project will not exceed the SCAQMD localized significance thresholds during construction. Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations during Project construction.

Additionally, the Project will not exceed the SCAQMD localized significance thresholds during operational activity. Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations as the result of Project operations.

CO “HOT SPOT” ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or “hot spots.” An adverse CO concentration, known as a “hot spot”, would occur if an exceedance of the state one-hour standard of 20 parts per million (ppm) or the eight-hour standard of 9 ppm were to occur.

It has long been recognized that CO hotspots are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentration in the SCAB is now designated as attainment.

To establish a more accurate record of baseline CO concentrations affecting the SCAB, a CO “hot spot” analysis was conducted in 2003 for four busy intersections in Los Angeles at the peak morning and afternoon time periods². This “hot spot” analysis did not predict any exceedance of the 1-hour (20.0 ppm) or 8-hour (9.0 ppm) CO standards, as shown on Table 6.

² The CO “hot spot” analysis conducted in 2003 is the most current study used for CO “hot spot” analysis in the SCAB.

TABLE 6: CO MODEL RESULTS

| Intersection Location | CO Concentrations (ppm) | | |
|--|-------------------------|------------------|--------|
| | Morning 1-hour | Afternoon 1-hour | 8-hour |
| Wilshire Boulevard/Veteran Avenue | 4.6 | 3.5 | 3.7 |
| Sunset Boulevard/Highland Avenue | 4 | 4.5 | 3.5 |
| La Cienega Boulevard/Century Boulevard | 3.7 | 3.1 | 5.2 |
| Long Beach Boulevard/Imperial Highway | 3 | 3.1 | 8.4 |

Notes: Federal 1-hour standard is 35 ppm and the deferral 8-hour standard is 9.0 ppm.

Based on the SCAQMD's 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan), peak carbon monoxide concentrations in the SCAB were a result of unusual meteorological and topographical conditions and not a result of traffic volumes and congestion at a particular intersection. As evidence of this, for example, of the 8.4 ppm 8-hr CO concentration measured at the Long Beach Blvd. and Imperial Hwy. intersection (i.e., the highest CO generating intersection within the "hot spot" analysis), only 0.7 ppm was attributable to the traffic volumes and congestion at this intersection; the remaining 7.7 ppm were due to the ambient air measurements at the time the 2003 AQMP was prepared (16). In contrast, an adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 parts per million (ppm) or the eight-hour standard of 9 ppm were to occur.

The ambient 1-hr and 8-hr CO concentration within the Project study area is estimated to be 2.1 ppm and 1.5 ppm, respectively (data from Central Orange County station for 2021). Therefore, even if the traffic volumes for the proposed Project were ten times the traffic volumes generated at the Long Beach Blvd. and Imperial Hwy. intersection, due to the on-going improvements in ambient air quality and vehicular emissions controls, the Project would not be capable of resulting in a CO "hot spot" at any study area intersections. As noted above, only 0.7 ppm were attributable to the traffic volumes and congestion at one of the busiest intersections in the SCAB. Therefore if these traffic volumes were multiplied by ten times, it could be expected that the CO attributable to traffic would increase tenfold as well, resulting in 7 ppm – even if this were added to either the 1-hour or 8-hour CO concentrations within the Project study area, this would result in 9.1 ppm and 8.5 ppm for the 1-hr and 8-hr timeframes, respectively. Neither of which would exceed the applicable 1-hr standard of 20 ppm or the 8-hr standard of 9 ppm.

Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour (vph)—or 24,000 vph where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (17). Traffic volumes generating the CO concentrations for the "hot spot" analysis is shown on Table 3-11. The busiest intersection evaluated was that at Wilshire Boulevard and Veteran Avenue, which had AM/PM traffic volumes of 8,062 vph and 7,719 vph respectively (16).

TABLE 7: CO MODEL RESULTS

| Intersection Location | Peak Traffic Volumes (vph) | | | | |
|--|----------------------------|-------------------|--------------------|--------------------|---------------|
| | Eastbound (AM/PM) | Westbound (AM/PM) | Southbound (AM/PM) | Northbound (AM/PM) | Total (AM/PM) |
| Wilshire Boulevard/Veteran Avenue | 4,954/2,069 | 1,830/3,317 | 721/1,400 | 560/933 | 8,062/7,719 |
| Sunset Boulevard/Highland Avenue | 1,417/1,764 | 1,342/1,540 | 2,304/1,832 | 1,551/2,238 | 6,614/5,374 |
| La Cienega Boulevard/Century Boulevard | 2,540/2,243 | 1,890/2,728 | 1,384/2,029 | 821/1,674 | 6,634/8,674 |
| Long Beach Boulevard/Imperial Highway | 1,217/2,020 | 1,760/1,400 | 479/944 | 756/1,150 | 4,212/5,514 |

AIR QUALITY IMPACTS – CONSISTENCY WITH THRESHOLD NO. 4

Would the Project result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- Agricultural uses (livestock and farming)
- Wastewater treatment plants
- Food processing plants
- Chemical plants
- Composting operations
- Refineries
- Landfills
- Dairies
- Fiberglass molding facilities

The Project does not contain land uses typically associated with emitting objectionable odors. Potential odor sources associated with the proposed Project may result from construction equipment exhaust and the application of asphalt and architectural coatings during construction activities and the temporary storage of typical solid waste (refuse) associated with the proposed Project’s (long-term operational) uses. Standard construction requirements would minimize odor impacts from construction. The construction odor emissions would be temporary, short-term, and intermittent in nature and would cease upon completion of the respective phase of construction and is thus considered less than significant. It is expected that Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the solid waste regulations. The proposed Project would also be required to comply with SCAQMD Rule 402 to prevent occurrences of public nuisances. Therefore, odors associated with the proposed Project construction and operations would be less than significant and no mitigation is required (18).

PROJECT GHG ANALYSIS

CLIMATE CHANGE SETTING

Global climate change (GCC) is the change in average meteorological conditions on the earth with respect to temperature, precipitation, and storms. The majority of scientists believe that the climate shift taking place since the Industrial Revolution is occurring at a quicker rate and magnitude than in the past. Scientific evidence suggests that GCC is the result of increased concentrations of GHGs in the earth's atmosphere, including carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), and fluorinated gases. The majority of scientists believe that this increased rate of climate change is the result of GHGs resulting from human activity and industrialization over the past 200 years.

An individual project like the proposed Project evaluated in this memo cannot generate enough GHG emissions to affect a discernible change in global climate. However, the proposed Project may participate in the potential for GCC by its incremental contribution of GHGs combined with the cumulative increase of all other sources of GHGs, which when taken together constitute potential influences on GCC. Because these changes may have serious environmental consequences, this memo will evaluate the potential for the proposed Project to have a significant effect upon the environment as a result of its potential contribution to the greenhouse effect.

GCC refers to the change in average meteorological conditions on the earth with respect to temperature, wind patterns, precipitation and storms. Global temperatures are regulated by naturally occurring atmospheric gases such as water vapor, CO₂, N₂O, CH₄, hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF₆). These particular gases are important due to their residence time (duration they stay) in the atmosphere, which ranges from 10 years to more than 100 years. These gases allow solar radiation into the earth's atmosphere, but prevent radiative heat from escaping, thus warming the earth's atmosphere. GCC can occur naturally as it has in the past with the previous ice ages.

Gases that trap heat in the atmosphere are often referred to as GHGs. GHGs are released into the atmosphere by both natural and anthropogenic activity. Without the natural GHG effect, the earth's average temperature would be approximately 61 degrees Fahrenheit (°F) cooler than it is currently. The cumulative accumulation of these gases in the earth's atmosphere is considered to be the cause for the observed increase in the earth's temperature.

For the purposes of this analysis, emissions of CO₂, CH₄, and N₂O were evaluated because these gases are the primary contributors to GCC from development projects. Although there are other substances such as fluorinated gases that also contribute to GCC, these fluorinated gases were not evaluated as their sources are not well-defined and do not contain accepted emissions factors or methodology to accurately calculate these gases.

REGULATORY SETTING

Executive Order S-3-05

Former California Governor Arnold Schwarzenegger announced on June 1, 2005, through Executive Order S-3-05, the following reduction targets for GHG emissions:

- By 2010, reduce GHG emissions to 2000 levels.

- By 2020, reduce GHG emissions to 1990 levels.
- By 2050, reduce GHG emissions to 80% below 1990 levels.

The 2050 reduction goal represents what some scientists believe is necessary to reach levels that will stabilize the climate. The 2020 goal was established to be a mid-term target. Because this is an executive order, the goals are not legally enforceable for local governments or the private sector.

Assembly Bill (AB) 32

The California State Legislature enacted AB 32, which requires that GHGs emitted in California be reduced to 1990 levels by the year 2020. "GHGs" as defined under AB 32 include CO₂, CH₄, N₂O, hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF₆). Since AB 32 was enacted, a seventh chemical, nitrogen trifluoride, has also been added to the list of GHGs. CARB is the state agency charged with monitoring and regulating sources of GHGs. Pursuant to AB 32, CARB adopted regulations to achieve the maximum technologically feasible and cost-effective GHG emission reductions. AB 32 states the following:

"Global warming poses a serious threat to the economic well-being, public health, natural resources, and the environment of California. The potential adverse impacts of global warming include the exacerbation of air quality problems, a reduction in the quality and supply of water to the state from the Sierra snowpack, a rise in sea levels resulting in the displacement of thousands of coastal businesses and residences, damage to marine ecosystems and the natural environment, and an increase in the incidences of infectious diseases, asthma, and other human health-related problems."

CARB approved the 1990 GHG emissions level of 427 million metric ton of CO₂ equivalent per year (MMTCO₂e) on December 6, 2007 (19). Therefore, emissions generated in California in 2020 are required to be equal to or less than 427 MMTCO₂e. Emissions in 2020 in a "business as usual" (BAU) scenario were estimated to be 596 MMTCO₂e, which do not account for reductions from AB 32 regulations (20). At that level, a 28.4% reduction was required to achieve the 427 MMTCO₂e 1990 inventory. In October 2010, CARB prepared an updated BAU 2020 forecast to account for the recession and slower forecasted growth. The forecasted inventory without the benefits of adopted regulation is now estimated at 545 MMTCO₂e. Therefore, under the updated forecast, a 21.7% reduction from BAU is required to achieve 1990 levels (21).

Progress in Achieving AB 32 Targets and Remaining Reductions Required

The State has made steady progress in implementing AB 32 and achieving targets included in Executive Order S-3-05. The progress is shown in updated emission inventories prepared by CARB for 2000 through 2012 (22). The State has achieved the Executive Order S-3-05 target for 2010 of reducing GHG emissions to 2000 levels. As shown below, the 2010 emission inventory achieved this target.

- 1990: 427 MMTCO₂e (AB 32 2020 target)
- 2000: 463 MMTCO₂e (an average 8% reduction needed to achieve 1990 base)
- 2010: 450 MMTCO₂e (an average 5% reduction needed to achieve 1990 base)

CARB has also made substantial progress in achieving its goal of achieving 1990 emissions levels by 2020. As described earlier in this section, CARB revised the 2020 BAU inventory forecast to account for new lower growth projections, which resulted in a new lower reduction from BAU to achieve the 1990 base. The previous reduction from 2020 BAU needed to achieve 1990 levels was 28.4% and the latest reduction from 2020 BAU is 21.7%.

- 2020: 545 MMTCO₂e BAU (an average 21.7% reduction from BAU needed to achieve 1990 base)

Senate Bill (SB) 32

On September 8, 2016, Governor Jerry Brown signed the SB 32 and its companion bill, AB 197. SB 32 requires the state to reduce statewide GHG emissions to 40% below 1990 levels by 2030, a reduction target that was first introduced in Executive Order B-30-15. The new legislation builds upon the AB 32 goal of 1990 levels by 2020 and provides an intermediate goal to achieving S-3-05, which sets a statewide GHG reduction target of 80% below 1990 levels by 2050. AB 197 creates a legislative committee to oversee regulators to ensure that CARB not only responds to the Governor, but also the Legislature (23).

AB 197

A condition of approval for SB 32 was the passage of AB 197. AB 197 requires that CARB consider the social costs of GHG emissions and prioritize direct reductions in GHG emissions at mobile sources and large stationary sources. AB 197 also gives the California legislature more oversight over CARB through the addition of two legislatively appointed members to the CARB Board and the establishment a legislative committee to make recommendations about CARB programs to the legislature.

Executive Order B-55-18 and SB 100

Executive Order B-55-18 and SB 100. SB 100 and Executive Order B-55-18 were signed by Governor Brown on September 10, 2018. Under the existing RPS, 25% of retail sales are required to be from renewable sources by December 31, 2016, 33% by December 31, 2020, 40% by December 31, 2024, 45% by December 31, 2027, and 50% by December 31, 2030. SB 100 raises California's RPS requirement to 50% renewable resources target by December 31, 2026, and to achieve a 60% target by December 31, 2030. SB 100 also requires that retail sellers and local publicly owned electric utilities procure a minimum quantity of electricity products from eligible renewable energy resources so that the total kilowatt hours of those products sold to their retail end-use customers achieve 44% of retail sales by December 31, 2024, 52% by December 31, 2027, and 60% by December 31, 2030. In addition to targets under AB 32 and SB 32, Executive Order B-55-18 establishes a carbon neutrality goal for the state of California by 2045; and sets a goal to maintain net negative emissions thereafter. The Executive Order directs the California Natural Resources Agency (CNRA), California Environmental Protection Agency (CalEPA), the Department of Food and Agriculture (CDFA), and CARB to include sequestration targets in the Natural and Working Lands Climate Change Implementation Plan consistent with the carbon neutrality goal.

Title 24 California Code of Regulations (CCR)

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on August 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that became effective on January 1, 2023³. As construction of the Project is anticipated to be completed in 2025, it is presumed that the Project would be required to comply with the Title 24 standards in place at that time.

SCAQMD

SCAQMD is the agency responsible for air quality planning and regulation in the SCAB. The SCAQMD addresses the impacts to climate change of projects subject to SCAQMD permit as a lead agency if they are the only agency having discretionary approval for the project and acts as a responsible agency when a land use agency must also approve discretionary permits for the project. The SCAQMD acts as an expert commenting agency for impacts to air quality. This expertise carries over to GHG emissions, so the agency helps local land use agencies through the development of models and emission thresholds that can be used to address GHG emissions.

In 2008, SCAQMD formed a Working Group to identify GHG emissions thresholds for land use projects that could be used by local lead agencies in the SCAB. The Working Group developed several different options that are contained in the SCAQMD Draft Guidance Document – Interim CEQA GHG Significance Threshold, that could be applied by lead agencies. The working group has not provided additional guidance since release of the interim guidance in 2008. The SCAQMD Board has not approved the thresholds; however, the Guidance Document provides substantial evidence supporting the approaches to significance of GHG emissions that can be considered by the lead agency in adopting its own threshold. The current interim thresholds consist of the following tiered approach:

- Tier 1 consists of evaluating whether or not the project qualifies for any applicable exemption under CEQA.
- Tier 2 consists of determining whether the project is consistent with a GHG reduction plan. If a project is consistent with a qualifying local GHG reduction plan, it does not have significant GHG emissions.
- Tier 3 consists of screening values, which the lead agency can choose, but must be consistent with all projects within its jurisdiction. A project's construction emissions are averaged over 30 years and are added to the project's operational emissions. If a project's emissions are below one of the following screening thresholds, then the project is less than significant:
 - Residential and commercial land use: 3,000 metric ton of CO₂ equivalent (MTCO₂e/yr)

³ The 2022 California Green Building Standard Code was published on July 1, 2022.

- Industrial land use: 10,000 MTCO₂e/yr
- Based on land use type: residential: 3,500 MTCO₂e/yr; commercial: 1,400 MTCO₂e/yr; or mixed use: 3,000 MTCO₂e/yr
- Tier 4 has the following options:
 - Option 1: Reduce Business-as-Usual (BAU) emissions by a certain percentage; this percentage is currently undefined.
 - Option 2: Early implementation of applicable AB 32 Scoping Plan measures
 - Option 3: 2020 target for service populations (SP), which includes residents and employees: 4.8 MTCO₂e per SP per year for projects and 6.6 MTCO₂e per SP per year for plans;
 - Option 3, 2035 target: 3.0 MTCO₂e per SP per year for projects and 4.1 MTCO₂e per SP per year for plans
- Tier 5 involves mitigation offsets to achieve target significance threshold.

The SCAQMD's interim thresholds used the Executive Order S-3-05-year 2050 goal as the basis for the Tier 3 screening level. Achieving the Executive Order's objective would contribute to worldwide efforts to cap CO₂ concentrations at 450 ppm, thus stabilizing global climate.

SCAQMD only has authority over GHG emissions from development projects that include air quality permits. At this time, it is unknown if the project would include stationary sources of emissions subject to SCAQMD permits. Notwithstanding, if the Project requires a stationary permit, it would be subject to the applicable SCAQMD regulations.

SCAQMD Regulation XXVII, adopted in 2009 includes the following rules:

- Rule 2700 defines terms and post global warming potentials.
- Rule 2701, Southern California (SoCal) Climate Solutions Exchange, establishes a voluntary program to encourage, quantify, and certify voluntary, high quality certified GHG emission reductions in the SCAQMD.
- Rule 2702, GHG Reduction Program created a program to produce GHG emission reductions within the SCAQMD. The SCAQMD will fund projects through contracts in response to requests for proposals or purchase reductions from other parties.

SCAQMD is the agency responsible for air quality planning and regulation in the SCAB. The SCAQMD addresses the impacts to climate change of projects subject to SCAQMD permit as a lead agency if they are the only agency having discretionary approval for the project and acts as a responsible agency when a land use agency must also approve discretionary permits for the project. The SCAQMD acts as an expert commenting agency for impacts to air quality. This expertise carries over to GHG emissions, so the agency helps local land use agencies through the development of models and emission thresholds that can be used to address GHG emissions.

City of Upland Climate Action Plan

The City of Upland released a final draft CAP in September 2015 in accordance with the California Environmental Quality Act, Section 15183.5(a), which states that lead agencies may adopt a plan

for the reduction of GHG emissions that can then be used for project-specific environmental documents to tier from and/or incorporate by reference that existing programmatic review pursuant to CEQA Guidelines Sections 15183.5 (b), 15064 (h), and 15130 (32). The CAP was designed under the premise that the City of Upland, and the community it represents, is uniquely capable of addressing emissions associated with sources under the City of Upland's jurisdiction, and that the City of Upland's emission reduction efforts should coordinate with the state strategies of reducing emissions in order to accomplish these reductions in an efficient and cost-effective manner.

GHG IMPACTS

Standards of Significance

According to the CEQA Guidelines Appendix G thresholds, to determine whether impacts from GHG emissions are significant. Would the project:

- **Threshold 1:** Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment?
- **Threshold 2:** Conflict with an applicable plan, policy or regulation adopted for the purpose of reducing the emissions of GHGs?

The City of Upland has not adopted its own numeric threshold of significance for determining impacts with respect to greenhouse gas (GHG) emissions. A screening threshold of 3,000 MTCO_{2e} per year to determine if additional analysis is required is an acceptable approach for small projects. This approach is a widely accepted screening threshold used by numerous cities in the South Coast Air Basin and is based on the South Coast Air Quality Management District (SCAQMD) staff's proposed GHG screening threshold for stationary source emissions for non-industrial projects, as described in the SCAQMD's Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans ("SCAQMD Interim GHG Threshold"). The SCAQMD Interim GHG Threshold identifies a screening threshold to determine whether additional analysis is required (24). As noted by the SCAQMD:

"...the...screening level for stationary sources is based on an emission capture rate of 90 percent for all new or modified projects...the policy objective of [SCAQMD's] recommended interim GHG significance threshold proposal is to achieve an emission capture rate of 90 percent of all new or modified stationary source projects. **significance threshold based on a 90 percent emission capture rate** may be more appropriate to address the long-term adverse impacts associated with global climate change because most projects will be required to implement GHG reduction measures. Further, a 90 percent emission capture rate sets the emission threshold low enough to capture a substantial fraction of future stationary source projects that will be constructed to accommodate future statewide population and economic growth, while setting the emission threshold high enough to exclude small projects that will in aggregate contribute a relatively small fraction of the cumulative statewide GHG emissions. This assertion is based on the fact that [SCAQMD] staff estimates that these GHG emissions would account for slightly less than one percent of future 2050 statewide GHG emissions target (85 [MMTCO_{2e}/yr]). In addition, these small projects may be subject to future applicable GHG control regulations that would further reduce their overall future contribution to the statewide GHG inventory. Finally, these small sources are already subject to [Best Available Control Technology] (BACT) for criteria pollutants

and are more likely to be single-permit facilities, so they are more likely to have few opportunities readily available to reduce GHG emissions from other parts of their facility.” (24)

Thus, and based on guidance from the SCAQMD, if a non-industrial project would emit GHGs less than 3,000 MTCO₂e per year, the project is not considered a substantial GHG emitter and the GHG impact is less than significant, requiring no additional analysis and no mitigation. On the other hand, if a non-industrial project would emit GHGs in excess of 3,000 MTCO₂e per year, then the project could be considered a substantial GHG emitter, requiring additional analysis and potential mitigation. As previously discussed, a screening threshold of 3,000 MTCO₂e per year is an acceptable approach for small projects to determine if additional analysis is required and is therefore applied for this Project.

GHG IMPACTS – CONSISTENCY WITH THRESHOLD NO. 1

Would the Project have the potential to generate direct or indirect GHG emissions that would result in a significant impact on the environment?

PROJECT GHG EMISSIONS

The estimated GHG emissions for the Project land use are summarized on Table 8. The estimated GHG emission include emissions from Carbon Dioxide (CO₂), Methane (CH₄), Nitrous Oxide (N₂O), and Refrigerants (R). As shown on Table 8, the Project would generate a total of approximately 1,052.17 MTCO₂e/yr.

TABLE 8: TOTAL PROJECT GHG EMISSIONS

| Source | Emission (MT/year) | | | | |
|---|--------------------|-----------------|------------------|----------|-------------------------|
| | CO ₂ | CH ₄ | N ₂ O | R | Total CO ₂ E |
| Annual construction-related emissions amortized over 30 years | 18.77 | 1.00E-03 | 1.00E-03 | 8.00E-03 | 19.14 |
| Mobile | 778.00 | 0.04 | 0.04 | 1.32 | 792.00 |
| Area | 15.10 | < 0.005 | < 0.005 | 0.00 | 15.10 |
| Energy | 186.00 | 0.02 | < 0.005 | 0.00 | 187.00 |
| Water | 16.30 | 0.09 | < 0.005 | 0.00 | 19.20 |
| Waste | 5.60 | 0.56 | 0.00 | 0.00 | 19.60 |
| Refrigerants | 0.00 | 0.00 | 0.00 | 0.13 | 0.13 |
| Total CO ₂ E (All Sources) | 1,052.17 | | | | |

A numerical threshold for determining the significance of GHG emissions in the SCAB has not been established by the SCAQMD for Projects where it is not the lead agency. As an interim threshold based on guidance provided in the CAPCOA CEQA and Climate Change handbook, the City has opted to use a non-zero threshold approach based on Approach 2 of the handbook. Threshold 2.5 (Unit-Based Thresholds Based on Market Capture) establishes a numerical threshold based on capture of approximately 90% of emissions from future development. The latest threshold developed by SCAQMD using this method is 3,000 MTCO₂e/yr for all projects (24).

The Project would result in approximately 1,052.17 MTCO₂e/yr; the proposed Project would not exceed the SCAQMD's numeric threshold of 3,000 MTCO₂e/yr. Thus, the Project would result in a less than significant impact with respect to GHG emissions.

GHG IMPACTS – CONSISTENCY WITH THRESHOLD NO. 2

Would the Project have the potential to conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs?

As previously stated, pursuant to 15604.4 of the CEQA Guidelines, a lead agency may rely on qualitative analysis or performance-based standards to determine the significance of impacts from GHG emissions (25). Project consistency with the City's CAP is evaluated in the following discussion.

The 2022 Scoping Plan for Achieving Carbon Neutrality (2022 Scoping Plan) lays out a path to achieve targets for carbon neutrality and reduce anthropogenic greenhouse gas (GHG) emissions by 85 percent below 1990 levels no later than 2045, as directed by Assembly Bill 1279. The actions and outcomes in the plan will achieve significant reductions in fossil fuel combustion by deploying clean technologies and fuels, further reductions in short-lived climate pollutants, support for sustainable development, increased action on natural and working lands to reduce emissions and sequester carbon, and the capture and storage of carbon. The 2022 Scoping Plan advocates for compliance with a local CAP to determine consistency (26).

City of Upland CAP Consistency

The proposed project would be required to comply with CALGreen building standards, as well as implement various sustainability features with which the project applicant is required to comply. These features would foster, among other benefits, reductions in energy consumption, waste generation, and associated pollution. In addition, newer construction materials and practices, current energy efficiency requirements, and newer appliances tend to emit lower levels of air pollutant emissions, including GHGs, as compared to materials and equipment used years ago. One of the City's methods to reduce GHG emissions is to encourage "smart growth" or promote efficient land use development (27).

According to the City's CAP under Objective B: Maximize Land Use Efficiency, the project is consistent with transportation and land use Measure T-7: Residential Density. The proposed project would increase residential density on the flood control basin, which would help the City to increase residential land use density goals in the CAP.

Finally, the Project is consistent with the general plan land use designation, density, building intensity, and applicable policies specified for the Project area in SCAG's Sustainable Community Strategy/Regional Transportation Plan, which pursuant to SB 375 calls for the integration of transportation, land-use and housing policies to plan for achievement of the GHG-emissions target for the region. Thus, a less than significant impact related to GHG emissions from Project construction and operation would occur and no mitigation is required.

CONCLUSION

Results of the assessment indicate that the Project is not anticipated to result in a significant impact during construction or operational activities associated with air quality and greenhouse gas.

REFERENCES

1. **Air Resources Board.** California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: April 16, 2018.] <http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm>.
2. **Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. <https://www.epa.gov/environmental-topics/air-topics>.
3. **South Coast Air Quality Management District.** RULE 403. FUGITIVE DUST. [Online] <https://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf?sfvrsn=4>.
4. —. RULE 445. Wood-Burning Devices. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-445.pdf>.
5. —. RULE 1113. Architectural Coatings. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/reg-xi/r1113.pdf>.
6. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] May 2022. www.caleemod.com.
7. **State of California.** 2020 CEQA California Environmental Quality Act. 2020.
8. **South Coast Air Quality Management District (SCAQMD).** SCAQMD Air Quality Significance Thresholds. [Online] <https://www.aqmd.gov/docs/default-source/ceqa/handbook/south-coast-aqmd-air-quality-significance-thresholds.pdf>.
9. **California Air Pollution Control Officers Association (CAPCOA).** Appendix A: Calculation Details for CalEEMod. *CalEEMod*. [Online] http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6.
10. **Urban Crossroads, Inc.** *Villa Serena Specific Plan Traffic Analysis*. 2022.
11. **South Coast Air Quality Management District.** *Localized Significance Thresholds Methodology*. s.l. : South Coast Air Quality Management District, 2003.
12. —. Final 2016 Air Quality Management Plan (AQMP). [Online] March 2017. <http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf?sfvrsn=11>.
13. **Southern California Association of Governments.** 2020-2045 Regional Transportation Plan/Sustainable Communities Strategy. [Online] September 2020. https://scag.ca.gov/sites/main/files/file-attachments/0903fconnectsocial-plan_0.pdf?1606001176.
14. **City of Upland.** City of Upland General Plan: Land Use Element. [Online] 2015. https://www.uplandca.gov/uploads/ftp/city_departments/development_services/planning/general_plan_map/pdfs/01_Land%20Use%20Element%20-%20revised%20LU%20map.pdf.
15. **Goss, Tracy A and Kroeger, Amy.** White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. [Online] South Coast Air Quality Management District, 2003. http://www.aqmd.gov/rules/ciwig/final_white_paper.pdf.

16. **South Coast Air Quality Management District.** 2003 Air Quality Management Plan. [Online] 2003. <https://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2003-aqmp>.
17. **Bay Area Air Quality Management District.** [Online] <http://www.baaqmd.gov/>.
18. **South Coast Air Quality Management District.** RULE 402 NUISANCE. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-402.pdf>.
19. **California Air Resources Board.** GHG 1990 Emissions Level & 2020 Limit. *California Air Resources Board*. [Online] <https://ww2.arb.ca.gov/ghg-2020-limit>.
20. —. *Climate Change Draft Scoping Plan*. 2008.
21. —. STATUS OF SCOPING PLAN RECOMMENDED MEASURES. [Online] [Cited: September 19, 2019.] https://ww3.arb.ca.gov/cc/scopingplan/status_of_scoping_plan_measures.pdf.
22. —. *First Update to the Climate Change Scoping Plan*. 2014.
23. **California Legislative Information.** Senate Bill No. 32. [Online] September 8, 2016. https://leginfo.legislature.ca.gov/faces/billNavClient.xhtml?bill_id=201520160SB32.
24. **South Coast Air Quality Management District.** Interim CEQA GHG Threshold for Stationary Sources, Rules and Plans. [Online] December 5, 2008. [http://www.aqmd.gov/docs/default-source/ceqa/handbook/greenhouse-gases-\(ghg\)-ceqa-significance-thresholds/ghgboardsynopsis.pdf](http://www.aqmd.gov/docs/default-source/ceqa/handbook/greenhouse-gases-(ghg)-ceqa-significance-thresholds/ghgboardsynopsis.pdf).
25. **Association of Environmental Professionals.** *2018 CEQA California Environmental Quality Act*. 2018.
26. **California Air Resources Board.** 2022 Scoping Plan Documents. [Online] <https://ww2.arb.ca.gov/our-work/programs/ab-32-climate-change-scoping-plan/2022-scoping-plan-documents>.
27. **City of Upland.** City of Upland Climate Action Plan. [Online] 2015. http://www.ci.upland.ca.us/uploads/ftp/city_departments/development_services/planning/pdfs/Attachment%206%20-%20Final%20Draft%20Climate%20Action%20Plan.pdf.

ATTACHMENT A
CALEEMOD PROPOSED PROJECT EMISSIONS MODEL OUTPUTS

14896 Villa Serena Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
- 3. Construction Emissions Details
 - 3.1. Site Preparation (2024) - Unmitigated
 - 3.3. Grading (2024) - Unmitigated
 - 3.5. Building Construction (2024) - Unmitigated
 - 3.7. Paving (2024) - Unmitigated

3.9. Paving (2025) - Unmitigated

3.11. Architectural Coating (2025) - Unmitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.3. Area Emissions by Source

4.3.2. Unmitigated

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

| Data Field | Value |
|-----------------------------|---------------------------------------|
| Project Name | 14896 Villa Serena |
| Lead Agency | — |
| Land Use Scale | Project/site |
| Analysis Level for Defaults | County |
| Windspeed (m/s) | 2.80 |
| Precipitation (days) | 2.20 |
| Location | 34.1184295523901, -117.63468136395888 |
| County | San Bernardino-South Coast |
| City | Upland |
| Air District | South Coast AQMD |
| Air Basin | South Coast |
| TAZ | 5225 |
| EDFZ | 10 |
| Electric Utility | Southern California Edison |
| Gas Utility | Southern California Gas |

1.2. Land Use Types

| Land Use Subtype | Size | Unit | Lot Acreage | Building Area (sq ft) | Landscape Area (sq ft) | Special Landscape Area (sq ft) | Population | Description |
|-----------------------|------|---------------|-------------|-----------------------|------------------------|--------------------------------|------------|-------------|
| Single Family Housing | 65.0 | Dwelling Unit | 9.16 | 126,750 | 761,336 | — | 215 | — |

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Un/Mit. | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|--------|--------|------|------|------|--------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 1.71 | 1.42 | 12.5 | 16.3 | 0.03 | 0.54 | 0.37 | 0.91 | 0.50 | 0.09 | 0.59 | — | 3,185 | 3,185 | 0.14 | 0.07 | 1.95 | 3,210 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 5.44 | 39.9 | 45.8 | 36.4 | 0.14 | 2.25 | 7.12 | 8.78 | 2.07 | 2.74 | 4.81 | — | 20,938 | 20,938 | 2.08 | 2.87 | 0.98 | 21,845 |
| Average Daily (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 1.52 | 2.23 | 11.6 | 12.9 | 0.03 | 0.49 | 0.78 | 1.28 | 0.45 | 0.25 | 0.70 | — | 3,301 | 3,301 | 0.21 | 0.20 | 1.44 | 3,367 |
| Annual (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 0.28 | 0.41 | 2.12 | 2.36 | < 0.005 | 0.09 | 0.14 | 0.23 | 0.08 | 0.05 | 0.13 | — | 546 | 546 | 0.03 | 0.03 | 0.24 | 557 |

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Year | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily - Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|----------------------|------|------|------|------|---------|---------|---------|------|---------|---------|---------|---|--------|--------|---------|---------|---------|--------|
| 2024 | 1.71 | 1.42 | 12.5 | 16.3 | 0.03 | 0.54 | 0.37 | 0.91 | 0.50 | 0.09 | 0.59 | — | 3,185 | 3,185 | 0.14 | 0.07 | 1.95 | 3,210 |
| Daily - Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 2024 | 5.44 | 4.58 | 45.8 | 36.4 | 0.14 | 2.25 | 7.12 | 8.78 | 2.07 | 2.74 | 4.81 | — | 20,938 | 20,938 | 2.08 | 2.87 | 0.98 | 21,845 |
| 2025 | 1.02 | 39.9 | 7.53 | 10.9 | 0.01 | 0.35 | 0.20 | 0.54 | 0.32 | 0.05 | 0.37 | — | 1,705 | 1,705 | 0.07 | 0.02 | 0.02 | 1,713 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 2024 | 1.52 | 1.18 | 11.6 | 12.9 | 0.03 | 0.49 | 0.78 | 1.28 | 0.45 | 0.25 | 0.70 | — | 3,301 | 3,301 | 0.21 | 0.20 | 1.44 | 3,367 |
| 2025 | 0.07 | 2.23 | 0.46 | 0.68 | < 0.005 | 0.02 | 0.01 | 0.03 | 0.02 | < 0.005 | 0.02 | — | 103 | 103 | < 0.005 | < 0.005 | 0.02 | 104 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 2024 | 0.28 | 0.22 | 2.12 | 2.36 | < 0.005 | 0.09 | 0.14 | 0.23 | 0.08 | 0.05 | 0.13 | — | 546 | 546 | 0.03 | 0.03 | 0.24 | 557 |
| 2025 | 0.01 | 0.41 | 0.08 | 0.12 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | — | 17.1 | 17.1 | < 0.005 | < 0.005 | < 0.005 | 17.2 |

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Un/Mit. | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|------|-------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 3.24 | 5.82 | 3.74 | 25.2 | 0.06 | 0.16 | 1.65 | 1.80 | 0.15 | 0.29 | 0.45 | 39.0 | 7,510 | 7,549 | 4.29 | 0.25 | 19.6 | 7,752 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 2.71 | 5.31 | 3.87 | 18.2 | 0.06 | 0.15 | 1.65 | 1.80 | 0.15 | 0.29 | 0.45 | 39.0 | 7,184 | 7,223 | 4.30 | 0.26 | 1.30 | 7,410 |
| Average Daily (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Unmit. | 2.78 | 5.42 | 2.98 | 20.6 | 0.05 | 0.08 | 1.62 | 1.70 | 0.08 | 0.29 | 0.37 | 39.0 | 6,006 | 6,045 | 4.27 | 0.26 | 8.77 | 6,237 |
| Annual (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|--------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-------|------|------|------|-------|
| Unmit. | 0.51 | 0.99 | 0.54 | 3.76 | 0.01 | 0.01 | 0.30 | 0.31 | 0.01 | 0.05 | 0.07 | 6.46 | 994 | 1,001 | 0.71 | 0.04 | 1.45 | 1,033 |
|--------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-------|------|------|------|-------|

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Sector | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|-------|---------|---------|------|-------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Mobile | 2.72 | 2.47 | 2.22 | 20.8 | 0.05 | 0.03 | 1.65 | 1.68 | 0.03 | 0.29 | 0.33 | — | 5,051 | 5,051 | 0.24 | 0.23 | 18.8 | 5,145 |
| Area | 0.46 | 3.32 | 1.01 | 4.09 | 0.01 | 0.08 | — | 0.08 | 0.08 | — | 0.08 | 0.00 | 1,242 | 1,242 | 0.02 | < 0.005 | — | 1,243 |
| Energy | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 1,124 | 1,124 | 0.10 | 0.01 | — | 1,129 |
| Water | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Waste | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Refrig. | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Total | 3.24 | 5.82 | 3.74 | 25.2 | 0.06 | 0.16 | 1.65 | 1.80 | 0.15 | 0.29 | 0.45 | 39.0 | 7,510 | 7,549 | 4.29 | 0.25 | 19.6 | 7,752 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Mobile | 2.54 | 2.29 | 2.38 | 17.5 | 0.05 | 0.03 | 1.65 | 1.68 | 0.03 | 0.29 | 0.33 | — | 4,734 | 4,734 | 0.25 | 0.24 | 0.49 | 4,813 |
| Area | 0.11 | 2.99 | 0.97 | 0.41 | 0.01 | 0.08 | — | 0.08 | 0.08 | — | 0.08 | 0.00 | 1,232 | 1,232 | 0.02 | < 0.005 | — | 1,233 |
| Energy | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 1,124 | 1,124 | 0.10 | 0.01 | — | 1,129 |
| Water | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Waste | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Refrig. | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Total | 2.71 | 5.31 | 3.87 | 18.2 | 0.06 | 0.15 | 1.65 | 1.80 | 0.15 | 0.29 | 0.45 | 39.0 | 7,184 | 7,223 | 4.30 | 0.26 | 1.30 | 7,410 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Mobile | 2.47 | 2.23 | 2.38 | 17.8 | 0.05 | 0.03 | 1.62 | 1.65 | 0.03 | 0.29 | 0.32 | — | 4,697 | 4,697 | 0.25 | 0.24 | 7.95 | 4,782 |
| Area | 0.25 | 3.16 | 0.09 | 2.55 | < 0.005 | 0.01 | — | 0.01 | 0.01 | — | 0.01 | 0.00 | 91.1 | 91.1 | < 0.005 | < 0.005 | — | 91.2 |

| | | | | | | | | | | | | | | | | | | |
|---------|------|------|------|------|---------|---------|------|---------|---------|------|---------|------|-------|-------|---------|---------|------|-------|
| Energy | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 1,124 | 1,124 | 0.10 | 0.01 | — | 1,129 |
| Water | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Waste | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Refrig. | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Total | 2.78 | 5.42 | 2.98 | 20.6 | 0.05 | 0.08 | 1.62 | 1.70 | 0.08 | 0.29 | 0.37 | 39.0 | 6,006 | 6,045 | 4.27 | 0.26 | 8.77 | 6,237 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Mobile | 0.45 | 0.41 | 0.43 | 3.25 | 0.01 | 0.01 | 0.30 | 0.30 | 0.01 | 0.05 | 0.06 | — | 778 | 778 | 0.04 | 0.04 | 1.32 | 792 |
| Area | 0.05 | 0.58 | 0.02 | 0.47 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | 0.00 | 15.1 | 15.1 | < 0.005 | < 0.005 | — | 15.1 |
| Energy | 0.01 | 0.01 | 0.09 | 0.04 | < 0.005 | 0.01 | — | 0.01 | 0.01 | — | 0.01 | — | 186 | 186 | 0.02 | < 0.005 | — | 187 |
| Water | — | — | — | — | — | — | — | — | — | — | — | 0.86 | 15.5 | 16.3 | 0.09 | < 0.005 | — | 19.2 |
| Waste | — | — | — | — | — | — | — | — | — | — | — | 5.60 | 0.00 | 5.60 | 0.56 | 0.00 | — | 19.6 |
| Refrig. | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.13 | 0.13 |
| Total | 0.51 | 0.99 | 0.54 | 3.76 | 0.01 | 0.01 | 0.30 | 0.31 | 0.01 | 0.05 | 0.07 | 6.46 | 994 | 1,001 | 0.71 | 0.04 | 1.45 | 1,033 |

3. Construction Emissions Details

3.1. Site Preparation (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Location | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|---|-------|
| Onsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 5.35 | 4.49 | 42.5 | 35.3 | 0.05 | 2.25 | — | 2.25 | 2.07 | — | 2.07 | — | 5,529 | 5,529 | 0.22 | 0.04 | — | 5,548 |

| | | | | | | | | | | | | | | | | | | |
|------------------------------|------|------|------|------|---------|------|------|------|------|------|------|---|------|------|---------|---------|------|------|
| Dust From Material Movement: | — | — | — | — | — | — | 5.66 | 5.66 | — | 2.69 | 2.69 | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.15 | 0.12 | 1.16 | 0.97 | < 0.005 | 0.06 | — | 0.06 | 0.06 | — | 0.06 | — | 151 | 151 | 0.01 | < 0.005 | — | 152 |
| Dust From Material Movement: | — | — | — | — | — | — | 0.16 | 0.16 | — | 0.07 | 0.07 | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.03 | 0.02 | 0.21 | 0.18 | < 0.005 | 0.01 | — | 0.01 | 0.01 | — | 0.01 | — | 25.1 | 25.1 | < 0.005 | < 0.005 | — | 25.2 |
| Dust From Material Movement: | — | — | — | — | — | — | 0.03 | 0.03 | — | 0.01 | 0.01 | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.10 | 0.09 | 0.10 | 1.12 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | — | 231 | 231 | 0.01 | 0.01 | 0.03 | 234 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| | | | | | | | | | | | | | | | | | | |
|---------------|---------|---------|---------|------|------|------|---------|---------|------|------|------|---|------|------|---------|---------|---------|------|
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 6.42 | 6.42 | < 0.005 | < 0.005 | 0.01 | 6.51 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 1.06 | 1.06 | < 0.005 | < 0.005 | < 0.005 | 1.08 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.3. Grading (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Location | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------------|------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|---------|------|-------|
| Onsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 3.02 | 2.53 | 23.1 | 20.6 | 0.03 | 1.33 | — | 1.33 | 1.22 | — | 1.22 | — | 3,134 | 3,134 | 0.13 | 0.03 | — | 3,144 |
| Dust From Material Movement | — | — | — | — | — | — | 2.29 | 2.29 | — | 0.94 | 0.94 | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.17 | 0.14 | 1.27 | 1.13 | < 0.005 | 0.07 | — | 0.07 | 0.07 | — | 0.07 | — | 172 | 172 | 0.01 | < 0.005 | — | 172 |

| | | | | | | | | | | | | | | | | | | |
|------------------------------|---------|---------|---------|------|---------|------|---------|---------|------|------|------|---|--------|--------|---------|---------|---------|--------|
| Dust From Material Movement: | — | — | — | — | — | — | 0.13 | 0.13 | — | 0.05 | 0.05 | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.03 | 0.03 | 0.23 | 0.21 | < 0.005 | 0.01 | — | 0.01 | 0.01 | — | 0.01 | — | 28.4 | 28.4 | < 0.005 | < 0.005 | — | 28.5 |
| Dust From Material Movement: | — | — | — | — | — | — | 0.02 | 0.02 | — | 0.01 | 0.01 | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.08 | 0.07 | 0.09 | 0.96 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | — | 198 | 198 | 0.01 | 0.01 | 0.02 | 200 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 2.31 | 0.35 | 22.5 | 12.2 | 0.12 | 0.33 | 1.32 | 1.65 | 0.22 | 0.44 | 0.66 | — | 17,607 | 17,607 | 1.94 | 2.83 | 0.96 | 18,500 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.06 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 11.0 | 11.0 | < 0.005 | < 0.005 | 0.02 | 11.2 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.13 | 0.02 | 1.25 | 0.66 | 0.01 | 0.02 | 0.07 | 0.09 | 0.01 | 0.02 | 0.04 | — | 965 | 965 | 0.11 | 0.16 | 0.87 | 1,014 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 1.82 | 1.82 | < 0.005 | < 0.005 | < 0.005 | 1.85 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| | | | | | | | | | | | | | | | | | | |
|---------|------|---------|------|------|---------|---------|------|------|---------|---------|------|---|-----|-----|------|------|------|-----|
| Hauling | 0.02 | < 0.005 | 0.23 | 0.12 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | — | 160 | 160 | 0.02 | 0.03 | 0.14 | 168 |
|---------|------|---------|------|------|---------|---------|------|------|---------|---------|------|---|-----|-----|------|------|------|-----|

3.5. Building Construction (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Location | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|---------|------|-------|
| Onsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 1.55 | 1.30 | 12.2 | 14.2 | 0.03 | 0.54 | — | 0.54 | 0.49 | — | 0.49 | — | 2,630 | 2,630 | 0.11 | 0.02 | — | 2,639 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 1.55 | 1.30 | 12.2 | 14.2 | 0.03 | 0.54 | — | 0.54 | 0.49 | — | 0.49 | — | 2,630 | 2,630 | 0.11 | 0.02 | — | 2,639 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.98 | 0.82 | 7.67 | 8.97 | 0.02 | 0.34 | — | 0.34 | 0.31 | — | 0.31 | — | 1,657 | 1,657 | 0.07 | 0.01 | — | 1,663 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.18 | 0.15 | 1.40 | 1.64 | < 0.005 | 0.06 | — | 0.06 | 0.06 | — | 0.06 | — | 274 | 274 | 0.01 | < 0.005 | — | 275 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|---------------------|---------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.13 | 0.12 | 0.11 | 1.98 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | 0.00 | 0.00 | — | 337 | 337 | 0.01 | 0.01 | 1.35 | 342 |
| Vendor | 0.02 | 0.01 | 0.25 | 0.13 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | — | 218 | 218 | 0.02 | 0.03 | 0.61 | 229 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.13 | 0.12 | 0.13 | 1.50 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | 0.00 | 0.00 | — | 309 | 309 | 0.01 | 0.01 | 0.03 | 313 |
| Vendor | 0.02 | 0.01 | 0.26 | 0.14 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | — | 218 | 218 | 0.02 | 0.03 | 0.02 | 228 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.08 | 0.07 | 0.08 | 0.99 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | — | 197 | 197 | 0.01 | 0.01 | 0.37 | 200 |
| Vendor | 0.01 | < 0.005 | 0.17 | 0.09 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | — | 137 | 137 | 0.01 | 0.02 | 0.16 | 144 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.01 | 0.01 | 0.02 | 0.18 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 32.7 | 32.7 | < 0.005 | < 0.005 | 0.06 | 33.1 |
| Vendor | < 0.005 | < 0.005 | 0.03 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | — | 22.7 | 22.7 | < 0.005 | < 0.005 | 0.03 | 23.8 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.7. Paving (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Location | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|---------------------|---------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|-------|-------|---------|---------|------|-------|
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 1.01 | 0.85 | 7.81 | 10.0 | 0.01 | 0.39 | — | 0.39 | 0.36 | — | 0.36 | — | 1,512 | 1,512 | 0.06 | 0.01 | — | 1,517 |
| Paving | — | 0.00 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 2.96 | 2.96 | < 0.005 | < 0.005 | — | 2.97 |
| Paving | — | 0.00 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 0.49 | 0.49 | < 0.005 | < 0.005 | — | 0.49 |
| Paving | — | 0.00 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.08 | 0.07 | 0.09 | 0.96 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | — | 198 | 198 | 0.01 | 0.01 | 0.02 | 200 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|---------|---------|---------|---------|---------|------|------|---------|---------|------|------|------|---|------|------|---------|---------|---------|------|
| Worker | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 0.39 | 0.39 | < 0.005 | < 0.005 | < 0.005 | 0.40 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 0.07 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.07 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.9. Paving (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Location | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|-------|---------|---------|------|-------|
| Onsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.95 | 0.80 | 7.45 | 9.98 | 0.01 | 0.35 | — | 0.35 | 0.32 | — | 0.32 | — | 1,511 | 1,511 | 0.06 | 0.01 | — | 1,517 |
| Paving | — | 0.00 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.05 | 0.04 | 0.39 | 0.53 | < 0.005 | 0.02 | — | 0.02 | 0.02 | — | 0.02 | — | 79.9 | 79.9 | < 0.005 | < 0.005 | — | 80.1 |
| Paving | — | 0.00 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| | | | | | | | | | | | | | | | | | | |
|---------------------|---------|---------|---------|------|---------|---------|---------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.01 | 0.01 | 0.07 | 0.10 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 13.2 | 13.2 | < 0.005 | < 0.005 | — | 13.3 |
| Paving | — | 0.00 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.07 | 0.06 | 0.07 | 0.88 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 | — | 194 | 194 | 0.01 | 0.01 | 0.02 | 196 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 10.4 | 10.4 | < 0.005 | < 0.005 | 0.02 | 10.5 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 1.72 | 1.72 | < 0.005 | < 0.005 | < 0.005 | 1.74 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.11. Architectural Coating (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Location | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|------------------------|---------|---------|------|------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.21 | 0.17 | 1.18 | 1.52 | < 0.005 | 0.04 | — | 0.04 | 0.03 | — | 0.03 | — | 178 | 178 | 0.01 | < 0.005 | — | 179 |
| Architectural Coatings | — | 39.7 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | 0.01 | 0.01 | 0.06 | 0.08 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 9.76 | 9.76 | < 0.005 | < 0.005 | — | 9.79 |
| Architectural Coatings | — | 2.17 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Off-Road Equipment | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 1.62 | 1.62 | < 0.005 | < 0.005 | — | 1.62 |
| Architectural Coatings | — | 0.40 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|---------------------|---------|---------|---------|---------|------|------|---------|---------|------|------|------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | 0.02 | 0.02 | 0.02 | 0.27 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 60.5 | 60.5 | < 0.005 | < 0.005 | 0.01 | 61.2 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 3.36 | 3.36 | < 0.005 | < 0.005 | 0.01 | 3.41 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Worker | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | 0.00 | 0.00 | — | 0.56 | 0.56 | < 0.005 | < 0.005 | < 0.005 | 0.56 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | — | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------|------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|------|-------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | 2.72 | 2.47 | 2.22 | 20.8 | 0.05 | 0.03 | 0.28 | 0.31 | 0.03 | 0.09 | 0.12 | — | 5,051 | 5,051 | 0.24 | 0.23 | 18.8 | 5,145 |

| | | | | | | | | | | | | | | | | | | |
|-----------------------|------|------|------|------|------|------|------|------|------|------|------|---|-------|-------|------|------|------|-------|
| Total | 2.72 | 2.47 | 2.22 | 20.8 | 0.05 | 0.03 | 0.28 | 0.31 | 0.03 | 0.09 | 0.12 | — | 5,051 | 5,051 | 0.24 | 0.23 | 18.8 | 5,145 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | 2.54 | 2.29 | 2.38 | 17.5 | 0.05 | 0.03 | 0.28 | 0.31 | 0.03 | 0.09 | 0.12 | — | 4,734 | 4,734 | 0.25 | 0.24 | 0.49 | 4,813 |
| Total | 2.54 | 2.29 | 2.38 | 17.5 | 0.05 | 0.03 | 0.28 | 0.31 | 0.03 | 0.09 | 0.12 | — | 4,734 | 4,734 | 0.25 | 0.24 | 0.49 | 4,813 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | 0.45 | 0.41 | 0.43 | 3.25 | 0.01 | 0.01 | 0.05 | 0.06 | 0.01 | 0.02 | 0.02 | — | 778 | 778 | 0.04 | 0.04 | 1.32 | 792 |
| Total | 0.45 | 0.41 | 0.43 | 3.25 | 0.01 | 0.01 | 0.05 | 0.06 | 0.01 | 0.02 | 0.02 | — | 778 | 778 | 0.04 | 0.04 | 1.32 | 792 |

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | — | 472 | 472 | 0.04 | 0.01 | — | 475 |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | 472 | 472 | 0.04 | 0.01 | — | 475 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | — | 472 | 472 | 0.04 | 0.01 | — | 475 |

| | | | | | | | | | | | | | | | | | | |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|------|------|------|---------|---|------|
| Total | — | — | — | — | — | — | — | — | — | — | — | — | 472 | 472 | 0.04 | 0.01 | — | 475 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | — | 78.2 | 78.2 | 0.01 | < 0.005 | — | 78.7 |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | 78.2 | 78.2 | 0.01 | < 0.005 | — | 78.7 |

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------|------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|---------|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 652 | 652 | 0.06 | < 0.005 | — | 654 |
| Total | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 652 | 652 | 0.06 | < 0.005 | — | 654 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 652 | 652 | 0.06 | < 0.005 | — | 654 |
| Total | 0.06 | 0.03 | 0.51 | 0.22 | < 0.005 | 0.04 | — | 0.04 | 0.04 | — | 0.04 | — | 652 | 652 | 0.06 | < 0.005 | — | 654 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | 0.01 | 0.01 | 0.09 | 0.04 | < 0.005 | 0.01 | — | 0.01 | 0.01 | — | 0.01 | — | 108 | 108 | 0.01 | < 0.005 | — | 108 |
| Total | 0.01 | 0.01 | 0.09 | 0.04 | < 0.005 | 0.01 | — | 0.01 | 0.01 | — | 0.01 | — | 108 | 108 | 0.01 | < 0.005 | — | 108 |

4.3. Area Emissions by Source

4.3.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Source | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|------------------------|---------|---------|------|------|---------|---------|-------|---------|---------|--------|---------|------|-------|-------|---------|---------|---|-------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Hearths | 0.11 | 0.06 | 0.97 | 0.41 | 0.01 | 0.08 | — | 0.08 | 0.08 | — | 0.08 | 0.00 | 1,232 | 1,232 | 0.02 | < 0.005 | — | 1,233 |
| Consumer Products | — | 2.71 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Architectural Coatings | — | 0.22 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Landscape Equipment | 0.35 | 0.33 | 0.04 | 3.68 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 9.86 | 9.86 | < 0.005 | < 0.005 | — | 9.89 |
| Total | 0.46 | 3.32 | 1.01 | 4.09 | 0.01 | 0.08 | — | 0.08 | 0.08 | — | 0.08 | 0.00 | 1,242 | 1,242 | 0.02 | < 0.005 | — | 1,243 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Hearths | 0.11 | 0.06 | 0.97 | 0.41 | 0.01 | 0.08 | — | 0.08 | 0.08 | — | 0.08 | 0.00 | 1,232 | 1,232 | 0.02 | < 0.005 | — | 1,233 |
| Consumer Products | — | 2.71 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Architectural Coatings | — | 0.22 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | 0.11 | 2.99 | 0.97 | 0.41 | 0.01 | 0.08 | — | 0.08 | 0.08 | — | 0.08 | 0.00 | 1,232 | 1,232 | 0.02 | < 0.005 | — | 1,233 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Hearths | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | 0.00 | 14.0 | 14.0 | < 0.005 | < 0.005 | — | 14.0 |

| | | | | | | | | | | | | | | | | | | |
|------------------------|------|------|---------|------|---------|---------|---|---------|---------|---|---------|------|------|------|---------|---------|---|------|
| Consumer Products | — | 0.50 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Architectural Coatings | — | 0.04 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Landscape Equipment | 0.04 | 0.04 | < 0.005 | 0.46 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | — | 1.12 | 1.12 | < 0.005 | < 0.005 | — | 1.12 |
| Total | 0.05 | 0.58 | 0.02 | 0.47 | < 0.005 | < 0.005 | — | < 0.005 | < 0.005 | — | < 0.005 | 0.00 | 15.1 | 15.1 | < 0.005 | < 0.005 | — | 15.1 |

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Total | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Total | — | — | — | — | — | — | — | — | — | — | — | 5.19 | 93.4 | 98.6 | 0.54 | 0.01 | — | 116 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|------|------|------|------|---------|---|------|
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | 0.86 | 15.5 | 16.3 | 0.09 | < 0.005 | — | 19.2 |
| Total | — | — | — | — | — | — | — | — | — | — | — | 0.86 | 15.5 | 16.3 | 0.09 | < 0.005 | — | 19.2 |

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Total | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Total | — | — | — | — | — | — | — | — | — | — | — | 33.8 | 0.00 | 33.8 | 3.38 | 0.00 | — | 118 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | 5.60 | 0.00 | 5.60 | 0.56 | 0.00 | — | 19.6 |
| Total | — | — | — | — | — | — | — | — | — | — | — | 5.60 | 0.00 | 5.60 | 0.56 | 0.00 | — | 19.6 |

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-----------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|------|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.81 | 0.81 |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Single Family Housing | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.13 | 0.13 |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | 0.13 | 0.13 |

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Equipment Type | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
|----------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|

| | | | | | | | | | | | | | | | | | | |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Equipment Type | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Equipment Type | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Vegetation | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Total | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Species | TOG | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------|-----|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Avoided | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Sequestered | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Removed | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

| | | | | | | | | | | | | | | | | | | |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Daily, Winter (Max) | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Avoided | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Sequestered | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Removed | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Annual | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Avoided | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Sequestered | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Removed | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| Subtotal | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

5. Activity Data

5.1. Construction Schedule

| Phase Name | Phase Type | Start Date | End Date | Days Per Week | Work Days per Phase | Phase Description |
|------------|------------|------------|----------|---------------|---------------------|-------------------|
|------------|------------|------------|----------|---------------|---------------------|-------------------|

| | | | | | | |
|-----------------------|-----------------------|------------|------------|------|------|---|
| Site Preparation | Site Preparation | 1/2/2024 | 1/15/2024 | 5.00 | 10.0 | — |
| Grading | Grading | 1/16/2024 | 2/12/2024 | 5.00 | 20.0 | — |
| Building Construction | Building Construction | 2/13/2024 | 12/30/2024 | 5.00 | 230 | — |
| Paving | Paving | 12/31/2024 | 1/27/2025 | 5.00 | 20.0 | — |
| Architectural Coating | Architectural Coating | 1/28/2025 | 2/24/2025 | 5.00 | 20.0 | — |

5.2. Off-Road Equipment

5.2.1. Unmitigated

| Phase Name | Equipment Type | Fuel Type | Engine Tier | Number per Day | Hours Per Day | Horsepower | Load Factor |
|-----------------------|---------------------------|-----------|-------------|----------------|---------------|------------|-------------|
| Site Preparation | Rubber Tired Dozers | Diesel | Average | 3.00 | 8.00 | 367 | 0.40 |
| Site Preparation | Crawler Tractors | Diesel | Average | 4.00 | 8.00 | 87.0 | 0.43 |
| Grading | Excavators | Diesel | Average | 1.00 | 8.00 | 36.0 | 0.38 |
| Grading | Graders | Diesel | Average | 1.00 | 8.00 | 148 | 0.41 |
| Grading | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| Grading | Crawler Tractors | Diesel | Average | 3.00 | 8.00 | 87.0 | 0.43 |
| Building Construction | Cranes | Diesel | Average | 1.00 | 8.00 | 367 | 0.29 |
| Building Construction | Forklifts | Diesel | Average | 3.00 | 8.00 | 82.0 | 0.20 |
| Building Construction | Generator Sets | Diesel | Average | 1.00 | 8.00 | 14.0 | 0.74 |
| Building Construction | Tractors/Loaders/Backhoes | Diesel | Average | 3.00 | 8.00 | 84.0 | 0.37 |
| Building Construction | Welders | Diesel | Average | 1.00 | 8.00 | 46.0 | 0.45 |
| Paving | Pavers | Diesel | Average | 2.00 | 8.00 | 81.0 | 0.42 |
| Paving | Paving Equipment | Diesel | Average | 2.00 | 8.00 | 89.0 | 0.36 |
| Paving | Rollers | Diesel | Average | 2.00 | 8.00 | 36.0 | 0.38 |
| Architectural Coating | Air Compressors | Diesel | Average | 1.00 | 8.00 | 37.0 | 0.48 |

5.3. Construction Vehicles

5.3.1. Unmitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|-----------------------|--------------|-----------------------|----------------|---------------|
| Site Preparation | — | — | — | — |
| Site Preparation | Worker | 17.5 | 18.5 | LDA,LDT1,LDT2 |
| Site Preparation | Vendor | — | 10.2 | HHDT,MHDT |
| Site Preparation | Hauling | 0.00 | 20.0 | HHDT |
| Site Preparation | Onsite truck | — | — | HHDT |
| Grading | — | — | — | — |
| Grading | Worker | 15.0 | 18.5 | LDA,LDT1,LDT2 |
| Grading | Vendor | — | 10.2 | HHDT,MHDT |
| Grading | Hauling | 250 | 20.0 | HHDT |
| Grading | Onsite truck | — | — | HHDT |
| Building Construction | — | — | — | — |
| Building Construction | Worker | 23.4 | 18.5 | LDA,LDT1,LDT2 |
| Building Construction | Vendor | 6.95 | 10.2 | HHDT,MHDT |
| Building Construction | Hauling | 0.00 | 20.0 | HHDT |
| Building Construction | Onsite truck | — | — | HHDT |
| Paving | — | — | — | — |
| Paving | Worker | 15.0 | 18.5 | LDA,LDT1,LDT2 |
| Paving | Vendor | — | 10.2 | HHDT,MHDT |
| Paving | Hauling | 0.00 | 20.0 | HHDT |
| Paving | Onsite truck | — | — | HHDT |
| Architectural Coating | — | — | — | — |
| Architectural Coating | Worker | 4.68 | 18.5 | LDA,LDT1,LDT2 |
| Architectural Coating | Vendor | — | 10.2 | HHDT,MHDT |

| | | | | |
|-----------------------|--------------|------|------|------|
| Architectural Coating | Hauling | 0.00 | 20.0 | HHDT |
| Architectural Coating | Onsite truck | — | — | HHDT |

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

| Phase Name | Residential Interior Area Coated (sq ft) | Residential Exterior Area Coated (sq ft) | Non-Residential Interior Area Coated (sq ft) | Non-Residential Exterior Area Coated (sq ft) | Parking Area Coated (sq ft) |
|-----------------------|--|--|--|--|-----------------------------|
| Architectural Coating | 256,669 | 85,556 | 0.00 | 0.00 | — |

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

| Phase Name | Material Imported (cy) | Material Exported (cy) | Acres Graded (acres) | Material Demolished (sq. ft.) | Acres Paved (acres) |
|------------------|------------------------|------------------------|----------------------|-------------------------------|---------------------|
| Site Preparation | — | — | 35.0 | 0.00 | — |
| Grading | 40,000 | — | 50.0 | 0.00 | — |
| Paving | 0.00 | 0.00 | 0.00 | 0.00 | 0.72 |

5.6.2. Construction Earthmoving Control Strategies

| Control Strategies Applied | Frequency (per day) | PM10 Reduction | PM2.5 Reduction |
|----------------------------|---------------------|----------------|-----------------|
| Water Exposed Area | 3 | 74% | 74% |

5.7. Construction Paving

| Land Use | Area Paved (acres) | % Asphalt |
|----------|--------------------|-----------|
|----------|--------------------|-----------|

| | | |
|-----------------------|------|----|
| Single Family Housing | 0.72 | 0% |
|-----------------------|------|----|

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

| Year | kWh per Year | CO2 | CH4 | N2O |
|------|--------------|-----|------|---------|
| 2024 | 0.00 | 349 | 0.03 | < 0.005 |
| 2025 | 0.00 | 349 | 0.03 | < 0.005 |

5.9. Operational Mobile Sources

5.9.1. Unmitigated

| Land Use Type | Trips/Weekday | Trips/Saturday | Trips/Sunday | Trips/Year | VMT/Weekday | VMT/Saturday | VMT/Sunday | VMT/Year |
|-----------------------|---------------|----------------|--------------|------------|-------------|--------------|------------|-----------|
| Single Family Housing | 614 | 616 | 551 | 220,846 | 5,883 | 5,908 | 5,285 | 2,117,470 |

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

| Hearth Type | Unmitigated (number) |
|-----------------------|----------------------|
| Single Family Housing | — |
| Wood Fireplaces | 0 |
| Gas Fireplaces | 59 |
| Propane Fireplaces | 0 |
| Electric Fireplaces | 0 |
| No Fireplaces | 7 |

5.10.2. Architectural Coatings

| Residential Interior Area Coated (sq ft) | Residential Exterior Area Coated (sq ft) | Non-Residential Interior Area Coated (sq ft) | Non-Residential Exterior Area Coated (sq ft) | Parking Area Coated (sq ft) |
|--|--|--|--|-----------------------------|
| 256668.75 | 85,556 | 0.00 | 0.00 | — |

5.10.3. Landscape Equipment

| Season | Unit | Value |
|-------------|--------|-------|
| Snow Days | day/yr | 0.00 |
| Summer Days | day/yr | 250 |

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO₂ and CH₄ and N₂O and Natural Gas (kBTU/yr)

| Land Use | Electricity (kWh/yr) | CO ₂ | CH ₄ | N ₂ O | Natural Gas (kBTU/yr) |
|-----------------------|----------------------|-----------------|-----------------|------------------|-----------------------|
| Single Family Housing | 494,625 | 349 | 0.0330 | 0.0040 | 2,033,832 |

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

| Land Use | Indoor Water (gal/year) | Outdoor Water (gal/year) |
|-----------------------|-------------------------|--------------------------|
| Single Family Housing | 2,709,276 | 14,943,364 |

5.13. Operational Waste Generation

5.13.1. Unmitigated

| Land Use | Waste (ton/year) | Cogeneration (kWh/year) |
|----------|------------------|-------------------------|
|----------|------------------|-------------------------|

| | | |
|-----------------------|------|------|
| Single Family Housing | 19.0 | 0.00 |
|-----------------------|------|------|

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

| Land Use Type | Equipment Type | Refrigerant | GWP | Quantity (kg) | Operations Leak Rate | Service Leak Rate | Times Serviced |
|-----------------------|---|--------------|-------|---------------|----------------------|-------------------|----------------|
| Single Family Housing | Average room A/C & Other residential A/C and heat pumps | User Defined | 750 | < 0.005 | 2.50 | 2.50 | 10.0 |
| Single Family Housing | Household refrigerators and/or freezers | R-134a | 1,430 | 0.12 | 0.60 | 0.00 | 1.00 |

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

| Equipment Type | Fuel Type | Engine Tier | Number per Day | Hours Per Day | Horsepower | Load Factor |
|----------------|-----------|-------------|----------------|---------------|------------|-------------|
|----------------|-----------|-------------|----------------|---------------|------------|-------------|

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

| Equipment Type | Fuel Type | Number per Day | Hours per Day | Hours per Year | Horsepower | Load Factor |
|----------------|-----------|----------------|---------------|----------------|------------|-------------|
|----------------|-----------|----------------|---------------|----------------|------------|-------------|

5.16.2. Process Boilers

| Equipment Type | Fuel Type | Number | Boiler Rating (MMBtu/hr) | Daily Heat Input (MMBtu/day) | Annual Heat Input (MMBtu/yr) |
|----------------|-----------|--------|--------------------------|------------------------------|------------------------------|
|----------------|-----------|--------|--------------------------|------------------------------|------------------------------|

5.17. User Defined

| Equipment Type | Fuel Type |
|----------------|-----------|
|----------------|-----------|

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

| Vegetation Land Use Type | Vegetation Soil Type | Initial Acres | Final Acres |
|--------------------------|----------------------|---------------|-------------|
|--------------------------|----------------------|---------------|-------------|

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

| Biomass Cover Type | Initial Acres | Final Acres |
|--------------------|---------------|-------------|
|--------------------|---------------|-------------|

5.18.2. Sequestration

5.18.2.1. Unmitigated

| Tree Type | Number | Electricity Saved (kWh/year) | Natural Gas Saved (btu/year) |
|-----------|--------|------------------------------|------------------------------|
|-----------|--------|------------------------------|------------------------------|

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

| Climate Hazard | Result for Project Location | Unit |
|------------------------------|-----------------------------|--|
| Temperature and Extreme Heat | 19.6 | annual days of extreme heat |
| Extreme Precipitation | 6.05 | annual days with precipitation above 20 mm |
| Sea Level Rise | 0.00 | meters of inundation depth |

| | | |
|----------|------|------------------------|
| Wildfire | 0.00 | annual hectares burned |
|----------|------|------------------------|

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

| Climate Hazard | Exposure Score | Sensitivity Score | Adaptive Capacity Score | Vulnerability Score |
|------------------------------|----------------|-------------------|-------------------------|---------------------|
| Temperature and Extreme Heat | 2 | 0 | 0 | N/A |
| Extreme Precipitation | N/A | N/A | N/A | N/A |
| Sea Level Rise | 1 | 0 | 0 | N/A |
| Wildfire | 1 | 0 | 0 | N/A |
| Flooding | N/A | N/A | N/A | N/A |
| Drought | N/A | N/A | N/A | N/A |
| Snowpack | N/A | N/A | N/A | N/A |
| Air Quality | 0 | 0 | 0 | N/A |

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

| Climate Hazard | Exposure Score | Sensitivity Score | Adaptive Capacity Score | Vulnerability Score |
|------------------------------|----------------|-------------------|-------------------------|---------------------|
| Temperature and Extreme Heat | 2 | 1 | 1 | 3 |

| | | | | |
|-----------------------|-----|-----|-----|-----|
| Extreme Precipitation | N/A | N/A | N/A | N/A |
| Sea Level Rise | 1 | 1 | 1 | 2 |
| Wildfire | 1 | 1 | 1 | 2 |
| Flooding | N/A | N/A | N/A | N/A |
| Drought | N/A | N/A | N/A | N/A |
| Snowpack | N/A | N/A | N/A | N/A |
| Air Quality | 1 | 1 | 1 | 2 |

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

| Indicator | Result for Project Census Tract |
|---------------------|---------------------------------|
| Exposure Indicators | — |
| AQ-Ozone | 93.6 |
| AQ-PM | 98.2 |
| AQ-DPM | 45.9 |
| Drinking Water | 93.7 |
| Lead Risk Housing | 8.71 |
| Pesticides | 53.1 |
| Toxic Releases | 54.7 |
| Traffic | 84.6 |

| | |
|---------------------------------|------|
| Effect Indicators | — |
| CleanUp Sites | 22.9 |
| Groundwater | 14.3 |
| Haz Waste Facilities/Generators | 65.2 |
| Impaired Water Bodies | 0.00 |
| Solid Waste | 52.9 |
| Sensitive Population | — |
| Asthma | 13.0 |
| Cardio-vascular | 25.2 |
| Low Birth Weights | 53.8 |
| Socioeconomic Factor Indicators | — |
| Education | 13.1 |
| Housing | 44.5 |
| Linguistic | 29.5 |
| Poverty | 24.4 |
| Unemployment | 18.3 |

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

| Indicator | Result for Project Census Tract |
|------------------------|---------------------------------|
| Economic | — |
| Above Poverty | 66.99602207 |
| Employed | 46.86256897 |
| Median HI | 74.75939946 |
| Education | — |
| Bachelor's or higher | 73.18105993 |
| High school enrollment | 100 |

| | |
|--|-------------|
| Preschool enrollment | 38.32926986 |
| Transportation | — |
| Auto Access | 76.73553189 |
| Active commuting | 10.9842166 |
| Social | — |
| 2-parent households | 76.08109842 |
| Voting | 82.47144874 |
| Neighborhood | — |
| Alcohol availability | 79.69973053 |
| Park access | 5.607596561 |
| Retail density | 16.39933273 |
| Supermarket access | 34.96727833 |
| Tree canopy | 32.02874374 |
| Housing | — |
| Homeownership | 78.53201591 |
| Housing habitability | 76.35057103 |
| Low-inc homeowner severe housing cost burden | 10.31695111 |
| Low-inc renter severe housing cost burden | 88.6179905 |
| Uncrowded housing | 74.48992686 |
| Health Outcomes | — |
| Insured adults | 59.70742974 |
| Arthritis | 21.6 |
| Asthma ER Admissions | 87.5 |
| High Blood Pressure | 28.2 |
| Cancer (excluding skin) | 14.0 |
| Asthma | 72.9 |
| Coronary Heart Disease | 37.1 |

| | |
|---------------------------------------|------|
| Chronic Obstructive Pulmonary Disease | 56.7 |
| Diagnosed Diabetes | 60.0 |
| Life Expectancy at Birth | 89.2 |
| Cognitively Disabled | 76.7 |
| Physically Disabled | 74.5 |
| Heart Attack ER Admissions | 86.7 |
| Mental Health Not Good | 79.6 |
| Chronic Kidney Disease | 55.3 |
| Obesity | 74.1 |
| Pedestrian Injuries | 19.6 |
| Physical Health Not Good | 69.2 |
| Stroke | 51.7 |
| Health Risk Behaviors | — |
| Binge Drinking | 66.7 |
| Current Smoker | 80.3 |
| No Leisure Time for Physical Activity | 73.6 |
| Climate Change Exposures | — |
| Wildfire Risk | 0.0 |
| SLR Inundation Area | 0.0 |
| Children | 75.0 |
| Elderly | 12.2 |
| English Speaking | 29.9 |
| Foreign-born | 43.9 |
| Outdoor Workers | 76.1 |
| Climate Change Adaptive Capacity | — |
| Impervious Surface Cover | 75.2 |
| Traffic Density | 79.1 |

| | |
|------------------------|------|
| Traffic Access | 23.0 |
| Other Indices | — |
| Hardship | 23.0 |
| Other Decision Support | — |
| 2016 Voting | 84.6 |

7.3. Overall Health & Equity Scores

| Metric | Result for Project Census Tract |
|---|---------------------------------|
| CalEnviroScreen 4.0 Score for Project Location (a) | 37.0 |
| Healthy Places Index Score for Project Location (b) | 64.0 |
| Project Located in a Designated Disadvantaged Community (Senate Bill 535) | No |
| Project Located in a Low-Income Community (Assembly Bill 1550) | No |
| Project Located in a Community Air Protection Program Community (Assembly Bill 617) | No |

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

| Screen | Justification |
|-----------------------------------|--|
| Land Use | Taken from Site plan |
| Construction: Construction Phases | OY 2025, used previous AQ report construction schedule |

| | |
|----------------------------------|--|
| Construction: Off-Road Equipment | T/L/B replaced with Crawler Tractor to accurately calculate disturbance for Site Preparation and Grading phases Standard 8-hour work days |
| Operations: Vehicle Data | Taken from ITE weekend trip rates LU 210 |
| Operations: Hearths | Woodstoves - Rule 445 no wood burning devices, Wood burning devices added to gas devices |
| Operations: Refrigerants | Beginning 1 January 2025, all new air conditioning equipment may not use refrigerants with a GWP of 750 or greater. |