


TTM 38171 RESIDENTIAL DEVELOPMENT AIR QUALITY AND GREENHOUSE GAS ANALYSIS City of Jurupa Valley

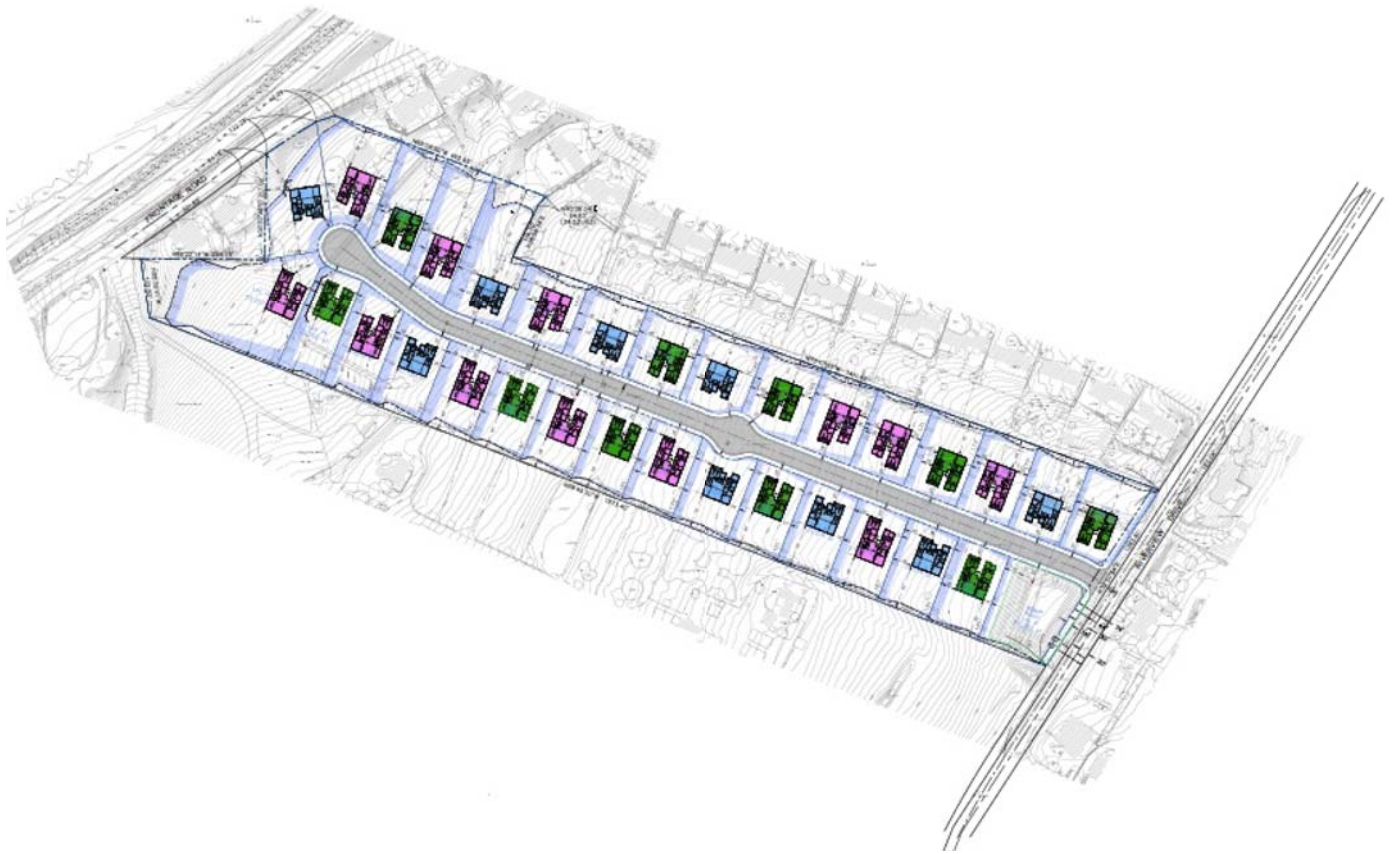

**TTM 38171 RESIDENTIAL DEVELOPMENT
AIR QUALITY AND GREENHOUSE GAS IMPACT STUDY
City of Jurupa Valley, California**

Prepared for:

Mr. Roger Hobbs
RC HOBBS COMPANY
1428 East Chapman Avenue
Orange, CA 92866

Prepared by:

RK ENGINEERING GROUP, INC.
4000 Westerly Place, Suite 280
Newport Beach, CA 92660

**Bryan Estrada, AICP, PTP
Darshan Shivaiah, M.S**

August 13, 2021

Table of Contents

Section	Page
1.0 Introduction	1-1
1.1 Site Location	1-1
1.2 Project Description	1-1
1.3 Sensitive Receptors	1-2
1.4 Summary of Air Quality and Greenhouse Gas Impacts	1-3
1.5 Recommended Project Design Features	1-4
2.0 Air Quality Setting	2-1
2.1 Description of Air Pollutants	2-1
2.2 Federal and State Ambient Air Quality Standards	2-4
2.3 Attainment Status	2-6
2.4 South Coast Air Quality Management District (SCAQMD)	2-7
2.4.1 SCAQMD Rules and Regulations	2-8
2.5 Local Climate and Meteorology	2-9
2.6 Local Air Quality	2-10
3.0 Global Climate Change Setting	3-1
3.1 Greenhouse Gases	3-2
3.2 GHG Regulatory Setting – State of California	3-4
3.3 GHG Emissions Inventory	3-4
4.0 Modeling Parameters and Assumptions	4-1
4.1 Construction Assumptions	4-1
4.2 Localized Construction Analysis Modeling Parameters	4-2
4.3 Operational Assumptions	4-3
4.3.1 Mobile Source Emissions	4-3
4.3.2 Energy Source Emissions	4-5
4.3.3 Area Source Emissions	4-6
4.3.4 Other Sources of Operational Emissions	4-7
5.0 Significance Thresholds	5-1
5.1 Air Quality Regional Significance Thresholds	5-1
5.2 Air Quality Localized Significance Thresholds	5-1
5.3 GHG Significance Thresholds	5-2
5.3.1 SCAQMD Recommended GHG Thresholds	5-2
6.0 Air Quality Impact Analysis	6-1
6.1 Short-Term Air Quality Impacts - Construction	6-1
6.1.1 Daily Emissions - Construction	6-1
6.1.2 Localized Emissions - Construction	6-2
6.1.3 Fugitive Dust - Construction	6-3

Table of Contents (continued)

Section		Page
	6.1.4 Odors - Construction	6-4
	6.1.5 Asbestos - Construction	6-4
	6.1.6 Diesel Particulate Matter - Construction	6-5
6.2	Long Terms Air Quality Impacts - Operation	6-7
	6.2.1 Regional Emissions - Operation	6-7
	6.2.2 Localized Emissions - Operation	6-8
	6.2.3 Odors – Operation	6-8
	6.2.4 Toxic Air Contaminants – Operation	6-9
7.0	Greenhouse Gas Impact Analysis	7-1
	7.1 Greenhouse Gas Emissions - Construction	7-1
	7.2 Greenhouse Gas Emissions - Operation	7-2
	7.3 Project Consistency with GHG Reduction Plans	7-3

List of Attachments

Exhibits

Location Map	A
Site Plan	B

Tables

Land Use Summary	1
CEQA Air Quality Impact Criteria	2
CEQA GHG Impact Criteria	3
Federal and State Ambient Air Quality Standards (AAQS)	4
South Coast Air Basin Attainment Status	5
Meteorological Summary	6
Local Air Quality	7
Global Warming Potential of Greenhouse Gases	8
GHG Emissions Inventory	9
Construction Equipment Assumptions	10
Operational Vehicle Miles Traveled	11
Operational Vehicle Mix	12
Electricity and Natural Gas Usage - Unmitigated	13
Operational Water Usage and Waste Generation	14
SCAQMD Regional Significance Air Quality Thresholds	15
SCAQMD Localized Significance Air Quality Thresholds	16
SCAQMD Tier 3 GHG Screening Thresholds	17
SCAQMD Tier 4 GHG Efficiency Thresholds	18
Regional Construction Emissions	19
Localized Construction Emissions	20
Regional Operational Emissions	21
Localized Operational Emissions	22
Construction Greenhouse Gas Emissions	23
Operational Greenhouse Gas Emissions	24

Appendices

Daily Emission Calculations Outputs (CalEEMod)	A
Annual Emission Calculations Outputs (CalEEMod)	B

1.0 Introduction

The purpose of this air quality and greenhouse gas (GHG) impact study is to determine whether the estimated criteria air pollutants and greenhouse gas emissions generated from the construction and operation of the proposed TTM 38171 Residential Development (hereinafter referred to as project) would cause significant impacts to air resources.

This assessment was conducted within the context of the California Environmental Quality Act (CEQA, California Public Resources Code Sections 21000, et seq.). The methodology follows the California Air Resources Board (CARB), the South Coast Air Quality Management District (SCAQMD), and City of Jurupa Valley recommendations for quantification of emissions and evaluation of potential impacts.

1.1 Site Location

The project site is located along the northwest side of Riverview Drive, southeast of Limonite Avenue, and south of Maverick Lane, in the City of Jurupa Valley.

The project site is located within the South Coast Air Basin (SCAB), the SCAQMD Riverside Valley General Forecast Area, and the Metropolitan Riverside Area County Air Monitoring Area – 23.

The project site is zoned for EDR – Ranch in the City of Jurupa Valley Zoning Map and the City of Jurupa Valley land use designation map.

The project location map is provided in Exhibit A.

1.2 Project Description

The project proposes to construct and operate 31 single family residential homes and approximately 68,700 square feet of on-site street improvements (paved surfaces) on an approximately 19.36 acre vacant site. The site plan used for this analysis, provided by ROBERT BEERS, is illustrated in Exhibit B. Table 1 summarizes the proposed project land uses.

**Table 1
Land Use Summary**

Project Land Use	CalEEMod Land Use Category	Quantity	Metric
Residential - Single family	Single Family Housing	31	Dwelling Units
New Paved Surfaces (Internal Roadway)	Parking Lot	68,700	Square Feet

Construction of the project is estimated to begin in the year 2022 and last approximately 19 months. Construction activities are expected to consist of site preparation, grading, building construction, paving, and architectural coating.

The project will demolish one (1) existing residential dwelling unit (approximately 1,500 square feet). The project is expected to require the export approximately 34,874 cubic yards of earthwork material during grading phase. The project is expected to be operational in the year 2023.

1.3 Sensitive Receptors

Sensitive receptors are considered land uses or other types of population groups that are more sensitive to air pollution exposure. Sensitive population groups include children, the elderly, the acutely and chronically ill, and those with cardio-respiratory diseases. For CEQA purposes, the SCAQMD considers a sensitive receptor to be a location where a sensitive individual could remain for 24-hours or longer, such as residences, hospitals, and schools (etc), as described in the Localized Significance Threshold Methodology (SCAQMD 2008a, page 3-2).

The nearest sensitive land uses to the project site include the following:

- Existing residential dwelling units located adjacent to the site to the north, south, east and west of the project site. Sensitive receptors are located within 25 meters of the project site.

1.4 Summary of Air Quality and Greenhouse Gas Impacts

Table 2 provides a summary of the CEQA air quality impact analysis results.

**Table 2
CEQA Air Quality Impact Criteria**

Air Quality Impact Criteria	Potentially Significant	Potentially Significant Unless Mitigated	Less Than Significant Impact	No Impact
<i>Would the project:</i>				
a) Conflict with, or obstruct implementation of, the applicable air quality plan?			X	
c) Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable Federal or State ambient air quality standard?			X	
d) Expose sensitive receptors to substantial pollutant concentrations?			X	
e) Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?			X	

Table 3 provides a summary of the CEQA GHG impact criteria analysis results.

**Table 3
CEQA GHG Impact Criteria**

GHG Impact Criteria	Potentially Significant	Potentially Significant Unless Mitigated	Less Than Significant Impact	No Impact
<i>Would the project:</i>				
a) Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment?			X	
b) Conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing emissions of greenhouse gases?			X	

1.5 Recommended Project Design Features

The following recommended project design features include standard dust control measures, construction best practices and building code requirements that are intended to reduce air quality and GHG emissions. Project design features should be included as part of the conditions of approval for the project, but are not typically considered mitigation under CEQA.

Construction Design Features:

DF-1 Prior to starting construction, submit a Construction Management Plan to the City of Jurupa Valley that specifies how all construction design features will be implemented.

DF-2 The project must follow the standard SCAQMD rules and requirements with regards to fugitive dust control, which includes, but are not limited to the following:

1. All active construction areas shall be watered two (2) times daily.
2. Speed on unpaved roads shall be reduced to less than 15 mph.
3. Any visible dirt deposition on any public roadway shall be swept or washed at the site access points within 30 minutes.
4. Any on-site stockpiles of debris, dirt or other dusty material shall be covered or watered twice daily.
5. All operations on any unpaved surface shall be suspended if winds exceed 15 mph.
6. Access points shall be washed or swept daily.
7. Construction sites shall be sandbagged for erosion control.
8. Apply nontoxic chemical soil stabilizers according to manufacturers' specifications to all inactive construction areas (previously graded areas inactive for 10 days or more).
9. Cover all trucks hauling dirt, sand, soil, or other loose materials, and maintain at least 2 feet of freeboard space in accordance with the requirements of California Vehicle Code (CVC) section 23114.
10. Pave or gravel construction access roads at least 100 feet onto the site from the main road and use gravel aprons at truck exits.
11. Replace the ground cover of disturbed areas as quickly possible.

- DF-3** All diesel construction equipment should have Tier 4 low emission “clean diesel” engines (OEM or retrofit) that include diesel oxidation catalysts and diesel particulate filters that meet the latest CARB best available control technology.
- DF-4** Construction equipment should be maintained in proper tune.
- DF-5** All construction vehicles should be prohibited from excessive idling. Excessive idling is defined as five (5) minutes or longer.
- DF-6** Minimize the simultaneous operation of multiple construction equipment units, to the maximum extent feasible.
- DF-7** The use of heavy construction equipment and earthmoving activity should be suspended during Air Alerts when the Air Quality Index reaches the “Unhealthy” level.
- DF-8** Establish an electricity supply to the construction site and use electric powered equipment instead of diesel-powered equipment or generators, where feasible.
- DF-9** Establish staging areas for the construction equipment that as far from adjacent residential homes, as feasible.
- DF-10** Use haul trucks with on-road engines instead of off-road engines for on-site hauling.

Operational Design Features

- DF-11** The project will comply with the mandatory requirements of the California Building Standards Code, Title 24, Part 6 (Energy Code) and Part 11 (CALGreen), including, but not limited to:
- Install low flow fixtures and toilets, water efficient irrigation systems, drought tolerant/native landscaping, and reduce the amount of turf.
 - Provide the necessary infrastructure to support electric vehicle charging.

- Provide solar installations per the prescribed Energy Design Ratings.

DF-12 Participate in the local waste management recycling and composting programs.

DF-13 Encourage the homeowner's association and landscape maintenance crews to use electric powered landscaping equipment for landscape maintenance.

2.0 Air Quality Setting

The Federal Clean Air Act (§ 7602) defines air pollution as any agent or combination of such agents, including any physical, chemical, biological, or radioactive substance which is emitted into or otherwise enters the ambient air. Household combustion devices, motor vehicles, industrial facilities and forest fires are common sources of air pollution. Air pollution can cause disease, allergies and even death. It affects soil, water, crops, vegetation, manmade materials, animals, wildlife, weather, visibility, and climate. It can also cause damage to and deterioration of property, present hazards to transportation, and negatively impact the economy.

This section provides background information on criteria air pollutants, the applicable federal, state and local regulations concerning air pollution, and the existing physical setting of the project within the context of local air quality.

2.1 Description of Air Pollutants¹.

The following section describes the air pollutants of concern related to the project. Criteria air pollutants are defined as those pollutants for which the federal and state governments have established air quality standards for outdoor or ambient concentrations to protect public health. The following descriptions of criteria air pollutants have been provided by the SCAQMD.

- **Carbon Monoxide (CO)** is a colorless, odorless, toxic gas produced by incomplete combustion of carbon-containing fuels (e.g., gasoline, diesel fuel, and biomass). Sources include motor vehicle exhaust, industrial processes (metals processing and chemical manufacturing), residential wood burning, and natural sources. CO is somewhat soluble in water; therefore, rainfall and fog can suppress CO conditions. CO enters the body through the lungs, dissolves in the blood, and competes with oxygen, often replacing it in the blood, thus reducing the blood's ability to transport oxygen to vital organs in the body. The ambient air quality standard for carbon monoxide is intended to protect persons whose medical condition already compromises their circulatory system's ability to deliver oxygen. These medical conditions include certain heart ailments, chronic lung diseases, and anemia. Persons with these conditions have reduced exercise capacity even when exposed to relatively low levels of CO. Fetuses are at risk because their blood has an even greater affinity to bind with CO. Smokers are also at risk from ambient CO levels because smoking

¹ SCAQMD. Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning (May 6, 2005)

increases the background level of CO in their blood. The South Coast basin has recently achieved attainment status for carbon monoxide by both USEPA and CARB.

- **Nitrogen Dioxide (NO₂)** is a byproduct of fuel combustion. The principal form of nitrogen oxide produced by combustion is nitric oxide (NO), but NO reacts quickly to form NO₂, creating the mixture of NO and NO₂ commonly called NO_x. NO₂ acts as an acute irritant and, in equal concentrations, is more injurious than NO. At atmospheric concentrations, however, NO₂ is only potentially irritating. There is some indication of a relationship between NO₂ and chronic pulmonary fibrosis. Some increase in bronchitis in young children has also been observed at concentrations below 0.3 parts per million (ppm). NO₂ absorbs blue light which results in a brownish red cast to the atmosphere and reduced visibility. Although NO₂ concentrations have not exceeded national standards since 1991 and the state hourly standard since 1993, NO_x emissions remain of concern because of their contribution to the formation of O₃ and particulate matter.
- **Ozone (O₃)** is one of several substances called photochemical oxidants that are formed when volatile organic compounds (VOC) and NO_x react in the presence of ultraviolet sunlight. O₃ concentrations in the South Coast basin are typically among the highest in the nation, and the damaging effects of photochemical smog, which is a popular name for a number of oxidants in combination, are generally related to the concentrations of O₃. Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be the subgroups most susceptible to O₃ effects. Short-term exposures (lasting for a few hours) to O₃ at levels typically observed in southern California can result in breathing pattern changes, reduction of breathing capacity, increased susceptibility to infections, inflammation of the lung tissue, and some immunological changes. In recent years, a correlation between elevated ambient O₃ levels and increases in daily hospital admission rates, as well as mortality, has also been reported. The South Coast Air Basin is designated by the USEPA as an extreme non-attainment area for ozone. Although O₃ concentrations have declined substantially since the early 1990s, the South Coast basin continues to have peak O₃ levels that exceed both state and federal standards.
- **Fine Particulate Matter (PM₁₀)** consists of extremely small, suspended particles or droplets 10 microns or smaller in diameter that can lodge in the lungs, contributing to respiratory problems. PM₁₀ arises from such sources as re-entrained road dust, diesel soot, combustion products, tire and brake abrasion, construction operations, and fires. It is also formed in the atmosphere from NO_x and SO₂ reactions with ammonia. PM₁₀ scatters light and significantly reduces visibility. Inhalable particulates

pose a serious health hazard, alone or in combination with other pollutants. More than half of the smallest particles inhaled will be deposited in the lungs and can cause permanent lung damage. Inhalable particulates can also have a damaging effect on health by interfering with the body's mechanism for clearing the respiratory tract or by acting as a carrier of an absorbed toxic substance. The South Coast basin has recently achieved federal attainment status for PM₁₀, but is non-attainment based on state requirements.

- **Ultra-Fine Particulate Matter (PM_{2.5})** is defined as particulate matter with a diameter less than 2.5 microns and is a subset of PM₁₀. PM_{2.5} consists mostly of products from the reaction of NO_x and SO₂ with ammonia, secondary organics, finer dust particles, and the combustion of fuels, including diesel soot. PM_{2.5} can cause exacerbation of symptoms in sensitive patients with respiratory or cardiovascular disease, declines in pulmonary function growth in children, and increased risk of premature death from heart or lung diseases in the elderly. Daily fluctuations in PM_{2.5} levels have been related to hospital admissions for acute respiratory conditions, school absences, and increased medication use in children and adults with asthma. The South Coast basin is designated as non-attainment for PM_{2.5} by both federal and state standards.
- **Sulfur dioxide (SO₂)** is a colorless, pungent gas formed primarily by the combustion of sulfur-containing fossil fuels. Health effects include acute respiratory symptoms and difficulty in breathing for children. Individuals with asthma may experience constriction of airways with exposure to SO₂. Though SO₂ concentrations have been reduced to levels well below state and federal standards, further reductions in SO₂ emissions are needed because SO₂ is a precursor to sulfate and PM₁₀. The South Coast basin is considered a SO₂ attainment area by USEPA and CARB.
- **Lead (Pb)** is a toxic heavy metal that can be emitted into the air through some industrial processes, burning of leaded gasoline and past use of lead-based consumer products. Lead is a neurotoxin that accumulates in soft tissues and bones, damages the nervous system, and causes blood disorders. It is particularly problematic in children, in that permanent brain damage may result, even if blood levels are promptly normalized with treatment. Concentrations of lead once exceeded the state and federal air quality standards by a wide margin, but as a result of the removal of lead from motor vehicle gasoline, ambient air quality standards for lead have not been exceeded since 1982. Though special monitoring sites immediately downwind of lead sources recorded localized violations of the state standard in 1994, no violations have been recorded since. Consequently, the South Coast basin is designated as an attainment area for lead by both the USEPA and CARB. This report

does not analyze lead emissions from the project, as it is not expected to emit lead in any significant measurable quantity.

- **Volatile Organic Compounds (VOC)**, although not actually a criteria air pollutant, VOCs are regulated by the SCAQMD because they cause chemical reactions which contribute to the formation of ozone. VOCs are also transformed into organic aerosols in the atmosphere, contributing to higher PM₁₀ and lower visibility levels. Sources of VOCs include combustion engines, and evaporative emissions associated with fuel, paints and solvents, asphalt paving, and the use of household consumer products such as aerosols. Although health-based standards have not been established for VOCs, health effects can occur from exposures to high concentrations of VOC. Some hydrocarbon components classified as VOC emissions are hazardous air pollutants. Benzene, for example, is a hydrocarbon component of VOC emissions that are known to be a human carcinogen. The term reactive organic gases (ROG) are often used interchangeably with VOC.
- **Toxic Air Contaminants (TACs)** are defined as air pollutants which may cause or contribute to an increase in mortality or serious illness, or which may pose a hazard to human health, and for which there is no concentration that does not present some risk. This contrasts with the criteria pollutants, in that there is no threshold level for TAC exposure below which adverse health impacts are not expected to occur. The majority of the estimated health risk from TACs can be attributed to a relatively few compounds, the most common being diesel particulate matter (DPM) from diesel engine exhaust. In addition to DPM, benzene and 1,3-butadiene are also significant contributors to overall ambient public health risk in California.

2.2 Federal and State Ambient Air Quality Standards

The Federal Clean Air Act, which was last amended in 1990, requires the EPA to set National Ambient Air Quality Standards (NAAQS) for criteria pollutants considered harmful to public health and the environment. The State of California has also established additional and more stringent California Ambient Air Quality Standards (CAAQS) in addition to the seven criteria pollutants designated by the federal government.

AAQS are designed to protect the health and welfare of the populace with a reasonable margin of safety. The standards are divided into two categories, primary standards, and secondary standards. Primary standards are implemented to provide protection for the "sensitive" populations such as those with asthma, or the children and elderly. Secondary standards are to provide protection against visible pollution as well as damage to the surrounding environment, including animals, crops, and buildings.

Table 4 shows the Federal and State Ambient Air Quality Standards.

**Table 4
Federal and State Ambient Air Quality Standards (AAQS)¹**

Air Pollutant	Averaging Time ²	Federal Standard (NAAQS) ²	California Standard (CAAQS) ²
Ozone	1 Hour	--	0.09 ppm
	8 Hour	0.070 ppm	0.070 ppm
Carbon Monoxide (CO)	1 Hour	35 ppm	20 ppm
	8 Hour	9 ppm	9 ppm
Nitrogen Dioxide (NO ₂)	1 Hour	0.100 ppm	0.18 ppm
	Annual	0.053 ppm	0.030 ppm
Sulfur Dioxide (SO ₂)	1 Hour	0.075 ppm	0.25 ppm
	3 Hour	0.5 ppm ³	--
	24 Hour	--	0.04 ppm
Particulate Matter (PM ₁₀)	24 Hour	150 µg/m ³	50 µg/m ³
	Mean	--	20 µg/m ³
Particulate Matter (PM _{2.5})	24 Hour	35 µg/m ³	--
	Annual	12 µg/m ³	12 µg/m ³
Lead	30-day	--	1.5 µg/m
	Quarter	1.5 µg/m	--
	3-month average	0.15 µg/m	--
Visibility reducing particles	8 Hour	--	0.23/km extinction coefficient. (10-mile visibility standard)
Sulfates	24 Hour	--	25 µg/m
Vinyl chloride	24 Hour	--	0.01 ppm
Hydrogen sulfide	24 Hour	--	0.03 ppm

¹ Source: USEPA: <https://www.epa.gov/criteria-air-pollutants/naaq-table> and

CARB: <https://www2.arb.ca.gov/resources/california-ambient-air-quality-standards>

² ppm = parts per million of air, by volume; µg/m³ = micrograms per cubic meter; Annual = Annual Arithmetic Mean; 30-day = 30-day average; Quarter = Calendar quarter.

³ Secondary standards

Several pollutants listed in Table 4 are not addressed in this analysis. Lead is not included because the project is not anticipated to emit lead. Visibility-reducing particles are not explicitly addressed in this analysis because particulate matter is addressed. The project is not expected to generate or be exposed to vinyl chloride because proposed project uses do not utilize the chemical processes that create this pollutant and there are no such uses in the project vicinity. The proposed project is not expected to cause exposure to hydrogen sulfide because it would not generate hydrogen sulfide in any substantial quantity.

2.3 Attainment Status

The Clean Air Act requires states to prepare a State Implementation Plan (SIP) to ensure air quality meets the NAAQS. The California Air Resources Board (CARB) provides designations of attainment for air basins where AAQS are either met or exceeded. If the AAQS are met, the area is designated as being in “attainment”, if the air pollutant concentrations exceed the AAQS, then the area is designated as being “nonattainment”. If there is inadequate or inconclusive data to make a definitive attainment designation, the area is considered “unclassified.”

National nonattainment areas are further designated as marginal, moderate, serious, severe, or extreme as a function of deviation from standards. Each standard has a different definition, or ‘form’ of what constitutes attainment, based on specific air quality statistics. For example, the Federal 8-hour CO standard is not to be exceeded more than once per year; therefore, an area is in attainment of the CO standard if no more than one 8-hour ambient air monitoring values exceeds the threshold per year. In contrast, the federal annual PM_{2.5} standard is met if the three-year average of the annual average PM_{2.5} concentration is less than or equal to the standard.

When a state submits a request to the EPA to re-designate a nonattainment area to attainment, the Clean Air Act (CAA) section 175A(a) requires that the state (or states, if the area is a multi-state area) submit a maintenance plan ensuring the area can maintain the air quality standard for which the area is to be re-designated for at least 10 years following the effective date of re-designation.

Table 5 lists the attainment status for the criteria pollutants in the South Coast Air Basin (SCAB).

**Table 5
South Coast Air Basin Attainment Status¹**

Pollutant	State Status	National Status
Ozone	Nonattainment	Nonattainment (Extreme) ²
Carbon monoxide	Attainment	Attainment (Maintenance)
Nitrogen dioxide	Attainment	Attainment (Maintenance)
PM ₁₀	Nonattainment	Attainment (Maintenance)
PM _{2.5}	Nonattainment	Nonattainment
Lead	Attainment	Nonattainment (Partial) ³

¹ Source: California Air Resources Board. <http://www.arb.ca.gov/desig/adm/adm.htm>

² 8-Hour Ozone.

³ Partial Nonattainment designation – Los Angeles County portion of Basin only.

2.4 South Coast Air Quality Management District (SCAQMD)

The agency responsible for air pollution control for the South Coast Air Basin (SCAB) is the South Coast Air Quality Management District (SCAQMD). SCAQMD is responsible for controlling emissions primarily from stationary sources. SCAQMD maintains air quality monitoring stations throughout the SCAB. SCAQMD, in coordination with the Southern California Association of Governments, is also responsible for developing, updating, and implementing the Air Quality Management Plan (AQMP) for the SCAB. An AQMP is a plan prepared and implemented by an air pollution district for a county or region designated as nonattainment of the federal and/or California ambient air quality standards. The term nonattainment area is used to refer to an air SCAB where one or more ambient air quality standards are exceeded.

The latest version is the 2016 AQMP. The 2016 AQMP is a regional blueprint for achieving the federal air quality standards and healthful air. While air quality has dramatically improved over the years, the SCAB still exceeds federal public health standards for both ozone and particulate matter (PM) and experiences some of the worst air pollution in the nation. The 2016 AQMP includes both stationary and mobile source strategies to ensure that rapidly approaching attainment deadlines are met, that public health is protected to the maximum extent feasible, and that the region is not faced with burdensome sanctions if the Plan is not approved or if the NAAQS are not met on time.

According to the 2016 AQMP, the most significant air quality challenge in the SCAB is to reduce nitrogen oxide (NOx) emissions sufficiently to meet the upcoming ozone standard deadlines. Based on the inventory and modeling results, 522 tons per day (tpd) of total

SCAB NO_x 2012 emissions are projected to drop to 255 tpd and 214 tpd in the 8-hour ozone attainment years of 2023 and 2031 respectively, due to continued implementation of already adopted regulatory actions (“baseline emissions”). The analysis suggests that total SCAB emissions of NO_x must be reduced to approximately 141 tpd in 2023 and 96 tpd in 2031 to attain the 8-hour ozone standards. This represents an additional 45 percent reduction in NO_x in 2023, and an additional 55 percent NO_x reduction beyond 2031 levels.²

2.4.1 SCAQMD Rules and Regulations

The SCAQMD establishes a program of rules and regulations to obtain attainment of the state and federal standards in conjunction with the AQMP. Several of the rules and regulations that may be applicable to this project include, but are not limited to, the following:

- **SCAQMD Rule 402** prohibits a person from discharging from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.
- **SCAQMD Rule 403** governs emissions of fugitive dust during construction and operation activities. Compliance with this rule is achieved through application of standard Best Management Practices, such as application of water or chemical stabilizers to disturbed soils, covering haul vehicles, restricting vehicle speeds on unpaved roads to 15 miles per hour, sweeping loose dirt from paved site access roadways, cessation of construction activity when winds exceed 25 mph, and establishing a permanent ground cover on finished sites.
- **SCAQMD Rule 445** restricts wood burning devices from being installed into any new development and is intended to reduce the emissions of particulate matter for wood burning devices.
- **SCAQMD Rule 1113** governs the sale, use, and manufacturing of architectural coating and limits the VOC content in paints and paint solvents. This rule regulates the VOC content of paints available during construction. Therefore, all paints and

² SCAQMD. Final 2016 Air Quality Management Plan. <http://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/final-2016-aqmp>

solvents used during construction and operation of project must comply with Rule 1113.

- **SCAQMD Rule 1143** governs the manufacture, sale, and use of paint thinners and solvents used in thinning of coating materials, cleaning of coating application equipment, and other solvent cleaning operations by limiting their VOC content. This rule regulates the VOC content of solvents used during construction. Solvents used during the construction phase must comply with this rule.
- **SCAQMD Rule 1186** limits the presence of fugitive dust on paved and unpaved roads and sets certification protocols and requirements for street sweepers that are under contract to provide sweeping services to any federal, state, county, agency or special district such as water, air, sanitation, transit, or school district.

2.5 Local Climate and Meteorology

The project is located in the South Coast Air Basin (SCAB). Climatological data from the nearest weather station to the project site is summarized in Table 6.

Table 6
Meteorological Summary¹

Month	Temperature (°F)			Mean Precipitation (inches)
	Max.	Min.	Mean	
January	53.0	66.8	39.1	2.01
February	54.7	68.3	41.1	2.20
March	57.3	71.3	43.2	1.84
April	61.2	75.6	46.7	0.77
May	65.6	80.0	51.1	0.23
June	70.9	87.0	54.8	0.05
July	76.9	94.2	59.5	0.04
August	77.0	94.4	59.6	0.13
September	73.6	90.9	56.2	0.19
October	66.5	82.9	50.0	0.44
November	58.7	74.5	42.8	0.84
December	53.5	67.8	39.2	1.46
Annual	64.0	79.5	48.6	10.20

¹ Source: Western Regional Climate Center 2016-2019. Averages derived from measurements recorded between 1893 and 2016 at Riverside Fire Station 3, (047470).

2.6 Local Air Quality

The air quality at any site is dependent on the regional air quality and local pollutant sources. Regional air quality is determined by the release of pollutants throughout the air basin. Estimates of the existing emissions in the Basin provided in the Final 2016 Air Quality Management Plan, prepared by SCAQMD, March 2017, indicate that collectively, mobile sources account for 60 percent of the VOC, 90 percent of the NOx emissions, 95 percent of the CO emissions and 34 percent of directly emitted PM2.5, with another 13 percent of PM2.5 from road dust.

The SCAQMD has divided the SCAB into fourteen general forecasting areas and thirty eight Source Receptor Areas (SRA) for monitoring and reporting local air quality. The SCAQMD provides daily reports of the current air quality conditions in each general forecast area and SRA. The monitoring areas provide a general representation of the local meteorological, terrain, and air quality conditions within the SCAB.

The project is located within the Riverside Valley general forecasting area and Metropolitan Riverside air monitoring area (SRA-23).

Table 7 summarizes the published air quality monitoring for the most recent 3-year period available. These pollutant levels were used to comprise a “background” for the project location and existing local air quality.

**Table 7
Local Air Quality**

Air Pollutant Location	Averaging Time	Item	2017	2018	2019
Carbon Monoxide -- Metropolitan Riverside County 1	1 Hour	Max 1-Hour (ppm)	1.9	2.2	1.5
		Exceeded State Standard (20 ppm)	No	No	No
		Exceeded National Standard (35 ppm)	No	No	No
	8 Hour	Max 8 Hour (ppm)	1.7	2.0	1.2
		Exceeded State Standard (9 ppm)	No	No	No
		Exceeded National Standard (9 ppm)	No	No	No
Ozone -- Metropolitan Riverside County 1	1 Hour	Max 1-Hour (ppm)	0.145	0.123	0.123
		Days > State Standard (0.09 ppm)	47.0	22.0	24.0
	8 Hour	Max 8 Hour (ppm)	0.118	0.101	0.096
		Days > State Standard (0.07 ppm)	81	53	59
		Days > National Standard (0.070 ppm)	81	53	59
Nitrogen Dioxide -- Metropolitan Riverside County 1	1 Hour	Max 1-Hour (ppm)	0.063	0.055	0.056
		Exceeded State Standard (0.18 ppm)	No	No	No
	Annual	Annual Average (ppm)	0.015	0.014	0.014
		Exceeded >State Standard (0.030 ppm)	No	No	No
		Exceeded >National Standard (0.053 ppm)	No	No	No
Sulfur Dioxide -- Metropolitan Riverside County 1	1 Hour	Max 1 Hour (ppm)	0.0025	0.0017	0.0018
		Exceed State Standard (0.25 ppm)	No	No	No
		Exceed National Standard (0.075 ppm)	No	No	No
	24 Hour	Max 24-Hour ($\mu\text{g}/\text{m}^3$)	138.00	126.00	99.00
		Days > State Standard ($50 \mu\text{g}/\text{m}^3$)	103.00	132.00	21.00
		Days > National Standard ($150 \mu\text{g}/\text{m}^3$)	0.00	0.00	0.00
Annual	Annual Average ($\mu\text{g}/\text{m}^3$)	41.60	44.00	34.40	
	Exceeded State Standard ($20 \mu\text{g}/\text{m}^3$)	Yes	Yes	Yes	
Fine Particulates (PM2.5) -- Metropolitan Riverside County 1	24 Hour	Max 24-Hour ($\mu\text{g}/\text{m}^3$)	50.30	50.70	46.70
		Days > National Standard ($35 \mu\text{g}/\text{m}^3$)	6.00	2.00	4.00
	Annual	Annual Average ($\mu\text{g}/\text{m}^3$)	12.18	12.41	11.13
		Exceeded State Standard ($12 \mu\text{g}/\text{m}^3$)	Yes	Yes	No
		Exceeded National Standard ($15 \mu\text{g}/\text{m}^3$)	No	No	No

Source : <https://www.aqmd.gov/home/air-quality/historical-air-quality-data/historical-data-by-year>

$\mu\text{g}/\text{m}^3$ = micrograms per cubic meter
 ARB = California Air Resource Board
 EPA= Environmental Protection Agency
 ppm = part per million
 (-) = Data not provided

3.0 Global Climate Change Setting

Global climate change is the change in the average weather of the earth that is measured by such things as alterations in temperature, wind patterns, storms, and precipitation. Current data shows that the recent period of warming is occurring more rapidly than past geological events. The average global surface temperature has increased by approximately 1.4° Fahrenheit since the early 20th Century. 1.4° Fahrenheit may seem like a small change, but it's an unusual event in Earth's recent history, and as we are seeing, even small changes in temperature can cause enormous changes in the environment.

The planet's climate record, preserved in tree rings, ice cores, and coral reefs, shows that the global average temperature has been stable over long periods of time. For example, at the end of the last ice age, when the Northeast United States was covered by more than 3,000 feet of ice, average global temperatures were only 5° to 9° Fahrenheit cooler than today. The Intergovernmental Panel on Climate Change (IPCC), which includes more than 1,300 scientists from the United States and other countries, forecasts a temperature rise of 2.5° to 10° Fahrenheit over the next century. Therefore, significant changes to the environment are expected in the near future.

The consequences of global climate change include more frequent and severe weather, worsening air pollution by increasing ground level ozone, higher rates of plant and animal extinction, more acidic and oxygen depleted oceans, strain on food and water resources, and threats to densely populated coastal and low lying areas from sea level rise.

The impacts of climate change are already visible in the Southwest United States. In California, the consequences of climate change include;

- A rise in sea levels resulting in the displacement of coastal businesses and residencies
- A reduction in the quality and supply of water from the Sierra snowpack
- Increased risk of large wildfires
- Exacerbation of air quality problems
- Reductions in the quality and quantity of agricultural products
- An increased temperature and extreme weather events
- A decrease in the health and productivity of California's forests

3.1 Greenhouse Gases

GHGs comprise less than 0.1 percent of the total atmospheric composition, yet they play an essential role in influencing climate. Greenhouse gases include naturally occurring compounds such as carbon dioxide (CO₂), methane (CH₄), water vapor (H₂O), and nitrous oxide (N₂O), while others are synthetic. Man-made GHGs include the chlorofluorocarbons (CFCs), hydrofluorocarbons (HFCs) and Perfluorocarbons (PFCs), as well as sulfur hexafluoride (SF₆). Different GHGs have different effects on the Earth's warming. GHGs differ from each other in their ability to absorb energy (their "radiative efficiency") and how long they stay in the atmosphere, also known as the "lifetime".

The Global Warming Potential (GWP) was developed to allow comparisons of the global warming impacts of different gases. Specifically, it is a measure of how much energy the emissions of 1 ton of a gas will absorb over a given period of time, relative to the emissions of 1 ton of CO₂. The larger the GWP, the more that a given gas warms the Earth compared to CO₂ over that time period. The time period usually used for GWPs is 100 years. GWPs provide a common unit of measure, which allows analysts to add up emissions estimates of different gases and allows policymakers to compare emissions reduction opportunities across sectors and gases.

Table 8 lists the 100-year GWP of GHGs from the Intergovernmental Panel on Climate Change (IPCC) fifth assessment report (AR5).

Table 8
Global Warming Potential of Greenhouse Gases^{1, 2}

Gas Name	Formula	Lifetime (years)	GWP
Carbon Dioxide	CO ₂		1
Methane	CH ₄	12	28
Nitrous Oxide	N ₂ O	114	265
Sulphur Hexafluoride	SF ₆	3200	23,500
Nitrogen Trifluoride	NF ₃	740	16,100
Hexafluoroethane (PFC-116)	C ₂ F ₆	10,000	11,100
Octafluoropropane (PFC-218)	C ₃ F ₈	2,600	8,900
Octafluorocyclobutane (PFC-318)	C ₄ F ₈	3,200	9,540
Tetrafluoromethane (PFC-14)	CF ₄	50,000	6,630
Hydrofluorocarbon 125	HFC-125	29	3,170
Hydrofluorocarbon 134a	HFC-134a	14	1,300
Hydrofluorocarbon 143a	HFC-143a	52	4,800
Hydrofluorocarbon 152a	HFC-152a	1	138
Hydrofluorocarbon 227ea	HFC-227ea	34	3,350
Hydrofluorocarbon 23	HFC-23	270	12,400
Hydrofluorocarbon 236fa	HFC-236fa	240	8,060
Hydrofluorocarbon 245fa	HFC-245fa	8	858
Hydrofluorocarbon 32	HFC-32	5	677
Hydrofluorocarbon 365mfc	HFC-365mfc	9	804
Hydrofluorocarbon 43-10mee	HFC-43-10mee	16	1,650

¹ Source: IPCC Fifth Assessment Report (AR5)

https://www.ipcc.ch/site/assets/uploads/2018/02/WG1AR5_Chapter08_FINAL.pdf

² GWPs are used to convert GHG emission values to "carbon dioxide equivalent" (CO₂e) units

3.2 GHG Regulatory Setting – State of California

The State of California has been a leader in climate change legislation and has passed numerous bills to reduce greenhouse gas emissions across all sectors of the economy. Some of the key climate legislation in the State include the following:

- **Assembly Bill (AB) 32, California Global Warming Solutions Act of 2006.** AB 32 set the stage for the State’s transition to a sustainable, low-carbon future. AB 32 was the first program in the country to take a comprehensive, long-term approach to addressing climate change.³
- **Senate Bill (SB) 375, Sustainable Communities & Climate Protection Act of 2008.** SB 375 requires the Air Resources Board to develop regional greenhouse gas emission reduction targets for passenger vehicles GHG reduction targets for 2020 and 2035 for each region covered by the State's 18 metropolitan planning organizations.⁴
- **Senate Bill (SB) 100, California Renewables Portfolio Standard Program.** SB 100 established a landmark policy requiring renewable energy and zero-carbon resources supply 100 percent of electric retail sales to end-use customers by 2045.⁵

3.3 GHG Emissions Inventory

Table 9 shows the latest GHG emission inventories at the national, state, regional and local levels.

Table 9
GHG Emissions Inventory¹

United States (2019) ²	State of California (2018) ³	SCAG (2020) ⁴	City of Jurupa Valley
6,558 MMTCO ₂ e	425 MMTCO ₂ e	216.4 MMTCO ₂ e	--

¹ MMTCO₂e = Million Metric Tons of Carbon Dioxide Equivalent

² <https://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks>

³ https://ww3.arb.ca.gov/cc/inventory/pubs/reports/2000_2018/ghg_inventory_trends_00-18.pdf.

⁴ <http://www.scag.ca.gov/programs/Pages/GreenhouseGases.aspx>. Projected Emission from SACG - Regional GHG Inventory and Reference Case Projections, 1990-2035, dated May 30, 2012.

³ California Air Resources Board. AB 32 Global Warming Solutions Act of 2006.

<https://ww2.arb.ca.gov/resources/fact-sheets/ab-32-global-warming-solutions-act-2006>

⁴ California Air Resources Board. Sustainable Communities and Climate Protection Program.

<https://ww2.arb.ca.gov/our-work/programs/sustainable-communities-climate-protection-program/about>

⁵ California Energy Commission. SB 100 Joint Agency Report. <https://www.energy.ca.gov/sb100>

4.0 Modeling Parameters and Assumptions

The California Emissions Estimator Model Version 2020.4.0 (CalEEMod) was used to calculate criteria air pollutants and GHG emissions from the construction and operation of the project. CalEEMod is a statewide land use emissions computer model designed to provide a uniform platform for government agencies, land use planners, and environmental professionals to quantify criteria air pollutant and GHG emissions.

The model quantifies direct emissions from construction and operation activities (including vehicle use), as well as indirect emissions, such as GHG emissions from off-site energy generation, solid waste disposal, vegetation planting and/or removal, and water use. The model also identifies design features to reduce criteria pollutant and GHG emissions. The model was developed for the California Air Pollution Control Officers Association (CAPCOA) in collaboration with the California air districts.

4.1 Construction Assumptions

Construction of the project is estimated to begin in the year 2022 and last approximately 19 months. Construction activities are expected to consist of site preparation, grading, building construction, paving, and architectural coating. The project is expected to be operational in the year 2023. For purposes of this analysis, construction phases are not expected to overlap.

The project is expected to require the demolition of an existing 1,500 square feet residential dwelling unit. The project is also expected to require the export of approximately 34,874 cubic yards of earthwork material during grading phase.

The CalEEMod default construction equipment list is based on survey data and the size of the site. The parameters used to estimate construction emissions, such as the worker and vendor trips and trip lengths, utilize the CalEEMod defaults. The construction equipment list is shown in Table 10.

The project will be required to comply with several standard fugitive dust control measures, per SCAQMD Rule 403. The following key inputs are utilized in CalEEMod and are based upon data provided from SCAQMD⁶:

⁶ SCAQMD. Fugitive Dust Mitigation Measures. <http://www.aqmd.gov/home/rules-compliance/ceqa/air-quality-analysis-handbook/mitigation-measures-and-control-efficiencies/fugitive-dust>

- Utilize soil stabilizers - 30% PM₁₀ and PM_{2.5} reduction.
- Replace ground cover - 15% PM₁₀ and PM_{2.5} reduction.
- Water exposed areas 2x per day.
- Unpaved road moisture content – 25%.
- Unpaved road vehicle speed – 15 mph.

Table 10
Construction Equipment Assumptions¹

Phase	Equipment	Number	Hours Per Day	Soil Disturbance Rate (Acres/8hr-Day) ²	Off-Road Equipment Daily Disturbance Footprint (Acres)	Total Daily Disturbance Footprint (Acres)
Demolition	Concrete/Industrial Saws	1	8	0.0	0.0	1.0
	Excavators	3	8	0.0	0.0	
	Rubber Tired Dozers	2	8	0.5	1.0	
Site Preparation	Rubber Tired Dozers	3	8	0.5	1.5	3.5
	Tractors/Loaders/Backhoes	4	8	0.5	2.0	
Grading	Excavators	2	8	0.0	0.0	4.0
	Graders	1	8	0.5	0.5	
	Rubber Tired Dozers	1	8	0.5	0.5	
	Scrapers	2	8	1.0	2.0	
	Tractors/Loaders/Backhoes	2	8	0.5	1.0	
Building Construction	Cranes	1	7	0.0	0.0	1.3
	Forklifts	3	8	0.0	0.0	
	Generator Sets	1	8	0.0	0.0	
	Tractors/Loaders/Backhoes	3	7	0.5	1.3	
	Welders	1	8	0.0	0.0	
Paving	Pavers	2	8	0.0	0.0	0.0
	Paving Equipment	2	8	0.0	0.0	
	Rollers	2	8	0.0	0.0	
Architectural Coating	Air Compressors	1	6	0.0	0.0	0.0

¹ CalEEMod Defaults

4.2 Localized Construction Analysis Modeling Parameters

CalEEMod calculates construction emissions based on the number of equipment hours and the maximum daily disturbance activity possible for each piece of equipment. This report identifies the following parameters in the project design or applicable mitigation measures in order to compare CalEEMod reported emissions against the localized significance threshold lookup tables:

- 1) The off-road equipment list (including type of equipment, horsepower, and hours of operation) assumed for the day of construction activity with maximum emissions.
- 2) The maximum number of acres disturbed on the peak day.
- 3) Any emission control devices added onto off-road equipment.
- 4) Specific dust suppression techniques used on the day of construction activity with maximum emissions.

Based on recent discussions with SCAQMD, the Fact Sheet for Applying CalEEMod to Localized Significance Thresholds should no longer be used to determine disturbance acreage for the localized analysis.

4.3 Operational Assumptions

Operational emissions occur over the life of the project and are considered “long-term” sources of emissions. Operational emissions include both direct and indirect sources. This section briefly describes the operational sources of emissions analyzed for the project.

4.3.1 Mobile Source Emissions

Mobile source emissions are the largest source of long-term air pollutants from the operation of the project. Mobile sources are direct sources of project emissions that are primarily attributed to tailpipe exhaust and road dust (tire, brake, clutch, and road surface wear) from motor vehicles traveling to and from the site.

Estimates of mobile source emissions require information on four parameters: trip generation, trip length, vehicle/fleet mix, and emission factors (quantity of emission for each mile traveled or time spent idling by each vehicle).

The trip generation rates, trip length and trip percentages for this project are based on the CalEEMod defaults.

The Emission Factors (EMFAC2017) 2017 model and off-model adjustments factors to account for the SAFE Vehicle Rule is used to estimate the mobile source emissions are embedded in the CalEEMod emissions model. No adjustments have been made to default emission factors.

The project's total vehicle miles traveled estimated by CalEEMod is shown in the Table 11 for this project.

Table 11
Operational Vehicle Miles Traveled¹

Land Use	Annual Vehicle Miles Traveled (VMT)
Single Family Residential	988,040

¹ CalEEMod defaults.

The operational vehicle fleet mix has been adjusted to reflect vehicle types used for typical residential home-based trips generated by the project. The Southern California Association of Governments (SCAG) regional travel demand model does not include heavy-duty trucks, buses or other large vehicles that would require passenger car equivalent (PCE) adjustments for residential home-based trips. The project does not consist of land uses that would typically require PCE adjustments to account for large trucks, such as warehousing.

To be conservative, the Air Quality/GHG analysis has assumed that 2% of the total residential home-based trips will include trucks with a gross vehicle weight rating (GVWR) of 10,000 pound or greater. This includes LHD2, MHD, HHD, OBUS, UBUS, and SBUS vehicles. The 2% mix is also consistent with the default Highway Capacity Manual (HCM) assumptions. The adjusted vehicle mix is proportioned according to the default CalEEMod vehicle mix.

Table 12 summarizes vehicle mix used for this project.

Table 12
Operational Vehicle Mix¹

YUY	Vehicle Mix (%)
Light Duty Automobile (LDA)	54.88%
Light Duty Truck (LDT1)	5.75%
Light Duty Truck (LDT2)	17.71%
Medium Duty Truck (MDV)	14.47%
Light Heavy Truck (LHD1)	2.73%
Light Heavy Truck (LHD2)	0.33%
Medium Heavy Truck (MHD)	0.51%
Heavy Heavy Truck (HHD)	0.83%
Other Bus (OBUS)	0.03%
Urban Bus (UBUS)	0.01%
Motorcycle (MCY)	2.47%
School Bus (SBUS)	0.05%
Motor Home (MH)	0.24%
Total	100.0%

¹ Adjusted fleet mix to include 2% total trucks over 10,000 lbs. GVWR. (LHD2, MHD, HHD, OBUS, UBUS, SBUS, MH)

4.3.2 Energy Source Emissions

Energy usage includes both direct and indirect sources of emissions. Direct sources of emissions include on-site natural gas usage (non-hearth) for heating, while indirect emissions include electricity generated by offsite power plants. Natural gas use is measured in units of a thousand British Thermal Units (kBtu) per size metric for each land use subtype and electricity use is measured in kilowatt hours (kWh) per size metric for each land use subtype.

CalEEMod divides building electricity and natural gas use into uses that are subject to Title 24 standards and those that are not. Lighting electricity usage is also calculated as a separate category in CalEEMod. For electricity, Title 24 uses include the major building envelope systems covered by Part 6 (California Energy Code) of Title 24, such as space heating, space cooling, water heating, and ventilation. Non-Title 24 uses include all other end uses, such as appliances, electronics, and other miscellaneous plug-in uses. Because some lighting is not considered as part of the building envelope energy budget, and since a

separate mitigation measure is applicable to this end use, CalEEMod makes lighting a separate category.

For natural gas, uses are likewise categorized as Title 24 or Non-Title 24. Title 24 uses include building heating and hot water end uses. Non-Title 24 natural gas uses include cooking and appliances (including pool/spa heaters).

The baseline values are based on the California Energy Commission (CEC) sponsored California Commercial End Use Survey (CEUS) and Residential Appliance Saturation Survey (RASS) studies.

The project will be required to provide on-site renewable energy photovoltaic installations (solar panels), as required by the latest 2019 CA Energy Code requirements. The Energy Code requires all new residential construction to achieve net-zero emissions associated with electricity usage through the use of on-site renewable sources.

Table 13 shows the total annual expected electricity and natural gas usage for the proposed project.

Table 13
Electricity and Natural Gas Usage – Unmitigated

Land Use	Electricity Usage ¹ (KWhr/yr) ²	Natural Gas Usage ¹ (KBTU/yr) ²
Single Family Residential	246,904	876,895
Parking Lot	24,045	--
Total	270,949	876,895

¹ CalEEMod default unmitigated estimates.

² KWhr/yr = Kilowatt Hours per Year
KBTU/yr = Thousand British Thermal Units per Year

4.3.3 Area Source Emissions

Area source emissions are direct sources of emissions that fall under four categories; hearths, consumer products, architectural coatings, and landscaping equipment. Per SCAQMD rule 445, no wood burning devices are allowed in new developments; therefore, no wood hearths are included in this project.

Consumer products are various solvents used in non-industrial applications which emit ROG's during their product use. These typically include cleaning supplies, kitchen aerosols, cosmetics and toiletries.

4.3.4 Other Sources of Operational Emissions

Water. Greenhouse gas emissions are generated from the upstream energy required to supply and treat the water used on the project site. Indirect emissions from water usage are counted as part of the project's overall impact. The estimated water usage for the project is reported in Table 14 and recommendations to reduce water usage are discussed in Section 6.0.

Waste. CalEEMod calculates the indirect GHG emissions associated with waste that is disposed of at a landfill. The program uses annual waste disposal rates from the California Department of Resources Recycling and Recovery (CalRecycle) data for individual land uses. The program quantifies the GHG emissions associated with the decomposition of the waste which generates methane based on the total amount of degradable organic carbon.

The estimated waste generation by the project is reported in Table 14 and recommendations to reduce waste generation in landfills are discussed in Section 6.0

Table 14
Operational Water Usage and Waste Generation¹

Land Use	Water Usage (gallons/year)			Waste Generation (tons/year) ¹
	Indoor	Outdoor	Total	
Single Family Residential	2,084,930	1,314,410	3,399,340	37.72

¹ CalEEMod default unmitigated estimates.

5.0 Significance Thresholds

5.1 Air Quality Significance Thresholds

The SCAQMD has established air quality emissions thresholds for criteria air pollutants for the purposes of determining whether a project may have a significant effect on the environment per Section 15002(g) of the Guidelines for implementing CEQA. By complying with the thresholds of significance, the project would be in compliance with the SCAQMD Air Quality Management Plan (AQMP) and the federal and state air quality standards.

Table 15 lists the air quality significance thresholds for the six air pollutants analyzed in this report. Lead is not included as part of this analysis as the project is not expected to emit lead in any significant measurable quantity.

Table 15
SCAQMD Air Quality Significance Thresholds

Pollutant	Construction (lbs/day)	Operation (lbs/day)
NO_x	100	55
VOC	75	55
PM₁₀	150	150
PM_{2.5}	55	55
SO_x	150	150
CO	550	550

¹ Source: <http://www.aqmd.gov/docs/default-source/ceqa/handbook/scaqmd-air-quality-significance-thresholds.pdf>

5.2 Air Quality Localized Significance Thresholds

Air quality emissions were analyzed using the SCAQMD's Mass Rate Localized Significant Threshold (LST) Look-up Tables.

Table 16 lists the Localized Significance Thresholds (LST) used to determine whether a project may generate significant adverse localized air quality impacts. LSTs represent the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard.

LSTs are developed based on the ambient concentrations of four applicable air pollutants for source receptor area (SRA) 23 – Metropolitan Riverside.

The nearest existing sensitive receptors are located along the property lines surrounding the project site, less than 25 meters from potential areas of on-site construction and operational activity. Although receptors are located closer than 25 meters to the site, SCAQMD LST methodology states that projects with boundaries located closer than 25 meters to the nearest receptor should use the LSTs for receptors located at 25 meters.

The daily disturbance area is calculated to be 4.0 acres, however LST thresholds are only based on 1, 2 and 5-acre sites. In order to be conservative, a linear progression model was used to estimate the threshold for 4-acre site based on the established LST thresholds.

Table 16
SCAQMD Localized Significance Thresholds¹ (LST)

Pollutant	Construction (lbs/day)	Operation (lbs/day)
NO_x	235.2	235.2
CO	1,341.8	1341.8
PM₁₀	10.9	3.3
PM_{2.5}	6.7	1.7

¹ Source: SCAQMD Mass Rate Localized Significance Thresholds for 4-acre site in SRA-23 at 25 meters

5.3 GHG Significance Thresholds

5.3.1 SCAQMD Recommended GHG Thresholds

For quantifiable analysis purposes, the project GHG emissions are also compared to the SCAQMD *Interim CEQA Greenhouse Gas (GHG) Significance Thresholds, December 2008*. The purpose of the SCAQMD thresholds of significance is to assist local agencies with determining the impact of a project for CEQA. SCAQMD’s objective in providing the GHG guidelines is to establish a performance standard that will ultimately contribute to reducing GHG emissions below 1990 levels, and thus achieve the requirements of the California Global Warming Solutions Act (AB 32). The SCAQMD has held several GHG Significance Thresholds Stakeholder Working Group meetings where staff has presented updated recommendations that serve in addendum to the interim document.

The SCAQMD describes a five-tiered approach for determining GHG Significance Thresholds.

- **Tier 1** - If a project is exempt from CEQA, project-level and cumulative GHG emissions are less than significant.
- **Tier 2** - If the project complies with a GHG emissions reduction plan or mitigation program that avoids or substantially reduces GHG emissions in the project’s geographic area (i.e., city or county), project-level and cumulative GHG emissions are less than significant.

For projects that are not exempt or where no qualifying GHG reduction plans are directly applicable, SCAQMD requires an assessment based on the following tiers.

- **Tier 3** - Consists of screening values that are intended to capture 90 percent of the GHG emissions from projects. If a project’s emissions are under the screening thresholds, then the project is less than significant. SCAQMD has presented two options that lead agencies could choose for screening values. Option #1 sets the thresholds for residential projects to 3,500 MTCO₂e/year, commercial projects to 1,400 MTCO₂e/year), and the mixed use to 3,000 MTCO₂e/year. Option #2 sets a single numerical threshold for all non-industrial projects of 3,000 MTCO₂e/year. The current staff recommendation is to use option #2, but allows lead agencies to choose option #1 if they prefer. Regardless of which option a lead agency chooses to follow, it is recommended that the same option is consistently used for all projects.

Table 17 shows the screening levels described in option #2, which has been used previously in the City of Jurupa Valley.

Table 17
SCAQMD Tier 3 GHG Screening Values

Land Use	Screening Value
Industrial Projects	10,000 MTCO ₂ e/Yr
Residential/Commercial Projects	3,000 MTCO ₂ e/Yr

- **Tier 4** - includes three performance standard compliance options to demonstrate that a project is not significant for GHG emissions.

Compliance Option 1 consists of achieving a target percentage reduction in emission compared to the business as usual (BAU) methodology. The project proponent would

need to incorporate design features into the project and/or implement GHG mitigation measures to demonstrate a 30 percent reduction in GHG emissions below BAU that is consistent with the current applicable goals of AB 32 in the State of the California.

Compliance Option 2 consists of early compliance with AB 32 through early implementation of CARB’s Scoping Plan Measures. This option is intended for projects in sectors subject to the Scoping Plan Measures.

Compliance Option 3 consists of establishing efficiency-based performance standards at the plan level (program-level projects such as general plans) and project level. Efficiency standards are based on the amount of GHG emissions (MTCO₂e/year) per Service Population (SP). SP is defined as the sum of the residential and employment populations provided by a project.

Table 18
SCAQMD Tier 4 Efficiency Thresholds

Project Type	Efficiency Thresholds ¹	
	Target Year 2020	Target Year 2035
Plan (Program) Level	6.6 MTCO ₂ e/yr/SP	4.1 MTCO ₂ e/yr/SP
Project Level	4.8 MTCO ₂ e/yr/SP	3.0 MTCO ₂ e/yr/SP

- **Tier 5** – involves implementing off-site mitigation or the purchasing of offsets to reduce GHG emissions to less than the proposed screening level. The project proponent would be required to provide offsets for the life of the project, which is defined as 30 years.

By complying with the SCAQMD GHG thresholds of significance, the project is considered to be in compliance with the applicable State GHG legislation.

6.0 Air Quality Impact Analysis

Consistent with CEQA and the State CEQA Guidelines, a significant impact related to air quality would occur if the proposed project is determined to:

- a) Conflict with or obstruct implementation of the applicable air quality plan.
- b) Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable Federal or State ambient air quality standard.
- c) Expose sensitive receptors to substantial pollutant concentrations.
- d) Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

6.1 Short Term Air Quality Impacts - Construction

6.1.1 Daily Emissions - Construction

Daily air quality emissions include both on-site and off-site emissions associated with construction of the project. Regional daily emissions of criteria pollutants are compared to the SCAQMD thresholds of significance.

As shown in Table 19, daily emissions of criteria pollutants are expected to be below the allowable thresholds of significance.

CalEEMod daily emissions outputs are provided in Appendix A.

**Table 19
Daily Construction Emissions**

Maximum Daily Emissions (lbs/day) ¹						
Activity	VOC	NO _x	CO	SO ₂	PM ₁₀	PM _{2.5}
Demolition	2.70	25.81	21.20	0.04	1.45	1.21
Site Preparation	3.24	33.13	20.42	0.04	9.33	5.40
Grading	4.16	58.47	33.97	0.15	8.20	3.87
Building Construction	1.89	16.39	18.18	0.03	1.36	0.92
Paving	1.29	10.23	15.13	0.02	0.68	0.51
Architectural Coating	19.20	1.32	2.10	0.00	0.16	0.09
Maximum¹	19.20	58.47	33.97	0.15	9.33	5.40
SCAQMD Threshold	75	100	550	150	150	55
Exceeds Threshold (?)	No	No	No	No	No	No

¹ Maximum daily emission during summer or winter; includes both on-site and off-site project emissions.

The project must follow mandatory SCAQMD rules and requirements with regards to fugitive dust control, as described in Section 6.1.3. Compliance with the standard dust control measures is considered to be part of the conditions of approval for the project and built into the design features.

Table 19 shows that, the project's daily construction emissions will be below the applicable SCAQMD air quality standards and thresholds of significance. As a result, the project would not contribute substantially to an existing or projected air quality violation.

Furthermore, by complying with the SCAQMD standards, the project would not contribute to a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard (including releasing emissions which exceed quantitative thresholds for ozone precursors).

The project's short-term construction impact on regional air resources is less than significant.

6.1.2 Localized Emissions - Construction

Table 20 illustrates the construction related localized emissions and compares the results to SCAQMD LST thresholds. As shown in Table 20, the emissions will be below the SCAQMD

thresholds of significance for localized construction emissions. The project must follow all standard SCAQMD rules and requirements with regards to fugitive dust control, as described in Section 6.1.3. Compliance with the dust control is considered a standard requirement and included as part of the project’s design features, not mitigation.

The project’s short-term construction impact to localized air resources is less than significant.

**Table 20
Localized Construction Emissions**

Maximum Daily Emissions (lbs/day)¹				
Activity	NOx	CO	PM₁₀	PM_{2.5}
On-site Emissions	38.84	29.04	9.13	5.35
SCAQMD Construction Threshold ²	235.2	1,341.8	10.9	6.7
Exceeds Threshold (?)	No	No	No	No

¹ Maximum daily emission during summer or winter; includes on-site project emissions only.

² Reference 2006-2008 SCAQMD Mass Rate Localized Significant Thresholds for construction and operation. SRA-23, Metropolitan Riverside, 4-acre site, receptor distance 25 meters.

6.1.3 Fugitive Dust - Construction

The Project is required to comply with regional rules that assist in reducing short-term air pollutant emissions associated with suspended particulate matter, also known as fugitive dust. Fugitive dust emissions are commonly associated with land clearing activities, cut-and-fill grading operations, and exposure of soils to the air and wind. SCAQMD Rule 403 requires that fugitive dust is controlled with best-available control measures so that the presence of such dust does not remain visible in the atmosphere beyond the property line of the emission source. In addition, SCAQMD Rules 402 and 403 require implementation of dust suppression techniques to prevent fugitive dust from creating a nuisance off site.

To ensure full compliance with the applicable dust control standards, the following project design are recommended for the project:

- DF-1** Prior to starting construction, submit a Construction Management Plan to the City of Jurupa Valley that specifies how all construction design features will be implemented.

DF-2

The project must follow the standard SCAQMD rules and requirements with regards to fugitive dust control, which includes, but are not limited to the following:

1. All active construction areas shall be watered two (2) times daily.
2. Speed on unpaved roads shall be reduced to less than 15 mph.
3. Any visible dirt deposition on any public roadway shall be swept or washed at the site access points within 30 minutes.
4. Any on-site stockpiles of debris, dirt or other dusty material shall be covered or watered twice daily.
5. All operations on any unpaved surface shall be suspended if winds exceed 15 mph.
6. Access points shall be washed or swept daily.
7. Construction sites shall be sandbagged for erosion control.
8. Apply nontoxic chemical soil stabilizers according to manufacturers' specifications to all inactive construction areas (previously graded areas inactive for 10 days or more).
9. Cover all trucks hauling dirt, sand, soil, or other loose materials, and maintain at least 2 feet of freeboard space in accordance with the requirements of California Vehicle Code (CVC) section 23114.
10. Pave or gravel construction access roads at least 100 feet onto the site from the main road and use gravel aprons at truck exits.
11. Replace the ground cover of disturbed areas as quickly possible.

6.1.4 Odors - Construction

Heavy-duty equipment in the project area during construction will emit odors; however, the construction activity would cease to occur after individual construction is completed. The project is required to comply with Rule 402 during construction, which states that a person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property. No other sources of objectionable odors have been identified for the proposed Project.

Therefore, the project impact from odor emissions is less than significant.

6.1.5 Asbestos - Construction

Asbestos is a carcinogen and is categorized as a hazardous air pollutant by the Environmental Protection Agency (EPA). Asbestos fibers imbedded within construction materials become a health hazard once they are disturbed and rendered airborne, such as through physical contact like building renovation and demolition activities. Asbestos is regulated through the National Emissions Standards for Hazardous Air Pollutants (NESHAP) and SCAQMD is the local enforcement authority for asbestos.

The project is not expected to require the demolition of existing building or structures. Therefore, the potential risk from exposure to asbestos during construction is small.

Asbestos also occurs naturally in serpentine and ultramafic rock. Based on the California Division of Mines and Geology General Location Guide for Ultramafic Rocks in California - Areas More Likely to Contain Naturally Occurring Asbestos, naturally occurring asbestos has not been shown to occur within in the vicinity of the project site. Therefore, the potential risk for naturally occurring asbestos (NOA) during project construction is small.

In the event asbestos is found on the site, the project will be required to comply with SCAQMD and NESHAP standards and protocols. SCAQMD Rule 1403 establishes the survey requirements, notification, and work practice requirements to prevent asbestos emissions during construction activities. By following the required asbestos abatement protocols, the project impact from asbestos would be less than significant.

6.1.6 Diesel Particulate Matter - Construction

The project will generate diesel particulate matter (DPM) during construction from off-road diesel equipment and trucks. The California Office of Environmental Health Hazard Assessment (OEHHA) adopted the Guidance Manual for Preparation of Health Risk Assessments (HRA Guidelines) to provide procedures for use in the Air Toxics Hot Spots Program or for the permitting of existing, new, or modified stationary sources.⁷

The HRA Guidelines provide risk factors based on exposure to toxic substances over a 30-year lifetime span. The proposed project's construction activity is not expected to be a long-term (i.e., 30 years) source of toxic air contaminant emissions and short-term risk factors have not been developed. Due the significantly reduced risk from short-term

⁷ OEHHA. Air Toxics Hot Spots Program. Risk Assessment Guidelines. Guidance for Preparation of Health Risk Assessments. February 2015.

exposure, SCAQMD does not typically require the evaluation of long-term cancer risk or chronic health impacts for construction operations from a project such as the one being proposed.

Hence, the impacts from short-term exposure to DPM during project construction may be presumed to be less than significant without the need for a detailed HRA study.

To help further reduce the potential health risks associated with DPM exposure during construction, the following project design features are recommended. Project design features include a recommendation for Tier 4 engines on all off-road diesel equipment. Tier 4 engines, along with the latest national fuel standards, have been shown to yield PM reductions of over 95% from the typical Tier 2 and Tier 3 engines.⁸ Thus ensuring the potential DPM exposure to adjacent sensitive receptors is reduced to the maximum extent feasible.

- DF-3** All diesel construction equipment should have Tier 4 low emission “clean diesel” engines (OEM or retrofit) that include diesel oxidation catalysts and diesel particulate filters that meet the latest CARB best available control technology.
- DF-4** Construction equipment should be maintained in proper tune.
- DF-5** All construction vehicles should be prohibited from excessive idling. Excessive idling is defined as five (5) minutes or longer.
- DF-6** Minimize the simultaneous operation of multiple construction equipment units, to the maximum extent feasible.
- DF-7** The use of heavy construction equipment and earthmoving activity should be suspended during Air Alerts when the Air Quality Index reaches the “Unhealthy” level.
- DF-8** Establish an electricity supply to the construction site and use electric powered equipment instead of diesel-powered equipment or generators, where feasible.

⁸ EPA. Control of Emissions of Air Pollution from Nonroad Diesel Engines and Fuel; Final Rule. (40 CFR Parts 9, 69, et al.)

DF-9 Establish staging areas for the construction equipment that as far from adjacent residential homes, as feasible.

DF-10 Use haul trucks with on-road engines instead of off-road engines for on-site hauling.

6.2 Long Term Air Quality Impacts - Operation

6.2.1 Daily Emissions - Operation

Long-term operational air pollutant impacts from the project are shown in Table 21. The project is not expected to exceed any of the allowable daily emissions thresholds for criteria pollutants at the regional level. CalEEMod daily emissions outputs are provided in Appendix A.

The project's daily operational emissions will be below the applicable SCAQMD air quality thresholds of significance and the project would not contribute substantially to an existing or projected air quality violation. Furthermore, by complying with the SCAQMD standards, the project would not contribute to a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard (including releasing emissions which exceed quantitative thresholds for ozone precursors).

The project related long-term air quality impacts are less than significant.

**Table 21
Daily Operational Emissions**

Maximum Daily Emissions (lbs/day) ¹						
Activity	VOC	NO _x	CO	SO ₂	PM ₁₀	PM _{2.5}
Mobile Sources	0.97	1.06	9.58	0.02	2.14	0.58
Energy Sources	0.03	0.22	0.09	0.00	0.02	0.02
Area Sources	1.37	0.56	2.79	0.00	0.06	0.06
Total	2.37	1.85	12.47	0.03	2.21	0.65
SCAQMD Threshold	55	55	550	150	150	55
Exceeds Threshold (?)	No	No	No	No	No	No

¹ Maximum daily emission during summer or winter; includes both on-site and off-site project emissions.

² Daily emissions reports are provided in Appendix A.

6.2.2 Localized Operational Emissions - Operation

Table 22 shows the localized operational emissions and compares the results to SCAQMD LST thresholds of significance. As shown in Table 22, the emissions will be below the SCAQMD thresholds of significance for localized operational emissions. **The project will result in less than significant localized operational emissions impacts.**

Table 22
Localized Operational Emissions

Maximum Daily Emissions (lbs/day) ¹				
LST Pollutants	NOx (lbs/day)	CO (lbs/day)	PM ₁₀ (lbs/day)	PM _{2.5} (lbs/day)
On-site Emissions ¹	0.84	3.36	0.2	0.1
SCAQMD Operation Threshold ²	235.2	1,341.8	3.3	1.7
Exceeds Threshold (?)	No	No	No	No

¹ Maximum daily emission in summer or winter.

² Mobile source emissions include on-site vehicle emissions only. It is estimated that approximately 5% of mobile emissions will occur on the project site.

³ Reference: 2006-2008 SCAQMD Mass Rate Localized Significant Thresholds for construction and operation Table C-1 through C-6; SRA 23, Metropolitan Riverside disturbance area of 4-acre and receptor distance of 25 meters.

6.2.3 Odors - Operation

Land uses that commonly receive odor complaints include agricultural uses (farming and livestock), chemical plants, composting operations, dairies, fiberglass molding facilities, food processing plants, landfills, refineries, rail yards, and wastewater treatment plants. The proposed project does not contain land uses that would typically be associated with significant odor emissions.

The project will be required to comply with standard building code requirements related to exhaust ventilation, as well as comply with SCAQMD Rule 402. Rule 402 requires that a person may not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property. Project related odors are not expected to meet the criteria of being a nuisance. **The project's operation would result in less than significant odor impacts.**

6.2.4 Toxic Air Contaminants - Operations

The project would consist of residential land uses. These types of projects do not include major sources of toxic air contaminants (TAC) emissions that would result in significant exposure of sensitive receptors to substantial pollutant concentrations. Therefore, **the project impact is considered less than significant.**

7.0 Greenhouse Gas Impact Analysis

Consistent with CEQA Guidelines, a significant impact related to greenhouse gas would occur if the proposed project is determined to:

- a) Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment.
- b) Conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing emissions of greenhouse gases.

7.1 Greenhouse Gas Emissions - Construction

Greenhouse gas emissions are estimated for on-site and off-site construction activity using CalEEMod. Table 23 shows the construction greenhouse gas emissions, including equipment and worker vehicle emissions for all phases of construction. Construction emissions are averaged over 30 years and added to the long-term operational emissions, pursuant to SCAQMD recommendations.

CalEEMod annual GHG output calculations are provided in Appendix B.

Table 23
Construction Greenhouse Gas Emissions

Activity	Emissions (MTCO ₂ e) ¹		
	On-site	Off-site	Total
Demolition	34.23	1.52	35.75
Site Preparation	16.85	0.79	17.64
Grading	82.46	129.68	212.14
Building Construction	349.70	92.76	442.46
Paving	20.19	1.28	21.47
Architectural Coating	2.56	0.68	3.24
Total	505.99	226.71	732.70
Amortized over 30 years²	16.87	7.56	24.42

¹ MTCO₂e = metric tons of carbon dioxide equivalents (includes carbon dioxide, methane, nitrous oxide, and/or hydrofluorocarbon).

² The emissions are amortized over 30 years and added to the operational emissions, pursuant to SCAQMD recommendations.

Because impacts from construction activities occur over a relatively short-term period of time, they contribute a relatively small portion of the overall lifetime project GHG emissions. By itself, the construction activities from this project are less than significant when compared to the thresholds recommended by SCAQMD. However, SCAQMD recommends that construction emissions be amortized over a 30-year project lifetime and added to the overall project operational emissions. In doing so, construction GHG emissions are included in the overall contribution of the project, as further discussed in the following section.

7.2 Greenhouse Gas Emissions - Operation

Greenhouse gas emissions are estimated for on-site and off-site operational activity using CalEEMod. Greenhouse gas emissions from mobile sources, area sources and energy sources are shown in Table 24. CalEEMod annual GHG output calculations are provided in Appendix B.

Table 24
Operational Greenhouse Gas Emissions

Emission Source	GHG Emissions (MTCO ₂ e) ¹
Mobile Source	322.27
Energy Source	56.73
Area Source	8.27
Water	10.28
Waste	18.97
Construction (30 year average)	24.42
Total Annual Emissions	440.94
SCAQMD Tier 3 Screening Threshold ²	3,000
Exceed Tier 3 Threshold?	No

¹ MTCO₂e = metric tons of carbon dioxide equivalents.

² Per South Coast Air Quality Management District (SCAQMD) Draft Guidance Document - Interim CEQA Greenhouse Gas (GHG) Significance Threshold, October 2008

As shown in Table 24, the project GHG emissions are expected to be below the SCAQMD's Tier 3 approach, which limits GHG emissions to 3,000 MTCO₂e for residential projects.

The project related long-term GHG impacts are less than significant.

7.3 Project Consistency With GHG Reduction Plans

The project will be required to comply with the mandatory requirements of the latest 2019 California Building Standards Code, including Title 24, Part 11, CALGreen and Title 24, Part 6, Energy Code. The purpose of the building standards is to reduce negative impacts on the environment through improved planning and design, energy efficiency, water efficiency and conservation and material and resource conservation. The California Building Standards were developed to help meet the requirements of the Global Warming Solutions Act (AB 32).

As part of the latest Energy Code requirements, the project will be required to include rooftop solar panels, community solar panels, and/or other sources of on-site renewable energy capable of meeting the required California Energy Code Energy Design Rating. Therefore, by complying with the City's GHG reduction policy the project would not conflict with an applicable plan, policy, or regulation for the purpose of reducing the emissions of greenhouse gases and the impact is considered less than significant.

The following project design features will be implemented to ensure the project is consistent with applicable GHG reduction standards.

DF-11 The project will comply with the mandatory requirements of the California Building Standards Code, Title 24, Part 6 (Energy Code) and Part 11 (CALGreen), including, but not limited to:

- Install low flow fixtures and toilets, water efficient irrigation systems, drought tolerant/native landscaping, and reduce the amount of turf.
- Provide the necessary infrastructure to support electric vehicle charging.
- Provide solar installations per the prescribed Energy Design Ratings.


DF-12 Participate in the local waste management recycling and composting programs.

DF-13 Encourage the property management company and landscape maintenance crews to use electric powered landscaping equipment for landscape maintenance.

As a result, the project would not conflict with an applicable plan, policy, or regulation for the purpose of reducing the emissions of greenhouse gases and the impact is considered less than significant.

Exhibits



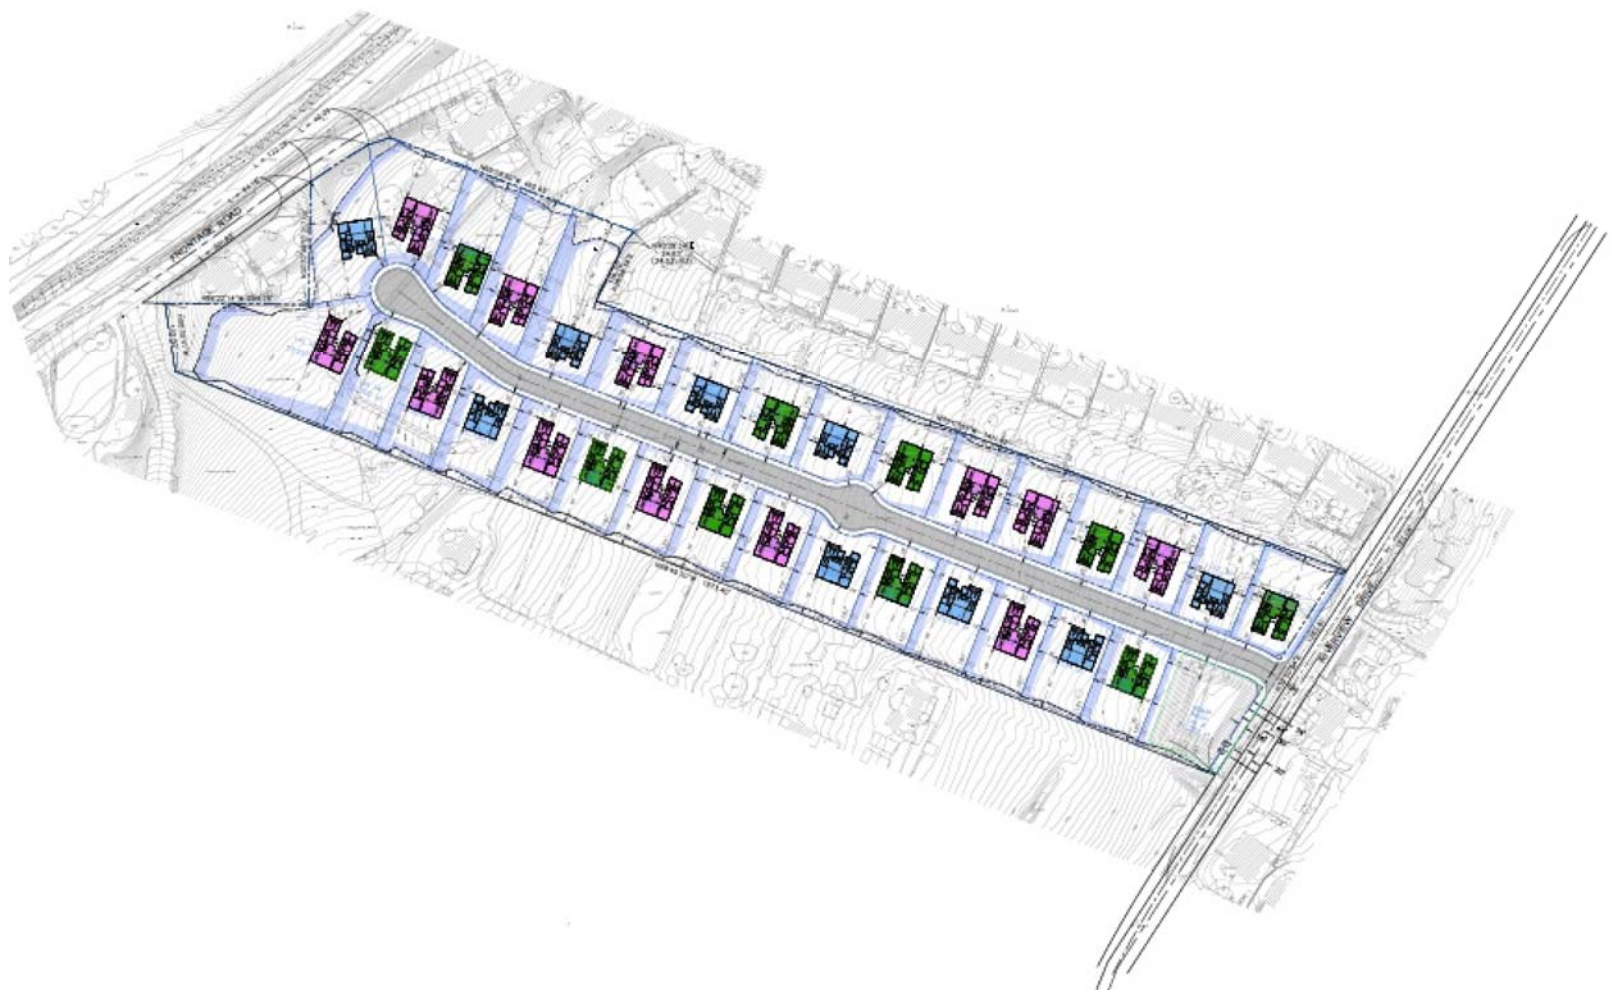

Appendices

Appendix A

Daily Emissions Calculations Output
(CalEEMod)

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM 38171 Residential Project AQ & GHG Analysis

Riverside-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	68.70	1000sqft	1.58	68,700.00	0
Single Family Housing	31.00	Dwelling Unit	17.78	55,800.00	89

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - The project consists of constructing and operating 32 single family residential dwelling units and on-site and off-site street improvements of approximately 68,700 square feet on a 19.36 acres of vacant land.

Demolition - The project is expected to demolish approximately 1,500 square feet of existing residential unit on-site.

Grading - The project is expected to import approximately 34,874 cy of earthwork material.

Woodstoves - SCAQMD Rule 445 restricts wood burning hearths/fireplaces from being installed in new development.

Construction Off-road Equipment Mitigation - Project will be required to comply with SCAQMD Rule 403 regarding fugitive dust control.

Fleet Mix - Operational fleet mix adjusted to equal 2% trucks with GVWR > 10,000 lbs.

Energy Mitigation - The project will be required to provide on-site renewable energy photovoltaic installations (solar panels), as required by the latest 2019 CA Energy Code requirements.

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Table Name	Column Name	Default Value	New Value
tblConstDustMitigation	WaterUnpavedRoadMoistureContent	0	12
tblConstDustMitigation	WaterUnpavedRoadVehicleSpeed	0	15
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberGas	27.20	32.00
tblFireplaces	NumberWood	1.60	0.00
tblFleetMix	HHD	0.02	8.3400e-003
tblFleetMix	LDA	0.53	0.55
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD2	7.3100e-003	3.2610e-003
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MDV	0.14	0.14
tblFleetMix	MH	5.4680e-003	2.4390e-003
tblFleetMix	MHD	0.01	5.0530e-003
tblFleetMix	OBUS	6.1600e-004	2.7500e-004
tblFleetMix	SBUS	1.1000e-003	4.9100e-004
tblFleetMix	UBUS	3.1500e-004	1.4100e-004
tblGrading	MaterialImported	0.00	34,874.00
tblLandUse	LotAcreage	10.06	17.78
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	4.1631	57.4515	33.9654	0.1477	19.8582	1.8517	21.4718	10.1558	1.7115	11.6403	0.0000	15,130.12 20	15,130.12 20	2.0699	1.4090	15,601.74 22
2023	19.1970	14.9653	17.9132	0.0335	0.5432	0.7061	1.2493	0.1462	0.6644	0.8107	0.0000	3,235.597 6	3,235.597 6	0.7174	0.0505	3,266.128 5
Maximum	19.1970	57.4515	33.9654	0.1477	19.8582	1.8517	21.4718	10.1558	1.7115	11.6403	0.0000	15,130.12 20	15,130.12 20	2.0699	1.4090	15,601.74 22

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	4.1631	57.4515	33.9654	0.1477	7.7200	1.8517	9.3336	3.9176	1.7115	5.4020	0.0000	15,130.12 20	15,130.12 20	2.0699	1.4090	15,601.74 22
2023	19.1970	14.9653	17.9132	0.0335	0.5432	0.7061	1.2493	0.1462	0.6644	0.8107	0.0000	3,235.597 6	3,235.597 6	0.7174	0.0505	3,266.128 5
Maximum	19.1970	57.4515	33.9654	0.1477	7.7200	1.8517	9.3336	3.9176	1.7115	5.4020	0.0000	15,130.12 20	15,130.12 20	2.0699	1.4090	15,601.74 22

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	59.50	0.00	53.42	60.55	0.00	50.10	0.00	0.00	0.00	0.00	0.00	0.00

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058
Energy	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Mobile	0.9700	1.0037	9.5839	0.0205	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		2,098.6031	2,098.6031	0.1035	0.0806	2,125.2164
Total	2.3689	1.7855	12.4691	0.0254	2.1224	0.0886	2.2110	0.5645	0.0877	0.6522	0.0000	3,063.5118	3,063.5118	0.1263	0.0982	3,095.9433

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058
Energy	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Mobile	0.9700	1.0037	9.5839	0.0205	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		2,098.6031	2,098.6031	0.1035	0.0806	2,125.2164
Total	2.3689	1.7855	12.4691	0.0254	2.1224	0.0886	2.2110	0.5645	0.0877	0.6522	0.0000	3,063.5118	3,063.5118	0.1263	0.0982	3,095.9433

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	1/3/2022	1/28/2022	5	20	
2	Site Preparation	Site Preparation	1/29/2022	2/11/2022	5	10	
3	Grading	Grading	2/12/2022	3/25/2022	5	30	
4	Building Construction	Building Construction	3/26/2022	5/19/2023	5	300	
5	Paving	Paving	5/20/2023	6/16/2023	5	20	
6	Architectural Coating	Architectural Coating	6/17/2023	7/14/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 90

Acres of Paving: 1.58

Residential Indoor: 116,640; Residential Outdoor: 38,880; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 4,122 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	7.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	4,359.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	40.00	15.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	8.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Use Soil Stabilizer

Replace Ground Cover

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Water Exposed Area

Water Unpaved Roads

Reduce Vehicle Speed on Unpaved Roads

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.0743	0.0000	0.0743	0.0113	0.0000	0.0113			0.0000			0.0000
Off-Road	2.6392	25.7194	20.5941	0.0388		1.2427	1.2427		1.1553	1.1553		3,746.781 2	3,746.781 2	1.0524		3,773.092 0
Total	2.6392	25.7194	20.5941	0.0388	0.0743	1.2427	1.3169	0.0113	1.1553	1.1665		3,746.781 2	3,746.781 2	1.0524		3,773.092 0

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	1.1100e-003	0.0447	9.9400e-003	2.0000e-004	6.1300e-003	5.2000e-004	6.6500e-003	1.6800e-003	5.0000e-004	2.1800e-003		21.4673	21.4673	2.9000e-004	3.3800e-003	22.4823
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0591	0.0383	0.5980	1.5200e-003	0.1677	8.4000e-004	0.1685	0.0445	7.7000e-004	0.0452		155.0309	155.0309	3.8400e-003	3.8100e-003	156.2632
Total	0.0602	0.0830	0.6079	1.7200e-003	0.1738	1.3600e-003	0.1752	0.0462	1.2700e-003	0.0474		176.4982	176.4982	4.1300e-003	7.1900e-003	178.7455

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.0284	0.0000	0.0284	4.3000e-003	0.0000	4.3000e-003			0.0000			0.0000
Off-Road	2.6392	25.7194	20.5941	0.0388		1.2427	1.2427		1.1553	1.1553	0.0000	3,746.7812	3,746.7812	1.0524		3,773.0920
Total	2.6392	25.7194	20.5941	0.0388	0.0284	1.2427	1.2711	4.3000e-003	1.1553	1.1596	0.0000	3,746.7812	3,746.7812	1.0524		3,773.0920

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	1.1100e-003	0.0447	9.9400e-003	2.0000e-004	6.1300e-003	5.2000e-004	6.6500e-003	1.6800e-003	5.0000e-004	2.1800e-003		21.4673	21.4673	2.9000e-004	3.3800e-003	22.4823
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0591	0.0383	0.5980	1.5200e-003	0.1677	8.4000e-004	0.1685	0.0445	7.7000e-004	0.0452		155.0309	155.0309	3.8400e-003	3.8100e-003	156.2632
Total	0.0602	0.0830	0.6079	1.7200e-003	0.1738	1.3600e-003	0.1752	0.0462	1.2700e-003	0.0474		176.4982	176.4982	4.1300e-003	7.1900e-003	178.7455

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					19.6570	0.0000	19.6570	10.1025	0.0000	10.1025			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836		3,686.0619	3,686.0619	1.1922		3,715.8655
Total	3.1701	33.0835	19.6978	0.0380	19.6570	1.6126	21.2696	10.1025	1.4836	11.5860		3,686.0619	3,686.0619	1.1922		3,715.8655

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0709	0.0460	0.7176	1.8300e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		186.0370	186.0370	4.6100e-003	4.5800e-003	187.5158
Total	0.0709	0.0460	0.7176	1.8300e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		186.0370	186.0370	4.6100e-003	4.5800e-003	187.5158

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					7.5188	0.0000	7.5188	3.8642	0.0000	3.8642			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836	0.0000	3,686.0619	3,686.0619	1.1922		3,715.8655
Total	3.1701	33.0835	19.6978	0.0380	7.5188	1.6126	9.1314	3.8642	1.4836	5.3478	0.0000	3,686.0619	3,686.0619	1.1922		3,715.8655

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0709	0.0460	0.7176	1.8300e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		186.0370	186.0370	4.6100e-003	4.5800e-003	187.5158
Total	0.0709	0.0460	0.7176	1.8300e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		186.0370	186.0370	4.6100e-003	4.5800e-003	187.5158

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					9.3508	0.0000	9.3508	3.6761	0.0000	3.6761			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.4105	6,011.4105	1.9442		6,060.0158
Total	3.6248	38.8435	29.0415	0.0621	9.3508	1.6349	10.9857	3.6761	1.5041	5.1802		6,011.4105	6,011.4105	1.9442		6,060.0158

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.4595	18.5569	4.1266	0.0835	2.5431	0.2157	2.7588	0.6972	0.2064	0.9036		8,912.0037	8,912.0037	0.1205	1.4039	9,333.3755
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0788	0.0511	0.7973	2.0300e-003	0.2236	1.1100e-003	0.2247	0.0593	1.0300e-003	0.0603		206.7078	206.7078	5.1200e-003	5.0800e-003	208.3509
Total	0.5383	18.6080	4.9239	0.0856	2.7667	0.2168	2.9835	0.7565	0.2074	0.9639		9,118.7115	9,118.7115	0.1257	1.4090	9,541.7264

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.5767	0.0000	3.5767	1.4061	0.0000	1.4061			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158
Total	3.6248	38.8435	29.0415	0.0621	3.5767	1.6349	5.2116	1.4061	1.5041	2.9102	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.4595	18.5569	4.1266	0.0835	2.5431	0.2157	2.7588	0.6972	0.2064	0.9036		8,912.0037	8,912.0037	0.1205	1.4039	9,333.3755
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0788	0.0511	0.7973	2.0300e-003	0.2236	1.1100e-003	0.2247	0.0593	1.0300e-003	0.0603		206.7078	206.7078	5.1200e-003	5.0800e-003	208.3509
Total	0.5383	18.6080	4.9239	0.0856	2.7667	0.2168	2.9835	0.7565	0.2074	0.9639		9,118.7115	9,118.7115	0.1257	1.4090	9,541.7264

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0244	0.6343	0.2206	2.7300e-003	0.0961	9.1400e-003	0.1052	0.0277	8.7500e-003	0.0364		289.4180	289.4180	3.0600e-003	0.0429	302.2846
Worker	0.1576	0.1022	1.5946	4.0600e-003	0.4471	2.2300e-003	0.4493	0.1186	2.0500e-003	0.1206		413.4157	413.4157	0.0102	0.0102	416.7017
Total	0.1820	0.7364	1.8152	6.7900e-003	0.5432	0.0114	0.5546	0.1462	0.0108	0.1570		702.8337	702.8337	0.0133	0.0531	718.9863

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0244	0.6343	0.2206	2.7300e-003	0.0961	9.1400e-003	0.1052	0.0277	8.7500e-003	0.0364		289.4180	289.4180	3.0600e-003	0.0429	302.2846
Worker	0.1576	0.1022	1.5946	4.0600e-003	0.4471	2.2300e-003	0.4493	0.1186	2.0500e-003	0.1206		413.4157	413.4157	0.0102	0.0102	416.7017
Total	0.1820	0.7364	1.8152	6.7900e-003	0.5432	0.0114	0.5546	0.1462	0.0108	0.1570		702.8337	702.8337	0.0133	0.0531	718.9863

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0169	0.4901	0.2018	2.6200e-003	0.0961	4.2700e-003	0.1003	0.0277	4.0800e-003	0.0318		277.9065	277.9065	2.8300e-003	0.0411	290.2151
Worker	0.1461	0.0903	1.4674	3.9300e-003	0.4471	2.1000e-003	0.4492	0.1186	1.9300e-003	0.1205		402.4812	402.4812	9.1900e-003	9.3800e-003	405.5074
Total	0.1631	0.5804	1.6692	6.5500e-003	0.5432	6.3700e-003	0.5495	0.1462	6.0100e-003	0.1523		680.3877	680.3877	0.0120	0.0505	695.7225

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0169	0.4901	0.2018	2.6200e-003	0.0961	4.2700e-003	0.1003	0.0277	4.0800e-003	0.0318		277.9065	277.9065	2.8300e-003	0.0411	290.2151
Worker	0.1461	0.0903	1.4674	3.9300e-003	0.4471	2.1000e-003	0.4492	0.1186	1.9300e-003	0.1205		402.4812	402.4812	9.1900e-003	9.3800e-003	405.5074
Total	0.1631	0.5804	1.6692	6.5500e-003	0.5432	6.3700e-003	0.5495	0.1462	6.0100e-003	0.1523		680.3877	680.3877	0.0120	0.0505	695.7225

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.2070					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.2397	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0548	0.0339	0.5503	1.4700e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		150.9305	150.9305	3.4500e-003	3.5200e-003	152.0653
Total	0.0548	0.0339	0.5503	1.4700e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		150.9305	150.9305	3.4500e-003	3.5200e-003	152.0653

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.2070					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.2397	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0548	0.0339	0.5503	1.4700e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		150.9305	150.9305	3.4500e-003	3.5200e-003	152.0653
Total	0.0548	0.0339	0.5503	1.4700e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		150.9305	150.9305	3.4500e-003	3.5200e-003	152.0653

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	18.9762					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690
Total	19.1678	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0292	0.0181	0.2935	7.9000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		80.4962	80.4962	1.8400e-003	1.8800e-003	81.1015
Total	0.0292	0.0181	0.2935	7.9000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		80.4962	80.4962	1.8400e-003	1.8800e-003	81.1015

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	18.9762					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690
Total	19.1678	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0292	0.0181	0.2935	7.9000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		80.4962	80.4962	1.8400e-003	1.8800e-003	81.1015
Total	0.0292	0.0181	0.2935	7.9000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		80.4962	80.4962	1.8400e-003	1.8800e-003	81.1015

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	0.9700	1.0037	9.5839	0.0205	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		2,098.603 1	2,098.603 1	0.1035	0.0806	2,125.216 4
Unmitigated	0.9700	1.0037	9.5839	0.0205	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		2,098.603 1	2,098.603 1	0.1035	0.0806	2,125.216 4

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Single Family Housing	292.64	295.74	265.05	988,040	988,040
Total	292.64	295.74	265.05	988,040	988,040

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Single Family Housing	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Single Family Housing	0.548752	0.057478	0.177127	0.144672	0.027288	0.003261	0.005053	0.008340	0.000275	0.000141	0.024682	0.000491	0.002439

5.0 Energy Detail

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Historical Energy Use: N

5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
NaturalGas Unmitigated	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2402.45	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Total		0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2.40245	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Total		0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211

6.0 Area Detail

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058
Unmitigated	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.1040					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.1292					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0621	0.5308	0.2259	3.3900e-003		0.0429	0.0429		0.0429	0.0429	0.0000	677.6471	677.6471	0.0130	0.0124	681.6740
Landscaping	0.0777	0.0296	2.5651	1.4000e-004		0.0142	0.0142		0.0142	0.0142		4.6202	4.6202	4.4700e-003		4.7319
Total	1.3730	0.5604	2.7910	3.5300e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.1040					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.1292					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0621	0.5308	0.2259	3.3900e-003		0.0429	0.0429		0.0429	0.0429	0.0000	677.6471	677.6471	0.0130	0.0124	681.6740
Landscaping	0.0777	0.0296	2.5651	1.4000e-004		0.0142	0.0142		0.0142	0.0142		4.6202	4.6202	4.4700e-003		4.7319
Total	1.3730	0.5604	2.7910	3.5300e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058

7.0 Water Detail

7.1 Mitigation Measures Water

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM 38171 Residential Project AQ & GHG Analysis

Riverside-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	68.70	1000sqft	1.58	68,700.00	0
Single Family Housing	31.00	Dwelling Unit	17.78	55,800.00	89

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - The project consists of constructing and operating 32 single family residential dwelling units and on-site and off-site street improvements of approximately 68,700 square feet on a 19.36 acres of vacant land.

Demolition - The project is expected to demolish approximately 1,500 square feet of existing residential unit on-site.

Grading - The project is expected to import approximately 34,874 cy of earthwork material.

Woodstoves - SCAQMD Rule 445 restricts wood burning hearths/fireplaces from being installed in new development.

Construction Off-road Equipment Mitigation - Project will be required to comply with SCAQMD Rule 403 regarding fugitive dust control.

Fleet Mix - Operational fleet mix adjusted to equal 2% trucks with GVWR > 10,000 lbs.

Energy Mitigation - The project will be required to provide on-site renewable energy photovoltaic installations (solar panels), as required by the latest 2019 CA Energy Code requirements.

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Table Name	Column Name	Default Value	New Value
tblConstDustMitigation	WaterUnpavedRoadMoistureContent	0	12
tblConstDustMitigation	WaterUnpavedRoadVehicleSpeed	0	15
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberGas	27.20	32.00
tblFireplaces	NumberWood	1.60	0.00
tblFleetMix	HHD	0.02	8.3400e-003
tblFleetMix	LDA	0.53	0.55
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD2	7.3100e-003	3.2610e-003
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MDV	0.14	0.14
tblFleetMix	MH	5.4680e-003	2.4390e-003
tblFleetMix	MHD	0.01	5.0530e-003
tblFleetMix	OBUS	6.1600e-004	2.7500e-004
tblFleetMix	SBUS	1.1000e-003	4.9100e-004
tblFleetMix	UBUS	3.1500e-004	1.4100e-004
tblGrading	MaterialImported	0.00	34,874.00
tblLandUse	LotAcreage	10.06	17.78
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	4.1361	58.4697	33.9276	0.1475	19.8582	1.8520	21.4718	10.1558	1.7118	11.6403	0.0000	15,117.45 26	15,117.45 26	2.0688	1.4102	15,589.40 39
2023	19.1952	14.9983	17.6442	0.0331	0.5432	0.7061	1.2493	0.1462	0.6645	0.8107	0.0000	3,198.490 3	3,198.490 3	0.7174	0.0508	3,229.125 3
Maximum	19.1952	58.4697	33.9276	0.1475	19.8582	1.8520	21.4718	10.1558	1.7118	11.6403	0.0000	15,117.45 26	15,117.45 26	2.0688	1.4102	15,589.40 39

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	4.1361	58.4697	33.9276	0.1475	7.7200	1.8520	9.3336	3.9176	1.7118	5.4020	0.0000	15,117.45 26	15,117.45 26	2.0688	1.4102	15,589.40 39
2023	19.1952	14.9983	17.6442	0.0331	0.5432	0.7061	1.2493	0.1462	0.6645	0.8107	0.0000	3,198.490 3	3,198.490 3	0.7174	0.0508	3,229.125 3
Maximum	19.1952	58.4697	33.9276	0.1475	7.7200	1.8520	9.3336	3.9176	1.7118	5.4020	0.0000	15,117.45 26	15,117.45 26	2.0688	1.4102	15,589.40 39

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	59.50	0.00	53.42	60.55	0.00	50.10	0.00	0.00	0.00	0.00	0.00	0.00

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058
Energy	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Mobile	0.8282	1.0641	8.4317	0.0189	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		1,934.8153	1,934.8153	0.1059	0.0827	1,962.1169
Total	2.2271	1.8458	11.3169	0.0238	2.1224	0.0886	2.2110	0.5645	0.0877	0.6522	0.0000	2,899.7240	2,899.7240	0.1288	0.1003	2,932.8438

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058
Energy	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Mobile	0.8282	1.0641	8.4317	0.0189	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		1,934.8153	1,934.8153	0.1059	0.0827	1,962.1169
Total	2.2271	1.8458	11.3169	0.0238	2.1224	0.0886	2.2110	0.5645	0.0877	0.6522	0.0000	2,899.7240	2,899.7240	0.1288	0.1003	2,932.8438

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	1/3/2022	1/28/2022	5	20	
2	Site Preparation	Site Preparation	1/29/2022	2/11/2022	5	10	
3	Grading	Grading	2/12/2022	3/25/2022	5	30	
4	Building Construction	Building Construction	3/26/2022	5/19/2023	5	300	
5	Paving	Paving	5/20/2023	6/16/2023	5	20	
6	Architectural Coating	Architectural Coating	6/17/2023	7/14/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 90

Acres of Paving: 1.58

Residential Indoor: 116,640; Residential Outdoor: 38,880; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 4,122 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	7.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	4,359.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	40.00	15.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	8.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Use Soil Stabilizer

Replace Ground Cover

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Water Exposed Area

Water Unpaved Roads

Reduce Vehicle Speed on Unpaved Roads

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.0743	0.0000	0.0743	0.0113	0.0000	0.0113			0.0000			0.0000
Off-Road	2.6392	25.7194	20.5941	0.0388		1.2427	1.2427		1.1553	1.1553		3,746.781 2	3,746.781 2	1.0524		3,773.092 0
Total	2.6392	25.7194	20.5941	0.0388	0.0743	1.2427	1.3169	0.0113	1.1553	1.1665		3,746.781 2	3,746.781 2	1.0524		3,773.092 0

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	1.0500e-003	0.0472	0.0102	2.0000e-004	6.1300e-003	5.2000e-004	6.6500e-003	1.6800e-003	5.0000e-004	2.1800e-003		21.4837	21.4837	2.9000e-004	3.3800e-003	22.4994
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0552	0.0398	0.4846	1.3800e-003	0.1677	8.4000e-004	0.1685	0.0445	7.7000e-004	0.0452		140.4261	140.4261	3.8100e-003	3.9000e-003	141.6847
Total	0.0563	0.0869	0.4948	1.5800e-003	0.1738	1.3600e-003	0.1752	0.0462	1.2700e-003	0.0474		161.9098	161.9098	4.1000e-003	7.2800e-003	164.1841

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.0284	0.0000	0.0284	4.3000e-003	0.0000	4.3000e-003			0.0000			0.0000
Off-Road	2.6392	25.7194	20.5941	0.0388		1.2427	1.2427		1.1553	1.1553	0.0000	3,746.7812	3,746.7812	1.0524		3,773.0920
Total	2.6392	25.7194	20.5941	0.0388	0.0284	1.2427	1.2711	4.3000e-003	1.1553	1.1596	0.0000	3,746.7812	3,746.7812	1.0524		3,773.0920

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	1.0500e-003	0.0472	0.0102	2.0000e-004	6.1300e-003	5.2000e-004	6.6500e-003	1.6800e-003	5.0000e-004	2.1800e-003		21.4837	21.4837	2.9000e-004	3.3800e-003	22.4994
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0552	0.0398	0.4846	1.3800e-003	0.1677	8.4000e-004	0.1685	0.0445	7.7000e-004	0.0452		140.4261	140.4261	3.8100e-003	3.9000e-003	141.6847
Total	0.0563	0.0869	0.4948	1.5800e-003	0.1738	1.3600e-003	0.1752	0.0462	1.2700e-003	0.0474		161.9098	161.9098	4.1000e-003	7.2800e-003	164.1841

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					19.6570	0.0000	19.6570	10.1025	0.0000	10.1025			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836		3,686.0619	3,686.0619	1.1922		3,715.8655
Total	3.1701	33.0835	19.6978	0.0380	19.6570	1.6126	21.2696	10.1025	1.4836	11.5860		3,686.0619	3,686.0619	1.1922		3,715.8655

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0663	0.0477	0.5816	1.6600e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		168.5113	168.5113	4.5800e-003	4.6800e-003	170.0216
Total	0.0663	0.0477	0.5816	1.6600e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		168.5113	168.5113	4.5800e-003	4.6800e-003	170.0216

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					7.5188	0.0000	7.5188	3.8642	0.0000	3.8642			0.0000			0.0000
Off-Road	3.1701	33.0835	19.6978	0.0380		1.6126	1.6126		1.4836	1.4836	0.0000	3,686.0619	3,686.0619	1.1922		3,715.8655
Total	3.1701	33.0835	19.6978	0.0380	7.5188	1.6126	9.1314	3.8642	1.4836	5.3478	0.0000	3,686.0619	3,686.0619	1.1922		3,715.8655

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0663	0.0477	0.5816	1.6600e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		168.5113	168.5113	4.5800e-003	4.6800e-003	170.0216
Total	0.0663	0.0477	0.5816	1.6600e-003	0.2012	1.0000e-003	0.2022	0.0534	9.2000e-004	0.0543		168.5113	168.5113	4.5800e-003	4.6800e-003	170.0216

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					9.3508	0.0000	9.3508	3.6761	0.0000	3.6761			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.4105	6,011.4105	1.9442		6,060.0158
Total	3.6248	38.8435	29.0415	0.0621	9.3508	1.6349	10.9857	3.6761	1.5041	5.1802		6,011.4105	6,011.4105	1.9442		6,060.0158

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.4376	19.5733	4.2399	0.0836	2.5431	0.2160	2.7591	0.6972	0.2066	0.9039		8,918.8073	8,918.8073	0.1195	1.4050	9,340.4752
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0736	0.0530	0.6462	1.8400e-003	0.2236	1.1100e-003	0.2247	0.0593	1.0300e-003	0.0603		187.2348	187.2348	5.0800e-003	5.2000e-003	188.9129
Total	0.5112	19.6263	4.8861	0.0855	2.7667	0.2171	2.9838	0.7565	0.2077	0.9642		9,106.0420	9,106.0420	0.1246	1.4102	9,529.3881

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.5767	0.0000	3.5767	1.4061	0.0000	1.4061			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158
Total	3.6248	38.8435	29.0415	0.0621	3.5767	1.6349	5.2116	1.4061	1.5041	2.9102	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.4376	19.5733	4.2399	0.0836	2.5431	0.2160	2.7591	0.6972	0.2066	0.9039		8,918.8073	8,918.8073	0.1195	1.4050	9,340.4752
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0736	0.0530	0.6462	1.8400e-003	0.2236	1.1100e-003	0.2247	0.0593	1.0300e-003	0.0603		187.2348	187.2348	5.0800e-003	5.2000e-003	188.9129
Total	0.5112	19.6263	4.8861	0.0855	2.7667	0.2171	2.9838	0.7565	0.2077	0.9642		9,106.0420	9,106.0420	0.1246	1.4102	9,529.3881

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0234	0.6682	0.2290	2.7300e-003	0.0961	9.1700e-003	0.1053	0.0277	8.7700e-003	0.0364		289.7337	289.7337	3.0200e-003	0.0430	302.6230
Worker	0.1473	0.1060	1.2923	3.6800e-003	0.4471	2.2300e-003	0.4493	0.1186	2.0500e-003	0.1206		374.4695	374.4695	0.0102	0.0104	377.8257
Total	0.1706	0.7743	1.5214	6.4100e-003	0.5432	0.0114	0.5546	0.1462	0.0108	0.1571		664.2032	664.2032	0.0132	0.0534	680.4488

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322
Total	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0234	0.6682	0.2290	2.7300e-003	0.0961	9.1700e-003	0.1053	0.0277	8.7700e-003	0.0364		289.7337	289.7337	3.0200e-003	0.0430	302.6230
Worker	0.1473	0.1060	1.2923	3.6800e-003	0.4471	2.2300e-003	0.4493	0.1186	2.0500e-003	0.1206		374.4695	374.4695	0.0102	0.0104	377.8257
Total	0.1706	0.7743	1.5214	6.4100e-003	0.5432	0.0114	0.5546	0.1462	0.0108	0.1571		664.2032	664.2032	0.0132	0.0534	680.4488

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0157	0.5197	0.2086	2.6300e-003	0.0961	4.2800e-003	0.1004	0.0277	4.1000e-003	0.0318		278.5962	278.5962	2.7800e-003	0.0412	290.9442
Worker	0.1370	0.0937	1.1916	3.5600e-003	0.4471	2.1000e-003	0.4492	0.1186	1.9300e-003	0.1205		364.6841	364.6841	9.1600e-003	9.6000e-003	367.7751
Total	0.1526	0.6134	1.4002	6.1900e-003	0.5432	6.3800e-003	0.5496	0.1462	6.0300e-003	0.1523		643.2803	643.2803	0.0119	0.0508	658.7193

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061
Total	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0157	0.5197	0.2086	2.6300e-003	0.0961	4.2800e-003	0.1004	0.0277	4.1000e-003	0.0318		278.5962	278.5962	2.7800e-003	0.0412	290.9442
Worker	0.1370	0.0937	1.1916	3.5600e-003	0.4471	2.1000e-003	0.4492	0.1186	1.9300e-003	0.1205		364.6841	364.6841	9.1600e-003	9.6000e-003	367.7751
Total	0.1526	0.6134	1.4002	6.1900e-003	0.5432	6.3800e-003	0.5496	0.1462	6.0300e-003	0.1523		643.2803	643.2803	0.0119	0.0508	658.7193

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.2070					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.2397	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0514	0.0351	0.4468	1.3400e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		136.7566	136.7566	3.4300e-003	3.6000e-003	137.9157
Total	0.0514	0.0351	0.4468	1.3400e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		136.7566	136.7566	3.4300e-003	3.6000e-003	137.9157

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.2070					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.2397	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0514	0.0351	0.4468	1.3400e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		136.7566	136.7566	3.4300e-003	3.6000e-003	137.9157
Total	0.0514	0.0351	0.4468	1.3400e-003	0.1677	7.9000e-004	0.1685	0.0445	7.2000e-004	0.0452		136.7566	136.7566	3.4300e-003	3.6000e-003	137.9157

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	18.9762					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690
Total	19.1678	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708		281.4481	281.4481	0.0168		281.8690

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0274	0.0187	0.2383	7.1000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		72.9368	72.9368	1.8300e-003	1.9200e-003	73.5550
Total	0.0274	0.0187	0.2383	7.1000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		72.9368	72.9368	1.8300e-003	1.9200e-003	73.5550

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	18.9762					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1917	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690
Total	19.1678	1.3030	1.8111	2.9700e-003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	281.4481	0.0168		281.8690

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0274	0.0187	0.2383	7.1000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		72.9368	72.9368	1.8300e-003	1.9200e-003	73.5550
Total	0.0274	0.0187	0.2383	7.1000e-004	0.0894	4.2000e-004	0.0898	0.0237	3.9000e-004	0.0241		72.9368	72.9368	1.8300e-003	1.9200e-003	73.5550

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	0.8282	1.0641	8.4317	0.0189	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		1,934.8153	1,934.8153	0.1059	0.0827	1,962.1169
Unmitigated	0.8282	1.0641	8.4317	0.0189	2.1224	0.0136	2.1360	0.5645	0.0127	0.5772		1,934.8153	1,934.8153	0.1059	0.0827	1,962.1169

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Single Family Housing	292.64	295.74	265.05	988,040	988,040
Total	292.64	295.74	265.05	988,040	988,040

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Single Family Housing	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Single Family Housing	0.548752	0.057478	0.177127	0.144672	0.027288	0.003261	0.005053	0.008340	0.000275	0.000141	0.024682	0.000491	0.002439

5.0 Energy Detail

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Historical Energy Use: N

5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
NaturalGas Unmitigated	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2402.45	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Total		0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2.40245	0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211
Total		0.0259	0.2214	0.0942	1.4100e-003		0.0179	0.0179		0.0179	0.0179		282.6415	282.6415	5.4200e-003	5.1800e-003	284.3211

6.0 Area Detail

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058
Unmitigated	1.3730	0.5604	2.7910	3.5200e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.1040					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.1292					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0621	0.5308	0.2259	3.3900e-003		0.0429	0.0429		0.0429	0.0429	0.0000	677.6471	677.6471	0.0130	0.0124	681.6740
Landscaping	0.0777	0.0296	2.5651	1.4000e-004		0.0142	0.0142		0.0142	0.0142		4.6202	4.6202	4.4700e-003		4.7319
Total	1.3730	0.5604	2.7910	3.5300e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.1040					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.1292					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0621	0.5308	0.2259	3.3900e-003		0.0429	0.0429		0.0429	0.0429	0.0000	677.6471	677.6471	0.0130	0.0124	681.6740
Landscaping	0.0777	0.0296	2.5651	1.4000e-004		0.0142	0.0142		0.0142	0.0142		4.6202	4.6202	4.4700e-003		4.7319
Total	1.3730	0.5604	2.7910	3.5300e-003		0.0571	0.0571		0.0571	0.0571	0.0000	682.2672	682.2672	0.0175	0.0124	686.4058

7.0 Water Detail

7.1 Mitigation Measures Water

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

Appendix B

Annual Emissions Calculations Output
(CalEEMod)

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM 38171 Residential Project AQ & GHG Analysis

Riverside-South Coast County, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	68.70	1000sqft	1.58	68,700.00	0
Single Family Housing	31.00	Dwelling Unit	17.78	55,800.00	89

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - The project consists of constructing and operating 32 single family residential dwelling units and on-site and off-site street improvements of approximately 68,700 square feet on a 19.36 acres of vacant land.

Demolition - The project is expected to demolish approximately 1,500 square feet of existing residential unit on-site.

Grading - The project is expected to import approximately 34,874 cy of earthwork material.

Woodstoves - SCAQMD Rule 445 restricts wood burning hearths/fireplaces from being installed in new development.

Construction Off-road Equipment Mitigation - Project will be required to comply with SCAQMD Rule 403 regarding fugitive dust control.

Fleet Mix - Operational fleet mix adjusted to equal 2% trucks with GVWR > 10,000 lbs.

Energy Mitigation - The project will be required to provide on-site renewable energy photovoltaic installations (solar panels), as required by the latest 2019 CA Energy Code requirements.

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Table Name	Column Name	Default Value	New Value
tblConstDustMitigation	WaterUnpavedRoadMoistureContent	0	12
tblConstDustMitigation	WaterUnpavedRoadVehicleSpeed	0	15
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberGas	27.20	32.00
tblFireplaces	NumberWood	1.60	0.00
tblFleetMix	HHD	0.02	8.3400e-003
tblFleetMix	LDA	0.53	0.55
tblFleetMix	LDT1	0.06	0.06
tblFleetMix	LDT2	0.17	0.18
tblFleetMix	LHD1	0.03	0.03
tblFleetMix	LHD2	7.3100e-003	3.2610e-003
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MDV	0.14	0.14
tblFleetMix	MH	5.4680e-003	2.4390e-003
tblFleetMix	MHD	0.01	5.0530e-003
tblFleetMix	OBUS	6.1600e-004	2.7500e-004
tblFleetMix	SBUS	1.1000e-003	4.9100e-004
tblFleetMix	UBUS	3.1500e-004	1.4100e-004
tblGrading	MaterialImported	0.00	34,874.00
tblLandUse	LotAcreage	10.06	17.78
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2022	0.2923	2.9397	2.6162	6.1600e-003	0.3363	0.1303	0.4667	0.1321	0.1219	0.2540	0.0000	551.4688	551.4688	0.0999	0.0241	561.1571
2023	0.2908	0.8653	1.0564	1.9400e-003	0.0293	0.0411	0.0704	7.8800e-003	0.0386	0.0465	0.0000	169.9745	169.9745	0.0348	2.3600e-003	171.5479
Maximum	0.2923	2.9397	2.6162	6.1600e-003	0.3363	0.1303	0.4667	0.1321	0.1219	0.2540	0.0000	551.4688	551.4688	0.0999	0.0241	561.1571

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2022	0.2923	2.9397	2.6162	6.1600e-003	0.1886	0.1303	0.3189	0.0668	0.1219	0.1886	0.0000	551.4684	551.4684	0.0999	0.0241	561.1567
2023	0.2908	0.8653	1.0564	1.9400e-003	0.0293	0.0411	0.0704	7.8800e-003	0.0386	0.0465	0.0000	169.9743	169.9743	0.0348	2.3600e-003	171.5477
Maximum	0.2923	2.9397	2.6162	6.1600e-003	0.1886	0.1303	0.3189	0.0668	0.1219	0.1886	0.0000	551.4684	551.4684	0.0999	0.0241	561.1567

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	40.42	0.00	27.52	46.66	0.00	21.74	0.00	0.00	0.00	0.00	0.00	0.00

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	1-3-2022	4-2-2022	1.4378	1.4378
2	4-3-2022	7-2-2022	0.5928	0.5928
3	7-3-2022	10-2-2022	0.5993	0.5993
4	10-3-2022	1-2-2023	0.5991	0.5991
5	1-3-2023	4-2-2023	0.5375	0.5375
6	4-3-2023	7-2-2023	0.5128	0.5128
7	7-3-2023	9-30-2023	0.0879	0.0879
		Highest	1.4378	1.4378

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	0.2355	0.0103	0.3235	6.0000e-005		2.3100e-003	2.3100e-003		2.3100e-003	2.3100e-003	0.0000	8.2083	8.2083	6.5000e-004	1.4000e-004	8.2666
Energy	4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	94.8461	94.8461	4.9500e-003	1.3500e-003	95.3721
Mobile	0.1490	0.1913	1.5525	3.4100e-003	0.3714	2.4100e-003	0.3738	0.0989	2.2500e-003	0.1012	0.0000	317.8293	317.8293	0.0171	0.0135	322.2666
Waste						0.0000	0.0000		0.0000	0.0000	7.6568	0.0000	7.6568	0.4525	0.0000	18.9695
Water						0.0000	0.0000		0.0000	0.0000	0.6615	7.4044	8.0658	0.0686	1.6800e-003	10.2805
Total	0.3892	0.2420	1.8931	3.7300e-003	0.3714	7.9900e-003	0.3794	0.0989	7.8300e-003	0.1067	8.3183	428.2881	436.6064	0.5437	0.0166	455.1553

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	0.2355	0.0103	0.3235	6.0000e-005		2.3100e-003	2.3100e-003		2.3100e-003	2.3100e-003	0.0000	8.2083	8.2083	6.5000e-004	1.4000e-004	8.2666
Energy	4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	56.4048	56.4048	1.7100e-003	9.6000e-004	56.7325
Mobile	0.1490	0.1913	1.5525	3.4100e-003	0.3714	2.4100e-003	0.3738	0.0989	2.2500e-003	0.1012	0.0000	317.8293	317.8293	0.0171	0.0135	322.2666
Waste						0.0000	0.0000		0.0000	0.0000	7.6568	0.0000	7.6568	0.4525	0.0000	18.9695
Water						0.0000	0.0000		0.0000	0.0000	0.6615	7.4044	8.0658	0.0686	1.6800e-003	10.2805
Total	0.3892	0.2420	1.8931	3.7300e-003	0.3714	7.9900e-003	0.3794	0.0989	7.8300e-003	0.1067	8.3183	389.8468	398.1651	0.5405	0.0162	416.5157

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.98	8.80	0.60	2.35	8.49

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	1/3/2022	1/28/2022	5	20	
2	Site Preparation	Site Preparation	1/29/2022	2/11/2022	5	10	
3	Grading	Grading	2/12/2022	3/25/2022	5	30	

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4	Building Construction	Building Construction	3/26/2022	5/19/2023	5	300
5	Paving	Paving	5/20/2023	6/16/2023	5	20
6	Architectural Coating	Architectural Coating	6/17/2023	7/14/2023	5	20

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 90

Acres of Paving: 1.58

Residential Indoor: 116,640; Residential Outdoor: 38,880; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 4,122 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	7.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	4,359.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	40.00	15.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	8.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Use Soil Stabilizer

Replace Ground Cover

Water Exposed Area

Water Unpaved Roads

Reduce Vehicle Speed on Unpaved Roads

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					7.4000e-004	0.0000	7.4000e-004	1.1000e-004	0.0000	1.1000e-004	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0264	0.2572	0.2059	3.9000e-004		0.0124	0.0124		0.0116	0.0116	0.0000	33.9902	33.9902	9.5500e-003	0.0000	34.2289
Total	0.0264	0.2572	0.2059	3.9000e-004	7.4000e-004	0.0124	0.0132	1.1000e-004	0.0116	0.0117	0.0000	33.9902	33.9902	9.5500e-003	0.0000	34.2289

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.0000e-005	4.7000e-004	1.0000e-004	0.0000	6.0000e-005	1.0000e-005	7.0000e-005	2.0000e-005	0.0000	2.0000e-005	0.0000	0.1948	0.1948	0.0000	3.0000e-005	0.2040
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.2000e-004	4.1000e-004	5.1100e-003	1.0000e-005	1.6500e-003	1.0000e-005	1.6600e-003	4.4000e-004	1.0000e-005	4.5000e-004	0.0000	1.3037	1.3037	3.0000e-005	4.0000e-005	1.3153
Total	5.3000e-004	8.8000e-004	5.2100e-003	1.0000e-005	1.7100e-003	2.0000e-005	1.7300e-003	4.6000e-004	1.0000e-005	4.7000e-004	0.0000	1.4985	1.4985	3.0000e-005	7.0000e-005	1.5193

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					2.8000e-004	0.0000	2.8000e-004	4.0000e-005	0.0000	4.0000e-005	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0264	0.2572	0.2059	3.9000e-004		0.0124	0.0124		0.0116	0.0116	0.0000	33.9902	33.9902	9.5500e-003	0.0000	34.2289
Total	0.0264	0.2572	0.2059	3.9000e-004	2.8000e-004	0.0124	0.0127	4.0000e-005	0.0116	0.0116	0.0000	33.9902	33.9902	9.5500e-003	0.0000	34.2289

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.0000e-005	4.7000e-004	1.0000e-004	0.0000	6.0000e-005	1.0000e-005	7.0000e-005	2.0000e-005	0.0000	2.0000e-005	0.0000	0.1948	0.1948	0.0000	3.0000e-005	0.2040
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.2000e-004	4.1000e-004	5.1100e-003	1.0000e-005	1.6500e-003	1.0000e-005	1.6600e-003	4.4000e-004	1.0000e-005	4.5000e-004	0.0000	1.3037	1.3037	3.0000e-005	4.0000e-005	1.3153
Total	5.3000e-004	8.8000e-004	5.2100e-003	1.0000e-005	1.7100e-003	2.0000e-005	1.7300e-003	4.6000e-004	1.0000e-005	4.7000e-004	0.0000	1.4985	1.4985	3.0000e-005	7.0000e-005	1.5193

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0983	0.0000	0.0983	0.0505	0.0000	0.0505	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0159	0.1654	0.0985	1.9000e-004		8.0600e-003	8.0600e-003		7.4200e-003	7.4200e-003	0.0000	16.7197	16.7197	5.4100e-003	0.0000	16.8549
Total	0.0159	0.1654	0.0985	1.9000e-004	0.0983	8.0600e-003	0.1064	0.0505	7.4200e-003	0.0579	0.0000	16.7197	16.7197	5.4100e-003	0.0000	16.8549

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.1000e-004	2.4000e-004	3.0700e-003	1.0000e-005	9.9000e-004	1.0000e-005	9.9000e-004	2.6000e-004	0.0000	2.7000e-004	0.0000	0.7822	0.7822	2.0000e-005	2.0000e-005	0.7892
Total	3.1000e-004	2.4000e-004	3.0700e-003	1.0000e-005	9.9000e-004	1.0000e-005	9.9000e-004	2.6000e-004	0.0000	2.7000e-004	0.0000	0.7822	0.7822	2.0000e-005	2.0000e-005	0.7892

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0376	0.0000	0.0376	0.0193	0.0000	0.0193	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0159	0.1654	0.0985	1.9000e-004		8.0600e-003	8.0600e-003		7.4200e-003	7.4200e-003	0.0000	16.7197	16.7197	5.4100e-003	0.0000	16.8549
Total	0.0159	0.1654	0.0985	1.9000e-004	0.0376	8.0600e-003	0.0457	0.0193	7.4200e-003	0.0267	0.0000	16.7197	16.7197	5.4100e-003	0.0000	16.8549

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.1000e-004	2.4000e-004	3.0700e-003	1.0000e-005	9.9000e-004	1.0000e-005	9.9000e-004	2.6000e-004	0.0000	2.7000e-004	0.0000	0.7822	0.7822	2.0000e-005	2.0000e-005	0.7892
Total	3.1000e-004	2.4000e-004	3.0700e-003	1.0000e-005	9.9000e-004	1.0000e-005	9.9000e-004	2.6000e-004	0.0000	2.7000e-004	0.0000	0.7822	0.7822	2.0000e-005	2.0000e-005	0.7892

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1403	0.0000	0.1403	0.0551	0.0000	0.0551	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0544	0.5827	0.4356	9.3000e-004		0.0245	0.0245		0.0226	0.0226	0.0000	81.8019	81.8019	0.0265	0.0000	82.4633
Total	0.0544	0.5827	0.4356	9.3000e-004	0.1403	0.0245	0.1648	0.0551	0.0226	0.0777	0.0000	81.8019	81.8019	0.0265	0.0000	82.4633

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	6.7500e-003	0.2935	0.0626	1.2500e-003	0.0376	3.2400e-003	0.0408	0.0103	3.1000e-003	0.0134	0.0000	121.3114	121.3114	1.6300e-003	0.0191	127.0470
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.0500e-003	8.2000e-004	0.0102	3.0000e-005	3.3000e-003	2.0000e-005	3.3100e-003	8.8000e-004	2.0000e-005	8.9000e-004	0.0000	2.6074	2.6074	7.0000e-005	7.0000e-005	2.6306
Total	7.8000e-003	0.2943	0.0728	1.2800e-003	0.0409	3.2600e-003	0.0441	0.0112	3.1200e-003	0.0143	0.0000	123.9187	123.9187	1.7000e-003	0.0192	129.6776

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0537	0.0000	0.0537	0.0211	0.0000	0.0211	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0544	0.5827	0.4356	9.3000e-004		0.0245	0.0245		0.0226	0.0226	0.0000	81.8018	81.8018	0.0265	0.0000	82.4632
Total	0.0544	0.5827	0.4356	9.3000e-004	0.0537	0.0245	0.0782	0.0211	0.0226	0.0437	0.0000	81.8018	81.8018	0.0265	0.0000	82.4632

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	6.7500e-003	0.2935	0.0626	1.2500e-003	0.0376	3.2400e-003	0.0408	0.0103	3.1000e-003	0.0134	0.0000	121.3114	121.3114	1.6300e-003	0.0191	127.0470
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.0500e-003	8.2000e-004	0.0102	3.0000e-005	3.3000e-003	2.0000e-005	3.3100e-003	8.8000e-004	2.0000e-005	8.9000e-004	0.0000	2.6074	2.6074	7.0000e-005	7.0000e-005	2.6306
Total	7.8000e-003	0.2943	0.0728	1.2800e-003	0.0409	3.2600e-003	0.0441	0.0112	3.1200e-003	0.0143	0.0000	123.9187	123.9187	1.7000e-003	0.0192	129.6776

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1706	1.5616	1.6363	2.6900e-003		0.0809	0.0809		0.0761	0.0761	0.0000	231.7252	231.7252	0.0555	0.0000	233.1131
Total	0.1706	1.5616	1.6363	2.6900e-003		0.0809	0.0809		0.0761	0.0761	0.0000	231.7252	231.7252	0.0555	0.0000	233.1131

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	2.3800e-003	0.0666	0.0224	2.7000e-004	9.4800e-003	9.2000e-004	0.0104	2.7300e-003	8.8000e-004	3.6100e-003	0.0000	26.2676	26.2676	2.8000e-004	3.9000e-003	27.4361
Worker	0.0140	0.0109	0.1363	3.8000e-004	0.0440	2.2000e-004	0.0442	0.0117	2.1000e-004	0.0119	0.0000	34.7647	34.7647	9.3000e-004	9.6000e-004	35.0747
Total	0.0164	0.0775	0.1587	6.5000e-004	0.0535	1.1400e-003	0.0546	0.0144	1.0900e-003	0.0155	0.0000	61.0324	61.0324	1.2100e-003	4.8600e-003	62.5108

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1706	1.5616	1.6363	2.6900e-003		0.0809	0.0809		0.0761	0.0761	0.0000	231.7250	231.7250	0.0555	0.0000	233.1128
Total	0.1706	1.5616	1.6363	2.6900e-003		0.0809	0.0809		0.0761	0.0761	0.0000	231.7250	231.7250	0.0555	0.0000	233.1128

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	2.3800e-003	0.0666	0.0224	2.7000e-004	9.4800e-003	9.2000e-004	0.0104	2.7300e-003	8.8000e-004	3.6100e-003	0.0000	26.2676	26.2676	2.8000e-004	3.9000e-003	27.4361
Worker	0.0140	0.0109	0.1363	3.8000e-004	0.0440	2.2000e-004	0.0442	0.0117	2.1000e-004	0.0119	0.0000	34.7647	34.7647	9.3000e-004	9.6000e-004	35.0747
Total	0.0164	0.0775	0.1587	6.5000e-004	0.0535	1.1400e-003	0.0546	0.0144	1.0900e-003	0.0155	0.0000	61.0324	61.0324	1.2100e-003	4.8600e-003	62.5108

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0786	0.7192	0.8122	1.3500e-003		0.0350	0.0350		0.0329	0.0329	0.0000	115.9024	115.9024	0.0276	0.0000	116.5917
Total	0.0786	0.7192	0.8122	1.3500e-003		0.0350	0.0350		0.0329	0.0329	0.0000	115.9024	115.9024	0.0276	0.0000	116.5917

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	8.1000e-004	0.0257	0.0102	1.3000e-004	4.7400e-003	2.1000e-004	4.9500e-003	1.3700e-003	2.0000e-004	1.5700e-003	0.0000	12.6188	12.6188	1.3000e-004	1.8700e-003	13.1780
Worker	6.4900e-003	4.8100e-003	0.0628	1.8000e-004	0.0220	1.0000e-004	0.0221	5.8400e-003	1.0000e-004	5.9300e-003	0.0000	16.9266	16.9266	4.2000e-004	4.4000e-004	17.0693
Total	7.3000e-003	0.0305	0.0730	3.1000e-004	0.0267	3.1000e-004	0.0270	7.2100e-003	3.0000e-004	7.5000e-003	0.0000	29.5454	29.5454	5.5000e-004	2.3100e-003	30.2474

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0786	0.7192	0.8122	1.3500e-003		0.0350	0.0350		0.0329	0.0329	0.0000	115.9022	115.9022	0.0276	0.0000	116.5915
Total	0.0786	0.7192	0.8122	1.3500e-003		0.0350	0.0350		0.0329	0.0329	0.0000	115.9022	115.9022	0.0276	0.0000	116.5915

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	8.1000e-004	0.0257	0.0102	1.3000e-004	4.7400e-003	2.1000e-004	4.9500e-003	1.3700e-003	2.0000e-004	1.5700e-003	0.0000	12.6188	12.6188	1.3000e-004	1.8700e-003	13.1780
Worker	6.4900e-003	4.8100e-003	0.0628	1.8000e-004	0.0220	1.0000e-004	0.0221	5.8400e-003	1.0000e-004	5.9300e-003	0.0000	16.9266	16.9266	4.2000e-004	4.4000e-004	17.0693
Total	7.3000e-003	0.0305	0.0730	3.1000e-004	0.0267	3.1000e-004	0.0270	7.2100e-003	3.0000e-004	7.5000e-003	0.0000	29.5454	29.5454	5.5000e-004	2.3100e-003	30.2474

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0103	0.1019	0.1458	2.3000e-004		5.1000e-003	5.1000e-003		4.6900e-003	4.6900e-003	0.0000	20.0269	20.0269	6.4800e-003	0.0000	20.1888
Paving	2.0700e-003					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0124	0.1019	0.1458	2.3000e-004		5.1000e-003	5.1000e-003		4.6900e-003	4.6900e-003	0.0000	20.0269	20.0269	6.4800e-003	0.0000	20.1888

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	4.9000e-004	3.6000e-004	4.7100e-003	1.0000e-005	1.6500e-003	1.0000e-005	1.6600e-003	4.4000e-004	1.0000e-005	4.5000e-004	0.0000	1.2695	1.2695	3.0000e-005	3.0000e-005	1.2802
Total	4.9000e-004	3.6000e-004	4.7100e-003	1.0000e-005	1.6500e-003	1.0000e-005	1.6600e-003	4.4000e-004	1.0000e-005	4.5000e-004	0.0000	1.2695	1.2695	3.0000e-005	3.0000e-005	1.2802

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0103	0.1019	0.1458	2.3000e-004		5.1000e-003	5.1000e-003		4.6900e-003	4.6900e-003	0.0000	20.0268	20.0268	6.4800e-003	0.0000	20.1888
Paving	2.0700e-003					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0124	0.1019	0.1458	2.3000e-004		5.1000e-003	5.1000e-003		4.6900e-003	4.6900e-003	0.0000	20.0268	20.0268	6.4800e-003	0.0000	20.1888

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	4.9000e-004	3.6000e-004	4.7100e-003	1.0000e-005	1.6500e-003	1.0000e-005	1.6600e-003	4.4000e-004	1.0000e-005	4.5000e-004	0.0000	1.2695	1.2695	3.0000e-005	3.0000e-005	1.2802
Total	4.9000e-004	3.6000e-004	4.7100e-003	1.0000e-005	1.6500e-003	1.0000e-005	1.6600e-003	4.4000e-004	1.0000e-005	4.5000e-004	0.0000	1.2695	1.2695	3.0000e-005	3.0000e-005	1.2802

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	0.1898					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	1.9200e-003	0.0130	0.0181	3.0000e-005		7.1000e-004	7.1000e-004		7.1000e-004	7.1000e-004	0.0000	2.5533	2.5533	1.5000e-004	0.0000	2.5571
Total	0.1917	0.0130	0.0181	3.0000e-005		7.1000e-004	7.1000e-004		7.1000e-004	7.1000e-004	0.0000	2.5533	2.5533	1.5000e-004	0.0000	2.5571

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.6000e-004	1.9000e-004	2.5100e-003	1.0000e-005	8.8000e-004	0.0000	8.8000e-004	2.3000e-004	0.0000	2.4000e-004	0.0000	0.6771	0.6771	2.0000e-005	2.0000e-005	0.6828
Total	2.6000e-004	1.9000e-004	2.5100e-003	1.0000e-005	8.8000e-004	0.0000	8.8000e-004	2.3000e-004	0.0000	2.4000e-004	0.0000	0.6771	0.6771	2.0000e-005	2.0000e-005	0.6828

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	0.1898					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	1.9200e-003	0.0130	0.0181	3.0000e-005		7.1000e-004	7.1000e-004		7.1000e-004	7.1000e-004	0.0000	2.5533	2.5533	1.5000e-004	0.0000	2.5571
Total	0.1917	0.0130	0.0181	3.0000e-005		7.1000e-004	7.1000e-004		7.1000e-004	7.1000e-004	0.0000	2.5533	2.5533	1.5000e-004	0.0000	2.5571

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.6000e-004	1.9000e-004	2.5100e-003	1.0000e-005	8.8000e-004	0.0000	8.8000e-004	2.3000e-004	0.0000	2.4000e-004	0.0000	0.6771	0.6771	2.0000e-005	2.0000e-005	0.6828
Total	2.6000e-004	1.9000e-004	2.5100e-003	1.0000e-005	8.8000e-004	0.0000	8.8000e-004	2.3000e-004	0.0000	2.4000e-004	0.0000	0.6771	0.6771	2.0000e-005	2.0000e-005	0.6828

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	0.1490	0.1913	1.5525	3.4100e-003	0.3714	2.4100e-003	0.3738	0.0989	2.2500e-003	0.1012	0.0000	317.8293	317.8293	0.0171	0.0135	322.2666
Unmitigated	0.1490	0.1913	1.5525	3.4100e-003	0.3714	2.4100e-003	0.3738	0.0989	2.2500e-003	0.1012	0.0000	317.8293	317.8293	0.0171	0.0135	322.2666

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Parking Lot	0.00	0.00	0.00		
Single Family Housing	292.64	295.74	265.05	988,040	988,040
Total	292.64	295.74	265.05	988,040	988,040

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0
Single Family Housing	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Parking Lot	0.534849	0.056022	0.172639	0.141007	0.026597	0.007310	0.011327	0.018693	0.000616	0.000315	0.024057	0.001100	0.005468
Single Family Housing	0.548752	0.057478	0.177127	0.144672	0.027288	0.003261	0.005053	0.008340	0.000275	0.000141	0.024682	0.000491	0.002439

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Percent of Electricity Use Generated with Renewable Energy

Category	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	9.6103	9.6103	8.1000e-004	1.0000e-004	9.6599
Electricity Unmitigated						0.0000	0.0000		0.0000	0.0000	0.0000	48.0517	48.0517	4.0600e-003	4.9000e-004	48.2996
NaturalGas Mitigated	4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	46.7945	46.7945	9.0000e-004	8.6000e-004	47.0725
NaturalGas Unmitigated	4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	46.7945	46.7945	9.0000e-004	8.6000e-004	47.0725

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	876895	4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	46.7945	46.7945	9.0000e-004	8.6000e-004	47.0725
Total		4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	46.7945	46.7945	9.0000e-004	8.6000e-004	47.0725

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Single Family Housing	876895	4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	46.7945	46.7945	9.0000e-004	8.6000e-004	47.0725
Total		4.7300e-003	0.0404	0.0172	2.6000e-004		3.2700e-003	3.2700e-003		3.2700e-003	3.2700e-003	0.0000	46.7945	46.7945	9.0000e-004	8.6000e-004	47.0725

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

Unmitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Parking Lot	24045	4.2643	3.6000e-004	4.0000e-005	4.2863
Single Family Housing	246904	43.7874	3.7000e-003	4.5000e-004	44.0133
Total		48.0517	4.0600e-003	4.9000e-004	48.2996

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Parking Lot	4809	0.8529	7.0000e-005	1.0000e-005	0.8573
Single Family Housing	49380.9	8.7575	7.4000e-004	9.0000e-005	8.8027
Total		9.6103	8.1000e-004	1.0000e-004	9.6599

6.0 Area Detail

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	0.2355	0.0103	0.3235	6.0000e-005		2.3100e-003	2.3100e-003		2.3100e-003	2.3100e-003	0.0000	8.2083	8.2083	6.5000e-004	1.4000e-004	8.2666
Unmitigated	0.2355	0.0103	0.3235	6.0000e-005		2.3100e-003	2.3100e-003		2.3100e-003	2.3100e-003	0.0000	8.2083	8.2083	6.5000e-004	1.4000e-004	8.2666

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0190					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.2061					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	7.8000e-004	6.6400e-003	2.8200e-003	4.0000e-005		5.4000e-004	5.4000e-004		5.4000e-004	5.4000e-004	0.0000	7.6844	7.6844	1.5000e-004	1.4000e-004	7.7301
Landscaping	9.7100e-003	3.6900e-003	0.3206	2.0000e-005		1.7700e-003	1.7700e-003		1.7700e-003	1.7700e-003	0.0000	0.5239	0.5239	5.1000e-004	0.0000	0.5366
Total	0.2355	0.0103	0.3235	6.0000e-005		2.3100e-003	2.3100e-003		2.3100e-003	2.3100e-003	0.0000	8.2083	8.2083	6.6000e-004	1.4000e-004	8.2666

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0190					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.2061					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	7.8000e-004	6.6400e-003	2.8200e-003	4.0000e-005		5.4000e-004	5.4000e-004		5.4000e-004	5.4000e-004	0.0000	7.6844	7.6844	1.5000e-004	1.4000e-004	7.7301
Landscaping	9.7100e-003	3.6900e-003	0.3206	2.0000e-005		1.7700e-003	1.7700e-003		1.7700e-003	1.7700e-003	0.0000	0.5239	0.5239	5.1000e-004	0.0000	0.5366
Total	0.2355	0.0103	0.3235	6.0000e-005		2.3100e-003	2.3100e-003		2.3100e-003	2.3100e-003	0.0000	8.2083	8.2083	6.6000e-004	1.4000e-004	8.2666

7.0 Water Detail

7.1 Mitigation Measures Water

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	Total CO2	CH4	N2O	CO2e
Category	MT/yr			
Mitigated	8.0658	0.0686	1.6800e-003	10.2805
Unmitigated	8.0658	0.0686	1.6800e-003	10.2805

7.2 Water by Land Use

Unmitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Parking Lot	0 / 0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2.08493 / 1.31441	8.0658	0.0686	1.6800e-003	10.2805
Total		8.0658	0.0686	1.6800e-003	10.2805

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

7.2 Water by Land Use

Mitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Parking Lot	0 / 0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	2.08493 / 1.31441	8.0658	0.0686	1.6800e-003	10.2805
Total		8.0658	0.0686	1.6800e-003	10.2805

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e
	MT/yr			
Mitigated	7.6568	0.4525	0.0000	18.9695
Unmitigated	7.6568	0.4525	0.0000	18.9695

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	37.72	7.6568	0.4525	0.0000	18.9695
Total		7.6568	0.4525	0.0000	18.9695

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Single Family Housing	37.72	7.6568	0.4525	0.0000	18.9695
Total		7.6568	0.4525	0.0000	18.9695

9.0 Operational Offroad

TTM 38171 Residential Project AQ & GHG Analysis - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation
