

Air Quality Assessment
The Greens Indio Project
City of Indio, California



Expect More. Experience Better.

Prepared by:

Kimley-Horn and Associates, Inc.
1100 W. Town and Country Road, Suite 700
Orange, California 92868
Contact: Mr. Ryan Chiene
714.705.1343

August 2023

TABLE OF CONTENTS

TABLE OF CONTENTS	II
1 INTRODUCTION	1
1.1 Project Location and Setting	1
1.2 Project Description.....	1
2 ENVIRONMENTAL SETTING.....	5
2.1 Climate and Meteorology	5
2.2 Air Pollutants of Concern	6
2.3 Sensitive Receptors	9
3 REGULATORY SETTING	10
3.1 Federal	10
3.2 State of California.....	10
3.3 Regional.....	12
3.4 Local	14
4 SIGNIFICANCE CRITERIA AND METHODOLOGY.....	16
4.1 Air Quality Thresholds.....	16
4.2 Methodology.....	17
5 POTENTIAL IMPACTS AND MITIGATION.....	19
5.1 Air Quality Analysis.....	19
5.2 Cumulative Setting, Impacts, and Mitigation Measures	28
6 REFERENCES	29
TABLES	
Table 1: Air Contaminants and Associated Public Health Concerns	7
Table 2: Ambient Air Quality Data	8
Table 3: Sensitive Receptors.....	9
Table 4: State and National Ambient Air Quality Standards.....	11
Table 5: South Coast Air Basin Attainment Status.....	13
Table 6: South Coast Air Quality Management District Emissions Thresholds	16
Table 7: Local Significance Thresholds for Construction/Operations	17
Table 8: Construction-Related Emissions	21
Table 9: Operational Emissions	22
Table 10: Equipment-Specific Grading Rates.....	24
Table 11: Localized Significance of Construction Emissions	24
Table 12: Localized Significance of Operational Emissions.....	25

FIGURES

Figure 1:Regional Location Map	2
Figure 2: Project Vicinity Map.....	3
Figure 3: Site Plan	4

APPENDICES

Appendix A: Air Quality Modeling Data

LIST OF ABBREVIATED TERMS

AQMP	Air Quality Management Plan
AB	Assembly Bill
ADT	Average Daily Traffic
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CAAQS	California Ambient Air Quality Standards
CCAA	California Clean Air Act
CalEEMod	California Emissions Estimator Model
CEQA	California Environmental Quality Act
CO	Carbon monoxide
cy	cubic yards
DPM	Diesel particulate matter
FCAA	Federal Clean Air Act
H ₂ S	Hydrogen sulfide
Pb	Lead
LST	Localized significance threshold
µg/m ³	Micrograms per cubic meter
mg/m ³	Milligrams per cubic meter
NAAQS	National Ambient Air Quality Standards
NO ₂	Nitrogen dioxide
NO _x	Nitrogen oxide
O ₃	Ozone
PM ₁₀	Particulate matter less than 10 microns in diameter
PM _{2.5}	Particulate matter less than 2.5 microns in diameter
ppm	Parts per million
ROG	Reactive organic gases
RTP/SCS	Regional Transportation Plan/Sustainable Communities Strategy
SB	Senate Bill
SRA	Source receptor area
SCAB	South Coast Air Basin
SCAQMD	South Coast Air Quality Management District
SCAG	Southern California Association of Governments
sf	Square foot
SO ₄₋₂	Sulfates
SO ₂	Sulfur dioxide
TAC	Toxic air contaminant
U.S. EPA	U.S. Environmental Protection Agency
C ₂ H ₃ Cl	Vinyl chloride
VOC	Volatile organic compound

1 INTRODUCTION

This report documents the results of an Air Quality Assessment completed for the Greens Indio Project (“Project” or “proposed Project”). The purpose of this Air Quality Assessment is to evaluate the potential construction and operational emissions associated with the Project and determine the level of impact the Project would have on the environment.

1.1 Project Location and Setting

The Project site is located at the northeastern corner of Jackson Street and Avenue 42 (APNs 692-670-001, -014, and -017), in the City of Indio (City), California; refer to **Figure 1, Regional Location Map**. The Project site is approximately 6.34 acres and regional access to the Project site is provided via Interstate 10 (I-10). Local access to the Project site is provided via Jackson Street and Avenue 42, both four-lane roadways. The Project site is surrounded by commercial uses to the west, north, and south, a golf course to the east, and residential uses to the north. The site is bordered by a surface parking lot to the north, Jackson Street to the west, Avenue 42 to the south, and the Lights at Indio Golf Course to the east; refer to **Figure 2, Project Vicinity Map**.

1.2 Project Description


The Project proposes a mixed-use development consisting of 13,288 square feet (sf) of commercial retail space including the following: a 3,750 sf fast food restaurant with drive-through; a 980 sf coffee shop with drive-through; a 3,996 sf fast food restaurant with drive-through; and a 4,562 sf high turnover sit down restaurant with a patio opening up to the golf course; refer to **Figure 3, Site Plan**. As noted above, the Project site’s ingress and egress would be provided via four driveways with two located on Jackson Street and two located on Avenue 42. Approximately 17 percent (approximately 38,823 sf) of the Project site area would be landscaped.

Project implementation would require the construction of new on-site and off-site utility infrastructure connections to serve the proposed commercial retail uses. These utilities would be connected to existing utility infrastructure. Trenching for new electrical conduit and wire would occur on the north side of Avenue 42 behind the existing sidewalk and from the single-family development to the western boundary of the Project site. The off-site trenching would be approximately 1,250 feet from the western boundary of the single-family residential development to the eastern terminus of the Project site. Trenching and construction activities associated with these off-site improvements are evaluated as a part of the overall Project.

Construction is anticipated to occur over a duration of approximately eight months, commencing in January 2024.

Parking

The Project is anticipated to provide 245 vehicle parking stall and 10 bicycle parking spaces would be provided on the site. Additionally, a new golf course parking lot, consisting of 87 parking stalls, will be constructed on City owned property located on the southeastern corner of the site, for use by the golf course as part of this Project refer to **Figure 3**.

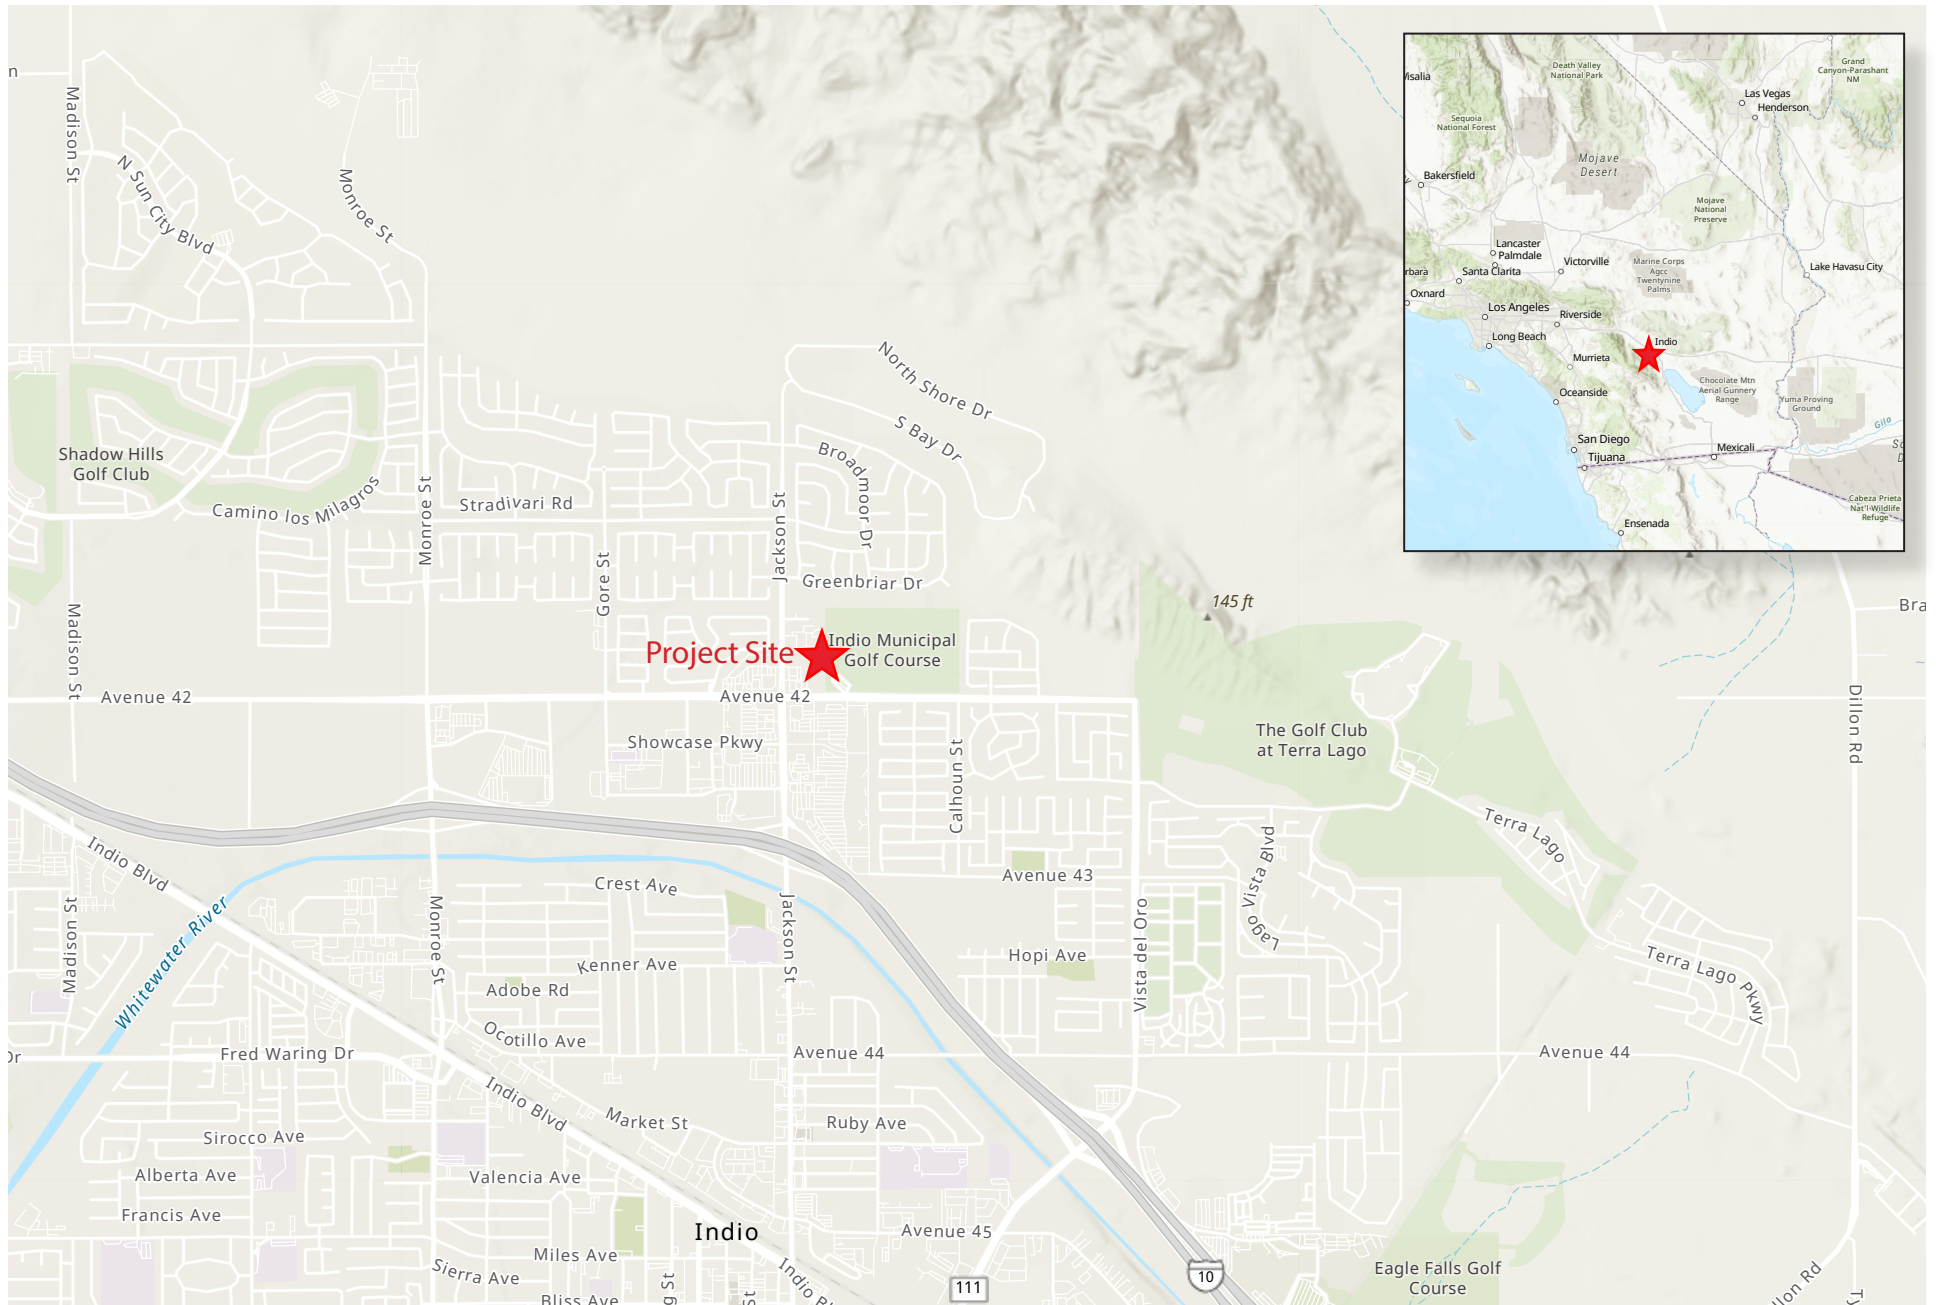

Source: USGS, 2023

Figure 1: Regional Location Map
The Greens Indio Project



Not to scale




Figure 2: Project Vicinity Map

The Greens Indio Project



Not to scale

Kimley»Horn

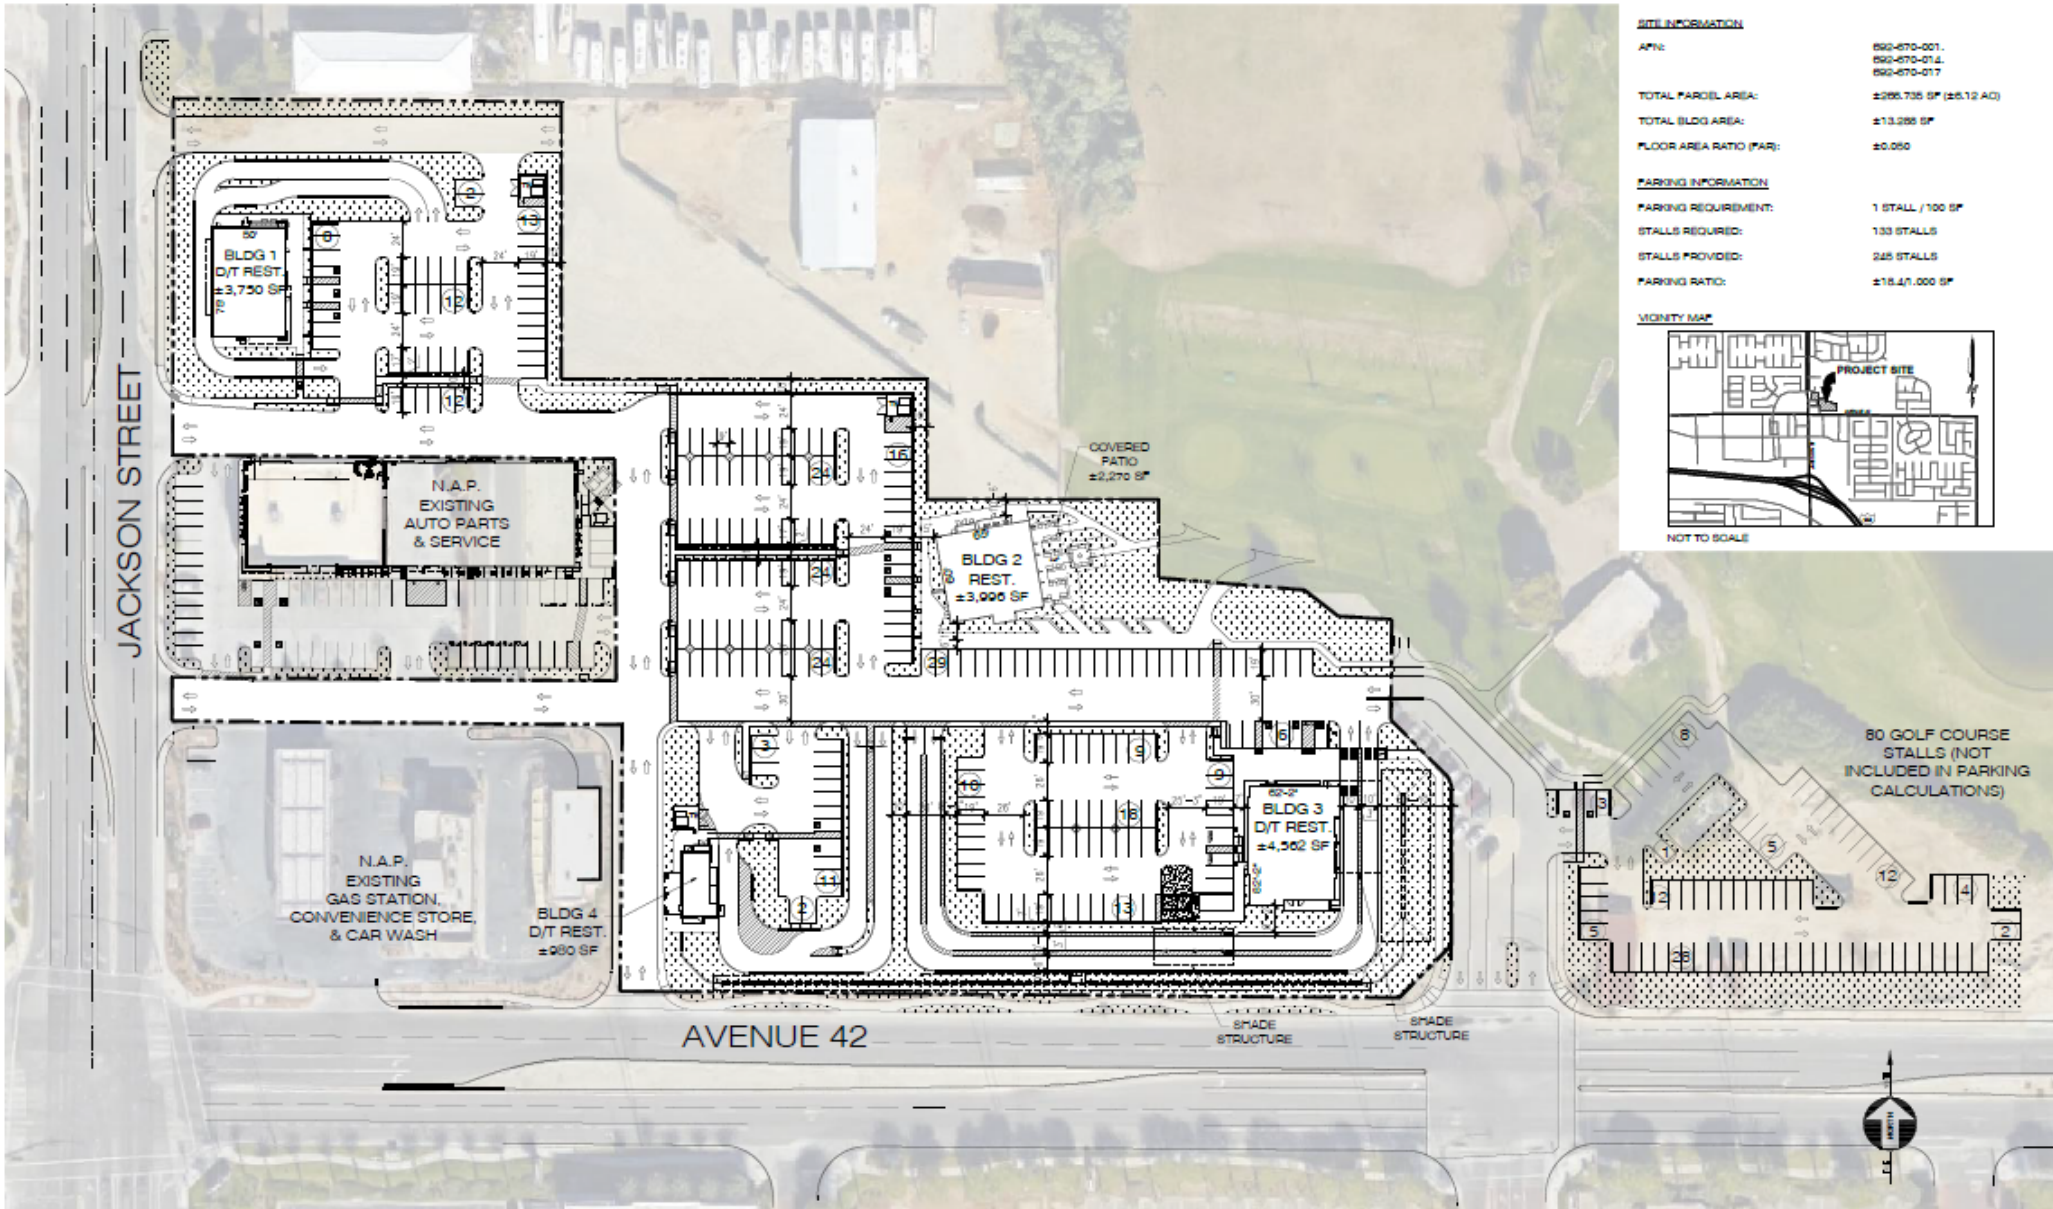

Source: Bickel Group Architecture, 2023

Figure 3: Site Plan
The Greens Indio Project



Not to scale

2 ENVIRONMENTAL SETTING

2.1 Climate and Meteorology

The California Air Resources Board (CARB) divides the State into 15 air basins that share similar meteorological and topographical features. The Project is located within the South Coast Air Basin (SCAB), which includes the non-desert portions of Los Angeles, Riverside, and San Bernardino counties, as well as all of Orange County. The SCAB is on a coastal plain with connecting broad valleys and low hills, bounded by the Pacific Ocean on the southwest and high mountains forming the remainder of the perimeter.¹ Air quality in this area is determined by such natural factors as topography, meteorology, and climate, in addition to the presence of existing air pollution sources and ambient conditions. These factors along with applicable regulations are discussed below.

The SCAB is part of a semi-permanent high-pressure zone in the eastern Pacific. As a result, the climate is mild and tempered by cool sea breezes. This usually mild weather pattern is occasionally interrupted by periods of extreme heat, winter storms, and Santa Ana winds. The annual average temperature throughout the 6,645-square-mile SCAB ranges from low 60 to high 80 degrees Fahrenheit with little variance. With more oceanic influence, coastal areas show less variability in annual minimum and maximum temperatures than inland areas.

Contrasting the steady pattern of temperature, rainfall is seasonally and annually highly variable. Almost all annual rainfall occurs between the months of November and April. Summer rainfall is reduced to widely scattered thundershowers near the coast, with slightly heavier activity in the east and over the mountains.

Although the SCAB has a semiarid climate, the air closer to the Earth's surface is typically moist because of the presence of a shallow marine layer. Except for occasional periods when dry, continental air is brought into the SCAB by offshore winds, the "ocean effect" is dominant. Periods of heavy fog are frequent and low clouds known as high fog are characteristic climatic features, especially along the coast. Annual average humidity is 70 percent at the coast and 57 percent in the eastern portions of the SCAB.

Wind patterns across the SCAB are characterized by westerly or southwesterly on-shore winds during the day and easterly or northeasterly breezes at night. Wind speed is typically higher during the dry summer months than during the rainy winter. Between periods of wind, air stagnation may occur in both the morning and evening hours. Air stagnation is one of the critical determinants of air quality conditions on any given day. During winter and fall, surface high-pressure systems over the SCAB, combined with other meteorological conditions, result in very strong, downslope Santa Ana winds. These winds normally continue for a few days before predominant meteorological conditions are reestablished.

The mountain ranges to the east affect the diffusion of pollutants by inhibiting the eastward transport of pollutants. Air quality in the SCAB generally ranges from fair to poor and is similar to air quality in most of coastal southern California. The entire region experiences heavy concentrations of air pollutants during prolonged periods of stable atmospheric conditions.

In addition to the characteristic wind patterns that affect the rate and orientation of horizontal pollutant transport, two distinct types of temperature inversions control the vertical depth through which air pollutants are mixed. These inversions are the marine inversion and the radiation inversion. The height of

¹ South Coast Air Quality Management District, *CEQA Air Quality Handbook*, 1993.

the base of the inversion at any given time is called the “mixing height.” The combination of winds and inversions is a critical determinant leading to highly degraded air quality for the SCAB in the summer and generally good air quality in the winter.

2.2 Air Pollutants of Concern

The air pollutants emitted into the ambient air by stationary and mobile sources are regulated by State and federal laws. These regulated air pollutants are known as “criteria air pollutants” and are categorized into primary and secondary pollutants.

Primary air pollutants are emitted directly from sources. Carbon monoxide (CO), reactive organic gases (ROG), nitrogen oxide (NO_x), sulfur dioxide (SO₂), coarse particulate matter (PM₁₀), fine particulate matter (PM_{2.5}), and lead are primary air pollutants. Of these, CO, NO_x, SO₂, PM₁₀, and PM_{2.5} are criteria pollutants. ROG and NO_x are criteria pollutant precursors and form secondary criteria pollutants through chemical and photochemical reactions in the atmosphere. For example, the criteria pollutant ozone (O₃) is formed by a chemical reaction between ROG and NO_x in the presence of sunlight. O₃ and nitrogen dioxide (NO₂) are the principal secondary pollutants. Sources and health effects commonly associated with criteria pollutants are summarized in **Table 1: Air Contaminants and Associated Public Health Concerns**.

Toxic Air Contaminants

Toxic air contaminants (TACs) are airborne substances that can cause short-term (acute) or long-term (i.e., chronic, carcinogenic or cancer causing) adverse human health effects (i.e., injury or illness). TACs include both organic and inorganic chemical substances. They may be emitted from a variety of common sources including gasoline stations, automobiles, dry cleaners, industrial operations, and painting operations. The current California list of TACs includes more than 200 compounds, including particulate emissions from diesel-fueled engines.

CARB identified diesel particulate matter (DPM) as a TAC. DPM differs from other TACs in that it is not a single substance but rather a complex mixture of hundreds of substances. Diesel exhaust is a complex mixture of particles and gases produced when an engine burns diesel fuel. DPM is a concern because it causes lung cancer; many compounds found in diesel exhaust are carcinogenic. DPM includes the particle-phase constituents in diesel exhaust. The chemical composition and particle sizes of DPM vary between different engine types (heavy-duty, light-duty), engine operating conditions (idle, accelerate, decelerate), fuel formulations (high/low sulfur fuel), and the year of the engine. Some short-term (acute) effects of diesel exhaust include eye, nose, throat, and lung irritation, and diesel exhaust can cause coughs, headaches, light-headedness, and nausea. DPM poses the greatest health risk among the TACs. Almost all diesel exhaust particle mass is 10 microns or less in diameter. Due to their extremely small size, these particles can be inhaled and eventually trapped in the bronchial and alveolar regions of the lung.

Table 1: Air Contaminants and Associated Public Health Concerns

Pollutant	Major Man-Made Sources	Human Health Effects
Particulate Matter (PM ₁₀ and PM _{2.5})	Power plants, steel mills, chemical plants, unpaved roads and parking lots, wood-burning stoves and fireplaces, automobiles, and others.	Increased respiratory symptoms, such as irritation of the airways, coughing, or difficulty breathing; asthma; chronic bronchitis; irregular heartbeat; nonfatal heart attacks; and premature death in people with heart or lung disease. Impairs visibility.
Ozone (O ₃)	Formed by a chemical reaction between reactive organic gases/volatile organic compounds (ROG or VOC) ¹ and nitrogen oxides (NO _x) in the presence of sunlight. Motor vehicle exhaust industrial emissions, gasoline storage and transport, solvents, paints and landfills.	Irritates and causes inflammation of the mucous membranes and lung airways; causes wheezing, coughing, and pain when inhaling deeply; decreases lung capacity; aggravates lung and heart problems. Damages plants; reduces crop yield.
Sulfur Dioxide (SO ₂)	A colorless gas formed when fuel containing sulfur is burned and when gasoline is extracted from oil. Examples are petroleum refineries, cement manufacturing, metal processing facilities, locomotives, and ships.	Respiratory irritant. Aggravates lung and heart problems. In the presence of moisture and oxygen, sulfur dioxide converts to sulfuric acid which can damage marble, iron, and steel. Damages crops and natural vegetation. Impairs visibility. Precursor to acid rain.
Carbon Monoxide (CO)	An odorless, colorless gas formed when carbon in fuel is not burned completely; a component of motor vehicle exhaust.	Reduces the ability of blood to deliver oxygen to vital tissues, affecting the cardiovascular and nervous system. Impairs vision, causes dizziness, and can lead to unconsciousness or death.
Nitrogen Dioxide (NO ₂)	A reddish-brown gas formed during fuel combustion for motor vehicles and industrial sources. Sources include motor vehicles, electric utilities, and other sources that burn fuel.	Respiratory irritant; aggravates lung and heart problems. Precursor to O ₃ . Contributes to global warming and nutrient overloading which deteriorates water quality. Causes brown discoloration of the atmosphere.
Lead (Pb)	Lead is a metal found naturally in the environment as well as in manufactured products. The major sources of lead emissions have historically been motor vehicles (such as cars and trucks) and industrial sources. Due to the phase out of leaded gasoline, metals processing is the major source of lead emissions to the air today. The highest levels of lead in air are generally found near lead smelters. Other stationary sources are waste incinerators, utilities, and lead-acid battery manufacturers.	Exposure to lead occurs mainly through inhalation of air and ingestion of lead in food, water, soil, or dust. It accumulates in the blood, bones, and soft tissues and can adversely affect the kidneys, liver, nervous system, and other organs. Excessive exposure to lead may cause neurological impairments such as seizures, mental retardation, and behavioral disorders. Even at low doses, lead exposure is associated with damage to the nervous systems of fetuses and young children, resulting in learning deficits and lowered IQ.
Notes: ¹ Volatile Organic Compounds (VOCs or Reactive Organic Gases [ROG]) are hydrocarbons/organic gases that are formed solely of hydrogen and carbon. There are several subsets of organic gases including ROG and VOCs. Both ROG and VOCs are emitted from the incomplete combustion of hydrocarbons or other carbon-based fuels. The major sources of hydrocarbons are combustion engine exhaust, oil refineries, and oil-fueled power plants; other common sources are petroleum fuels, solvents, dry cleaning solutions, and paint (via evaporation).		
Source: California Air Pollution Control Officers Association (CAPCOA), <i>Health Effects</i> , http://www.capcoa.org/health-effects/ , accessed January 2023.		

Ambient Air Quality

CARB monitors ambient air quality at approximately 250 air monitoring stations across the State. These stations usually measure pollutant concentrations ten feet above ground level; therefore, air quality is often referred to in terms of ground-level concentrations. Existing levels of ambient air quality, historical

trends, and projections near the Project are documented by measurements made by the South Coast Air Quality Management District (SCAQMD), the air pollution regulatory agency in the SCAB that maintains air quality monitoring stations which process ambient air quality measurements.

Pollutants of concern in the SCAB include O₃, PM₁₀, and PM_{2.5}. The closest air monitoring station to the Project that monitors ambient concentrations of these pollutants is the Indio-Jackson Street Monitoring Stations (located approximately 2.40 miles to the south of the Project site). Local air quality data from 2019 to 2021 are provided in **Table 2: Ambient Air Quality Data**, which lists the monitored maximum concentrations and number of exceedances of State or federal air quality standards for each year.

Table 2: Ambient Air Quality Data

Criteria Pollutant	2019	2020	2021
Ozone (O₃)¹			
1-hour Maximum Concentration (ppm)	0.103	0.097	0.099
8-hour Maximum Concentration (ppm)	0.087	0.084	0.078
<i>Number of Days Standard Exceeded</i>			
CAAQS 1-hour (>0.09 ppm)	4	2	2
NAAQS 8-hour (>0.070 ppm)	43	42	19
Carbon Monoxide (CO)			
1-hour Maximum Concentration (ppm)	--	--	--
<i>Number of Days Standard Exceeded</i>			
NAAQS 1-hour (>35 ppm)	--	--	--
CAAQS 1-hour (>20 ppm)	--	--	--
Nitrogen Dioxide (NO₂)			
1-hour Maximum Concentration (ppm)	--	--	--
<i>Number of Days Standard Exceeded</i>			
NAAQS 1-hour (>0.100 ppm)	--	--	--
CAAQS 1-hour (>0.18 ppm)	--	--	--
Particulate Matter Less Than 10 Microns (PM₁₀)¹			
National 24-hour Maximum Concentration	141.9	145.2	100.4
State 24-hour Maximum Concentration	80.3	53.8	100.6
State Annual Average Concentration (CAAQS=20 µg/m ³)	*	*	*
<i>Number of Days Standard Exceeded</i>			
NAAQS 24-hour (>150 µg/m ³)	0	0	0
CAAQS 24-hour (>50 µg/m ³)	4	2	5
Particulate Matter Less Than 2.5 Microns (PM_{2.5})¹			
National 24-hour Maximum Concentration	15.0	41.3	30.6
State 24-hour Maximum Concentration	15.0	41.3	30.6
<i>Number of Days Standard Exceeded</i>			
NAAQS 24-hour (>35 µg/m ³)	0	2.1	0
Notes: NAAQS = National Ambient Air Quality Standards; CAAQS = California Ambient Air Quality Standards; ppm = parts per million; µg/m ³ = micrograms per cubic meter; -- = not measured; * Insufficient (or no) data ¹ Measurements taken at the Indio-Jackson Street Monitoring Station at 46990 Jackson Street, Indio, California 92201 (CARB# 33157)			
Source: All pollutant measurements are from the CARB Aerometric Data Analysis and Management system database (https://www.arb.ca.gov/adam) except for CO and NO ₂ , which were retrieved from the CARB Air Quality and Meteorological Information System (https://www.arb.ca.gov/aqmis2/aqdselect.php).			

2.3 Sensitive Receptors

Sensitive populations are more susceptible to the effects of air pollution than is the general population. Sensitive receptors that are in proximity to localized sources of toxics are of particular concern. Land uses considered sensitive receptors include residences, schools, playgrounds, childcare centers, long-term health care facilities, rehabilitation centers, convalescent centers, and retirement homes. Sensitive land uses within 1,000 feet of the Project site consist of single-family residential communities. Sensitive land uses nearest to the Project are shown in **Table 3: Sensitive Receptors**.

Table 3: Sensitive Receptors

Receptor Description	Distance ¹ and Direction from the Project
Single-Family Residences	150 feet to the southeast
Single-Family Residences	190 feet to the northwest
Source: Google Earth, 2023.	
1. Distance measured from the Project site boundary to the nearest sensitive receptor property line.	

3 REGULATORY SETTING

3.1 Federal

Federal Clean Air Act

Air quality is federally protected by the Federal Clean Air Act (FCAA) and its amendments. Under the FCAA, the United States Environmental Protection Agency (U.S. EPA) developed the primary and secondary National Ambient Air Quality Standards (NAAQS) for the criteria air pollutants including O₃, NO₂, CO, SO₂, PM₁₀, PM_{2.5}, and lead. Proposed projects in or near nonattainment areas could be subject to more stringent air-permitting requirements. The FCAA requires each state to prepare a State Implementation Plan (SIP) to demonstrate how it will attain the NAAQS within the federally imposed deadlines.

The U.S. EPA can withhold certain transportation funds from states that fail to comply with the planning requirements of the FCAA. If a state fails to correct these planning deficiencies within two years of Federal notification, the U.S. EPA is required to develop a Federal implementation plan for the identified nonattainment area or areas. The provisions of 40 Code of Federal Regulations Parts 51 and 93 apply in all nonattainment and maintenance areas for transportation-related criteria pollutants for which the area is designated nonattainment or has a maintenance plan. The U.S. EPA has designated enforcement of air pollution control regulations to the individual states. Applicable federal standards are summarized in **Table 4: State and National Ambient Air Quality Standards**.

3.2 State of California

California Air Resources Board

CARB administers the air quality policy in California. The California Ambient Air Quality Standards (CAAQS) were established in 1969 pursuant to the Mulford-Carrell Act. These standards, included with the NAAQS in **Table 4**, are generally more stringent and apply to more pollutants than the NAAQS. In addition to the criteria pollutants, CAAQS have been established for visibility reducing particulates, hydrogen sulfide, and sulfates.

The California Clean Air Act (CCAA), which was approved in 1988, requires that each local air district prepare and maintain an Air Quality Management Plan (AQMP) to achieve compliance with CAAQS. These AQMPs also serve as the basis for the preparation of the SIP for meeting federal clean air standards for the State of California. Like the U.S. EPA, CARB also designates areas within California as either attainment or nonattainment for each criteria pollutant based on whether the CAAQS have been achieved. Under the CCAA, areas are designated as nonattainment for a pollutant if air quality data shows that a State standard for the pollutant was violated at least once during the previous three calendar years. Exceedances that are affected by highly irregular or infrequent events such as wildfires, volcanoes, etc. are not considered violations of a State standard, and are not used as a basis for designating areas as nonattainment. The applicable State standards are summarized in **Table 4**.

Table 4: State and National Ambient Air Quality Standards

Pollutant	Averaging Time	State Standards ¹	Federal Standards ²
Ozone (O ₃) ^{2, 5, 7}	8 Hour	0.070 ppm (137 µg/m ³)	0.070 ppm
	1 Hour	0.09 ppm (180 µg/m ³)	NA
Carbon Monoxide (CO)	8 Hour	9.0 ppm (10 mg/m ³)	9 ppm (10 mg/m ³)
	1 Hour	20 ppm (23 mg/m ³)	35 ppm (40 mg/m ³)
Nitrogen Dioxide (NO ₂)	1 Hour	0.18 ppm (339 µg/m ³)	0.10 ppm ¹¹
	Annual Arithmetic Mean	0.030 ppm (57 µg/m ³)	0.053 ppm (100 µg/m ³)
Sulfur Dioxide (SO ₂) ⁸	24 Hour	0.04 ppm (105 µg/m ³)	0.14 ppm (365 µg/m ³)
	1 Hour	0.25 ppm (655 µg/m ³)	0.075 ppm (196 µg/m ³)
	Annual Arithmetic Mean	NA	0.03 ppm (80 µg/m ³)
Particulate Matter (PM ₁₀) ^{1, 3, 6}	24-Hour	50 µg/m ³	150 µg/m ³
	Annual Arithmetic Mean	20 µg/m ³	NA
Fine Particulate Matter (PM _{2.5}) ^{3, 4, 6, 9}	24-Hour	NA	35 µg/m ³
	Annual Arithmetic Mean	12 µg/m ³	12 µg/m ³
Sulfates (SO ₄₋₂)	24 Hour	25 µg/m ³	NA
Lead (Pb) ^{10, 11}	30-Day Average	1.5 µg/m ³	NA
	Calendar Quarter	NA	1.5 µg/m ³
	Rolling 3-Month Average	NA	0.15 µg/m ³
Hydrogen Sulfide (H ₂ S)	1 Hour	0.03 ppm (0.42 µg/m ³)	NA
Vinyl Chloride (C ₂ H ₃ Cl) ¹⁰	24 Hour	0.01 ppm (26 µg/m ³)	NA

Notes:

ppm = parts per million; µg/m³ = micrograms per cubic meter; mg/m³ = milligrams per cubic meter; – = no information available.

¹ California standards for O₃, carbon monoxide (except Lake Tahoe), sulfur dioxide (1-hour and 24-hour), nitrogen dioxide, suspended particulate matter - PM₁₀, and visibility reducing particles are values that are not to be exceeded. The standards for sulfates, Lake Tahoe carbon monoxide, lead, hydrogen sulfide, and vinyl chloride are not to be equaled or exceeded. If the standard is for a 1-hour, 8-hour or 24-hour average (i.e. all standards except for lead and the PM₁₀ annual standard), then some measurements may be excluded. Measurements are excluded that CARB determines would occur less than once per year on the average. The Lake Tahoe carbon monoxide standard is 6.0 ppm, a level one-half the national standard and two-thirds the State standard.

² National standards shown are the "primary standards" designed to protect public health. National standards other than for O₃, particulates and those based on annual averages are not to be exceeded more than once a year. The 1-hour O₃ standard is attained if, during the most recent three-year period, the average number of days per year with maximum hourly concentrations above the standard is equal to or less than one. The 8-hour O₃ standard is attained when the 3-year average of the 4th highest daily concentrations is 0.070 ppm or less. The 24-hour PM₁₀ standard is attained when the 3-year average of the 99th percentile of monitored concentrations is less than 150 µg/m³. The 24-hour PM_{2.5} standard is attained when the 3-year average of 98th percentiles is less than 35 µg/m³.

³ Except for the national particulate standards, annual standards are met if the annual average falls below the standard at every site. The national annual particulate standard for PM₁₀ is met if the 3-year average falls below the standard at every site. The annual PM_{2.5} standard is met if the 3-year average of annual averages spatially-averaged across officially designed clusters of sites falls below the standard.

NAAQS are set by the U.S. EPA at levels determined to be protective of public health with an adequate margin of safety.

⁴ On October 1, 2015, the national 8-hour O₃ primary and secondary standards were lowered from 0.075 to 0.070 ppm. An area will meet the standard if the fourth-highest maximum daily 8-hour O₃ concentration per year, averaged over three years, is equal to or less than 0.070 ppm. U.S. EPA will make recommendations on attainment designations by October 1, 2016, and issue final designations October 1, 2017. Nonattainment areas will have until 2020 to late 2037 to meet the health standard, with attainment dates varying based on the O₃ level in the area.

⁵ The national 1-hour O₃ standard was revoked by the U.S. EPA on June 15, 2005.

⁶ In June 2002, CARB established new annual standards for PM_{2.5} and PM₁₀.

⁷ The 8-hour California O₃ standard was approved by the CARB on April 28, 2005 and became effective on May 17, 2006.

⁸ On June 2, 2010, the U.S. EPA established a new 1-hour SO₂ standard, effective August 23, 2010, which is based on the 3-year average of the annual 99th percentile of 1-hour daily maximum concentrations. The existing 0.030 ppm annual and 0.14 ppm 24-hour SO₂ NAAQS however must continue to be used until one year following U.S. EPA initial designations of the new 1-hour SO₂ NAAQS.

⁹ In December 2012, U.S. EPA strengthened the annual PM_{2.5} NAAQS from 15.0 to 12.0 µg/m³. In December 2014, the U.S. EPA issued final area designations for the 2012 primary annual PM_{2.5} NAAQS. Areas designated "unclassifiable/attainment" must continue to take steps to prevent their air quality from deteriorating to unhealthy levels. The effective date of this standard is April 15, 2015.

¹⁰ CARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure below which there are no adverse health effects determined.

¹¹ National lead standard, rolling 3-month average: final rule signed October 15, 2008. Final designations effective December 31, 2011.

Source: South Coast Air Quality Management District, *Air Quality Management Plan*, 2016; California Air Resources Board, *Ambient Air Quality Standards*, May 6, 2016.

3.3 Regional

South Coast Air Quality Management District

The SCAQMD is the air pollution control agency for Orange County and the urban portions of Los Angeles, Riverside, and San Bernardino counties. The agency's primary responsibility is ensuring that State and federal ambient air quality standards are attained and maintained in the SCAB. The SCAQMD is also responsible for adopting and enforcing rules and regulations concerning air pollutant sources, issuing permits for stationary sources of air pollutants, inspecting stationary sources of air pollutants, responding to citizen complaints, monitoring ambient air quality and meteorological conditions, awarding grants to reduce motor vehicle emissions, conducting public education campaigns, and many other activities. All projects are subject to SCAQMD rules and regulations in effect at the time of construction.

The SCAQMD is also the lead agency in charge of developing the AQMP, with input from the Southern California Association of Governments (SCAG) and CARB. The AQMP is a comprehensive plan that includes control strategies for stationary and area sources, as well as for on-road and off-road mobile sources. SCAG has the primary responsibility for providing future growth projections and the development and implementation of transportation control measures. CARB, in coordination with federal agencies, provides the control element for mobile sources.

The 2016 AQMP was adopted by the SCAQMD Governing Board on March 3, 2017. The purpose of the AQMP is to set forth a comprehensive and integrated program that would lead the SCAB into compliance with the federal 24-hour PM_{2.5} air quality standard, and to provide an update to the SCAQMD's commitments towards meeting the federal 8-hour O₃ standards. The AQMP incorporates the latest scientific and technological information and planning assumptions, including the *Regional Transportation Plan/Sustainable Communities Strategy* (RTP/SCS) and updated emission inventory methodologies for various source categories. As part of its air quality planning, SCAG has prepared the Regional Comprehensive Plan and Guide and the Connect SoCal – The 2020-2045 RTP/SCS. The 2020-2045 RTP/SCS was determined to conform to the federally mandated SIP for the attainment and maintenance of the NAAQS. The 2020-2045 RTP/SCS will be incorporated into the 2022 AQMP. Both the Regional Comprehensive Plan and AQMP are based, in part, on projections originating with county and city general plans.

On October 1, 2015, the U.S. EPA strengthened the NAAQS for ground-level O₃. The 2022 AQMP, adopted by the South Coast AQMD Governing Board on December 2, 2022, was developed to address the requirements for meeting the 2015 8-hour O₃ standard. The 2022 AQMP builds upon measures already in place from previous AQMPs. It also includes a variety of additional strategies such as regulation, accelerated deployment of available cleaner technologies (e.g., zero emissions technologies, when cost-effective and feasible, and low NO_x technologies in other applications), best management practices, co-benefits from existing programs (e.g., climate and energy efficiency), incentives, and other FCAA measures to achieve the 2015 8-hour ozone standard. The 2022 AQMP incorporates the latest scientific and technological information and planning assumptions, including the 2020-2045 RTP/SCS and updated emission inventory methodologies for various source categories.

The SCAQMD has published the CEQA Air Quality Handbook (approved by the SCAQMD Governing Board in 1993 and augmented with guidance for Local Significance Thresholds [LST] in 2008). The SCAQMD guidance helps local government agencies and consultants to develop environmental documents required by California Environmental Quality Act (CEQA) and provides identification of suggested thresholds of

significance for criteria pollutants for both construction and operation (see discussion of thresholds below). With the help of the CEQA Air Quality Handbook and associated guidance, local land use planners and consultants are able to analyze and document how proposed and existing projects affect air quality in order to meet the requirements of the CEQA review process. The SCAQMD periodically provides supplemental guidance and updates to the handbook on their website.

The SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino, and Imperial counties and serves as a forum for regional issues relating to transportation, the economy, community development, and the environment. Under federal law, SCAG is designated as a Metropolitan Planning Organization and under State law as a Regional Transportation Planning Agency and a Council of Governments.

The State and federal attainment status designations for the SCAB are summarized in **Table 5: South Coast Air Basin Attainment Status**. The SCAB is currently designated as a nonattainment area with respect to the State O₃, PM₁₀, and PM_{2.5} standards, as well as the national 8-hour O₃ and PM_{2.5} standards. The SCAB is designated as attainment or unclassified for the remaining State and federal standards.

Table 5: South Coast Air Basin Attainment Status

Pollutant	State	Federal
Ozone (O ₃) (1 Hour Standard)	Non-Attainment	Non-Attainment (Extreme)
Ozone (O ₃) (8 Hour Standard)	Non-Attainment	Non-Attainment (Extreme)
Particulate Matter (PM _{2.5}) (24 Hour Standard)	–	Non-Attainment (Serious)
Particulate Matter (PM _{2.5}) (Annual Standard)	Non-Attainment	Non-Attainment (Moderate)
Particulate Matter (PM ₁₀) (24 Hour Standard)	Non-Attainment	Attainment (Maintenance)
Particulate Matter (PM ₁₀) (Annual Standard)	Non-Attainment	–
Carbon Monoxide (CO) (1 Hour Standard)	Attainment	Attainment (Maintenance)
Carbon Monoxide (CO) (8 Hour Standard)	Attainment	Attainment (Maintenance)
Nitrogen Dioxide (NO ₂) (1 Hour Standard)	Attainment	Unclassifiable/Attainment
Nitrogen Dioxide (NO ₂) (Annual Standard)	Attainment	Attainment (Maintenance)
Sulfur Dioxide (SO ₂) (1 Hour Standard)	Attainment	Unclassifiable/Attainment
Sulfur Dioxide (SO ₂) (24 Hour Standard)	Attainment	–
Lead (Pb) (30 Day Standard)	–	Unclassifiable/Attainment
Lead (Pb) (3 Month Standard)	Attainment	–
Sulfates (SO ₄₋₂) (24 Hour Standard)	Attainment	–
Hydrogen Sulfide (H ₂ S) (1 Hour Standard)	Unclassified	–
Source: South Coast Air Quality Management District, <i>Air Quality Management Plan</i> , 2016; United States Environmental Protection Agency, <i>Nonattainment Areas for Criteria Pollutants (Green Book)</i> , 2020.		

The following is a list of SCAQMD rules that are required of construction activities associated with the Project:

- **Rule 402 (Nuisance)** – This rule prohibits the discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health, or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property. This rule does not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals.
- **Rule 403 (Fugitive Dust)** – This rule requires fugitive dust sources to implement best available control measures for all sources, and all forms of visible particulate matter are prohibited from crossing any property line. This rule is intended to reduce PM₁₀ emissions from any transportation, handling, construction, or storage activity that has the potential to generate fugitive dust. PM₁₀ suppression techniques are summarized below.
 - a) Portions of a construction site to remain inactive longer than a period of three months will be seeded and watered until grass cover is grown or otherwise stabilized.
 - b) All on-site roads will be paved as soon as feasible or watered periodically or chemically stabilized.
 - c) All material transported off-site will be either sufficiently watered or securely covered to prevent excessive amounts of dust.
 - d) The area disturbed by clearing, grading, earthmoving, or excavation operations will be minimized at all times.
 - e) Where vehicles leave a construction site and enter adjacent public streets, the streets will be swept daily or washed down at the end of the workday to remove soil tracked onto the paved surface.
- **Rule 431.2 (Sulfur Content of Liquid Fuels)** – This rule limits the sulfur content in diesel and other liquid fuels for the purpose of both reducing the formation of sulfur oxides and particulates during combustion and to enable the use of add-on control devices for diesel fueled internal combustion engines.
- **Rule 1113 (Architectural Coatings)** – This rule requires manufacturers, distributors, and end users of architectural and industrial maintenance coatings to reduce ROG emissions from the use of these coatings, primarily by placing limits on the ROG content of various coating categories.

3.4 Local

City of Indio General Plan

Chapter 3 (Land Use and Urban Design) and Chapter 6 (Health and Equity) of the Indio General Plan includes the following polices and implementation actions that pertain either directly or indirectly to air quality that are applicable to the Project:

Policy LU-10.4: Non-polluting industries. Promote development of non-polluting industries that are not major sources of air and water pollution or other negative externalities.

Goal HE-3: **Environmental Quality. A City designed to improve the quality of the built and natural environments to reduce disparate health and environmental impacts.**

Policy HE-3.1: Regional air quality planning efforts. Participate in air quality planning efforts with local, regional, and State agencies that improve local air quality to protect human health and

4 SIGNIFICANCE CRITERIA AND METHODOLOGY

4.1 Air Quality Thresholds

Based upon the criteria derived from Appendix G of the CEQA Guidelines, a project normally would have a significant effect on the environment if it would:

- Conflict with or obstruct implementation of the applicable air quality plan.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the Project region is in nonattainment under an applicable state or federal ambient air quality standard.
- Expose sensitive receptors to substantial pollutant concentrations.
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

SCAQMD Thresholds

The significance criteria established by SCAQMD may be relied upon to make the above determinations. According to the SCAQMD, an air quality impact is considered significant if the Project would violate any ambient air quality standard, contribute substantially to an existing or projected air quality violation, or expose sensitive receptors to substantial pollutant concentrations. The SCAQMD has established thresholds of significance for air quality during construction and operational activities of land use development projects, as shown in **Table 6: South Coast Air Quality Management District Emissions Thresholds**.

Table 6: South Coast Air Quality Management District Emissions Thresholds

Criteria Air Pollutants and Precursors	Pounds per Day	
	Construction-Related	Operational-Related
Reactive Organic Gases (ROG)	75	55
Carbon Monoxide (CO)	550	550
Nitrogen Oxides (NO _x)	100	55
Sulfur Oxides (SO _x)	150	150
Coarse Particulates (PM ₁₀)	150	150
Fine Particulates (PM _{2.5})	55	55

Source: South Coast Air Quality Management District, *South Coast AQMD Air Quality Significance Thresholds*, April 2019.

Localized Carbon Monoxide

In addition to the daily thresholds listed above, development associated with the Project would also be subject to the ambient air quality standards. These are addressed through an analysis of localized CO impacts. The significance of localized impacts depends on whether ambient CO levels near the Project are above State and national CO standards (the more stringent California standards are 20 ppm for 1-hour and 9 ppm for 8-hour). The SCAB has been designated as attainment under the 1-hour and 8-hour standards.

Localized Significance Thresholds

In addition to the CO hotspot analysis, the SCAQMD developed LSTs for emissions of NO₂, CO, PM₁₀, and PM_{2.5} generated at new development sites (off-site mobile source emissions are not included in the LST analysis). LSTs represent the maximum emissions that can be generated at a project without expecting to

cause or substantially contribute to an exceedance of the most stringent State or national ambient air quality standards. LSTs are based on the ambient concentrations of that pollutant within the Project source receptor area (SRA), as demarcated by the SCAQMD, and the distance to the nearest sensitive receptor. LST analysis for construction is applicable for all projects that disturb 5 acres or less on a single day. The City of Indio is located within SCAQMD SRA 30. **Table 7: Local Significance Thresholds for Construction/Operations**, shows the LSTs for a 1-acre, 2-acre, and 5-acre project in SRA 30 within 25 meters of the Project. The nearest sensitive receptor is a residential property located at approximately 46 meters to the southeast. Therefore, the threshold distance of 25 meters was conservatively used for the analysis based on the SCAQMD LST methodology guidance. LSTs associated with all acreage categories at 25 meters are provided in **Table 7** for informational purposes. The table shows that the LSTs increase as acreages increase. It should be noted that LSTs are screening thresholds and are therefore conservative. The construction LST acreage is determined based on daily acreage disturbed. The operational LST acreage is based on the total area of the Project site. Although the Project site is greater than five acres, the 5-acre operational LSTs are conservatively used to evaluate the Project.

Table 7: Local Significance Thresholds for Construction/Operations

Project Size	Pounds per Day			
	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Coarse Particulates (PM ₁₀)	Fine Particulates (PM _{2.5})
1 Acre	132/132	878/878	4/1	3/1
2 Acres	191/191	1,299/1,299	7/2	5/2
5 Acres	304/304	2,292/2,292	14/4	8/2

Source: South Coast Air Quality Management District, *Localized Significance Threshold Methodology*, July 2008.

4.2 Methodology

This air quality impact analysis considers construction and operational impacts associated with the Project. Where criteria air pollutant quantification was required, emissions were modeled using the California Emissions Estimator Model version 2022.1 (CalEEMod). CalEEMod is a Statewide land use emissions computer model designed to quantify potential criteria pollutant emissions associated with both construction and operations from a variety of land use projects. Air quality impacts were assessed according to methodologies recommended by CARB and the SCAQMD.

Construction equipment, trucks, worker vehicles, and ground-disturbing activities associated with Project construction would generate emissions of criteria air pollutants and precursors. Daily regional construction emissions are estimated by assuming construction occurs at the earliest feasible date (i.e., a conservative estimate of construction activities) and applying off-road, fugitive dust, and on-road emissions factors in CalEEMod.

Project operations would result in emissions of area sources (consumer products), energy sources (natural gas usage), and mobile sources (motor vehicles from Project generated vehicle trips). Project-generated increases in operational emissions would be predominantly associated with motor vehicle use. The increase of traffic over existing conditions as a result of the Project was obtained from the Project's Trip Generation prepared by Kimley-Horn (January 2023). Other operational emissions from area, energy, and stationary sources were quantified in CalEEMod based on land use activity data.

As discussed above, the SCAQMD provides significance thresholds for emissions associated with proposed Project construction and operations. The proposed Project's construction and operational emissions are compared to the daily criteria pollutant emissions significance thresholds in order to determine the significance of a Project's impact on regional air quality.

The localized effects from the Project's on-site emissions were evaluated in accordance with the SCAQMD's LST methodology, which uses on-site mass emissions rate look-up tables and Project-specific modeling. LSTs represent the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable federal or State ambient air quality standards and are developed based on the ambient concentrations of that pollutant for each SRA and distance to the nearest sensitive receptor.

5 POTENTIAL IMPACTS AND MITIGATION

5.1 Air Quality Analysis

Threshold 5.1 Would the Project conflict with or obstruct implementation of the applicable air quality plan?

As part of its enforcement responsibilities, the U.S. EPA requires each state with nonattainment areas to prepare and submit a SIP that demonstrates the means to attain the federal standards. The SIP must integrate federal, state, and local plan components and regulations to identify specific measures to reduce pollution in nonattainment areas, using a combination of performance standards and market-based programs. Similarly, under State law, the CCAA requires an air quality attainment plan to be prepared for areas designated as nonattainment regarding the state and federal ambient air quality standards. Air quality attainment plans outline emissions limits and control measures to achieve and maintain these standards by the earliest practical date.

The Project site is located within the SCAB, which is under the jurisdiction of the SCAQMD. The SCAQMD is required, pursuant to the FCAA, to reduce emissions of criteria pollutants for which the SCAB is in nonattainment. To reduce such emissions, the SCAQMD adopted the 2016 and 2022 AQMPs (AQMPs). The AQMPs establish a program of rules and regulations directed at reducing air pollutant emissions and achieving State (California) and national air quality standards. The AQMPs are a regional and multi-agency effort including the SCAQMD, the CARB, the SCAG, and the U.S. EPA. The AQMPs pollutant control strategies are based on the latest scientific and technical information and planning assumptions, including SCAG's RTP/SCS, updated emission inventory methodologies for various source categories, and SCAG's latest growth forecasts. SCAG's latest growth forecasts were defined in consultation with local governments and with reference to local general plans. The Project is subject to the SCAQMD's AQMPs.

Criteria for determining consistency with the AQMP are defined by the following indicators:

- **Consistency Criterion No. 1:** The Project will not result in an increase in the frequency or severity of existing air quality violations, or cause or contribute to new violations, or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMPs.
- **Consistency Criterion No. 2:** The Project will not exceed the assumptions in the AQMPs or increments based on the years of the Project build-out phase.

According to the SCAQMD's *CEQA Air Quality Handbook*, the purpose of the consistency finding is to determine if a project is inconsistent with the assumptions and objectives of the regional air quality plans, and thus if it would interfere with the region's ability to comply with CAAQS and NAAQS.

The violations to which Consistency Criterion No. 1 refers are CAAQS and NAAQS. As shown in **Table 8** and **Table 9** below, the Project would not exceed the construction or operational standards. Therefore, the Project would not contribute to an existing air quality violation. Thus, the Project would be consistent with the first criterion.

Concerning Consistency Criterion No. 2, the AQMP contains air pollutant reduction strategies based on SCAG's latest growth forecasts, and SCAG's growth forecasts were defined in consultation with local governments and with reference to local general plans. Project implementation would require a General Plan Amendment and Zone Change to re-designate/zone APN 692-670-006 as Open Space – Parks, and

re-designate/zone APN 692-670-012 as Regional Commercial to accommodate the proposed drive-through restaurants. Although the Project requires a General Plan Amendment (GPA) and a Zone Change, the Project would not result in a direct increase in population since the proposed Project would not accommodate any new residents. The Project would, however, increase the number of jobs which, in turn, could indirectly result in a nominal increase in population. As such, the Project would not result in substantial unplanned growth or unaccounted for growth in the General Plan or job growth projections used by the SCAQMD to develop the AQMP. Thus, a less than significant impact would occur, as the Project is also consistent with the second criterion.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

Threshold 5.2 Would the Project result in a cumulatively considerable net increase of any criteria pollutant for which the Project region is non-attainment under an applicable state or federal ambient air quality standard?

Construction Emissions

Construction associated with the Project would generate short-term emissions of criteria air pollutants. The criteria pollutants of primary concern within the Project area include O₃-precursor pollutants (i.e., ROG and NO_x) and PM₁₀ and PM_{2.5}. Construction-generated emissions are short term and of temporary duration, lasting only as long as construction activities occur, but would be considered a significant air quality impact if the volume of pollutants generated exceeds the SCAQMD's thresholds of significance.

Construction results in the temporary generation of emissions resulting from site grading, road paving, motor vehicle exhaust associated with construction equipment and worker trips, and the movement of construction equipment, especially on unpaved surfaces. Emissions of airborne particulate matter are largely dependent on the amount of ground disturbance associated with site preparation activities as well as weather conditions and the appropriate application of water.

The duration of construction activities associated with the Project is estimated to last approximately eight months. Construction-generated emissions associated the Project were calculated using the CARB-approved CalEEMod computer program, which is designed to model emissions for land use development projects, based on typical construction requirements. See **Appendix A: Air Quality Modeling Data** for more information regarding the construction assumptions used in this analysis. Predicted maximum daily construction-generated emissions for the Project are summarized in **Table 8: Construction-Related Emissions**.

Fugitive dust emissions may have a substantial, temporary impact on local air quality. In addition, fugitive dust may be a nuisance to those living and working in the Project vicinity. Uncontrolled dust from construction can become a nuisance and potential health hazard to those living and working nearby. SCAQMD Rules 402 and 403 (prohibition of nuisances, watering of inactive and perimeter areas, track out requirements, etc.) are applicable to the Project and were applied in CalEEMod to minimize fugitive dust emissions. **Table 8** shows that unmitigated construction emissions would not exceed the SCAQMD thresholds. Impacts would be less than significant.

Table 8: Construction-Related Emissions

Construction Year	Pollutant (Maximum Pounds per Day)					
	Reactive Organic Gases (ROG)	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Sulfur Dioxide (SO ₂)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
Unmitigated Emissions¹						
2024	3.56	36.43	32.74	<1	6.44	3.53
SCAQMD Threshold	75	100	550	150	55	150
Exceed SCAQMD Threshold?	No	No	No	No	No	No
Notes: 1. SCAQMD Rule 403 Fugitive Dust applied. The Rule 403 reduction/credits include the following: properly maintain mobile and other construction equipment; replace ground cover in disturbed areas quickly; water exposed surfaces three times daily; cover stock piles with tarps; water all haul roads twice daily; and limit speeds on unpaved roads to 15 miles per hour. Reductions percentages from the SCAQMD CEQA Handbook (Tables XI-A through XI-E) were applied. Refer to Appendix A: Air Quality Modeling Data for Model Data Outputs.						
Source: CalEEMod version 2022.1. Refer to Appendix A: Air Quality Monitoring Data for model outputs.						

Operational Emissions

The Project's operational emissions would be associated with area sources (e.g., landscape maintenance equipment, architectural coatings, off-road equipment, etc.), energy sources, mobile sources (i.e., motor vehicle use), and off-road equipment. Primary sources of operational criteria pollutants are from motor vehicle use and area sources. Long-term operational emissions attributable to the Project are summarized in **Table 9: Operational Emissions**. The operational emissions sources are described below.

- **Area Source Emissions.** Area source emissions would be generated due to on-site equipment, architectural coating, and landscaping that were previously not present on the site.
- **Energy Source Emissions.** Energy source emissions would be generated due to electricity and natural gas usage associated with the Project. Primary uses of electricity and natural gas by the Project would be for space heating and cooling, water heating, ventilation, lighting, appliances, electronics, and cooking.
- **Mobile Source.** Mobile sources are emissions from motor vehicles, including tailpipe and evaporative emissions. Depending upon the pollutant being discussed, the potential air quality impact may be of either regional or local concern. For example, ROG, NO_x, PM₁₀, and PM_{2.5} are all pollutants of regional concern. NO_x and ROG react with sunlight to form O₃, known as photochemical smog. Additionally, wind currents readily transport PM₁₀ and PM_{2.5}. However, CO tends to be a localized pollutant, dispersing rapidly at the source.
- Project-generated vehicle emissions are based on the trip generation within the Project's Trip Generation and incorporated into CalEEMod as recommended by the SCAQMD. Per the Project Trip Generation (Kimley-Horn, January 2023), the Project would generate a total of 7,632 daily trips.

As shown in **Table 9**, Project operational emissions would not exceed SCAQMD daily thresholds. Therefore, impacts would be less than significant.

Table 9: Operational Emissions

Source	Pollutant (Maximum Pounds per Day) ¹					
	Reactive Organic Gases (ROG)	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Sulfur Dioxide (SO ₂)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
Area Source Emissions	0.44	<0.1	0.59	<0.1	<0.1	<0.1
Energy Emissions	0.02	0.39	0.32	<0.1	<0.1	<0.1
Mobile Emissions	33.2	32.0	317	0.69	21.6	4.18
Mobile (On-Site Drive-Through) ²	<0.1	<0.1	<0.1	2.73	<0.1	<0.1
Total Project Emissions	33.6	32.4	318	3.42	21.6	4.21
<i>SCAQMD Threshold</i>	<i>55</i>	<i>55</i>	<i>550</i>	<i>150</i>	<i>150</i>	<i>55</i>
Exceeds Threshold?	No	No	No	No	No	No
Notes: 1 Totals may not add up due to rounding. 2 On-site drive through idling emissions were calculated with emissions factors from EMFAC2021. Source: CalEEMod version 2022.1. Refer to Appendix A: Air Quality Monitoring Data for model outputs.						

Cumulative Short-Term Emissions

The SCAB is designated nonattainment for O₃, PM₁₀, and PM_{2.5} for State standards and nonattainment for O₃ and PM_{2.5} for national standards. Appendix D of the SCAQMD White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (2003) notes that projects that result in emissions that do not exceed the project-specific SCAQMD regional thresholds of significance should result in a less than significant impact on a cumulative basis unless there is other pertinent information to the contrary. The mass-based regional significance thresholds published by the SCAQMD are designed to ensure compliance with both NAAQS and CAAQS and are based on an inventory of projected emissions in the SCAB. Therefore, if a project is estimated to result in emissions that do not exceed the thresholds, the project's contribution to the cumulative impact on air quality in the SCAB would not be cumulatively considerable. As shown in **Table 8**, Project construction-related emissions by themselves would not exceed the SCAQMD significance thresholds for criteria pollutants. Therefore, the proposed Project would not generate a cumulatively considerable contribution to air pollutant emissions during construction.

The SCAQMD has developed strategies to reduce criteria pollutant emissions outlined in the AQMP pursuant to the FCAA mandates. The analysis assumed fugitive dust controls would be utilized during construction, including frequent water applications. SCAQMD rules, mandates, and compliance with adopted AQMP emissions control measures would also be imposed on construction projects throughout the SCAB, which would include related projects. Compliance with SCAQMD rules and regulations would further reduce the Project construction-related impacts. Therefore, Project-related construction emissions, combined with those from other projects in the area, would not substantially deteriorate local air quality. Construction emissions associated with the Project would not result in a cumulatively considerable contribution to significant cumulative air quality impacts.

Cumulative Operational Impacts

The SCAQMD has not established separate significance thresholds for cumulative operational emissions. The nature of air emissions is largely a cumulative impact. As a result, no single project is sufficient in size to, by itself, result in nonattainment of ambient air quality standards. Instead, individual project emissions contribute to existing cumulatively significant adverse air quality impacts. The SCAQMD developed the operational thresholds of significance based on the level above which individual project emissions would result in a cumulatively considerable contribution to the SCAB's existing air quality conditions. Therefore, a project that exceeds the SCAQMD operational thresholds would also be a cumulatively considerable contribution to a significant cumulative impact.

As shown in **Table 9**, the Project operational emissions would not exceed SCAQMD thresholds. As a result, operational emissions associated with the Project would not result in a cumulatively considerable contribution to significant cumulative air quality impacts. Additionally, adherence to SCAQMD rules and regulations would alleviate potential impacts related to cumulative conditions on a project-by-project basis. Project operations would not contribute a cumulatively considerable net increase of any nonattainment criteria pollutant.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

Threshold 5.3 Would the Project expose sensitive receptors to substantial pollutant concentrations?

Localized Construction Significance Analysis

The nearest sensitive receptors are the single-family residences located approximately 75 feet (23 meters) to the northeast of the Project construction. To identify impacts to sensitive receptors, the SCAQMD recommends addressing LSTs for construction. LSTs were developed in response to SCAQMD Governing Boards' Environmental Justice Enhancement Initiative (I-4). The SCAQMD provided the *Final Localized Significance Threshold Methodology* (dated June 2003 [revised 2008]) for guidance. The LST methodology assists lead agencies in analyzing localized impacts associated with Project-specific emissions.

Since CalEEMod calculates construction emissions based on the number of equipment hours and the maximum daily soil disturbance activity possible for each piece of equipment, **Table 10: Equipment-Specific Grading Rates**, is used to determine the maximum daily disturbed acreage for comparison to LSTs. The appropriate SRA for the localized significance thresholds is the Coachella Valley Monitoring Area (SRA 30) since this area includes the Project. LSTs apply to CO, NO₂, PM₁₀, and PM_{2.5}. The SCAQMD produced look-up tables for projects that disturb areas less than or equal to 5 acres in size. Project construction is anticipated to disturb a maximum of 3.5 acres in a single day. As the LST guidance provides thresholds for projects disturbing 1-, 2-, and 5-acres in size and the thresholds increase with size of the site, the LSTs for a 3.5-acre threshold were utilized for this analysis.

Table 10: Equipment-Specific Grading Rates

Construction Phase	Equipment Type	Equipment Quantity	Acres Graded per 8-Hour Day	Operating Hours per Day	Acres Graded per Day
Site Preparation	Tractors	3	0.5	8	1.5
	Graders	2	0.5	8	1
	Dozers	2	0.5	8	1
	Scrapers	0	1	8	0
Total Acres Graded per Day					3.5
Source: CalEEMod version 2022.1. Refer to Appendix A for model outputs.					

The SCAQMD's methodology states that "off-site mobile emissions from the Project should not be included in the emissions compared to LSTs." Therefore, only emissions included in the CalEEMod "on-site" emissions outputs were considered. The nearest sensitive receptors are single-family residences located approximately 75 feet (23 meters) northeast of the Project construction. LST thresholds are provided for distances to sensitive receptors of 25, 50, 100, 200, and 500 meters. Therefore, LSTs for 25 meters were interpolated and utilized in this analysis. **Table 11: Localized Significance of Construction Emissions**, shows the results of localized emissions during construction. This table represents the worst-case scenario and are based on peak earthwork volumes anticipated. As shown, localized Project construction emissions would not exceed SCAQMD thresholds. Impacts would be less than significant. No mitigation is required.

Table 11: Localized Significance of Construction Emissions

Construction Activity	Pollutant (Maximum Pounds per Day) ¹			
	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
Demolition (2024)	15.60	16.00	0.86	0.81
Site Preparation (2024)	12.70	11.40	0.56	0.52
Grading (2024)	30.70	29.20	1.76	1.64
Trenching (2024)	1.35	1.49	<0.01	<0.01
Paving (2024)	6.44	8.26	0.31	0.29
Building Construction (2024)	11.20	11.90	0.49	0.42
Architectural Coating (2024)	0.91	1.15	0.03	0.03
Maximum emissions	30.70	29.20	1.76	1.64
<i>SCAQMD Localized Screening Threshold (adjusted for 3.5 acres at 25 meters)</i>	<i>149</i>	<i>984</i>	<i>10</i>	<i>6</i>
Exceed SCAQMD Threshold?	No	No	No	No
1 Totals may not add up due to rounding. Source: CalEEMod version 2022.1. Refer to Appendix A: Air Quality Modeling Data for model outputs.				

Localized Operational Significance Analysis

According to the SCAQMD LST methodology, LSTs would apply to the operational phase of a project only if it includes stationary sources or attracts mobile sources that may spend long periods queuing and idling at the site (e.g., warehouse or transfer facilities). Since the Project consists of restaurant and fast food uses, the operational phase LST protocol is conservatively applied to both on-site stationary sources and 10 percent of the total mobile source emissions. As the nearest receptor is located approximately 150 feet (46 meters) from the Project site, LSTs for 46 meters for SRA 30 were interpolated and used in this analysis. Although the Project site is 6.3 acres, the 5-acre LST threshold was conservatively used because the LSTs increase with the size of the site. Therefore, the 5-acre LSTs are conservative for evaluation of a 6.3-acre site.

The LST analysis only includes on-site sources. However, the CalEEMod model outputs do not separate on-site and off-site emissions for mobile sources. For a worst-case scenario assessment, the emissions shown in **Table 12: Localized Significance of Operational Emissions**, conservatively include all on-site Project-related stationary sources and 10 percent of the Project-related new mobile sources, since a portion of mobile sources could include idling on-site. **Table 12** shows that daily emissions of these pollutants during operations would not result in significant concentrations of pollutants at nearby sensitive receptors. Therefore, significant impacts would not occur concerning LSTs during operational activities.

Table 12: Localized Significance of Operational Emissions

Activity	Pollutant (Maximum Pounds per Day)			
	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
On-Site and Mobile Source Emissions ¹	3.2	31.7	2.2	0.42
SCAQMD Localized Screening Threshold (5 acres at 46 meters) ²	183	1,601	6	2
Exceed SCAQMD Threshold?	No	No	No	No
1. Conservatively assumes 10 percent of mobile emissions are on-site. 2. SRA Zone 30 – Coachella Valley; 5-acre area, 46 meters to receptor. Source: CalEEMod version 2022.1. Refer to Appendix A: Air Quality Modeling Data for model outputs.				

Criteria Pollutant Health Impacts

On December 24, 2018, the California Supreme Court issued an opinion identifying the need to provide sufficient information connecting a project's air emissions to health impacts or explain why such information could not be ascertained (*Sierra Club v. County of Fresno* [Friant Ranch, L.P.] [2018] Cal.5th, Case No. S219783). The SCAQMD has set its CEQA significance thresholds based on the FCAA, which defines a major stationary source (in extreme O₃ nonattainment areas such as the SCAB) as emitting 10 tons per year. The thresholds correlate with the trigger levels for the federal New Source Review (NSR) Program and SCAQMD Rule 1303 for new or modified sources. The NSR Program² was created by the

² Code of Federal Regulation (CFR) [i.e., PSD (40 CFR 52.21, 40 CFR 51.166, 40 CFR 51.165 (b)), Non-attainment NSR (40 CFR 52.24, 40 CFR 51.165, 40 CFR part 51, Appendix S)]

FCAA to ensure that stationary sources of air pollution are constructed or modified in a manner that is consistent with attainment of health-based NAAQS. The NAAQS establish the levels of air quality necessary, with an adequate margin of safety, to protect the public health. Therefore, projects that do not exceed the SCAQMD's LSTs and mass emissions thresholds would not violate any air quality standards or contribute substantially to an existing or projected air quality violation and no criteria pollutant health impacts.

NO_x and ROG are precursor emissions that form O₃ in the atmosphere in the presence of sunlight where the pollutants undergo complex chemical reactions. It takes time and the influence of meteorological conditions for these reactions to occur, so O₃ may be formed at a distance downwind from the sources. Breathing ground-level O₃ can result in health effects that include reduced lung function, inflammation of airways, throat irritation, pain, burning, or discomfort in the chest when taking a deep breath, chest tightness, wheezing, or shortness of breath. In addition to these effects, evidence from observational studies strongly indicates that higher daily O₃ concentrations are associated with increased asthma attacks, increased hospital admissions, increased daily mortality, and other markers of morbidity. The consistency and coherence of the evidence for effects upon asthmatics suggests that O₃ can make asthma symptoms worse and can increase sensitivity to asthma triggers.

According to the SCAQMD AQMPs, O₃, NO_x, and ROG have been decreasing in the SCAB since 1975 and are projected to continue to decrease in the future. Although vehicle miles traveled in the SCAB continue to increase, NO_x and ROG levels are decreasing because of the mandated controls on motor vehicles and the replacement of older polluting vehicles with lower-emitting vehicles. NO_x emissions from electric utilities have also decreased due to the use of cleaner fuels and renewable energy. The 2016 AQMP demonstrates how the SCAQMD's control strategy to meet the 8-hour O₃ standard in 2023 would lead to sufficient NO_x emission reductions to attain the 1-hour O₃ standard by 2022. In addition, since NO_x emissions also lead to the formation of PM_{2.5}, the NO_x reductions needed to meet the O₃ standards will likewise lead to improvement of PM_{2.5} levels and attainment of PM_{2.5} standards.

The SCAQMD's air quality modeling demonstrates that NO_x reductions prove to be much more effective in reducing O₃ levels and will also lead to significant improvement in PM_{2.5} concentrations. NO_x-emitting stationary sources regulated by the SCAQMD include Regional Clean Air Incentives Market (RECLAIM) facilities (e.g., refineries, power plants, etc.), natural gas combustion equipment (e.g., boilers, heaters, engines, burners, flares) and other combustion sources that burn wood or propane. The AQMPs identifies robust NO_x reductions from new regulations on RECLAIM facilities, non-refinery flares, commercial cooking, and residential and commercial appliances. Such combustion sources are already heavily regulated with the lowest NO_x emissions levels achievable but there are opportunities to require and accelerate replacement with cleaner zero-emission alternatives, such as residential and commercial furnaces, pool heaters, and backup power equipment. The AQMD plans to achieve such replacements through a combination of regulations and incentives. Technology-forcing regulations can drive development and commercialization of clean technologies, with future year requirements for new or existing equipment. Incentives can then accelerate deployment and enhance public acceptability of new technologies.

As previously discussed, Project emissions would be less than significant and would not exceed SCAQMD thresholds (refer to **Table 8** and **Table 9**). Localized effects of on-site Project emissions on nearby receptors were also found to be less than significant (refer to **Table 11** and **Table 12**). The LSTs represent

the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable State or national ambient air quality standard. The LSTs were developed by the SCAQMD based on the ambient concentrations of that pollutant for each SRA and distance to the nearest sensitive receptor. The ambient air quality standards establish the levels of air quality necessary, with an adequate margin of safety, to protect public health, including protecting the health of sensitive populations.

Carbon Monoxide Hotspots

An analysis of CO “hot spots” is needed to determine whether the change in the level of service of an intersection resulting from the Project would have the potential to result in exceedances of the CAAQS or NAAQS. It has long been recognized that CO exceedances are caused by vehicular emissions, primarily when vehicles are idling at intersections. Vehicle emissions standards have become increasingly stringent in the last 20 years. Currently, the CO standard in California is a maximum of 3.4 grams per mile for passenger cars (requirements for certain vehicles are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of control technology on industrial facilities, CO concentrations have steadily declined. Accordingly, with the steadily decreasing CO emissions from vehicles, even very busy intersections do not result in exceedances of the CO standard.

The SCAB was redesignated as attainment in 2007 and is no longer addressed in the SCAQMD’s AQMP. The 2003 AQMP is the most recent version that addresses CO concentrations. As part of the SCAQMD *CO Hotspot Analysis*, the Wilshire Boulevard/Veteran Avenue intersection, one of the most congested intersections in southern California with an average daily traffic (ADT) volume of approximately 100,000 vehicles per day, was modeled for CO concentrations. This modeling effort identified a CO concentration high of 4.6 ppm, which is well below the 35-ppm national standard. The Project considered herein would not produce the volume of traffic required to generate a CO hot spot in the context of SCAQMD’s *CO Hotspot Analysis*. As the CO hotspots were not experienced at the Wilshire Boulevard/Veteran Avenue intersection even as it accommodates 100,000 vehicles daily, it can be reasonably inferred that CO hotspots would not be experienced at any vicinity intersections resulting from 7,632 additional vehicle trips attributable to the Project. Therefore, impacts would be less than significant.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

Threshold 5.4 Would the Project result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

The SCAQMD *CEQA Air Quality Handbook* identifies certain land uses as sources of odors. These land uses include agriculture (farming and livestock), wastewater treatment plants, food processing plants, chemical plants, composting facilities, refineries, landfills, dairies, and fiberglass molding. The Project would not include any of the land uses that have been identified by the SCAQMD as odor sources.

During construction-related activities, some odors (not substantial pollutant concentrations) that may be detected are those typical of construction vehicles (e.g., diesel exhaust from grading and construction equipment). These odors are a temporary short-term impact that is typical of construction projects and would disperse rapidly. Furthermore, odors that could be generated by construction activities are required to follow SCAQMD Rule 402 (Nuisance) to prevent odor nuisances on sensitive land uses. The

Project would not include any of the land uses that have been identified by the SCAQMD as odor sources. Therefore, the Project would not create objectionable odors.

Mitigation Measures: No mitigation is required.

Level of Significance: No impact.

5.2 Cumulative Setting, Impacts, and Mitigation Measures

Cumulative Setting

The cumulative setting for air quality includes the City of Indio and SCAB. SCAB is designated as a nonattainment area for State standards of O₃, PM₁₀, and PM_{2.5}. The SCAB is designated as a nonattainment area for federal standards of O₃ and PM_{2.5}, attainment and serious maintenance for national PM₁₀ standards, and is designated as unclassified or attainment for all other pollutants. Cumulative growth in population and vehicle use could inhibit efforts to improve regional air quality and attain the ambient air quality standards.

Cumulative Impacts and Mitigation Measures

The SCAQMD's approach to assessing cumulative impacts is based on the AQMP forecasts of attainment of ambient air quality standards in accordance with requirements of the FCAA and CCAA. As discussed above, the proposed Project would be consistent with the AQMP, which is intended to bring SCAB into attainment for all criteria pollutants. Since the Project's estimated construction and operational emissions would not exceed the applicable SCAQMD daily significance thresholds that are designed to assist the region in attaining both NAAQS and CAAQS, cumulative impacts would be less than significant with mitigation incorporated.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

6 REFERENCES

1. California Air Pollution Control Officers Association (CAPCOA), *Health Effects*, 2018.
2. California Air Pollution Control Officers Association (CAPCOA), *Health Risk Assessments for Proposed Land Use Projects*, 2009.
3. California Air Resources Board, *Aerometric Data Analysis and Measurement System (ADAM) Top Four Summaries from 2019 to 2021*, 2022.
4. California Air Resources Board, *Air Quality and Land Use Handbook: A Community Health Perspective*, 2005.
5. California Air Resources Board, *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles*, 2000.
6. City of Indio, *General Plan*, 2019.
7. Kimley-Horn, *Trip Generation for the Greens Indio Project*, January 2023.
8. South Coast Air Quality Management District, *2016 Air Quality Management Plan*, March 2017.
9. South Coast Air Quality Management District, *2022 Air Quality Management Plan*, December 2022.
10. South Coast Air Quality Management District, *CEQA Air Quality Handbook*, 1993.
11. South Coast Air Quality Management District, *Localized Significance Threshold Methodology*, 2008.
12. South Coast Air Quality Management District, *High-Cube Warehouse Vehicle Trip Generation Analysis*, 2016.
13. South Coast Air Quality Management District, *South Coast AQMD Air Quality Significance Thresholds*, April 2019.
14. United States Environmental Protection Agency, *National Ambient Air Quality Standards Table*, 2016.
15. United States Environmental Protection Agency, *Nonattainment Areas for Criteria Pollutants*, 2019.
16. United States Environmental Protection Agency, *Policy Assessment for the Review of the Lead National Ambient Air Quality Standards*, 2013.

Appendix A

Air Quality Modeling Data

Drive-Through On Site Emissions

Total Trips/Day	1,527
Drive-Through Trips	1,069
Minutes/Trip	5
Distance (miles/trip)	0.1

	ROG	NO _x	CO	SO ₂	PM ₁₀	PM _{2.5}
EMFAC Emissions Rate (g/mi)	0.023578	0.001634	0.001772	138.7726	0.004455	0.002195
Pounds/Day	4.63E-04	3.21E-05	3.48E-05	2.73E+00	8.75E-05	4.31E-05

	CO ₂	CH ₄	N ₂ O	CO ₂ e
EMFAC Emissions Rate (g/mi)	0.027215	0.339957	0.001371	--
MT/year	0.00	0.00	0.00	0.029049

Source: EMFAC2021 (v1.0.0) Emission Rates, Los Angeles (SC) Sub-Area, Year 2022, Annual.

The Greens Indio Project Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

1.2. Land Use Types

1.3. User-Selected Emission Reduction Measures by Emissions Sector

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

2.2. Construction Emissions by Year, Unmitigated

2.4. Operations Emissions Compared Against Thresholds

2.5. Operations Emissions by Sector, Unmitigated

3. Construction Emissions Details

3.1. Demolition (2024) - Unmitigated

3.3. Site Preparation (2024) - Unmitigated

3.5. Grading (2024) - Unmitigated

3.7. Building Construction (2024) - Unmitigated

3.9. Paving (2024) - Unmitigated

3.11. Architectural Coating (2024) - Unmitigated

3.13. Trenching (2024) - Unmitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	The Greens Indio Project
Construction Start Date	1/1/2024
Operational Year	2024
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	3.00
Precipitation (days)	7.60
Location	33.74483529314546, -116.2150356103961
County	Riverside-Salton Sea
City	Indio
Air District	South Coast AQMD
Air Basin	Salton Sea
TAZ	5657
EDFZ	19
Electric Utility	Imperial Irrigation District
Gas Utility	Southern California Gas
App Version	2022.1.1.18

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
------------------	------	------	-------------	-----------------------	------------------------	--------------------------------	------------	-------------

Fast Food Restaurant with Drive Thru	9.55	1000sqft	0.22	9,550	77,667	—	—	3 fast food restaurants
High Turnover (Sit Down Restaurant)	4.00	1000sqft	0.09	4,000	0.00	—	—	—
Parking Lot	114	1000sqft	2.62	0.00	0.00	—	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.79	4.30	12.3	13.8	0.03	0.49	0.20	0.60	0.45	0.05	0.48	—	2,510	2,510	0.10	0.03	0.85	2,522
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.26	3.56	36.4	32.7	0.07	1.58	5.62	6.44	1.45	2.08	3.53	—	8,636	8,636	0.24	0.60	0.22	8,822
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.05	1.33	8.14	8.27	0.02	0.34	0.71	1.05	0.31	0.23	0.54	—	1,877	1,877	0.06	0.09	0.57	1,906
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.19	0.24	1.49	1.51	< 0.005	0.06	0.13	0.19	0.06	0.04	0.10	—	311	311	0.01	0.01	0.09	315

Exceeds (Daily Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	Yes	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Exceeds (Average Daily)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	Yes	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	1.79	4.30	12.3	13.8	0.03	0.49	0.20	0.60	0.45	0.05	0.48	—	2,510	2,510	0.10	0.03	0.85	2,522
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	4.26	3.56	36.4	32.7	0.07	1.58	5.62	6.44	1.45	2.08	3.53	—	8,636	8,636	0.24	0.60	0.22	8,822
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	1.05	1.33	8.14	8.27	0.02	0.34	0.71	1.05	0.31	0.23	0.54	—	1,877	1,877	0.06	0.09	0.57	1,906
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	0.19	0.24	1.49	1.51	< 0.005	0.06	0.13	0.19	0.06	0.04	0.10	—	311	311	0.01	0.01	0.09	315

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	36.1	33.6	32.4	318	0.69	0.53	53.9	54.4	0.50	13.7	14.2	92.8	71,933	72,026	12.1	3.20	273	73,557
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	28.9	26.5	35.2	216	0.61	0.53	53.9	54.4	0.50	13.7	14.2	92.8	64,030	64,123	12.3	3.30	27.7	65,442
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	27.3	25.9	21.6	152	0.34	0.30	27.7	28.0	0.29	7.03	7.32	92.8	36,353	36,446	11.4	1.97	77.4	37,396
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.97	4.72	3.93	27.8	0.06	0.06	5.06	5.12	0.05	1.28	1.34	15.4	6,019	6,034	1.89	0.33	12.8	6,191

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	35.9	33.2	32.0	317	0.69	0.50	53.9	54.4	0.47	13.7	14.1	—	70,169	70,169	2.71	3.17	252	71,434
Area	0.10	0.44	< 0.005	0.59	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.42	2.42	< 0.005	< 0.005	—	2.43
Energy	0.04	0.02	0.39	0.32	< 0.005	0.03	—	0.03	0.03	—	0.03	—	1,731	1,731	0.13	0.01	—	1,738
Water	—	—	—	—	—	—	—	—	—	—	—	7.88	30.2	38.1	0.81	0.02	—	64.2
Waste	—	—	—	—	—	—	—	—	—	—	—	84.9	0.00	84.9	8.49	0.00	—	297
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	21.2	21.2
Total	36.1	33.6	32.4	318	0.69	0.53	53.9	54.4	0.50	13.7	14.2	92.8	71,933	72,026	12.1	3.20	273	73,557

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	28.9	26.1	34.8	216	0.61	0.50	53.9	54.4	0.47	13.7	14.1	—	62,269	62,269	2.86	3.27	6.54	63,322
Area	—	0.34	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.04	0.02	0.39	0.32	< 0.005	0.03	—	0.03	0.03	—	0.03	—	1,731	1,731	0.13	0.01	—	1,738
Water	—	—	—	—	—	—	—	—	—	—	—	7.88	30.2	38.1	0.81	0.02	—	64.2
Waste	—	—	—	—	—	—	—	—	—	—	—	84.9	0.00	84.9	8.49	0.00	—	297
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	21.2	21.2
Total	28.9	26.5	35.2	216	0.61	0.53	53.9	54.4	0.50	13.7	14.2	92.8	64,030	64,123	12.3	3.30	27.7	65,442
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	27.2	25.5	21.2	152	0.34	0.27	27.7	28.0	0.26	7.03	7.29	—	34,590	34,590	1.99	1.94	56.3	35,274
Area	0.05	0.39	< 0.005	0.29	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.20	1.20	< 0.005	< 0.005	—	1.20
Energy	0.04	0.02	0.39	0.32	< 0.005	0.03	—	0.03	0.03	—	0.03	—	1,731	1,731	0.13	0.01	—	1,738
Water	—	—	—	—	—	—	—	—	—	—	—	7.88	30.2	38.1	0.81	0.02	—	64.2
Waste	—	—	—	—	—	—	—	—	—	—	—	84.9	0.00	84.9	8.49	0.00	—	297
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	21.2	21.2
Total	27.3	25.9	21.6	152	0.34	0.30	27.7	28.0	0.29	7.03	7.32	92.8	36,353	36,446	11.4	1.97	77.4	37,396
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	4.96	4.65	3.86	27.7	0.06	0.05	5.06	5.11	0.05	1.28	1.33	—	5,727	5,727	0.33	0.32	9.31	5,840
Area	0.01	0.07	< 0.005	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.20	0.20	< 0.005	< 0.005	—	0.20
Energy	0.01	< 0.005	0.07	0.06	< 0.005	0.01	—	0.01	0.01	—	0.01	—	287	287	0.02	< 0.005	—	288
Water	—	—	—	—	—	—	—	—	—	—	—	1.30	5.01	6.31	0.13	< 0.005	—	10.6
Waste	—	—	—	—	—	—	—	—	—	—	—	14.1	0.00	14.1	1.41	0.00	—	49.2
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3.51	3.51
Total	4.97	4.72	3.93	27.8	0.06	0.06	5.06	5.12	0.05	1.28	1.34	15.4	6,019	6,034	1.89	0.33	12.8	6,191

3. Construction Emissions Details

3.1. Demolition (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.92	1.61	15.6	16.0	0.02	0.67	—	0.67	0.62	—	0.62	—	2,494	2,494	0.10	0.02	—	2,502
Demolition	—	—	—	—	—	—	4.52	4.52	—	0.69	0.69	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.64	0.66	< 0.005	0.03	—	0.03	0.03	—	0.03	—	102	102	< 0.005	< 0.005	—	103
Demolition	—	—	—	—	—	—	0.19	0.19	—	0.03	0.03	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.12	0.12	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	—	17.0	17.0	< 0.005	< 0.005	—	17.0
Demolition	—	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.06	0.05	0.08	0.74	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	161	161	0.01	0.01	0.02	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.10	0.07	4.33	0.93	0.02	0.07	0.93	1.00	0.07	0.24	0.31	—	3,587	3,587	0.03	0.56	0.20	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	7.09	7.09	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	< 0.005	< 0.005	0.17	0.04	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	147	147	< 0.005	0.02	0.14	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.17	1.17	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	24.4	24.4	< 0.005	< 0.005	0.02	—

3.3. Site Preparation (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.56	1.31	12.7	11.4	0.03	0.55	—	0.55	0.51	—	0.51	—	2,716	2,716	0.11	0.02	—	2,725
Dust From Material Movement	—	—	—	—	—	—	0.41	0.41	—	0.04	0.04	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	0.24	0.22	< 0.005	0.01	—	0.01	0.01	—	0.01	—	52.1	52.1	< 0.005	< 0.005	—	52.3
Dust From Material Movement	—	—	—	—	—	—	0.01	0.01	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	< 0.005	0.04	0.04	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	8.62	8.62	< 0.005	< 0.005	—	8.65
Dust From Material Movement	—	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.05	0.44	0.00	0.00	0.10	0.10	0.00	0.02	0.02	—	96.8	96.8	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.99	1.99	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.33	0.33	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

3.5. Grading (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	3.81	3.20	30.7	29.2	0.04	1.44	—	1.44	1.32	—	1.32	—	4,653	4,653	0.19	0.04	—	4,669

Dust From Material Movement	—	—	—	—	—	—	3.69	3.69	—	1.78	1.78	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.33	0.28	2.69	2.56	< 0.005	0.13	—	0.13	0.12	—	0.12	—	408	408	0.02	< 0.005	—	409
Dust From Material Movement	—	—	—	—	—	—	0.32	0.32	—	0.16	0.16	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.49	0.47	< 0.005	0.02	—	0.02	0.02	—	0.02	—	67.5	67.5	< 0.005	< 0.005	—	67.8
Dust From Material Movement	—	—	—	—	—	—	0.06	0.06	—	0.03	0.03	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.07	0.11	1.03	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	226	226	0.01	0.01	0.03	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.10	0.06	4.25	0.91	0.02	0.07	0.92	0.98	0.07	0.23	0.30	—	3,517	3,517	0.03	0.55	0.19	—

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	21.2	21.2	< 0.005	< 0.005	0.04	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.01	0.01	0.37	0.08	< 0.005	0.01	0.08	0.09	0.01	0.02	0.03	—	308	308	< 0.005	0.05	0.28	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.51	3.51	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	< 0.005	< 0.005	0.07	0.01	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	< 0.005	—	51.0	51.0	< 0.005	0.01	0.05	—

3.7. Building Construction (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.58	1.32	11.2	11.9	0.02	0.46	—	0.46	0.42	—	0.42	—	2,201	2,201	0.09	0.02	—	2,209
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.48	0.40	3.39	3.60	0.01	0.14	—	0.14	0.13	—	0.13	—	663	663	0.03	0.01	—	666
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.09	0.07	0.62	0.66	< 0.005	0.03	—	0.03	0.02	—	0.02	—	110	110	< 0.005	< 0.005	—	110
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.03	0.59	0.00	0.00	0.07	0.07	0.00	0.02	0.02	—	86.4	86.4	< 0.005	< 0.005	0.32	—
Vendor	< 0.005	< 0.005	0.08	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	71.5	71.5	< 0.005	0.01	0.19	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.13	0.00	0.00	0.02	0.02	0.00	0.01	0.01	—	23.7	23.7	< 0.005	< 0.005	0.04	—
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	21.5	21.5	< 0.005	< 0.005	0.03	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.92	3.92	< 0.005	< 0.005	0.01	—
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.57	3.57	< 0.005	< 0.005	< 0.005	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

3.9. Paving (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.89	0.75	6.44	8.26	0.01	0.31	—	0.31	0.29	—	0.29	—	1,244	1,244	0.05	0.01	—	1,248
Paving	—	0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.89	0.75	6.44	8.26	0.01	0.31	—	0.31	0.29	—	0.29	—	1,244	1,244	0.05	0.01	—	1,248
Paving	—	0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.37	0.48	< 0.005	0.02	—	0.02	0.02	—	0.02	—	71.6	71.6	< 0.005	< 0.005	—	71.8
Paving	—	0.02	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	11.9	11.9	< 0.005	< 0.005	—	11.9
Paving	—	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.09	0.08	0.09	1.55	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	228	228	0.01	0.01	0.85	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.06	0.09	0.88	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	194	194	0.01	0.01	0.02	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.06	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	11.9	11.9	< 0.005	< 0.005	0.02	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.97	1.97	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

3.11. Architectural Coating (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.17	0.14	0.91	1.15	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134

Architect ural Coatings	—	2.81	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.02	0.14	0.18	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	20.5	20.5	< 0.005	< 0.005	—	20.6
Architect ural Coatings	—	0.43	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.03	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	3.39	3.39	< 0.005	< 0.005	—	3.40
Architect ural Coatings	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.12	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	17.3	17.3	< 0.005	< 0.005	0.06	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.41	2.41	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.40	0.40	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

3.13. Trenching (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.25	0.21	1.35	1.49	< 0.005	0.07	—	0.07	0.06	—	0.06	—	207	207	0.01	< 0.005	—	208
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.08	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	11.9	11.9	< 0.005	< 0.005	—	12.0

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.98	1.98	< 0.005	< 0.005	—	1.98
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.02	0.15	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	32.3	32.3	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.99	1.99	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.33	0.33	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	33.1	30.5	29.4	292	0.63	0.46	49.6	50.1	0.43	12.6	13.0	—	64,542	64,542	2.49	2.92	232	65,706
High Turnover (Sit Down Restaurant)	2.88	2.66	2.57	25.4	0.06	0.04	4.32	4.36	0.04	1.10	1.13	—	5,627	5,627	0.22	0.25	20.2	5,728
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	35.9	33.2	32.0	317	0.69	0.50	53.9	54.4	0.47	13.7	14.1	—	70,169	70,169	2.71	3.17	252	71,434
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	26.6	24.0	32.0	198	0.56	0.46	49.6	50.1	0.43	12.6	13.0	—	57,275	57,275	2.63	3.01	6.01	58,244
High Turnover (Sit Down Restaurant)	2.32	2.10	2.79	17.3	0.05	0.04	4.32	4.36	0.04	1.10	1.13	—	4,993	4,993	0.23	0.26	0.52	5,078
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	28.9	26.1	34.8	216	0.61	0.50	53.9	54.4	0.47	13.7	14.1	—	62,269	62,269	2.86	3.27	6.54	63,322
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Fast Food Restaurant with Drive Thru	4.56	4.27	3.54	25.3	0.06	0.05	4.62	4.67	0.04	1.17	1.21	—	5,230	5,230	0.30	0.29	8.50	5,334
High Turnover (Sit Down Restaurant)	0.40	0.38	0.33	2.34	0.01	< 0.005	0.44	0.44	< 0.005	0.11	0.12	—	497	497	0.03	0.03	0.81	506
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	4.96	4.65	3.86	27.7	0.06	0.05	5.06	5.11	0.05	1.28	1.33	—	5,727	5,727	0.33	0.32	9.31	5,840

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	807	807	0.06	0.01	—	811
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	—	338	338	0.02	< 0.005	—	340
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	125	125	0.01	< 0.005	—	126
Total	—	—	—	—	—	—	—	—	—	—	—	—	1,271	1,271	0.09	0.01	—	1,276

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	807	807	0.06	0.01	—	811
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	—	338	338	0.02	< 0.005	—	340
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	125	125	0.01	< 0.005	—	126
Total	—	—	—	—	—	—	—	—	—	—	—	—	1,271	1,271	0.09	0.01	—	1,276
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	134	134	0.01	< 0.005	—	134
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	—	56.0	56.0	< 0.005	< 0.005	—	56.2
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	20.7	20.7	< 0.005	< 0.005	—	20.8
Total	—	—	—	—	—	—	—	—	—	—	—	—	210	210	0.02	< 0.005	—	211

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
----------	-----	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	0.03	0.01	0.27	0.23	< 0.005	0.02	—	0.02	0.02	—	0.02	—	325	325	0.03	< 0.005	—	326
High Turnover (Sit Down Restaurant)	0.01	0.01	0.11	0.10	< 0.005	0.01	—	0.01	0.01	—	0.01	—	136	136	0.01	< 0.005	—	136
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.04	0.02	0.39	0.32	< 0.005	0.03	—	0.03	0.03	—	0.03	—	461	461	0.04	< 0.005	—	462
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	0.03	0.01	0.27	0.23	< 0.005	0.02	—	0.02	0.02	—	0.02	—	325	325	0.03	< 0.005	—	326
High Turnover (Sit Down Restaurant)	0.01	0.01	0.11	0.10	< 0.005	0.01	—	0.01	0.01	—	0.01	—	136	136	0.01	< 0.005	—	136
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.04	0.02	0.39	0.32	< 0.005	0.03	—	0.03	0.03	—	0.03	—	461	461	0.04	< 0.005	—	462
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	0.01	< 0.005	0.05	0.04	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	53.8	53.8	< 0.005	< 0.005	—	53.9

High Turnover (Sit Down Restaurant)	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	22.5	22.5	< 0.005	< 0.005	—	22.6
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	< 0.005	0.07	0.06	< 0.005	0.01	—	0.01	0.01	—	0.01	—	76.3	76.3	0.01	< 0.005	—	76.5

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	0.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.10	0.10	< 0.005	0.59	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.42	2.42	< 0.005	< 0.005	—	2.43
Total	0.10	0.44	< 0.005	0.59	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.42	2.42	< 0.005	< 0.005	—	2.43
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	0.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Architectural	—	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	0.34	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	0.05	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.01	0.01	< 0.005	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.20	0.20	< 0.005	< 0.005	—	0.20
Total	0.01	0.07	< 0.005	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.20	0.20	< 0.005	< 0.005	—	0.20

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	5.55	23.0	28.6	0.57	0.01	—	47.0
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	2.33	7.19	9.52	0.24	0.01	—	17.2

Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	7.88	30.2	38.1	0.81	0.02	—	64.2
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	5.55	23.0	28.6	0.57	0.01	—	47.0
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	2.33	7.19	9.52	0.24	0.01	—	17.2
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	7.88	30.2	38.1	0.81	0.02	—	64.2
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	0.92	3.82	4.73	0.09	< 0.005	—	7.78
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	0.39	1.19	1.58	0.04	< 0.005	—	2.85
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1.30	5.01	6.31	0.13	< 0.005	—	10.6

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	59.3	0.00	59.3	5.93	0.00	—	207
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	25.7	0.00	25.7	2.56	0.00	—	89.8
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	84.9	0.00	84.9	8.49	0.00	—	297
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	59.3	0.00	59.3	5.93	0.00	—	207
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	25.7	0.00	25.7	2.56	0.00	—	89.8
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	84.9	0.00	84.9	8.49	0.00	—	297
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	9.82	0.00	9.82	0.98	0.00	—	34.3
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	4.25	0.00	4.25	0.42	0.00	—	14.9
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	14.1	0.00	14.1	1.41	0.00	—	49.2

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	14.9	14.9
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	6.25	6.25
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	21.2	21.2
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	14.9	14.9
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	6.25	6.25
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	21.2	21.2
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.47	2.47
High Turnover (Sit Down Restaurant)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.04	1.04
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3.51	3.51

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequest ered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Remove d	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequest ered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Remove d	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Demolition	Demolition	1/1/2024	1/20/2024	5.00	15.0	—
Site Preparation	Site Preparation	1/23/2024	1/31/2024	5.00	7.00	—

Grading	Grading	2/1/2024	3/15/2024	5.00	32.0	—
Building Construction	Building Construction	4/16/2024	9/16/2024	5.00	110	—
Paving	Paving	3/18/2024	4/15/2024	5.00	21.0	—
Architectural Coating	Architectural Coating	7/1/2024	9/16/2024	5.00	56.0	—
Trenching	Trenching	2/1/2024	2/29/2024	5.00	21.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Average	1.00	8.00	33.0	0.73
Demolition	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Demolition	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Site Preparation	Graders	Diesel	Average	1.00	8.00	148	0.41
Site Preparation	Scrapers	Diesel	Average	1.00	8.00	423	0.48
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	1.00	7.00	84.0	0.37
Grading	Graders	Diesel	Average	2.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Average	3.00	7.00	84.0	0.37
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	2.00	7.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	1.00	8.00	14.0	0.74
Building Construction	Tractors/Loaders/Backhoes	Diesel	Average	1.00	6.00	84.0	0.37
Building Construction	Welders	Diesel	Average	3.00	8.00	46.0	0.45

Paving	Cement and Mortar Mixers	Diesel	Average	1.00	8.00	10.0	0.56
Paving	Pavers	Diesel	Average	1.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	1.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	2.00	8.00	36.0	0.38
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Architectural Coating	Air Compressors	Diesel	Average	1.00	6.00	37.0	0.48
Trenching	Trenchers	Diesel	Average	1.00	8.00	40.0	0.50

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	12.5	18.5	LDA,LDT1,LDT2
Demolition	Vendor	—	10.2	HHDT,MHDT
Demolition	Hauling	51.6	20.0	HHDT
Demolition	Onsite truck	—	—	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	7.50	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	—	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	17.5	18.5	LDA,LDT1,LDT2
Grading	Vendor	—	10.2	HHDT,MHDT
Grading	Hauling	50.6	20.0	HHDT

Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	5.69	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	2.22	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	1.14	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT
Trenching	—	—	—	—
Trenching	Worker	2.50	18.5	LDA,LDT1,LDT2
Trenching	Vendor	—	10.2	HHDT,MHDT
Trenching	Hauling	0.00	20.0	HHDT
Trenching	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Control Strategies Applied	PM10 Reduction	PM2.5 Reduction
Water unpaved roads twice daily	55%	55%

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	20,325	6,775	6,856

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (Ton of Debris)	Acres Paved (acres)
Demolition	0.00	0.00	0.00	3,093	—
Site Preparation	0.00	0.00	10.5	0.00	—
Grading	4,660	8,290	64.0	0.00	—
Paving	0.00	0.00	0.00	0.00	2.62

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Fast Food Restaurant with Drive Thru	0.00	0%
High Turnover (Sit Down Restaurant)	0.00	0%
Parking Lot	2.62	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2024	0.00	457	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Fast Food Restaurant with Drive Thru	7,020	7,020	7,020	2,562,305	22,312	70,168	70,168	13,134,453
High Turnover (Sit Down Restaurant)	612	612	612	223,380	2,356	6,117	6,117	1,252,145
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	20,325	6,775	6,856

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00

Summer Days	day/yr	180
-------------	--------	-----

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Fast Food Restaurant with Drive Thru	645,407	457	0.0330	0.0040	1,013,412
High Turnover (Sit Down Restaurant)	270,328	457	0.0330	0.0040	424,466
Parking Lot	100,094	457	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Fast Food Restaurant with Drive Thru	2,898,747	1,457,469
High Turnover (Sit Down Restaurant)	1,214,135	0.00
Parking Lot	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Fast Food Restaurant with Drive Thru	110	—
High Turnover (Sit Down Restaurant)	47.6	—
Parking Lot	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Fast Food Restaurant with Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
Fast Food Restaurant with Drive Thru	Other commercial A/C and heat pumps	R-410A	2,088	1.80	4.00	4.00	18.0
High Turnover (Sit Down Restaurant)	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
High Turnover (Sit Down Restaurant)	Other commercial A/C and heat pumps	R-410A	2,088	1.80	4.00	4.00	18.0
High Turnover (Sit Down Restaurant)	Walk-in refrigerators and freezers	R-404A	3,922	< 0.005	7.50	7.50	20.0
Fast Food Restaurant with Drive Thru	Walk-in refrigerators and freezers	R-404A	3,922	< 0.005	7.50	7.50	20.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
----------------	-----------	----------------	---------------	----------------	------------	-------------

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
----------------	-----------	--------	--------------------------	------------------------------	------------------------------

5.17. User Defined

Equipment Type	Fuel Type
—	—

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
----------------	-----------------------------	------

Temperature and Extreme Heat	22.4	annual days of extreme heat
Extreme Precipitation	0.10	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	0.00	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about $\frac{3}{4}$ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	1	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	1	0	0	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	1	1	1	2
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	1	1	1	2
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	88.7
AQ-PM	8.79
AQ-DPM	41.1
Drinking Water	11.6
Lead Risk Housing	6.58

Pesticides	43.3
Toxic Releases	2.74
Traffic	53.8
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	0.00
Haz Waste Facilities/Generators	16.6
Impaired Water Bodies	77.3
Solid Waste	9.67
Sensitive Population	—
Asthma	22.6
Cardio-vascular	44.6
Low Birth Weights	21.8
Socioeconomic Factor Indicators	—
Education	44.3
Housing	38.8
Linguistic	85.3
Poverty	41.5
Unemployment	35.0

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	63.53137431
Employed	91.91582189
Median HI	75.83728988

Education	—
Bachelor's or higher	47.7223149
High school enrollment	24.76581548
Preschool enrollment	65.63582702
Transportation	—
Auto Access	73.42486847
Active commuting	1.039394328
Social	—
2-parent households	81.99666367
Voting	39.09919158
Neighborhood	—
Alcohol availability	74.43859874
Park access	35.90401642
Retail density	25.49724111
Supermarket access	24.65032722
Tree canopy	0.500449121
Housing	—
Homeownership	80.90594123
Housing habitability	75.28551264
Low-inc homeowner severe housing cost burden	45.43821378
Low-inc renter severe housing cost burden	76.90234826
Uncrowded housing	82.07365584
Health Outcomes	—
Insured adults	74.96471192
Arthritis	88.1
Asthma ER Admissions	76.9
High Blood Pressure	88.4

Cancer (excluding skin)	68.9
Asthma	61.7
Coronary Heart Disease	90.3
Chronic Obstructive Pulmonary Disease	86.1
Diagnosed Diabetes	86.4
Life Expectancy at Birth	43.1
Cognitively Disabled	62.4
Physically Disabled	45.1
Heart Attack ER Admissions	66.5
Mental Health Not Good	57.3
Chronic Kidney Disease	85.5
Obesity	39.2
Pedestrian Injuries	19.6
Physical Health Not Good	70.2
Stroke	91.3
Health Risk Behaviors	—
Binge Drinking	5.5
Current Smoker	54.4
No Leisure Time for Physical Activity	62.4
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	13.5
Elderly	57.9
English Speaking	32.4
Foreign-born	27.0
Outdoor Workers	82.7

Climate Change Adaptive Capacity	—
Impervious Surface Cover	61.0
Traffic Density	57.2
Traffic Access	23.0
Other Indices	—
Hardship	44.9
Other Decision Support	—
2016 Voting	52.4

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	23.0
Healthy Places Index Score for Project Location (b)	70.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Construction: Construction Phases	Anticipated construction timeline
Construction: Off-Road Equipment	Anticipated construction equipment
Operations: Vehicle Data	Per trip generation memo