Radio Frequency Emissions Compliance Report For AT&T Mobility

Site Name:	**TETOTOM PARK**	**Site Structure Type:**	**Light Pole**
Address:	**2127 HEARTLAND DRIVE**	**Latitude:**	**38.718645**
	ANTELOPE, CA 95843	**Longitude:**	**-121.345593**
Report Date:	**August 26, 2025**	**Project:**	**Modification**

Compliance Statement

Based on information provided by AT&T Mobility and predictive modeling, the **TETOTOM PARK** installation proposed by AT&T Mobility will be compliant with Radiofrequency Radiation Exposure Limits of 47 C.F.R. §§ 1.1307(b)(3) and 1.1310. RF alerting signage and restricting access to the antenna to authorized personnel that have completed RF safety training is required for Occupational environment compliance. The proposed operation will not expose members of the General Public to hazardous levels of RF energy at ground level or in adjacent buildings.

Certification

I, Tim Alexander, am the reviewer and approver of this report and am fully aware of and familiar with the Rules and Regulations of both the Federal Communications Commissions (FCC) and the Occupational Safety and Health Administration (OSHA) with regard to Human Exposure to Radio Frequency Radiation, specifically in accordance with FCC's OET Bulletin 65. I have reviewed this Radio Frequency Exposure Assessment report and believe it to be both true and accurate to the best of my knowledge.



SIGNED, 27 AUG 2025

General Summary

The compliance framework is derived from the Federal Communications Commission (FCC) Rules and Regulations for preventing human exposure in excess of the applicable Maximum Permissible Exposure ("MPE") limits. At any location at this site, the power density resulting from each transmitter may be expressed as a percentage of the frequency-specific limits and added to determine if 100% of the exposure limit has been exceeded. The FCC Rules define two tiers of permissible exposure differentiated by the situation in which the exposure takes place and/or the status of the individuals who are subject to exposure. General Population / Uncontrolled exposure limits apply to those situations in which persons may not be aware of the presence of electromagnetic energy, where exposure is not employment-related, or where persons cannot exercise control over their exposure. Occupational / Controlled exposure limits apply to situations in which persons are exposed as a consequence of their employment, have been made fully aware of the potential for exposure, and can exercise control over their exposure. Based on the criteria for these classifications, the FCC General Population limit is considered to be a level that is safe for continuous exposure time. The FCC General Population limit is 5 times more restrictive than the Occupational limits.

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

Table 1: FCC Limits

Frequency (MHz)	*Limits for General Population/ Uncontrolled Exposure*		*Limits for Occupational/ Controlled Exposure*	
	Power Density (mW/cm^2)	Averaging Time (minutes)	Power Density (mW/cm^2)	Averaging Time (minutes)
30-300	0.2	30	1	6
300-1500	f/1500	30	f/300	6
1500-100,000	1.0	30	5.0	6

f=Frequency (MHz)

In situations where the predicted MPE exceeds the General Population threshold in an accessible area as a result of emissions from multiple transmitters, FCC licensees that contribute greater than 5% of the aggregate MPE share responsibility for mitigation.

Based on the computational guidelines set forth in FCC OET Bulletin 65, Waterford Consultants, LLC has developed software to predict the overall Maximum Permissible Exposure possible at any location given the spatial orientation and operating parameters of multiple RF sources. The power density in the Far Field of an RF source is specified by OET-65 Equation 5 as follows:

$$S = \frac{EIRP}{4 \cdot \pi \cdot R^2} \ (\mathrm{mW/cm^2})$$

Where EIRP is the Effective Radiated Power relative to an isotropic antenna and R is the distance between the antenna and point of study. Additionally, consideration is given to the manufacturers' horizontal and vertical antenna patterns as well as radiation reflection. At any location, the predicted power density in the Far Field is the spatial average of points within a 0 to 6-foot vertical profile that a person would occupy. Near field power density is based on OET-65 Equation 20 stated as

$$S = \left(\frac{180}{\theta_{BW}}\right) \cdot \frac{100 \cdot P_{in}}{\pi \cdot R \cdot h} \ (\mathrm{mW/cm^2})$$

Where P_{in} is the power input to the antenna, θ_{BW} is the horizontal pattern beamwidth and h is the aperture length.

Some antennas employ beamforming technology where RF energy allocated to each customer device is dynamically directed toward their location. In the analysis presented herein, predicted exposure levels are based on all beams at full utilization (i.e. full power) simultaneously focused in any direction. As this condition is unlikely to occur, the actual power density levels at ground and at adjacent structures are expected to be less that the levels reported below. These theoretical results represent maximum-case predictions as all RF emitters are assumed to be operating at 100% duty cycle.

For any area in excess of 100% General Population MPE, access controls with appropriate RF alerting signage must be put in place and maintained to restrict access to authorized personnel. Signage must be posted to be visible upon approach from any direction to provide notification of potential conditions within these areas. Subject to other site security requirements, occupational personnel should be trained in RF safety and equipped with personal protective equipment (e.g. RF personal monitor) designed for safe work in the vicinity of RF emitters. Controls such as physical barriers to entry imposed by locked doors, hatches and ladders or other access control mechanisms may be supplemented by alarms that alert the individual and notify site management of a breach in access control. Waterford Consultants, LLC recommends that any work activity in these designated areas or in front of any transmitting antennas be coordinated with all wireless tenants.

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

Analysis

AT&T Mobility proposes the following installation at this location :

· INSTALL (6) NEW PANEL ANTENNAS (2 PER SECTOR)
· INSTALL (3) NEW AIR ANTENNAS (1 PER SECTOR)
· INSTALL (9) NEW RRUS

The antenna will be mounted on a 50' Pole with centerline 46' above ground level. Proposed antenna operating parameters are listed in Appendix A. Other appurtenances such as GPS antennas, RRUs and hybrid cable below the antennas are not sources of RF emissions. No other antennas are known to be operating in the vicinity of this site.

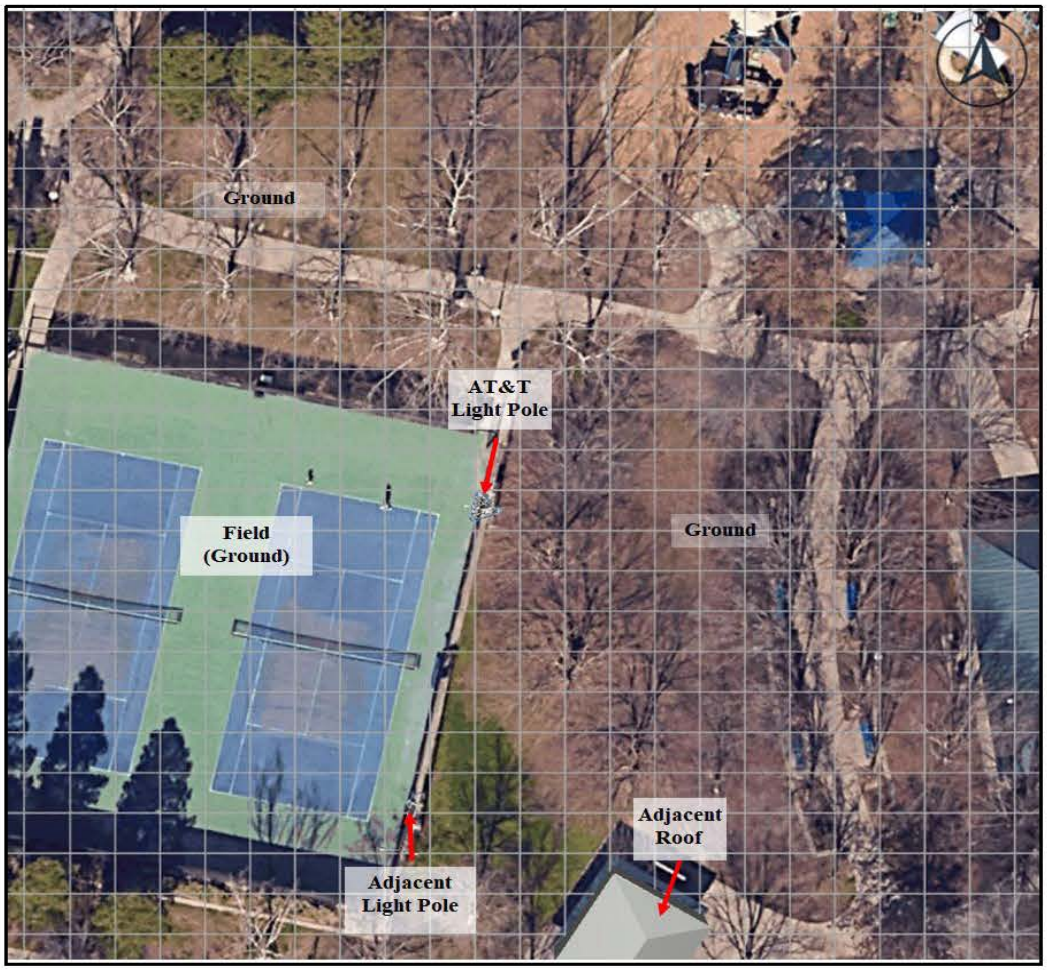

Figure 1: Antenna Locations

Power density decreases significantly with distance from any antenna. The panel-type antennas to be employed at this site are highly directional by design and the orientation in azimuth and mounting elevation, as documented, serves to reduce the potential to exceed MPE limits at any location other than directly in front of the antennas. For accessible areas at ground level, the maximum predicted power density level resulting from all AT&T Mobility operations is 7.46% of the FCC General Population limits. (Figure 2.3). The proposed operation will not expose members of the General Public to hazardous levels of RF energy at ground level or in adjacent buildings

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

On the pole in front of the antenna, predicted MPE levels will exceed the FCC General Population limits within 84 feet in front of the antennas and within 9 feet below the Antenna. The maximum predicted power density level resulting from all AT&T Mobility operations directly in front of the antennas is 17729.70% of the FCC General Population limits (3545.94% of the FCC Occupational limits). Waterford Consultants, LLC recommends posting RF alerting signage (ACP Caution) on the pole visible upon approach that informs personnel accessing this area of basic precautions to be followed when working around antennas. This recommendation is depicted in Figure 2. Any work activity in front of transmitting antennas should be coordinated with AT&T Mobility.

The following plots show the cumulative spatial average predicted power density levels in the reference plane indicated as a percentage of the General Public Limits. Please note that 100% of the General Public Limits corresponds to 20% of the Occupational Limits.

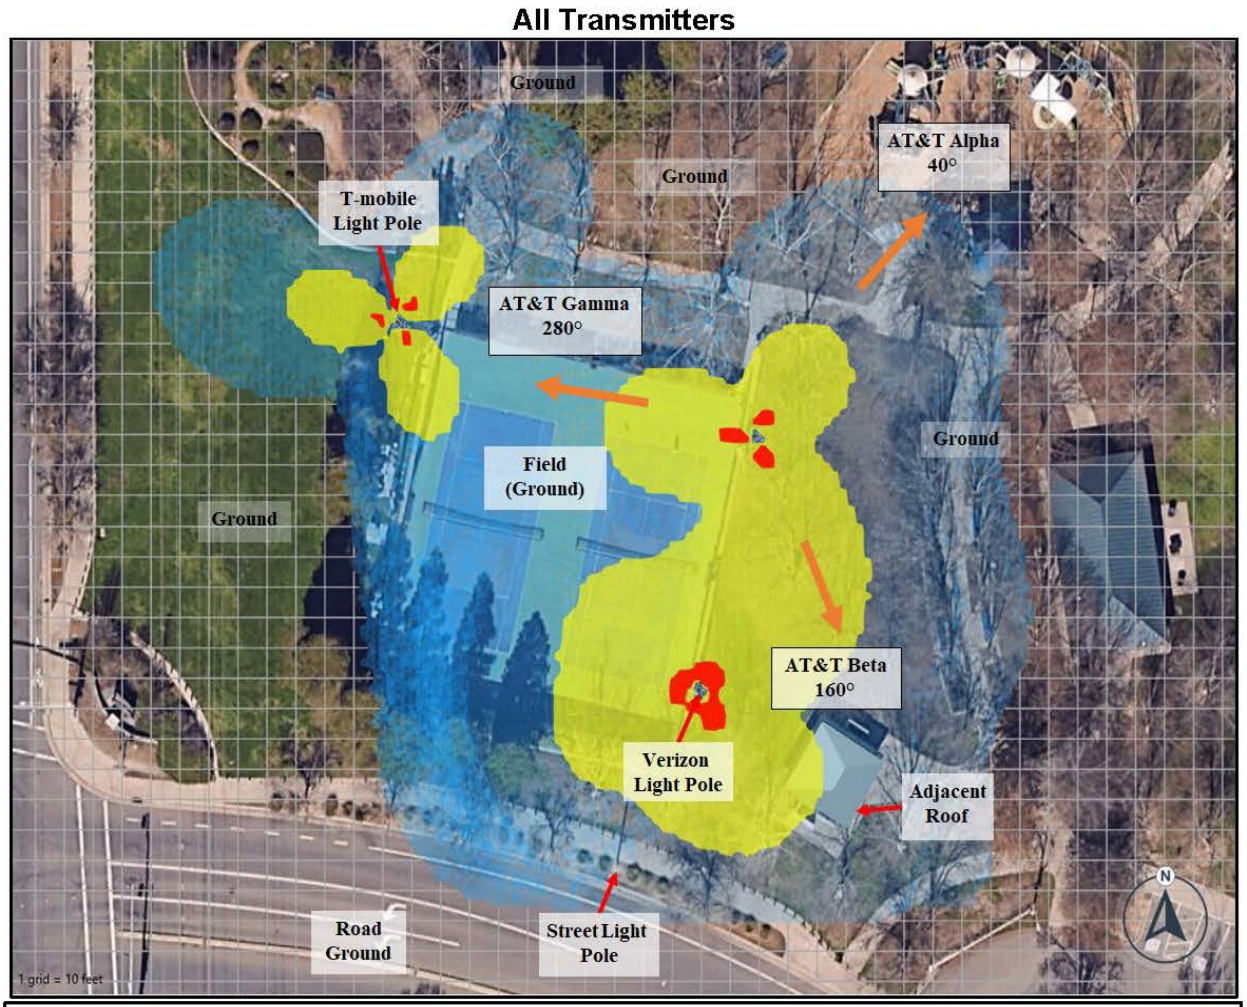

Legend

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
Antenna Level	20.0 - 70.0	3D Area	3D Sula9 GP 5.0 res	17884.57%	0.00	AT&T, VZW, TMO

100%-500% | 500%-5000% | 5000%+

Exposure Profile Name	Model	Exposure Area	Standard	Resolution	RCF
3D Sula9 GP 5.0 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	5	1.0

AT&T VZW TMO

Max MPE

Grid Size: 10.00 feet

Floor = Elevation +6' | Mid-Level = Elevation +/- 3'

Figure1.1: Antenna Level

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

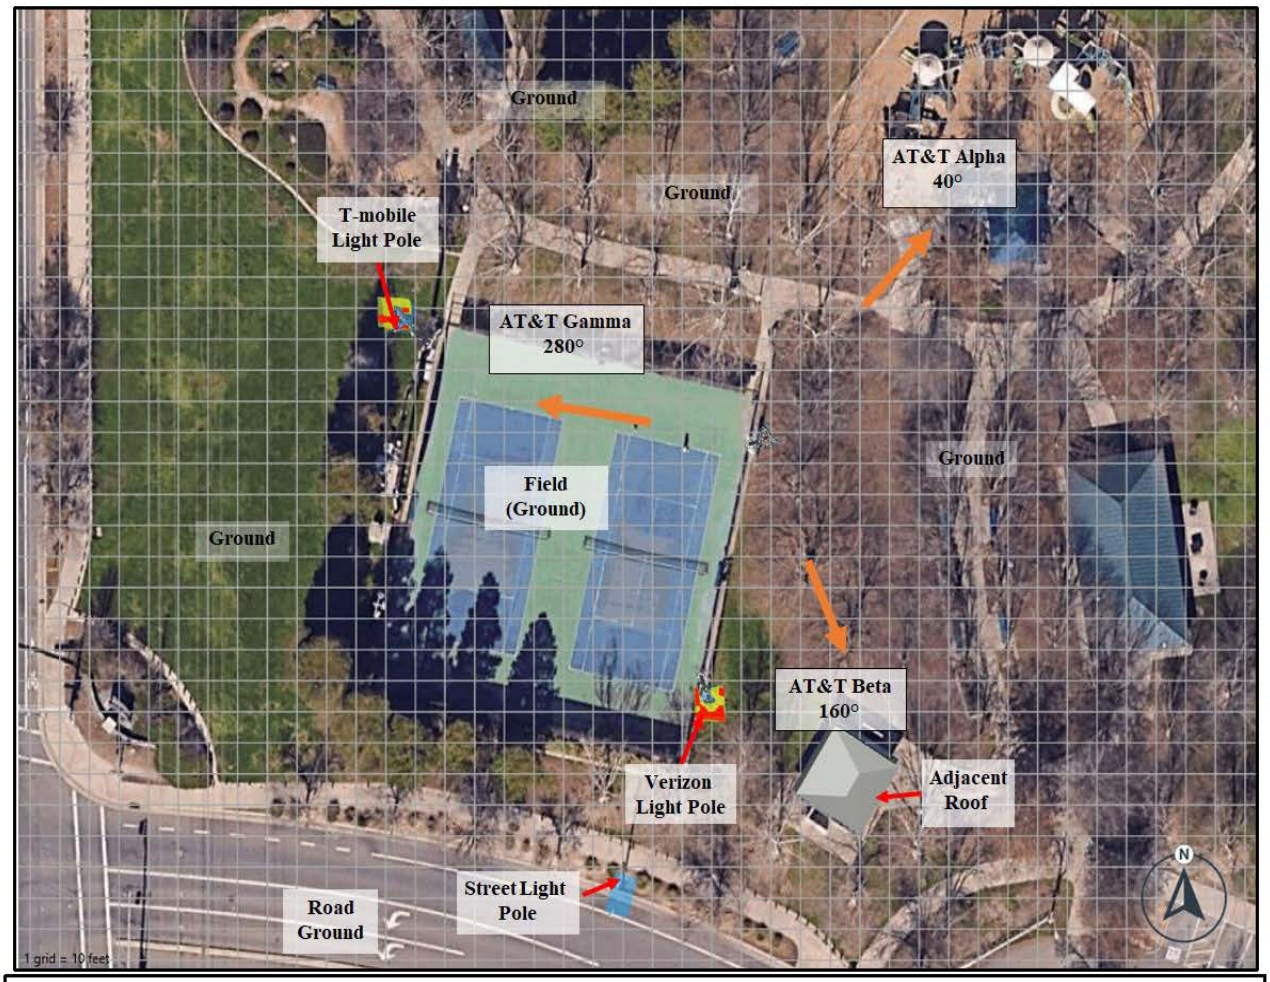

Legend

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
T-Mobile Light Pole	0.1 - 50.1	3D Area	3D Sula9 GP 5.0 res	14043.55%	0.00	AT&T, VZW, TMO
Verizon Light Pole	0.1 - 50.1	3D Area	3D Sula9 GP 5.0 res	18223.20%	0.00	AT&T, VZW, TMO

100%-500% | 500%-5000% | 5000%+

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
Adjacent Roof	14.1	Floor	2D Sula9 GP 2.5 res	3.71%	0.00	AT&T, VZW, TMO
Street Light Pole	25.1	Floor	2D Sula9 GP 2.5 res	159.66%	0.00	AT&T, VZW, TMO

5%-100% | 100%-500% | 500%-5000% | 5000%+

Exposure Profile Name	Model	Exposure Area	Standard	Resolution	RCF
2D Sula9 GP 2.5 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	2.5 ft3	1.0
3D Sula9 GP 5.0 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	5	1.0

AT&T VZW TMO

Max MPE

Grid Size: 10.00 feet

Floor = Elevation +6' | Mid-Level = Elevation +/- 3'

Figure 1.2: All Levels.

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

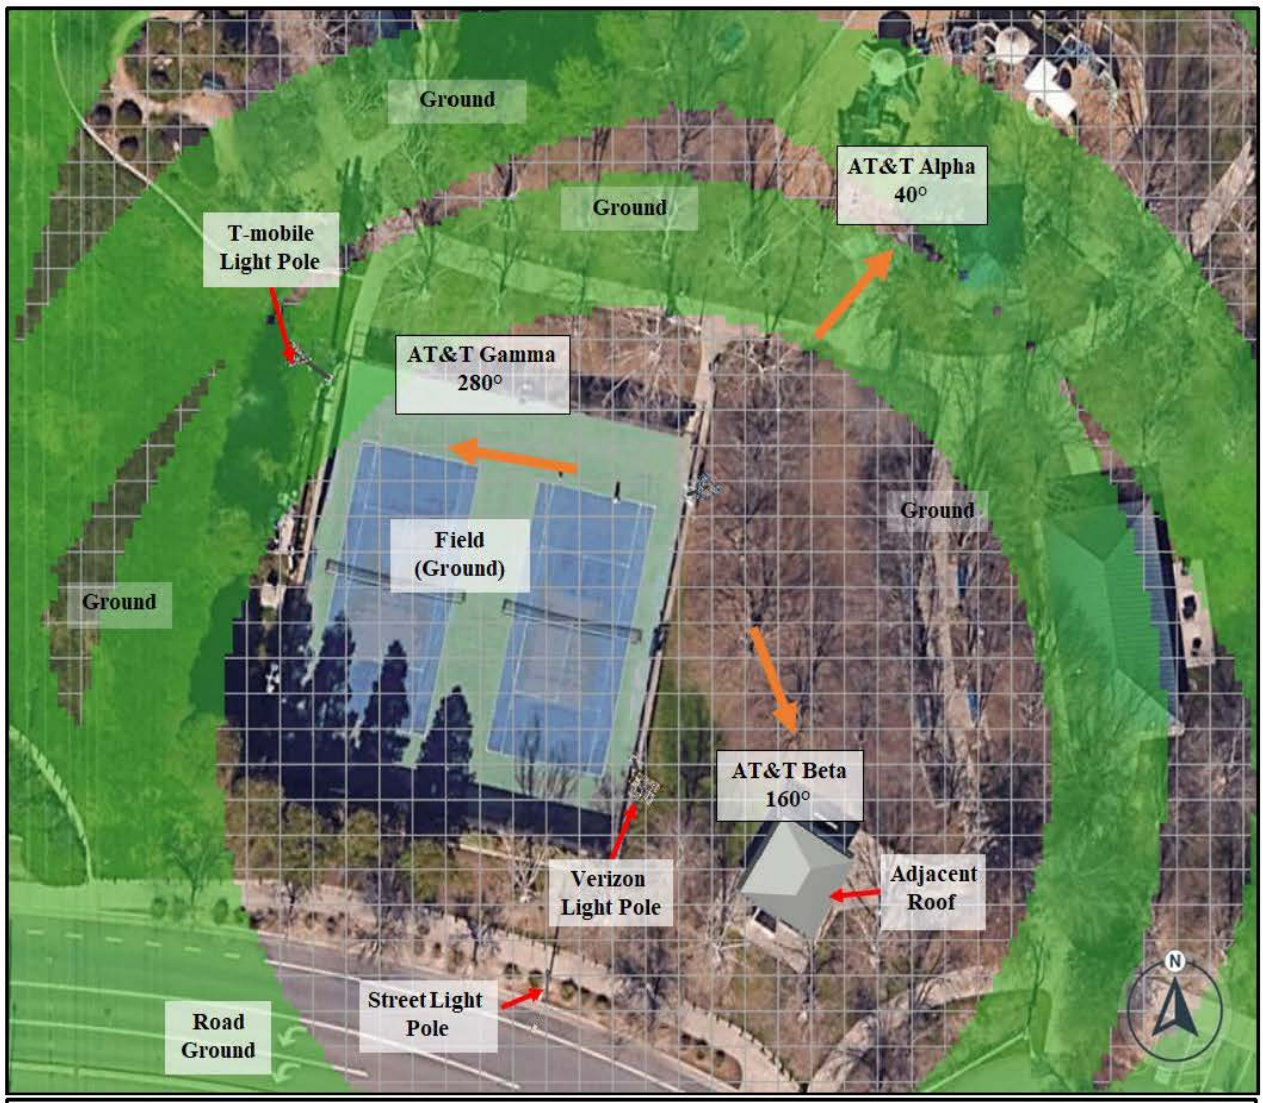

Legend

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
Ground	0.1	Floor	2D Sula9 GP 2.5 res	38.20%	0.00	AT&T, VZW, TMO

5%-100%	100%-500%	500%-5000%	5000%+

Exposure Profile Name	Model	Exposure Area	Standard	Resolution	RCF
2D Sula9 GP 2.5 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	2.5 ft3	1.0

AT&T VZW TMO

Max MPE

Grid Size: 10.00 feet

Floor = Elevation +6' | Mid-Level = Elevation +/- 3'

Figure 1.3: Ground Level.

AT&T Transmitters Only

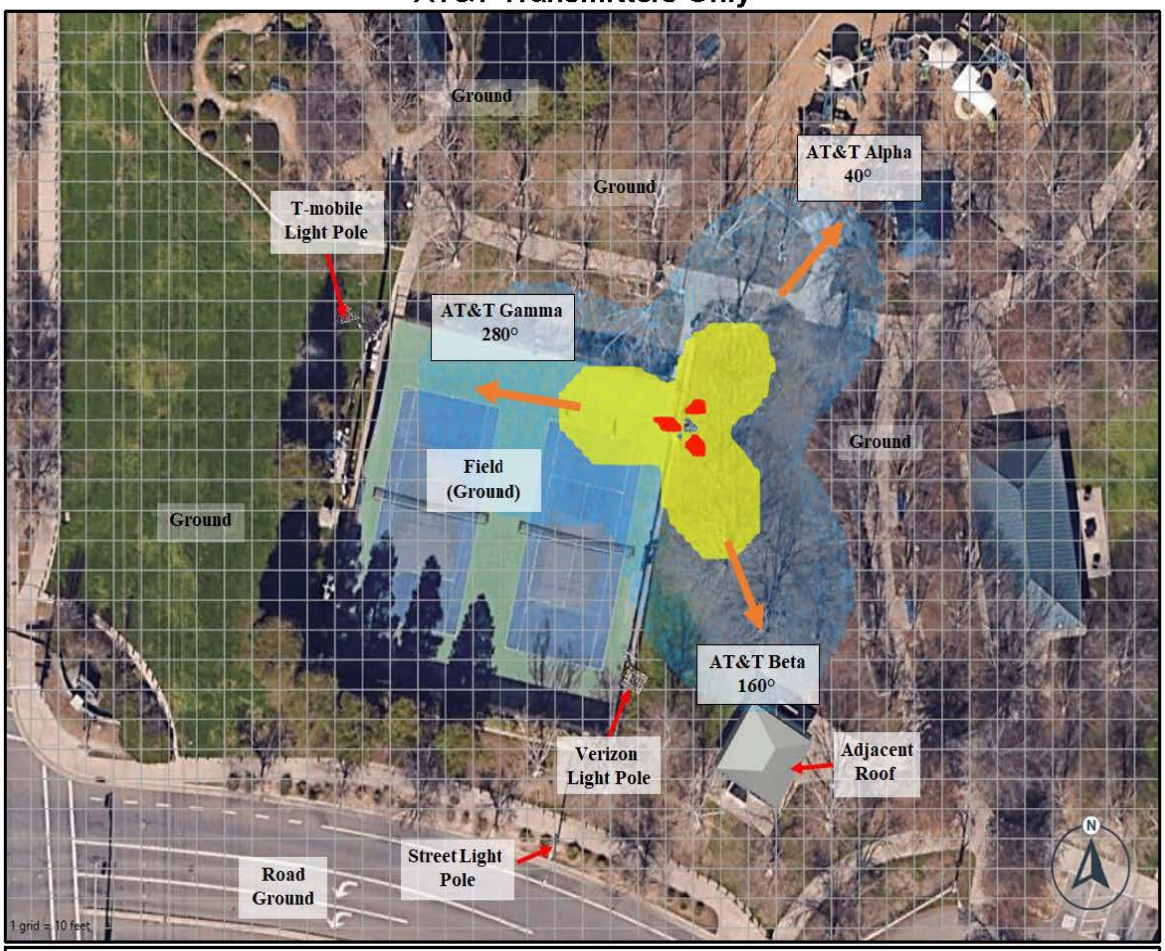

Legend

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
Antenna Level	26.0 - 66.0	3D Area	3D Sula9 GP 5.0 res	17729.70%	0.00	AT&T

100%-500% | 500%-5000% | 5000%+

Exposure Profile Name	Model	Exposure Area	Standard	Resolution	RCF
3D Sula9 GP 5.0 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	5	1.0

AT&T VZW TMO

Max MPE

Grid Size: 10.00 feet

Floor = Elevation +6' | Mid-Level = Elevation +/- 3'

Figure 2.1: Antenna Level

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

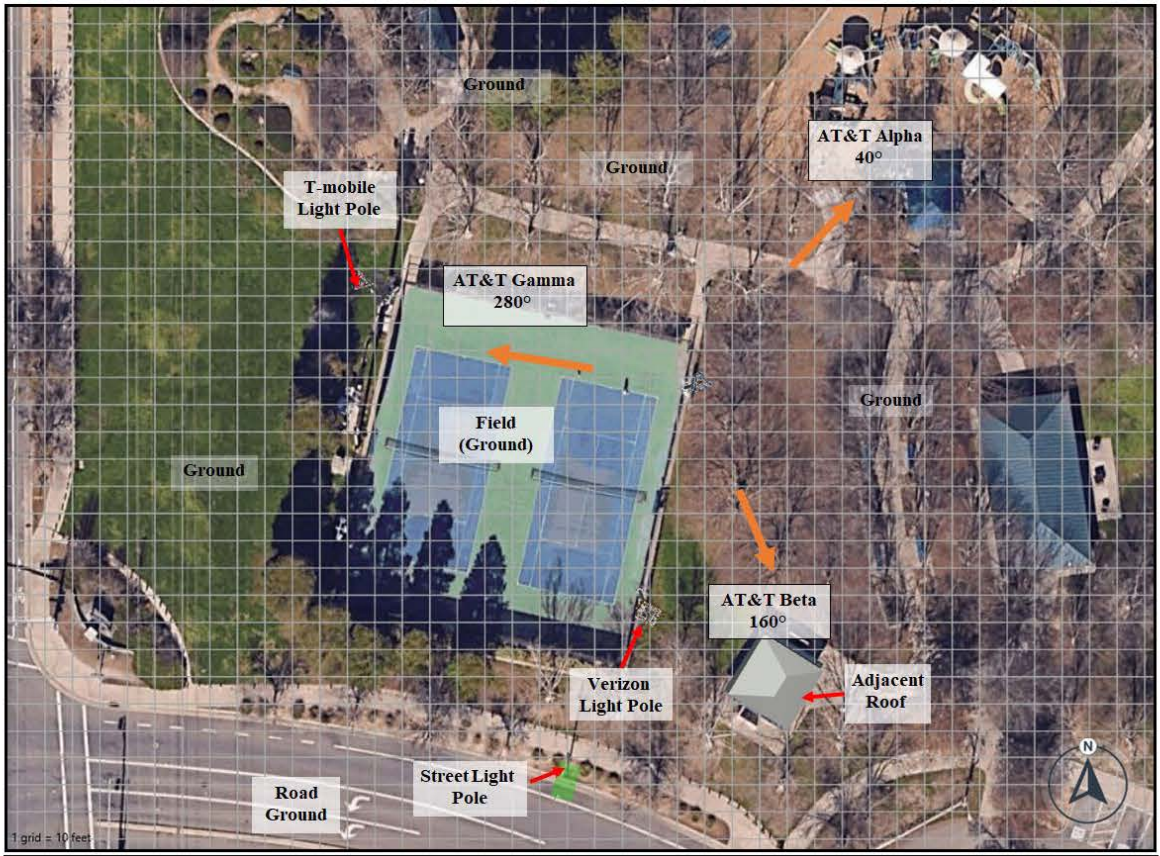

Legend

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
T-Mobile Light Pole	0.1 - 50.1	3D Area	3D Sula9 GP 5.0 res	60.07%	0.00	AT&T
Verizon Light Pole	0.1 - 50.1	3D Area	3D Sula9 GP 5.0 res	90.11%	0.00	AT&T

100%-500% | 500%-5000% | 5000%+

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
Adjacent Roof	14.1	Floor	2D Sula9 GP 2.5 res	1.55%	0.00	AT&T
Street Light Pole	25.1	Floor	2D Sula9 GP 2.5 res	8.44%	0.00	AT&T

5%-100% | 100%-500% | 500%-5000% | 5000%+

Exposure Profile Name	Model	Exposure Area	Standard	Resolution	RCF
2D Sula9 GP 2.5 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	2.5 ft3	1.0
3D Sula9 GP 5.0 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	5	1.0

AT&T VZW TMO

Max MPE

Grid Size: 10.00 feet

Floor = Elevation +6' | Mid-Level = Elevation +/- 3'

Figure 2.2: All Levels.

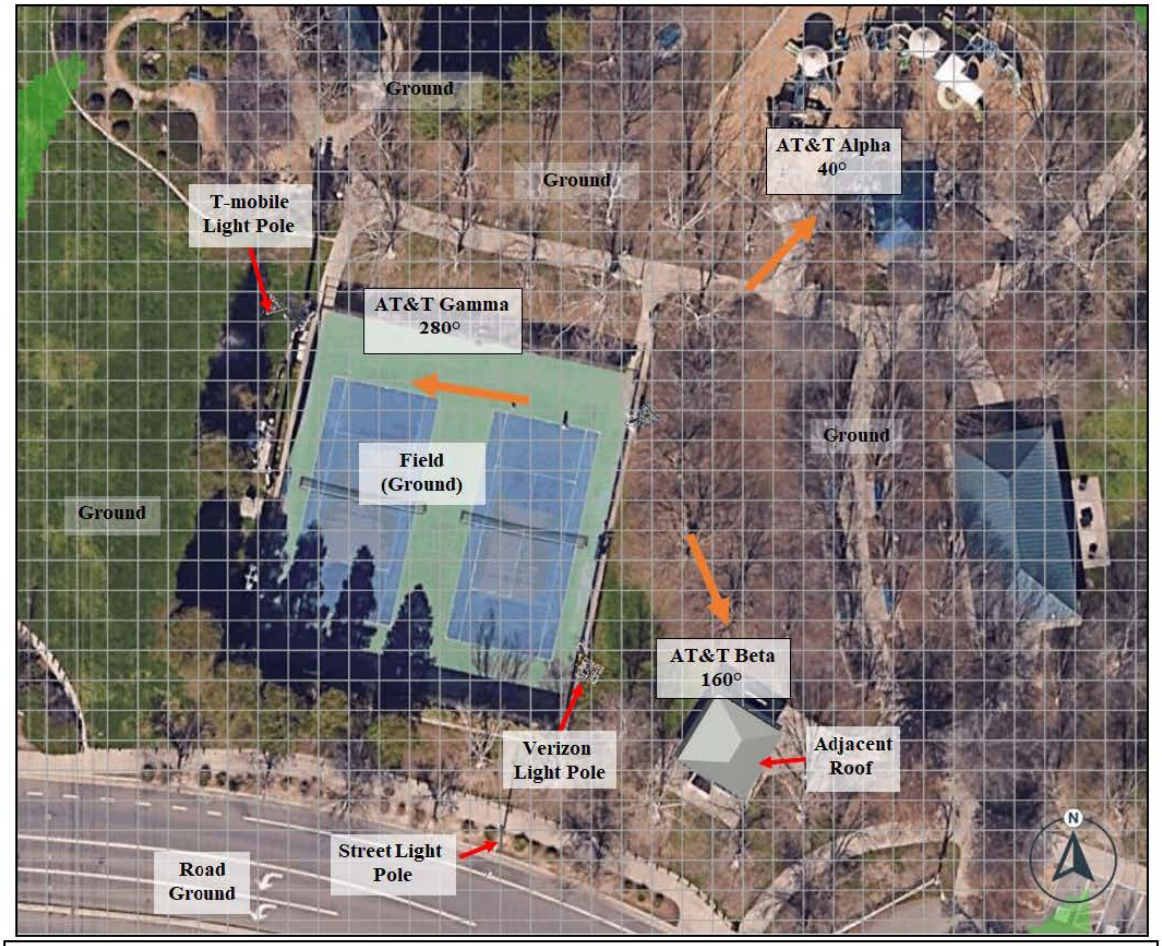

Legend

Study Zone	Elev. (ft)	Type	Exposure Profile	Max MPE	Att	Carriers
Ground	0.1	Floor	2D Sula9 GP 2.5 res	7.46%	0.00	AT&T

5%-100%	100%-500%	500%-5000%	5000%+

Exposure Profile Name	Model	Exposure Area	Standard	Resolution	RCF
2D Sula9 GP 2.5 res	Sula 9	Spatial Avg. (6 ft)	FCC General Public	2.5 ft3	1.0

AT&T VZW TMO

Max MPE

Grid Size: 10.00 feet

Floor = Elevation +6' | Mid-Level = Elevation +/- 3'

Figure 2.3: Ground Level.

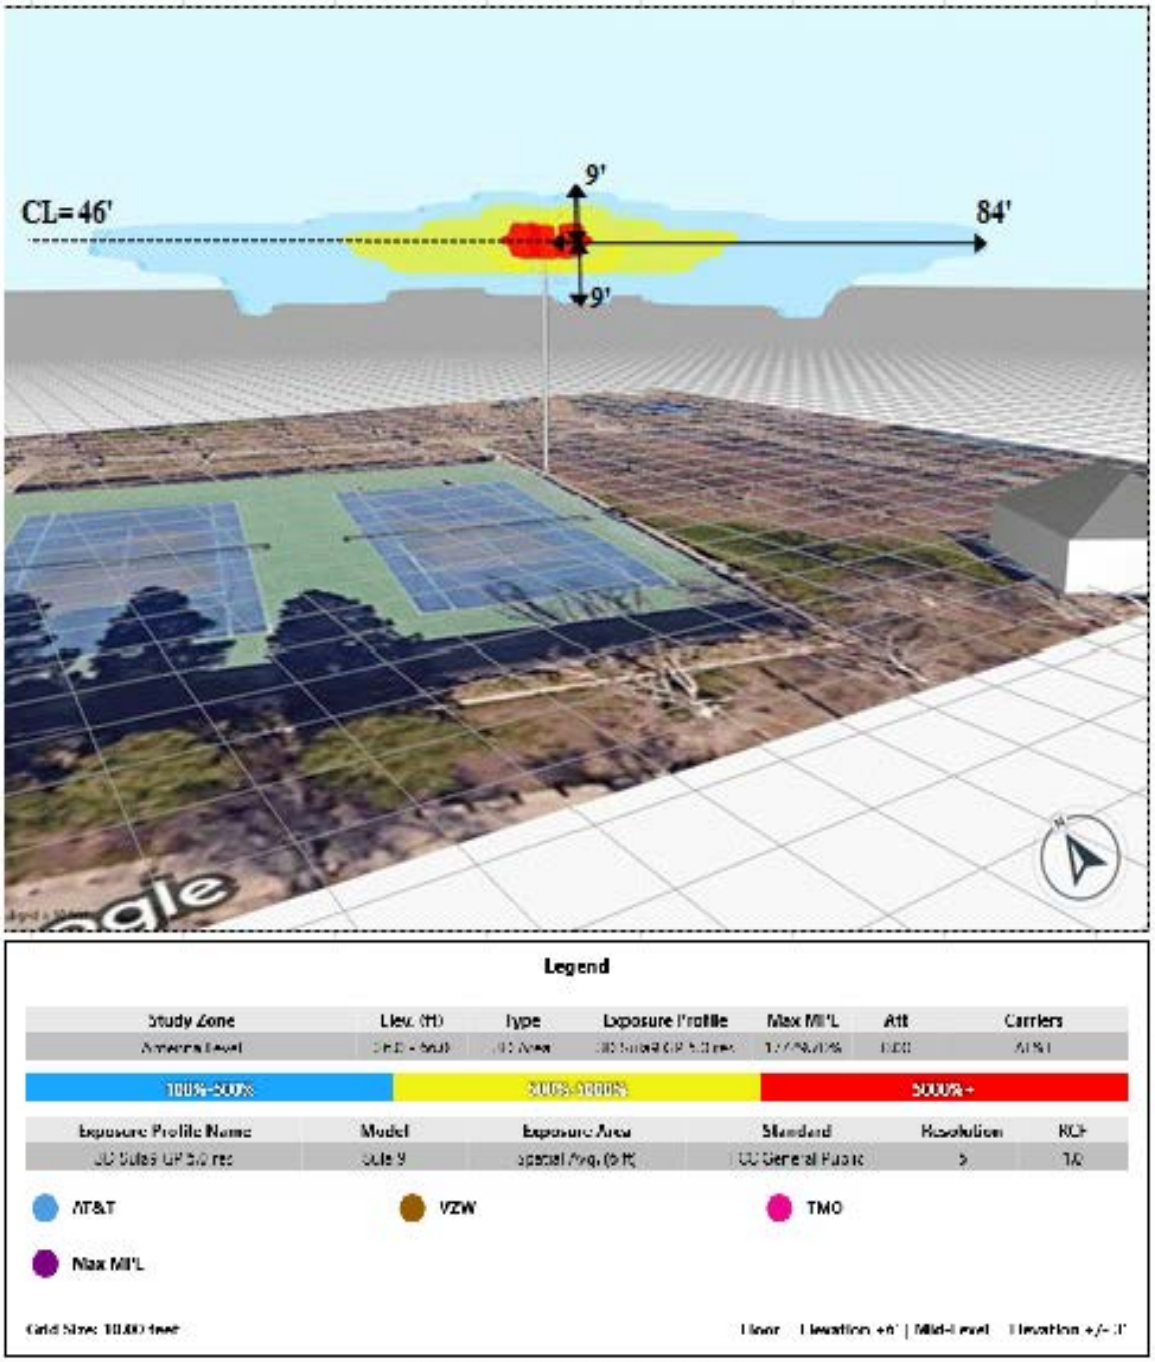

Figure2.4: Elevation Level

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

Compliance Requirement Diagram (Access Location)

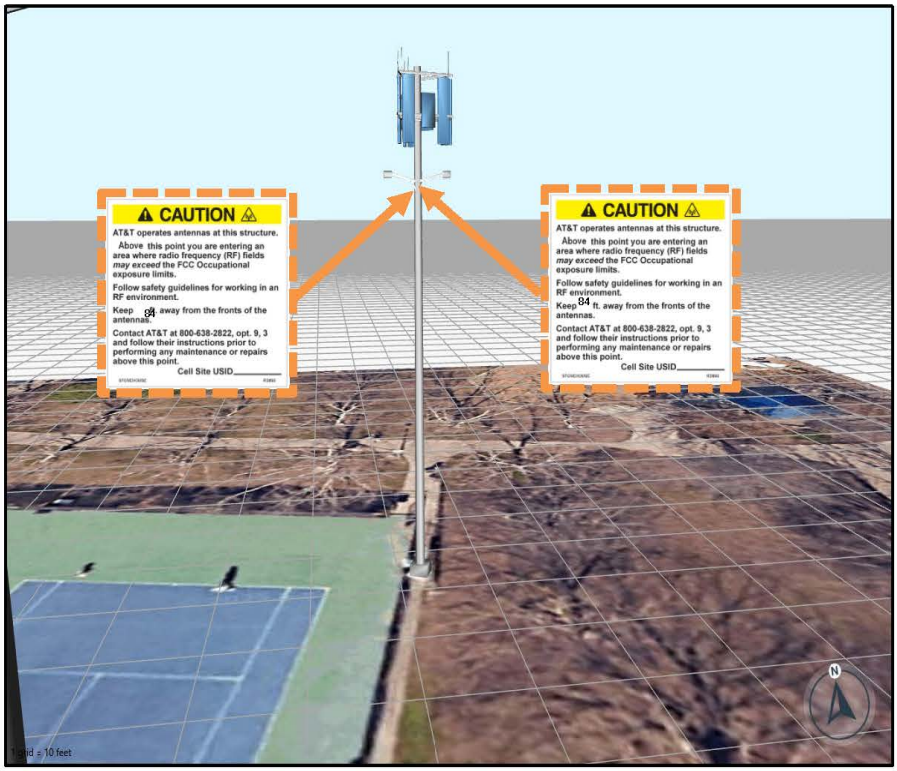

Recommendations

AT&T Mobility Access Location
Install (2) ACP Caution "Above" signs at 9ft below the antennas CL or 35ft AGL.

Materials
(2) ACP Caution "Above" signs sized 7"x7"

Safe Distance = 84ft
Bottom Distance = 9ft

Proposed Signs/Barriers

Existing Signs/Barriers

Figure 3: Mitigation Recommendations

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

Appendix A: Operating Parameters Considered in this Analysis

Ant #	Operator	Antenna Make	Antenna Model	Type	Frequency (MHz)	Block	mech/elec Az (Deg)	mech downtilt (Deg)	Horizontal Beam Width (Deg)	Antenna Length/Aperture (ft)	Antenna Gain (dBd)	TPO (Watts)	Total ERP (Watts)	Antenna Centerline Ground Level (ft)	Bottom of Antenna Ground Level (ft)
1	AT&T	CCI	TPA65R-BU6Dv2	Panel	700	B12	40	0	73	5.9	11.85	240	3674.60	46	43
1	AT&T	CCI	TPA65R-BU6Dv2	Panel	850	B5	40	0	58	5.9	12.55	240	4317.28	46	43
1	AT&T	CCI	TPA65R-BU6Dv2	Panel	1900	B25	40	0	59	5.9	14.55	240	6842.43	46	43
1	AT&T	CCI	TPA65R-BU6Dv2	Panel	2100	B66	40	0	60	5.9	15.55	240	8614.11	46	43
2	AT&T	ERICSSON	SON_AIR6472	Panel	3700	B77D	40	0	11	3.0	25.15	90.82	29728.95	46	44
2	AT&T	ERICSSON	SON_AIR6472	Panel	3500	B77G	40	0	12.5	3.0	24.25	44.73	11912.41	46	44
3	AT&T	CCI	TPA65R-BU6Dv2	Panel	700	B14	40	0	73	5.9	11.85	240	3674.60	46	43
4	AT&T	CCI	TPA65R-BU6Dv2	Panel	700	B12	160	0	73	5.9	11.85	240	3674.60	46	43
4	AT&T	CCI	TPA65R-BU6Dv2	Panel	850	B5	160	0	58	5.9	12.55	240	4317.28	46	43
4	AT&T	CCI	TPA65R-BU6Dv2	Panel	1900	B25	160	0	59	5.9	14.55	240	6842.43	46	43
4	AT&T	CCI	TPA65R-BU6Dv2	Panel	2100	B66	160	0	60	5.9	15.55	240	8614.11	46	43
5	AT&T	ERICSSON	SON_AIR6472	Panel	3700	B77D	160	0	11	3.0	25.15	90.82	29728.95	46	44
5	AT&T	ERICSSON	SON_AIR6472	Panel	3500	B77G	160	0	12.5	3.0	24.25	44.73	11912.41	46	44
6	AT&T	CCI	TPA65R-BU6Dv2	Panel	700	B14	160	0	73	5.9	11.85	240	3674.60	46	43
7	AT&T	CCI	TPA65R-BU6Dv2	Panel	700	B12	280	0	73	5.9	11.85	240	3674.60	46	43
7	AT&T	CCI	TPA65R-BU6Dv2	Panel	850	B5	280	0	58	5.9	12.55	240	4317.28	46	43
7	AT&T	CCI	TPA65R-BU6Dv2	Panel	1900	B25	280	0	59	5.9	14.55	240	6842.43	46	43
7	AT&T	CCI	TPA65R-BU6Dv2	Panel	2100	B66	280	0	60	5.9	15.55	240	8614.11	46	43
8	AT&T	ERICSSON	SON_AIR6472	Panel	3700	B77D	280	0	11	3.0	25.15	90.82	29728.95	46	44
8	AT&T	ERICSSON	SON_AIR6472	Panel	3500	B77G	280	0	12.5	3.0	24.25	44.73	11912.41	46	44
9	AT&T	CCI	TPA65R-BU6Dv2	Panel	700	B14	280	0	73	5.9	11.85	240	3674.60	46	43
10	VZW	Unknown	Unknown	Panel	3700	B77	40	0	11	2.8	23.55	320.00	72468.65	48.67	47
11	VZW	Unknown	Unknown	Panel	3500	B48	40	0	64	0.7	9.36	20.00	172.60	45.67	45
12	VZW	Unknown	Unknown	Panel	700	B12	50	0	65	6.0	12.33	106.95	1828.86	47	44
12	VZW	Unknown	Unknown	Panel	850	B5	50	0	60	6.0	12.7	106.95	1991.50	47	44
12	VZW	Unknown	Unknown	Panel	1900	B2	50	0	69	6.0	15.77	213.90	8076.25	47	44
13	VZW	Unknown	Unknown	Panel	700	B12	50	0	65	6.0	12.33	106.95	1828.86	47	44
13	VZW	Unknown	Unknown	Panel	850	B5	50	0	60	6.0	12.7	106.95	1991.50	47	44
13	VZW	Unknown	Unknown	Panel	2100	B66	50	0	64	6.0	16.48	213.90	9510.66	47	44
14	VZW	Unknown	Unknown	Panel	700	B12	155	0	65	6.0	12.33	106.95	1828.86	47	44
14	VZW	Unknown	Unknown	Panel	850	B5	155	0	60	6.0	12.7	106.95	1991.50	47	44
14	VZW	Unknown	Unknown	Panel	1900	B2	155	0	69	6.0	15.77	213.90	8076.25	47	44
15	VZW	Unknown	Unknown	Panel	700	B12	155	0	65	6.0	12.33	106.95	1828.86	47	44

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com

Ant #	Operator	Antenna Make	Antenna Model	Type	Frequency (MHz)	Block	mech/elec Az (Deg)	mech downtilt (Deg)	Horizontal Beam Width (Deg)	Antenna Length/Aperture (ft)	Antenna Gain (dBd)	TPO (Watts)	Total ERP (Watts)	Antenna Centerline Ground Level (ft)	Bottom of Antenna Ground Level (ft)
15	VZW	Unknown	Unknown	Panel	850	B5	155	0	60	6.0	12.7	106.95	1991.50	47	44
15	VZW	Unknown	Unknown	Panel	2100	B66	155	0	64	6.0	16.48	213.90	9510.66	47	44
16	VZW	Unknown	Unknown	Panel	3700	B77	160	0	11	2.8	23.55	320.00	72468.65	48.67	47
17	VZW	Unknown	Unknown	Panel	3500	B48	160	0	64	0.7	9.36	20.00	172.60	45.67	45
18	VZW	Unknown	Unknown	Panel	700	B12	240	0	65	6.0	12.33	106.95	1828.86	47	44
18	VZW	Unknown	Unknown	Panel	850	B5	240	0	60	6.0	12.7	106.95	1991.50	47	44
18	VZW	Unknown	Unknown	Panel	1900	B2	240	0	69	6.0	15.77	213.90	8076.25	47	44
19	VZW	Unknown	Unknown	Panel	700	B12	240	0	65	6.0	12.33	106.95	1828.86	47	44
19	VZW	Unknown	Unknown	Panel	850	B5	240	0	60	6.0	12.7	106.95	1991.50	47	44
19	VZW	Unknown	Unknown	Panel	2100	B66	240	0	64	6.0	16.48	213.90	9510.66	47	44
20	VZW	Unknown	Unknown	Panel	3500	B48	255	0	64	0.7	9.36	20.00	172.60	45.67	45
21	VZW	Unknown	Unknown	Panel	3700	B77	280	0	11	2.8	23.55	320.00	72468.65	48.67	47
22	VZW	Unknown	Unknown	Panel	3500	B48	310	0	64	0.7	9.36	20.00	172.60	45.67	45
23	VZW	Unknown	Unknown	Panel	700	B12	325	0	65	6.0	12.33	106.95	1828.86	47	44
23	VZW	Unknown	Unknown	Panel	850	B5	325	0	60	6.0	12.7	106.95	1991.50	47	44
23	VZW	Unknown	Unknown	Panel	1900	B2	325	0	69	6.0	15.77	213.90	8076.25	47	44
24	VZW	Unknown	Unknown	Panel	700	B12	325	0	65	6.0	12.33	106.95	1828.86	47	44
24	VZW	Unknown	Unknown	Panel	850	B5	325	0	60	6.0	12.7	106.95	1991.50	47	44
24	VZW	Unknown	Unknown	Panel	2100	B66	325	0	64	6.0	16.48	213.90	9510.66	47	44
25	TMO	Unknown	Unknown	Panel	600	B71	40	0	66	4.0	11.3	160.00	2158.34	50	48
25	TMO	Unknown	Unknown	Panel	700	B12	40	0	66	4.0	11.3	160.00	2158.34	50	48
25	TMO	Unknown	Unknown	Panel	1900	B2	40	0	65	4.0	14.65	320.00	9335.77	50	48
25	TMO	Unknown	Unknown	Panel	2100	B66	40	0	62	4.0	14.65	320.00	9335.77	50	48
26	TMO	Unknown	Unknown	Panel	2500	B41	40	0	61	4.0	15.94	320.00	12564.64	50	48
27	TMO	Unknown	Unknown	Panel	600	B71	160	0	66	4.0	11.3	160.00	2158.34	50	48
27	TMO	Unknown	Unknown	Panel	700	B12	160	0	66	4.0	11.3	160.00	2158.34	50	48
27	TMO	Unknown	Unknown	Panel	1900	B2	160	0	65	4.0	14.65	320.00	9335.77	50	48
27	TMO	Unknown	Unknown	Panel	2100	B66	160	0	62	4.0	14.65	320.00	9335.77	50	48
28	TMO	Unknown	Unknown	Panel	2500	B41	160	0	61	4.0	15.94	320.00	12564.64	50	48
29	TMO	Unknown	Unknown	Panel	600	B71	280	0	66	4.0	11.3	160.00	2158.34	50	48
29	TMO	Unknown	Unknown	Panel	700	B12	280	0	66	4.0	11.3	160.00	2158.34	50	48
29	TMO	Unknown	Unknown	Panel	1900	B2	280	0	65	4.0	14.65	320.00	9335.77	50	48
29	TMO	Unknown	Unknown	Panel	2100	B66	280	0	62	4.0	14.65	320.00	9335.77	50	48
30	TMO	Unknown	Unknown	Panel	2500	B41	280	0	61	4.0	15.94	320.00	12564.64	50	48

7430 New Technology Way, Suite 150 Frederick, Maryland 21703 (703) 596-1022 Phone www.waterfordconsultants.com