

Appendix D Noise Technical Modeling

APPENDIX

This page intentionally left blank.

N O I S E F U N D A M E N T A L S

Fundamentals of Noise

NOISE

Noise is most often defined as unwanted sound; whether it is loud, unpleasant, unexpected, or otherwise undesirable. Although sound can be easily measured, the perception of noise and the physical response to sound complicate the analysis of its impact on people. People judge the relative magnitude of sound sensation in subjective terms such as “noisiness” or “loudness.”

Noise Descriptors

The following are brief definitions of terminology used in this chapter:

- **Sound.** A disturbance created by a vibrating object, which, when transmitted by pressure waves through a medium such as air, is capable of being detected by a receiving mechanism, such as the human ear or a microphone.
- **Noise.** Sound that is loud, unpleasant, unexpected, or otherwise undesirable.
- **Decibel (dB).** A unitless measure of sound, expressed on a logarithmic scale and with respect to a defined reference sound pressure. The standard reference pressure is 20 micropascals (20 μPa).
- **Vibration Decibel (VdB).** A unitless measure of vibration, expressed on a logarithmic scale and with respect to a defined reference vibration velocity. In the U.S., the standard reference velocity is 1 micro-inch per second (1×10^{-6} in/sec).
- **A-Weighted Decibel (dBA).** An overall frequency-weighted sound level in decibels that approximates the frequency response of the human ear.
- **Equivalent Continuous Noise Level (L_{eq}); also called the Energy-Equivalent Noise Level.** The value of an equivalent, steady sound level which, in a stated time period (often over an hour) and at a stated location, has the same A-weighted sound energy as the time-varying sound. Thus, the L_{eq} metric is a single numerical value that represents the equivalent amount of variable sound energy received by a receptor over the specified duration.
- **Statistical Sound Level (L_n).** The sound level that is exceeded “n” percent of time during a given sample period. For example, the L_{50} level is the statistical indicator of the time-varying noise signal that is exceeded 50 percent of the time (during each sampling period); that is, half of the sampling time, the changing noise levels are above this value and half of the time they are below it. This is called the “median sound level.” The L_{10} level, likewise, is the value that is exceeded 10 percent of the time (i.e., near the maximum) and this is often known as the “intrusive sound level.” The L_{90} is the sound level exceeded 90 percent of the time and is often considered the “effective background level” or “residual noise level.”

- **Maximum Sound Level (L_{\max}).** The highest RMS sound level measured during the measurement period.
- **Root Mean Square Sound Level (RMS).** The square root of the average of the square of the sound pressure over the measurement period.
- **Day-Night Sound Level (L_{dn} or DNL).** The energy-average of the A-weighted sound levels occurring during a 24-hour period, with 10 dB added to the sound levels occurring during the period from 10:00 PM to 7:00 AM.
- **Community Noise Equivalent Level (CNEL).** The energy average of the A-weighted sound levels occurring during a 24-hour period, with 5 dB added from 7:00 PM to 10:00 PM and 10 dB from 10:00 PM to 7:00 AM. NOTE: For general community/environmental noise, CNEL and L_{dn} values rarely differ by more than 1 dB (with the CNEL being only slightly more restrictive – that is, higher than the L_{dn} value). As a matter of practice, L_{dn} and CNEL values are interchangeable and are treated as equivalent in this assessment.
- **Peak Particle Velocity (PPV).** The peak rate of speed at which soil particles move (e.g., inches per second) due to ground vibration.
- **Sensitive Receptor.** Noise- and vibration-sensitive receptors include land uses where quiet environments are necessary for enjoyment and public health and safety. Residences, schools, motels and hotels, libraries, religious institutions, hospitals, and nursing homes are examples.

Characteristics of Sound

When an object vibrates, it radiates part of its energy in the form of a pressure wave. Sound is that pressure wave transmitted through the air. Technically, airborne sound is a rapid fluctuation or oscillation of air pressure above and below atmospheric pressure that creates sound waves.

Sound can be described in terms of amplitude (loudness), frequency (pitch), or duration (time). Loudness or amplitude is measured in dB, frequency or pitch is measured in Hertz [Hz] or cycles per second, and duration or time variations is measured in seconds or minutes.

Amplitude

Unlike linear units such as inches or pounds, decibels are measured on a logarithmic scale. Because of the physical characteristics of noise transmission and perception, the relative loudness of sound does not closely match the actual amounts of sound energy. Table 1 presents the subjective effect of changes in sound pressure levels. Ambient sounds generally range from 30 dBA (very quiet) to 100 dBA (very loud). Changes of 1 to 3 dB are detectable under quiet, controlled conditions, and changes of less than 1 dB are usually not discernible (even under ideal conditions). A 3 dB change in noise levels is considered the minimum change that is detectable with human hearing in outside environments. A change of 5 dB is readily discernible to most people in an exterior environment, and a 10 dB change is perceived as a doubling (or halving) of the sound.

Table 1 Noise Perceptibility

Change in dB	Noise Level
± 3 dB	Barely perceptible increase
± 5 dB	Readily perceptible increase
± 10 dB	Twice or half as loud
± 20 dB	Four times or one-quarter as loud

Source: California Department of Transportation (Caltrans). 2013, September. *Technical Noise Supplement ("TeNS")*.

Frequency

The human ear is not equally sensitive to all frequencies. Sound waves below 16 Hz are not heard at all, but are “felt” more as a vibration. Similarly, though people with extremely sensitive hearing can hear sounds as high as 20,000 Hz, most people cannot hear above 15,000 Hz. In all cases, hearing acuity falls off rapidly above about 10,000 Hz and below about 200 Hz.

When describing sound and its effect on a human population, A-weighted (dBA) sound levels are typically used to approximate the response of the human ear. The A-weighted noise level has been found to correlate well with people’s judgments of the “noisiness” of different sounds and has been used for many years as a measure of community and industrial noise. Although the A-weighted scale and the energy-equivalent metric are commonly used to quantify the range of human response to individual events or general community sound levels, the degree of annoyance or other response also depends on several other perceptibility factors, including:

- Ambient (background) sound level
- General nature of the existing conditions (e.g., quiet rural or busy urban)
- Difference between the magnitude of the sound event level and the ambient condition
- Duration of the sound event
- Number of event occurrences and their repetitiveness
- Time of day that the event occurs

Duration

Time variation in noise exposure is typically expressed in terms of a steady-state energy level equal to the energy content of the time varying period (called L_{eq}), or alternately, as a statistical description of the sound level that is exceeded over some fraction of a given observation period. For example, the L_{50} noise level represents the noise level that is exceeded 50 percent of the time; half the time the noise level exceeds this level and half the time the noise level is less than this level. This level is also representative of the level that is exceeded 30 minutes in an hour. Similarly, the L_2 , L_8 and L_{25} values represent the noise levels that are exceeded 2, 8, and 25 percent of the time or 1, 5, and 15 minutes per hour, respectively. These “n” values are typically used to demonstrate compliance for stationary noise sources with many cities’ noise ordinances. Other values typically noted during a noise survey are the L_{min} and L_{max} . These values represent the minimum and maximum root-mean-square noise levels obtained over the measurement period, respectively.

Because community receptors are more sensitive to unwanted noise intrusion during the evening and at night, state law and many local jurisdictions use an adjusted 24-hour noise descriptor called the Community Noise Equivalent Level (CNEL) or Day-Night Noise Level (L_{dn}). The CNEL descriptor requires that an artificial increment (or “penalty”) of 5 dBA be added to the actual noise level for the hours from 7:00 PM to 10:00

PM and 10 dBA for the hours from 10:00 PM to 7:00 AM. The L_{dn} descriptor uses the same methodology except that there is no artificial increment added to the hours between 7:00 PM and 10:00 PM. Both descriptors give roughly the same 24-hour level, with the CNEL being only slightly more restrictive (i.e., higher). The CNEL or L_{dn} metrics are commonly applied to the assessment of roadway and airport-related noise sources.

Sound Propagation

Sound dissipates exponentially with distance from the noise source. This phenomenon is known as “spreading loss.” For a single-point source, sound levels decrease by approximately 6 dB for each doubling of distance from the source (conservatively neglecting ground attenuation effects, air absorption factors, and barrier shielding). For example, if a backhoe at 50 feet generates 84 dBA, at 100 feet the noise level would be 79 dBA, and at 200 feet it would be 73 dBA. This drop-off rate is appropriate for noise generated by on-site operations from stationary equipment or activity at a project site. If noise is produced by a line source, such as highway traffic, the sound decreases by 3 dB for each doubling of distance over a reflective (“hard site”) surface such as concrete or asphalt. Line source noise in a relatively flat environment with ground-level absorptive vegetation decreases by an additional 1.5 dB for each doubling of distance.

Psychological and Physiological Effects of Noise

Physical damage to human hearing begins at prolonged exposure to noise levels higher than 85 dBA. Exposure to high noise levels affects the entire system, with prolonged noise exposure in excess of 75 dBA increasing body tensions, thereby affecting blood pressure and functions of the heart and the nervous system. Extended periods of noise exposure above 90 dBA results in permanent cell damage, which is the main driver for employee hearing protection regulations in the workplace. For community environments, the ambient or background noise problem is widespread, though generally worse in urban areas than in outlying, less-developed areas. Elevated ambient noise levels can result in noise interference (e.g., speech interruption/masking, sleep disturbance, disturbance of concentration) and cause annoyance. Since most people do not routinely work with decibels or A-weighted sound levels, it is often difficult to appreciate what a given sound pressure level number means. To help relate noise level values to common experience, Table 2 shows typical noise levels from familiar sources.

Table 2 Typical Noise Levels

Common Outdoor Activities	Noise Level (dBA)	Common Indoor Activities
Onset of physical discomfort	120+	
	110	Rock Band (near amplification system)
Jet Flyover at 1,000 feet		
	100	
Gas Lawn Mower at three feet		
	90	
Diesel Truck at 50 feet, at 50 mph		Food Blender at 3 feet
	80	Garbage Disposal at 3 feet
Noisy Urban Area, Daytime		
	70	Vacuum Cleaner at 10 feet
Commercial Area		Normal speech at 3 feet
Heavy Traffic at 300 feet	60	
		Large Business Office
Quiet Urban Daytime	50	Dishwasher Next Room
Quiet Urban Nighttime	40	Theater, Large Conference Room (background)
Quiet Suburban Nighttime		
	30	Library
Quiet Rural Nighttime		Bedroom at Night, Concert Hall (background)
	20	
		Broadcast/Recording Studio
	10	
Lowest Threshold of Human Hearing	0	Lowest Threshold of Human Hearing

Source: California Department of Transportation (Caltrans). 2013, September. **Technical Noise Supplement ("TeNS")**.

Vibration Fundamentals

Vibration is an oscillatory motion through a solid medium in which the motion's amplitude can be described in terms of displacement, velocity, or acceleration. Vibration is normally associated with activities stemming from operations of railroads or vibration-intensive stationary sources, but can also be associated with construction equipment such as jackhammers, pile drivers, and hydraulic hammers. As with noise, vibration can be described by both its amplitude and frequency. Vibration displacement is the distance that a point on a surface moves away from its original static position; velocity is the instantaneous speed that a point on a surface moves; and acceleration is the rate of change of the speed. Each of these descriptors can be used to correlate vibration to human response, building damage, and acceptable equipment vibration levels. During construction, the operation of construction equipment can cause groundborne vibration. During the operational phase of a project, receptors may be subject to levels of vibration that can cause annoyance due to noise generated from vibration of a structure or items within a structure.

Vibration amplitudes are usually described in terms of either the peak particle velocity (PPV) or the root mean square (RMS) velocity. PPV is the maximum instantaneous peak of the vibration signal and RMS is the

square root of the average of the squared amplitude of the signal. PPV is more appropriate for evaluating potential building damage and RMS is typically more suitable for evaluating human response.

As with airborne sound, annoyance with vibrational energy is a subjective measure, depending on the level of activity and the sensitivity of the individual. To sensitive individuals, vibrations approaching the threshold of perception can be annoying. Persons accustomed to elevated ambient vibration levels, such as in an urban environment, may tolerate higher vibration levels. Table 3 displays the human response and the effects on buildings resulting from continuous vibration (in terms of various levels of PPV).

Table 3 Human Reaction to Typical Vibration Levels

Vibration Level, PPV (in/sec)	Human Reaction	Effect on Buildings
0.006–0.019	Threshold of perception, possibility of intrusion	Vibrations unlikely to cause damage of any type
0.08	Vibrations readily perceptible	Recommended upper level of vibration to which ruins and ancient monuments should be subjected
0.10	Level at which continuous vibration begins to annoy people	Virtually no risk of “architectural” (i.e. not structural) damage to normal buildings
0.20	Vibrations annoying to people in buildings	Threshold at which there is a risk to “architectural” damage to normal dwelling – houses with plastered walls and ceilings
0.4–0.6	Vibrations considered unpleasant by people subjected to continuous vibrations and unacceptable to some people walking on bridges	Vibrations at a greater level than normally expected from traffic, but would cause “architectural” damage and possibly minor structural damage

Source: California Department of Transportation (Caltrans). 2020, April. *Transportation and Construction Vibration Guidance Manual*. Prepared by ICF International.

N O I S E M O N I T O R I N G D A T A

Measurement Report

Report Summary

Meter's File Name	LxT_Data.166.s	Computer's File Name	LxT_0005424-20260209 130728-LxT_Data.166.ldbin		
Meter	LxT1 0005424	Firmware	2.404		
User	AC	Location	ST-1		
Job Description	BEA-13				
Note					
Start Time	2026-02-09 13:07:28	Duration	0:15:00.0		
End Time	2026-02-09 13:22:28	Run Time	0:15:00.0	Pause Time	0:00:00.0
Pre-Calibration	2026-02-09 13:06:37	Post-Calibration	None	Calibration Deviation	---

Results

Overall Metrics

LA _{eq}	55.9 dB		
LAE	85.4 dB	SEA	--- dB
EA	38.9 μPa²h		
EA8	1.2 mPa²h		
EA40	6.2 mPa²h		
LA _{Speak}	96.4 dB	2026-02-09 13:13:58	
LA _{Smax}	72.6 dB	2026-02-09 13:15:45	
LA _{Smin}	44.6 dB	2026-02-09 13:18:23	
LA _{eq}	55.9 dB		
LC _{eq}	62.6 dB	LC _{eq} - LA _{eq}	6.7 dB
LA _{Ieq}	59.0 dB	LA _{Ieq} - LA _{eq}	3.1 dB



Exceedances

	Count	Duration
LAS > 85.0 dB	0	0:00:00.0
LAS > 115.0 dB	0	0:00:00.0
LASpk > 135.0 dB	0	0:00:00.0
LASpk > 137.0 dB	0	0:00:00.0
LASpk > 140.0 dB	0	0:00:00.0

Community Noise

L _{DN}	---	L _{Day}	---	L _{Night}	0.0 dB
L _{DEN}	---	L _{Day}	---	L _{Eve}	---
				L _{Night}	---

Any Data

	A		C		Z	
	Level	Time Stamp	Level	Time Stamp	Level	Time Stamp
L _{eq}	55.9 dB		---		---	
L _{S(max)}	72.6 dB	2026-02-09 13:15:45	---	None	---	None
L _{S(min)}	44.6 dB	2026-02-09 13:18:23	---	None	---	None
L _{Peak(max)}	96.4 dB	2026-02-09 13:13:58	---	None	---	None

Overloads

Count	0
Duration	0:00:00.0

Statistics

LAS 2.0	67.5 dB
LAS 8.0	57.8 dB
LAS 25.0	50.7 dB
LAS 50.0	48.6 dB
LAS 90.0	46.1 dB
LAS 99.0	45.2 dB

Measurement Report

Report Summary

Meter's File Name	LxT_Data.167.s	Computer's File Name	LxT_0005424-20260209 133252-LxT_Data.167.ldbin		
Meter	LxT1 0005424	Firmware	2.404		
User	AC	Location	ST-2		
Job Description	BEA-13				
Note					
Start Time	2026-02-09 13:32:52	Duration	0:15:00.0		
End Time	2026-02-09 13:47:52	Run Time	0:15:00.0	Pause Time	0:00:00.0
Pre-Calibration	2026-02-09 13:32:24	Post-Calibration	None	Calibration Deviation	---

Results

Overall Metrics

LA _{eq}	54.5 dB		
LAE	84.0 dB	SEA	--- dB
EA	28.2 μPa²h		
EA8	901.9 μPa²h		
EA40	4.5 mPa²h		
LA _{Speak}	93.9 dB	2026-02-09 13:42:18	
LA _{Smax}	75.5 dB	2026-02-09 13:43:33	
LA _{Smin}	45.2 dB	2026-02-09 13:42:27	
LA _{eq}	54.5 dB		
LC _{eq}	61.6 dB	LC _{eq} - LA _{eq}	7.1 dB
LA _{Ieq}	57.8 dB	LA _{Ieq} - LA _{eq}	3.3 dB



Exceedances

	Count	Duration
LAS > 85.0 dB	0	0:00:00.0
LAS > 115.0 dB	0	0:00:00.0
LASpk > 135.0 dB	0	0:00:00.0
LASpk > 137.0 dB	0	0:00:00.0
LASpk > 140.0 dB	0	0:00:00.0

Community Noise

L _{DN}	---	L _{Day}	---	L _{Night}	0.0 dB
L _{DEN}	---	L _{Day}	---	L _{Eve}	---
				L _{Night}	---

Any Data

	A		C		Z	
	Level	Time Stamp	Level	Time Stamp	Level	Time Stamp
L _{eq}	54.5 dB		---		---	
L _{S(max)}	75.5 dB	2026-02-09 13:43:33	---	None	---	None
L _{S(min)}	45.2 dB	2026-02-09 13:42:27	---	None	---	None
L _{Peak(max)}	93.9 dB	2026-02-09 13:42:18	---	None	---	None

Overloads

Count	0
Duration	0:00:00.0

Statistics

LAS 2.0	63.6 dB
LAS 8.0	54.9 dB
LAS 25.0	50.4 dB
LAS 50.0	48.7 dB
LAS 90.0	46.8 dB
LAS 99.0	45.8 dB

Measurement Report

Report Summary

Meter's File Name	LxT_Data.171.s	Computer's File Name	LxT_0005424-20260209 144222-LxT_Data.171.ldbin		
Meter	LxT1 0005424	Firmware	2.404		
User	AC	Location	S-3		
Job Description	BEA-13				
Note					
Start Time	2026-02-09 14:42:22	Duration	0:15:00.0	Pause Time	0:00:00.0
End Time	2026-02-09 14:57:22	Run Time	0:15:00.0	Calibration Deviation	---
Pre-Calibration	2026-02-09 14:41:33	Post-Calibration	None		

Results

Overall Metrics

LA _{eq}	53.8 dB		
LAE	83.3 dB	SEA	--- dB
EA	24.0 μPa²h		
EA8	767.6 μPa²h		
EA40	3.8 mPa²h		
LA _{Speak}	94.6 dB	2026-02-09 14:44:10	
LA _{Smax}	69.7 dB	2026-02-09 14:54:33	
LA _{Smin}	42.4 dB	2026-02-09 14:45:12	
LA _{eq}	53.8 dB		
LC _{eq}	63.5 dB	LC _{eq} - LA _{eq}	9.7 dB
LA _{Ieq}	56.5 dB	LA _{Ieq} - LA _{eq}	2.7 dB



Exceedances

	Count	Duration
LAS > 85.0 dB	0	0:00:00.0
LAS > 115.0 dB	0	0:00:00.0
LASpk > 135.0 dB	0	0:00:00.0
LASpk > 137.0 dB	0	0:00:00.0
LASpk > 140.0 dB	0	0:00:00.0

Community Noise

L _{DN}	---	L _{Day}	---	L _{Night}	0.0 dB
L _{DEN}	---	L _{Day}	---	L _{Eve}	---
				L _{Night}	---

Any Data

	A		C		Z	
	Level	Time Stamp	Level	Time Stamp	Level	Time Stamp
L _{eq}	53.8 dB		---		---	
L _{S(max)}	69.7 dB	2026-02-09 14:54:33	---	None	---	None
L _{S(min)}	42.4 dB	2026-02-09 14:45:12	---	None	---	None
L _{Peak(max)}	94.6 dB	2026-02-09 14:44:10	---	None	---	None

Overloads

Count	0
Duration	0:00:00.0

Statistics

LAS 2.0	63.6 dB
LAS 8.0	57.6 dB
LAS 25.0	51.5 dB
LAS 50.0	48.9 dB
LAS 90.0	45.8 dB
LAS 99.0	43.4 dB

Measurement Report

Report Summary

Meter's File Name	LxT_Data.169.s	Computer's File Name	LxT_0005424-20260209 140540-LxT_Data.169.lddin		
Meter	LxT1 0005424	Firmware	2.404		
User	AC	Location	ST-4		
Job Description	BEA-13				
Note					
Start Time	2026-02-09 14:05:40	Duration	0:15:00.0		
End Time	2026-02-09 14:20:40	Run Time	0:15:00.0	Pause Time	0:00:00.0
Pre-Calibration	2026-02-09 14:05:11	Post-Calibration	None	Calibration Deviation	---

Results

Overall Metrics

LA _{eq}	61.0 dB		
LAE	90.5 dB	SEA	--- dB
EA	125.9 μPa²h		
EA8	4.0 mPa²h		
EA40	20.1 mPa²h		
LA _{Speak}	99.9 dB	2026-02-09 14:08:55	
LA _{Smax}	77.6 dB	2026-02-09 14:15:16	
LA _{Smin}	46.4 dB	2026-02-09 14:07:57	
LA _{eq}	61.0 dB		
LC _{eq}	65.3 dB	LC _{eq} - LA _{eq}	4.3 dB
LA _{Ieq}	65.8 dB	LA _{Ieq} - LA _{eq}	4.8 dB



Exceedances

	Count	Duration
LAS > 85.0 dB	0	0:00:00.0
LAS > 115.0 dB	0	0:00:00.0
LASpk > 135.0 dB	0	0:00:00.0
LASpk > 137.0 dB	0	0:00:00.0
LASpk > 140.0 dB	0	0:00:00.0

Community Noise

L _{DN}	---	L _{Day}	---	L _{Night}	0.0 dB
L _{DEN}	---	L _{Day}	---	L _{Eve}	---
				L _{Night}	---

Any Data

	A		C		Z	
	Level	Time Stamp	Level	Time Stamp	Level	Time Stamp
L _{eq}	61.0 dB		---		---	
L _{S(max)}	77.6 dB	2026-02-09 14:15:16	---	None	---	None
L _{S(min)}	46.4 dB	2026-02-09 14:07:57	---	None	---	None
L _{Peak(max)}	99.9 dB	2026-02-09 14:08:55	---	None	---	None

Overloads

Count	0
Duration	0:00:00.0

Statistics

LAS 2.0	69.8 dB
LAS 8.0	64.9 dB
LAS 25.0	59.2 dB
LAS 50.0	54.5 dB
LAS 90.0	49.2 dB
LAS 99.0	47.5 dB

Search Locations

Log In (/login)

Ad Free



Popular Cities

San Francisco, CA 63 °F Partly Cloudy (/weather/us/ca/san-francisco/37.78,-122.42)

Manhattan, NY 49 °F Partly Cloudy (/weather/us/ny/manhatta)

Elev 2703 ft, 33.95 °N, 116.95 °W

Sundance - KCABEAUM34

FORECAST FOR BEAUMONT, CA(/WEATHER/US/CA/BEAUMONT/KCABEAUM34)

We're building a brand-new Weather Underground(<https://preview.wunderground.com/>)— be among the first to check it out!



Station Summary


Online(updated 16 seconds ago)

CURRENT CONDITIONS

MAP



86.5



WIND & GUST
1.3 / 2.2 mph

Feels Like
83.4 °

DEWPOINT
43.3 ° F


PRECIP RATE
0.00 in/hr

PRESSURE
29.82 in

HUMIDITY
22 %

PRECIP ACCUM
0.00 in

UV
4

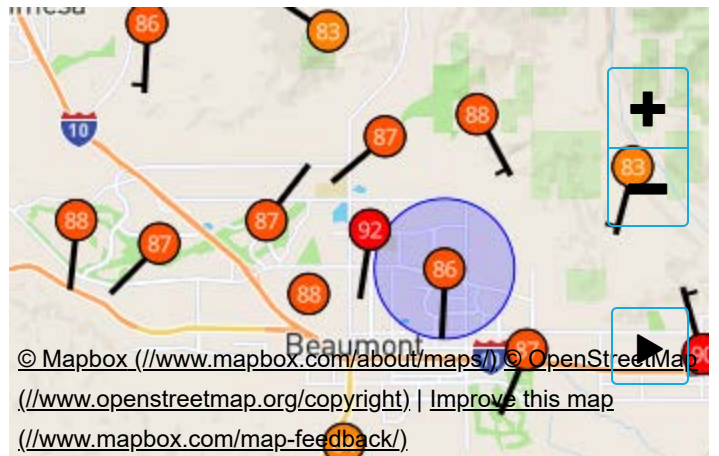

<https://www.mapbox.com/about/maps/> | <https://www.openstreetmap.org/copyright/> | [Improve this map](https://www.mapbox.com/map-feedback/)

PWS CURRENT CONDITIONS

TEMPERATURE



WIND



PRESSURE



CURRENT
87°

DEWPOINT
43.3 °F

HUMIDITY
22 %



WIND FROM
SSE
GUST
2.2 mph



CURRENT
29.82 In

PRECIPITATION



UV



SOLAR RADIATION




PRECIP RATE
0.00 in/hr

PRECIP TOTAL
0.00 in



CURRENT UV
4
UV RISK



CURRENT
432.00 watts/m²

Weather History for KCABEAUM34

Daily Mode

February

9

2026

Previous

View

Next

Summary


February 9, 2026


	High	Low	Average
Temperature	78.3 °F	48.6 °F	61.5 °F
Dew Point	44.4 °F	29.5 °F	36.3 °F
Humidity	61 %	24 %	41 %
Precipitation	0.00 in	--	--

	High	Low	Average
Wind Speed	5.4 mph	0.0 mph	0.1 mph
Wind Gust	6.9 mph	--	0.2 mph
Wind Direction	--	--	SSW
Pressure	30.00 in	29.81 in	--

Graph Table

February 9, 2026

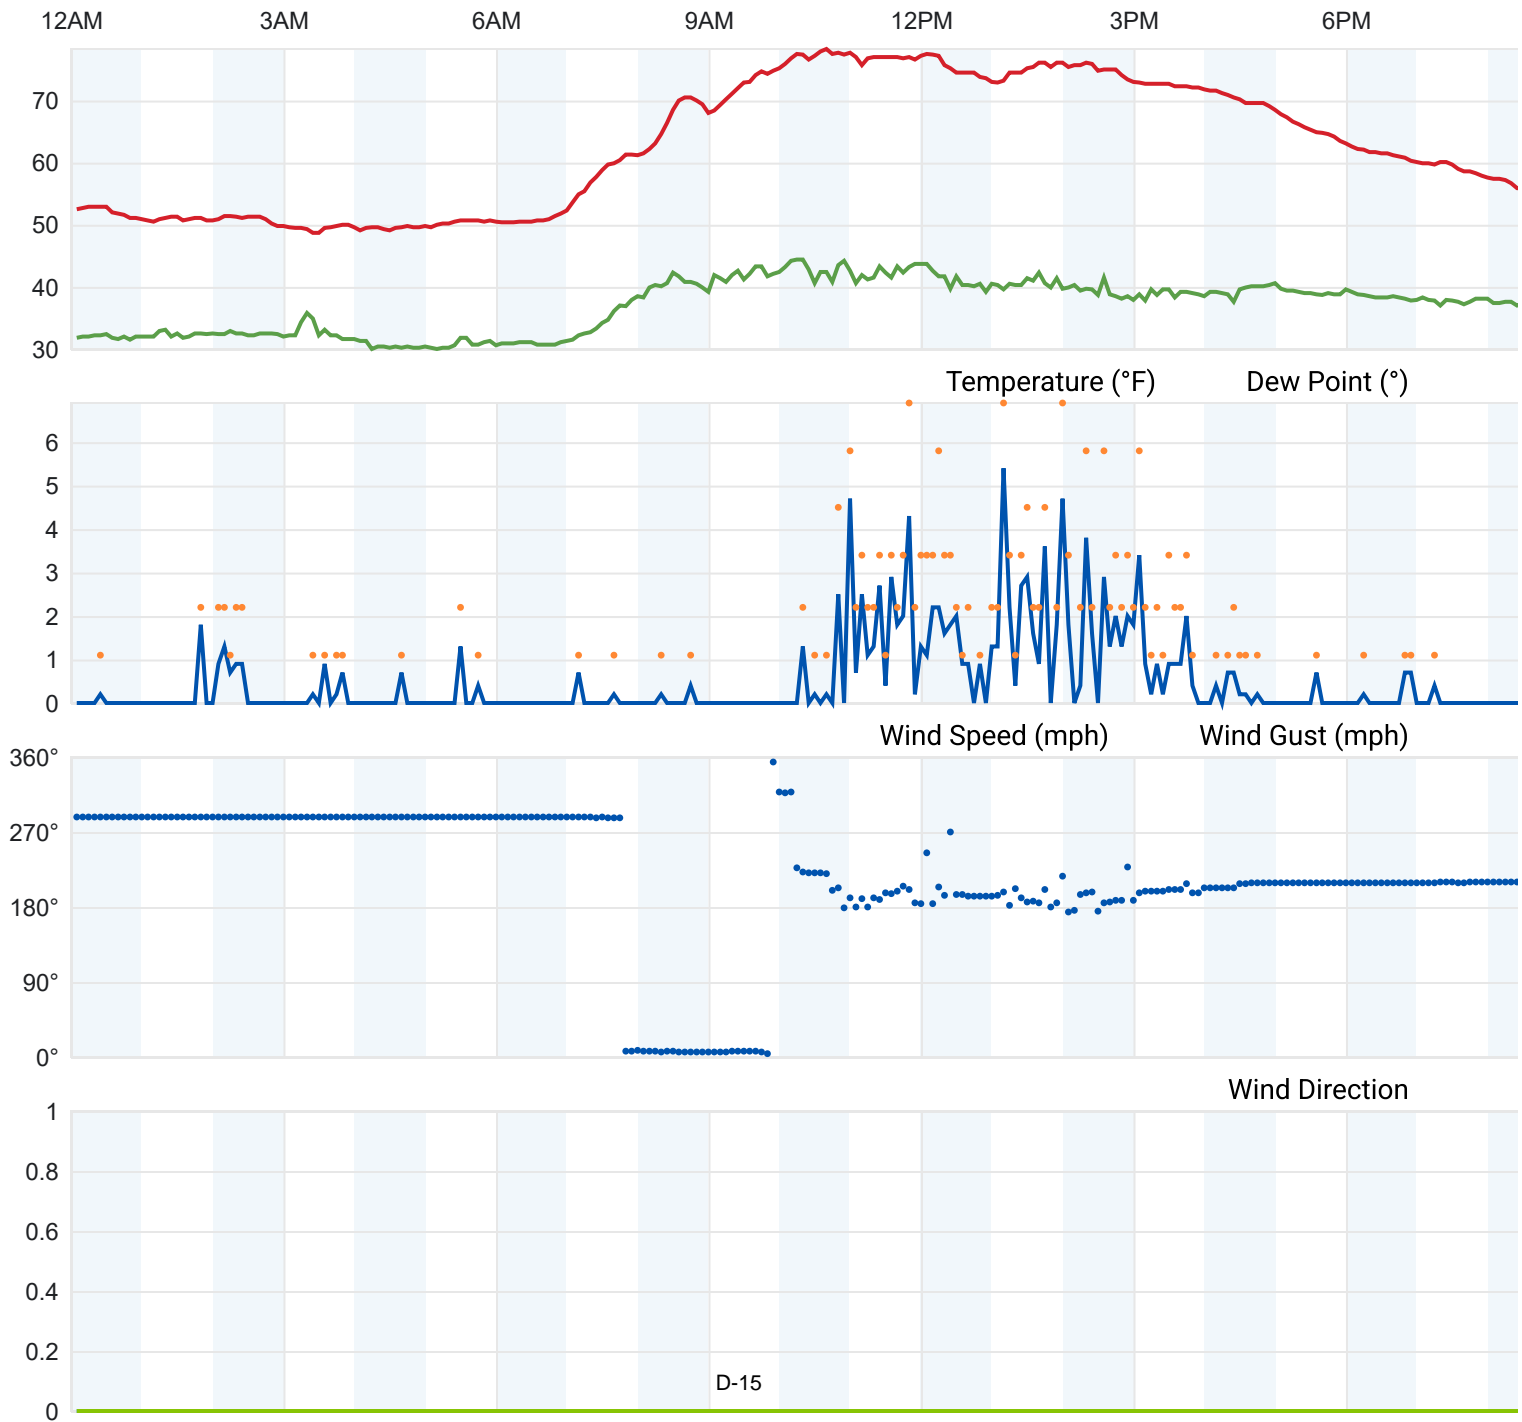

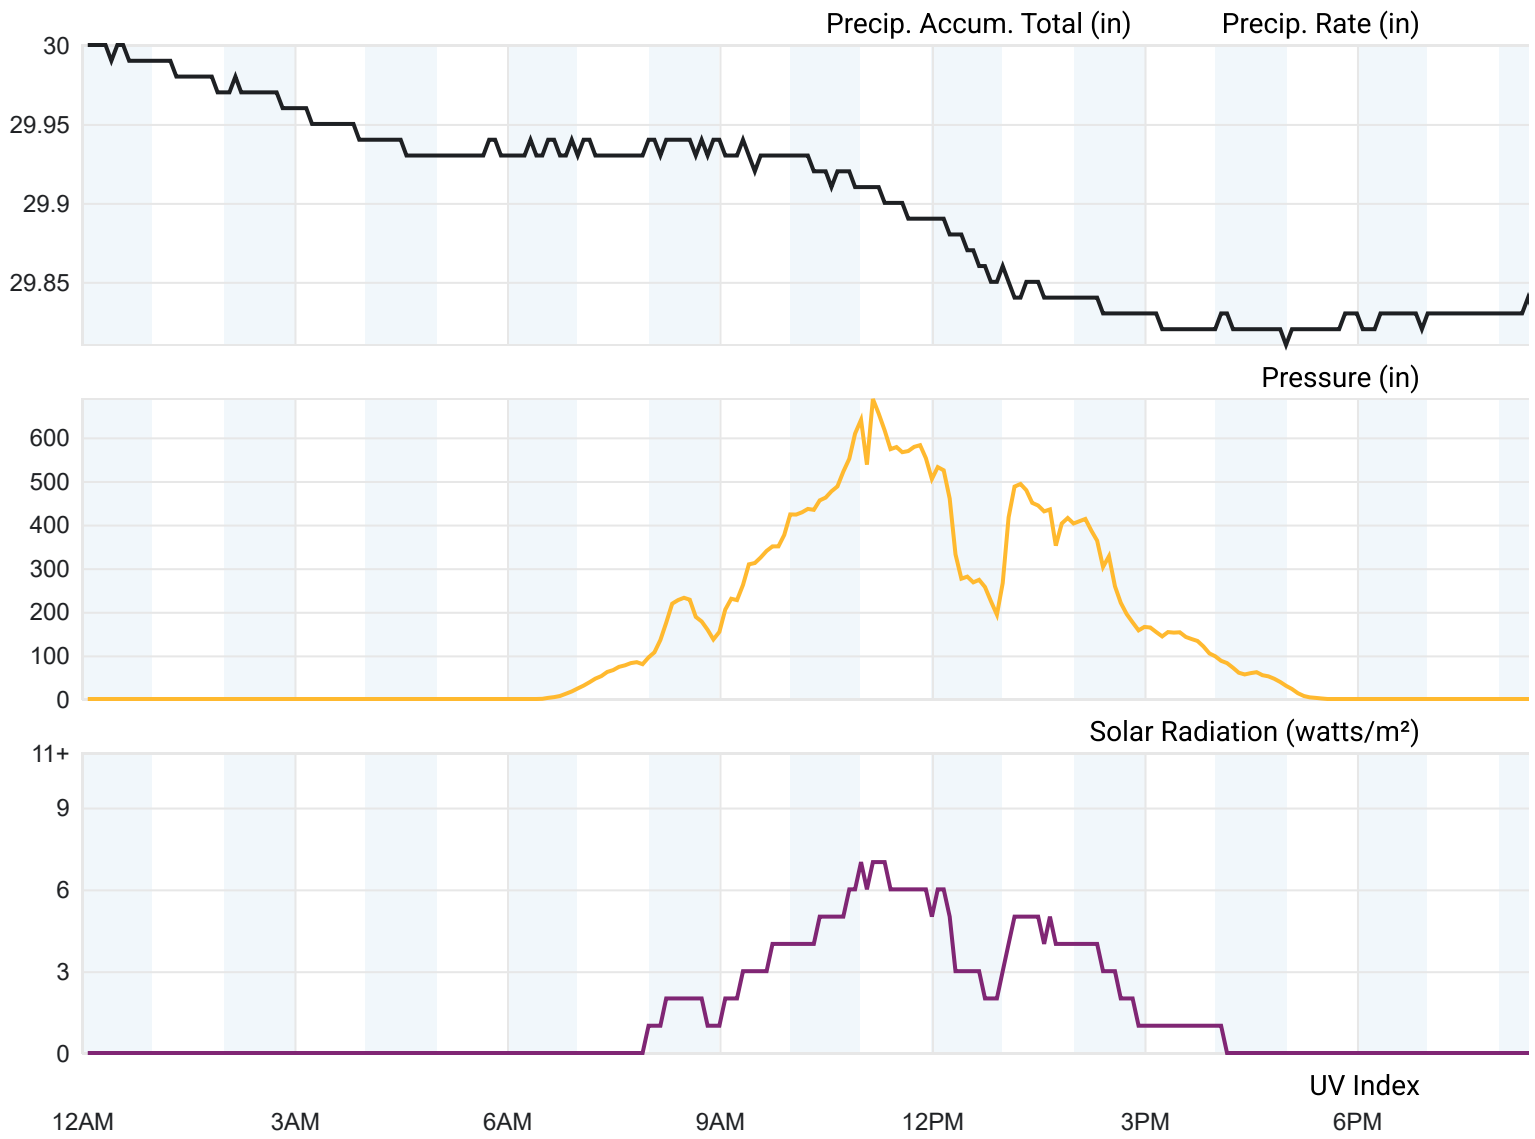

[Our Apps \(/download\)](#)

[About Us \(/about/our-company\)](#)

[Contact \(/about/contact-us\)](#)

[Careers \(https://www.weathercompany.com/careers\)](https://www.weathercompany.com/careers)

[Weather Data APIs \(https://www.weathercompany.com/weather-data-apis/\)](https://www.weathercompany.com/weather-data-apis/)

[PWS Network \(/pws/overview\)](#)

[WunderMap \(/wundermap\)](#)

[Feedback & Support \(https://www.wunderground.com/feedback\)](https://www.wunderground.com/feedback)

[Terms of Use \(/company/legal\)](#)

[Privacy Policy \(/company/privacy-policy\)](#)

C O N S T R U C T I O N M O D E L I N G R E S U L T S

Roadway Construction Noise Model (RCNM), Version 1.1

Report date 3/12/2026

Case Descr BEA-13 Demolition

---- Receptor #1 ----

		Baselines (dBA)		
Descriptor	Land Use	Daytime	Evening	Night
Receptor at	Residential	65	60	55

		Equipment				
Description	Impact Device	Usage(%)	Spec	Actual	Receptor	Estimated
			Lmax (dBA)	Lmax (dBA)	Distance (feet)	Shielding (dBA)
Dozer	No	40		81.7	50	0
Excavator	No	40		80.7	50	0
Concrete Saw	No	20		89.6	50	0

		Results													
		Calculated (dBA)		Noise Limits (dBA)				Noise Limit Exceedance (dBA)							
				Day		Evening		Night		Day		Evening		Night	
Equipment		*Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq
Dozer		81.7	77.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Excavator		80.7	76.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Concrete Saw		89.6	82.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Total		89.6	84.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

*Calculated Lmax is the Loudest value.

Roadway Construction Noise Model (RCNM), Version 1.1

Report date 3/12/2026

Case Descr BEA-13 Site Preparation

---- Receptor #1 ----

		Baselines (dBA)		
Descriptor	Land Use	Daytime	Evening	Night
Receptor at	Residential	65	60	55

		Equipment				
Description	Impact Device	Usage(%)	Spec	Actual	Receptor	Estimated
			Lmax (dBA)	Lmax (dBA)	Distance (feet)	Shielding (dBA)
Crane	No	16		80.6	50	0
Tractor	No	40	84		50	0

		Results													
		Calculated (dBA)		Noise Limits (dBA)				Noise Limit Exceedance (dBA)							
				Day		Evening		Night		Day		Evening		Night	
Equipment		*Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq
Crane		80.6	72.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Tractor		84	80	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Total	84	80.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

*Calculated Lmax is the Loudest value.

Roadway Construction Noise Model (RCNM), Version 1.1

Report date 3/12/2026

Case Descr BEA-12 Grading

---- Receptor #1 ----

		Baselines (dBA)		
Descriptor	Land Use	Daytime	Evening	Night
Receptor at	Residential	65	60	55

		Equipment				
Description	Impact Device	Usage(%)	Spec	Actual	Receptor	Estimated
			Lmax (dBA)	Lmax (dBA)	Distance (feet)	Shielding (dBA)
Excavator	No	40		80.7	50	0
Grader	No	40	85		50	0
Scraper	No	40		83.6	50	0

		Results													
		Calculated (dBA)		Noise Limits (dBA)						Noise Limit Exceedance (dBA)					
				Day		Evening		Night		Day		Evening		Night	
Equipment	*Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	
Excavator	80.7	76.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Grader	85	81	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Scraper	83.6	79.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Total	85	84.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

*Calculated Lmax is the Loudest value.

Roadway Construction Noise Model (RCNM), Version 1.1

Report date 3/12/2026

Case Descr BEA-13 Building Construction

---- Receptor #1 ----

Baselines (dBA)

Descriptor	Land Use	Daytime	Evening	Night
Receptor at Residential		65	60	55

Equipment

Description	Impact Device	Usage(%)	Spec	Actual	Receptor	Estimated
			Lmax (dBA)	Lmax (dBA)	Distance (feet)	Shielding (dBA)
Crane	No	16		80.6	50	0
Generator	No	50		80.6	50	0
Tractor	No	40	84		50	0

Results

Equipment	Calculated (dBA)		Noise Limits (dBA)						Noise Limit Exceedance (dBA)					
	*Lmax	Leq	Day		Evening		Night		Day		Evening		Night	
			Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq
Crane	80.6	72.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Generator	80.6	77.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Tractor	84	80	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Total	84	82.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

*Calculated Lmax is the Loudest value.

Roadway Construction Noise Model (RCNM), Version 1.1

Report date 3/12/2026

Case Descr BEA-13 Paving

---- Receptor #1 ----

		Baselines (dBA)		
Descriptor	Land Use	Daytime	Evening	Night
Receptor at	Residential	65	60	55

		Equipment				
Description	Impact Device	Usage(%)	Spec	Actual	Receptor	Estimated
			Lmax (dBA)	Lmax (dBA)	Distance (feet)	Shielding (dBA)
Paver	No	50		77.2	50	0
Roller	No	20		80	50	0
Paver	No	50		77.2	50	0

		Results													
		Calculated (dBA)		Noise Limits (dBA)				Noise Limit Exceedance (dBA)							
				Day		Evening		Night		Day		Evening		Night	
Equipment		*Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq
Paver		77.2	74.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Roller		80	73	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Paver		77.2	74.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Total	80	78.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

*Calculated Lmax is the Loudest value.

Roadway Construction Noise Model (RCNM), Version 1.1

Report date 3/12/2026

Case Descr BEA-13 Architectural Coating

---- Receptor #1 ----

		Baselines (dBA)		
Descriptor	Land Use	Daytime	Evening	Night
Receptor at	Residential	65	60	55

		Equipment				
Description	Impact Device	Usage(%)	Spec	Actual	Receptor	Estimated
			Lmax (dBA)	Lmax (dBA)	Distance (feet)	Shielding (dBA)
Compressor (air)	No	40		77.7	50	0

		Results													
		Calculated (dBA)		Noise Limits (dBA)				Noise Limit Exceedance (dBA)							
				Day		Evening		Night		Day		Evening		Night	
Equipment		*Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq	Lmax	Leq
Compressor (air)		77.7	73.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Total		77.7	73.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

*Calculated Lmax is the Loudest value.

BEA-13- Construction Noise Modeling Attenuation Calculations

Phase	Levels in dBA Leq				
	RCNM Reference Noise		Receptor to North ¹	Receptor to West	Receptor to East ¹
	Level	Distance in feet			
	50	515	690	90	
Demolition	85	59	62	74	
	50	685	500	220	
Building Construction	83	55	63	65	
Architectural Coating	74	46	55	56	
	50	700	500	320	
Site Preparation	81	53	61	60	
Grading	84	56	64	63	
	50	340	300	110	
Asphalt Paving	79	57	63	67	

Attenuation calculated through Inverse Square Law: $L_p(R2) = L_p(R1) - 20\text{Log}(R2/R1)$

¹ Assumes -5 dBA assumed for existing 8 foot residential noise walls

BEA-13 - Vibration Damage Attenuation Calculations				
Levels, PPV (in/sec)				
	Vibration Reference Level	Receptor to North	Receptor to East	Receptor to West
<i>Distance in feet</i>	<i>at 25 feet</i>	<i>250</i>	<i>85</i>	<i>210</i>
Large Bulldozer	0.089	0.003	0.014	0.004
Caisson Drilling	0.089	0.003	0.014	0.004
Loaded Trucks	0.076	0.002	0.012	0.003
Jackhammer	0.035	0.001	0.006	0.001
Small Bulldozer	0.003	0.000	0.000	0.000
Vibratory Roller	0.21	0.007	0.033	0.009

T R A F F I C M O D E L I N G R E S U L T S

Traffic Noise Calculator: FHWA 77-108																							
Anna M Hause Elementary School (BEA-13.0) Existing 2025 no Project Traffic Noise Traffic Conditions																							
ID	Output						Inputs														Auto Inputs		
	dBA at 50 feet			Distance to CNEL Contour			Roadway	Segment From - To	ADT	Posted Speed Limit	Grade	% Autos	% Med Trucks	% Heavy Trucks	% Daytime	% Evening	% Night	Number of Lanes	Site Condition	Distance to Receiver	Ground Absorption	Lane Distance	
	L _{eq,24hr}	L _{dn}	CNEL	70 dBA	65 dBA	60 dBA																	
1	54.6	57.3	58.0	8	17	37	Carnation Lane	Snapdragon Way	Driveway 1	3,020	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
2	53.8	56.6	57.3	7	15	33	Carnation Lane	Driveway 1	Driveway 2	2,560	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
3	54.1	56.9	57.6	7	16	35	Carnation Lane	Driveway 2	Driveway 3	2,740	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
4	55.4	58.2	58.9	9	20	42	Carnation Lane	Driveway 3	Xenia Avenue	3,660	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
5	55.2	58.0	58.7	9	19	41	Carnation Lane	Xenia Avenue	to the West	3,510	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
6	51.9	54.7	55.4	5	11	25	Snapdragon Way	Carnation Lane	Starlight Avenue	1,650	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
7	58.0	60.8	61.5	14	29	63	Starlight Avenue	Snapdragon Way	Tiger Flower Drive	3,300	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
8	59.1	61.9	62.6	16	35	74	Starlight Avenue	Tiger Flower Drive	E Oak Valley Parkway	4,260	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
9	60.2	63.0	63.7	19	41	88	Starlight Avenue	E Oak Valley Parkway	to the North	5,470	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
10	57.8	60.6	61.3	13	28	61	Starlight Avenue	Snapdragon Way	Xenia Avenue	3,310	35	0.0%	98.1%	0.0%	1.9%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
11	61.1	63.9	64.6	22	47	101	Xenia Avenue	Carnation Lane	to the East	5,240	35	0.0%	96.2%	0.0%	3.8%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44

Traffic Noise Calculator: FHWA 77-108																							
Anna M Hause Elementary School (BEA-13.0) Existing 2026 With Project Traffic Noise Traffic Conditions																							
ID	Output						Inputs														Auto Inputs		
	dBA at 50 feet			Distance to CNEL Contour			Roadway	Segment From - To	ADT	Posted Speed Limit	Grade	% Autos	% Med Trucks	% Heavy Trucks	% Daytime	% Evening	% Night	Number of Lanes	Site Condition	Distance to Receiver	Ground Absorption	Lane Distance	
L _{eq,24hr}	L _{dn}	CNEL	70 dBA	65 dBA	60 dBA																		
1	55.4	58.2	58.8	9	19	42	Carnation Lane	Snapdragon Way	Driveway 1	3,640	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
2	53.8	56.6	57.3	7	15	33	Carnation Lane	Driveway 1	Driveway 2	2,560	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
3	54.1	56.9	57.6	7	16	35	Carnation Lane	Driveway 2	Driveway 3	2,740	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
4	56.2	59.0	59.6	10	22	47	Carnation Lane	Driveway 3	Xenia Avenue	4,380	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
5	56.0	58.8	59.5	10	21	46	Carnation Lane	Xenia Avenue	to the West	4,230	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
6	53.0	55.8	56.5	6	13	29	Snapdragon Way	Carnation Lane	Starlight Avenue	2,100	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
7	58.0	60.8	61.5	14	29	63	Starlight Avenue	Snapdragon Way	Tiger Flower Drive	3,330	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
8	59.4	62.2	62.9	17	36	78	Starlight Avenue	Tiger Flower Drive	E Oak Valley Parkway	4,580	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
9	60.3	63.1	63.8	19	42	90	Starlight Avenue	E Oak Valley Parkway	to the North	5,630	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
10	57.9	60.7	61.4	13	29	62	Starlight Avenue	Snapdragon Way	Xenia Avenue	3,410	35	0.0%	98.1%	0.0%	1.9%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
11	61.6	64.4	65.1	23	51	109	Xenia Avenue	Carnation Lane	to the East	5,840	35	0.0%	96.2%	0.0%	3.8%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44

Traffic Noise Calculator: FHWA 77-108																							Anna M Hause Elementary School (BEA-13.0) Opening Year 2028 no Project Traffic Noise Traffic Conditions																						
ID	Output						Inputs															Auto Inputs																							
	dBA at 50 feet			Distance to CNEL Contour			Roadway	Segment From - To	ADT	Posted Speed Limit	Grade	% Autos	% Med Trucks	% Heavy Trucks	% Daytime	% Evening	% Night	Number of Lanes	Site Condition	Distance to Receiver	Ground Absorption	Lane Distance																							
L _{eq,24hr}	L _{dn}	CNEL	70 dBA	65 dBA	60 dBA																																								
1	54.6	57.4	58.1	8	17	37	Carnation Lane	Snapdragon Way	Driveway 1	3,080	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20																						
2	53.9	56.7	57.4	7	16	34	Carnation Lane	Driveway 1	Driveway 2	2,610	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20																						
3	54.2	57.0	57.7	8	16	35	Carnation Lane	Driveway 2	Driveway 3	2,790	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20																						
4	55.5	58.3	59.0	9	20	43	Carnation Lane	Driveway 3	Xenia Avenue	3,740	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20																						
5	55.3	58.1	58.8	9	19	41	Carnation Lane	Xenia Avenue	to the West	3,580	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20																						
6	52.0	54.8	55.5	5	12	25	Snapdragon Way	Carnation Lane	Starlight Avenue	1,680	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20																						
7	58.1	60.9	61.6	14	30	64	Starlight Avenue	Snapdragon Way	Tiger Flower Drive	3,370	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44																						
8	59.2	62.0	62.7	16	35	75	Starlight Avenue	Tiger Flower Drive	E Oak Valley Parkway	4,340	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44																						
9	60.3	63.1	63.8	19	41	89	Starlight Avenue	E Oak Valley Parkway	to the North	5,580	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44																						
10	57.9	60.7	61.3	13	28	61	Starlight Avenue	Snapdragon Way	Xenia Avenue	3,370	35	0.0%	98.1%	0.0%	1.9%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44																						
11	61.2	64.0	64.7	22	48	103	Xenia Avenue	Carnation Lane	to the East	5,350	35	0.0%	96.2%	0.0%	3.8%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44																						

Traffic Noise Calculator: FHWA 77-108																							
Anna M Hause Elementary School (BEA-13.0) Opening Year 2028 Plus Project Traffic Noise Traffic Conditions																							
ID	Output						Inputs														Auto Inputs		
	dBA at 50 feet			Distance to CNEL Contour			Roadway	Segment From - To	ADT	Posted Speed Limit	Grade	% Autos	% Med Trucks	% Heavy Trucks	% Daytime	% Evening	% Night	Number of Lanes	Site Condition	Distance to Receiver	Ground Absorption	Lane Distance	
L _{eq,24hr}	L _{dn}	CNEL	70 dBA	65 dBA	60 dBA																		
1	55.4	58.2	58.9	9	20	42	Carnation Lane	Snapdragon Way	Driveway 1	3,690	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
2	53.9	56.7	57.4	7	16	34	Carnation Lane	Driveway 1	Driveway 2	2,610	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
3	54.2	57.0	57.7	8	16	35	Carnation Lane	Driveway 2	Driveway 3	2,790	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
4	56.3	59.1	59.7	10	22	48	Carnation Lane	Driveway 3	Xenia Avenue	4,470	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
5	56.1	58.9	59.6	10	22	47	Carnation Lane	Xenia Avenue	to the West	4,320	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
6	53.1	55.9	56.5	6	14	29	Snapdragon Way	Carnation Lane	Starlight Avenue	2,140	25	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	2	Soft	50	0.5	20
7	58.1	60.9	61.6	14	30	64	Starlight Avenue	Snapdragon Way	Tiger Flower Drive	3,400	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
8	59.5	62.3	63.0	17	37	79	Starlight Avenue	Tiger Flower Drive	E Oak Valley Parkway	4,670	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
9	60.4	63.2	63.9	20	42	91	Starlight Avenue	E Oak Valley Parkway	to the North	5,740	35	0.0%	96.0%	2.5%	1.5%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
10	58.2	61.0	61.6	14	30	64	Starlight Avenue	Snapdragon Way	Xenia Avenue	3,610	35	0.0%	98.1%	0.0%	1.9%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44
11	61.7	64.5	65.2	24	51	110	Xenia Avenue	Carnation Lane	to the East	5,960	35	0.0%	96.2%	0.0%	3.8%	75.0%	15.0%	10.0%	4	Soft	50	0.5	44