Draft
Environmental Impact Report

SCH# 2023110442

Volume 2

Appendix A

IPG INDUSTRIAL PROJECT

by IPG Kern County Holdings 52, LLC

(PP23405)

Precise Development Plan No. 72, Map No. 102
Zone Variance No. 57, Map No. 102

Kern County
Planning and Natural Resources Department
Bakersfield, CA

March 2025

This page intentionally left blank.

Draft
Environmental Impact Report

SCH# 2023110442

Volume 2

Appendix A

IPG INDUSTRIAL PROJECT

by IPG Kern County 52 Holdings, LLC

(PP23405)

Precise Development Plan No. 72, Map No. 102
Zone Variance No. 57, Map No. 102

Kern County
Planning and Natural Resources Department
Bakersfield, CA

Technical Assistance by:

WSP USA, Inc.

March 2025

This page intentionally left blank.

Appendices - Volume 2

NOTE TO REVIEWER OF ELECTRONIC FILES:

To assist you in reviewing this electronic document, "bookmarks" and/or "links" have been provided for easier navigation between sections. When available, bookmarks are located in the panel to the left. Links are highlighted in **BLUE** in the Table of Contents. Clicking on either the bookmarks or links will take you to the selected item. This document may consist of multiple linked PDF files. If saving this document to your computer, you must save all corresponding files to a directory on your hard drive to maintain the manner in which these PDF documents are linked.

Appendix A: Notice of Preparation and Public Review

This page intentionally left blank.

Appendix A

Notice of Preparation and Public Review

Lorelei H. Oviatt, AICP, Director
2700 "M" Street, Suite 100
Bakersfield, CA 93301-2323
Phone: (661) 862-8600
Fax: (661) 862-8601 **TTY Relay 1-800-735-2929**
Email: planning@kerncounty.com
Web Address: http://kernplanning.com/

PLANNING AND NATURAL RESOURCES DEPARTMENT

Planning
Community Development
Administrative Operations

DATE: November 16, 2023

TO: See Attached Mailing List

FROM: Kern County Planning and Natural Resources Department
Attn: Alexis Brito
2700 "M" Street, Suite 100
Bakersfield, CA 93301
(661) 862-5029; BritoAL@kerncounty.com

SUBJECT: NOTICE OF PREPARATION (NOP) OF A DRAFT ENVIRONMENTAL IMPACT REPORT (EIR) FOR THE IPG INDUSTRIAL PROJECT BY IPG KERN COUNTY 52 HOLDINGS, LLC.

The Kern County Planning and Natural Resources Department as Lead Agency (per CEQA Guidelines Section 15062) has determined that preparation of an Environmental Impact Report (per CEQA Guidelines 15161) is necessary for the proposed project identified below. The Planning and Natural Resources Department solicits the views of your agency as to the scope and content of the environmental information which is germane to your agency's statutory responsibilities in connection with the proposed project. Your agency may need to use the EIR prepared by our agency when considering your permit or other approval of the project.

You are invited to view the NOP and submit written comments regarding the scope and content of the environmental information in connection with the proposed project should you wish to do so. Due to the limits mandated by State law, your response must be received by **December 18, 2023 at 5:00 p.m**. Comments can be submitted to the Kern County Planning and Natural Resources Department at the address shown above or to britoal@kerncounty.com. A Scoping Meeting will be held on **December 6, 2023 at 1:30 p.m.**, at the address listed above.

PROJECT TITLE: IPG Industrial Project by IPG Kern County 52 Holdings, LLC (PP23405); PD Plan 72, Map 102; ZV 57, Map 102

PROJECT LOCATION: The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the project site, and the unincorporated community of Oildale is directly bordering the east side of the project site. The project site is situated approximately 1.4 miles northeast of State Route (SR) 99. The project site is located on the *Oildale, California* United States Geological Survey (USGS) 7.5-minute Topographic Quadrangle Map, Township 29 South, Range 27 East, Section 2.

PROJECT DESCRIPTION:

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Documents can be viewed online at: https://kernplanning.com/planning/notices-of-preparation/

Signature:
Name: Alexis Brito, Planner I

I:\Planning\WORKGRPS\WP\LABELS\IPG Kern County Holdings LLC .docx
IPG Kern County Holdings LLC PD 72, ZV 57, Map 102
cc: 11/07/2023

City of Arvin
P.O. Box 548
Arvin, CA 93203

Bakersfield City Planning Dept
1715 Chester Avenue
Bakersfield, CA 93301

Bakersfield City Public Works Dept
1501 Truxtun Avenue
Bakersfield, CA 93301

California City Planning Dept
21000 Hacienda Blvd.
California City, CA 93515

Delano City Planning Dept
P.O. Box 3010
Delano, CA 93216

City of Maricopa
P.O. Box 548
Maricopa, CA 93252

City of McFarland
401 West Kern Avenue
McFarland, CA 93250

City of Ridgecrest
100 West California Avenue
Ridgecrest, CA 93555

City of Shafter
336 Pacific Avenue
Shafter, CA 93263

City of Taft
Planning & Building
209 East Kern Street
Taft, CA 93268

City of Tehachapi
Attn: John Schlosser
115 South Robinson Street
Tehachapi, CA 93561-1722

City of Wasco
764 E Street
Wasco, CA 93280

Inyo County Planning Dept
P.O. Drawer "L"
Independence, CA 93526

Kings County Planning Agency
1400 West Lacey Blvd, Bldg 6
Hanford, CA 93230

Los Angeles Co Reg Planning Dept
320 West Temple Street
Los Angeles, CA 90012

San Bernardino Co Planning Dept
385 North Arrowhead Avenue, 1st Floor
San Bernardino, CA 92415-0182

San Luis Obispo Co Planning Dept
Planning and Building
976 Osos Street
San Luis Obispo, CA 93408

Santa Barbara Co Resource Mgt Dept
123 East Anapamu Street
Santa Barbara, CA 93101

Tulare County Planning & Dev Dept
5961 South Mooney Boulevard
Visalia, CA 93291

Ventura County RMA Planning Div
800 South Victoria Avenue, L1740
Ventura, CA 93009-1740

U.S. Bureau of Land Management
Caliente/Bakersfield
35126 McMurtrey Avenue
Bakersfield, CA 93308

Federal Aviation Administration
Western Reg Office/
777 South Aviation Boulevard
Suite 150
El Segundo, CA 90245

Federal Communications Comm
18000 Studebaker Road, #660
Cerritos, CA 90701

U. S. Fish & Wildlife Service
Division of Ecological Services
2800 Cottage Way #W-2605
Sacramento, CA 95825-1846

U.S. Dept of Agriculture/NRCS
5080 California Avenue, Ste 150
Bakersfield, CA 93309-0711

U.S. Army Corps of Engineers
Regulatory Division
1325 "J" Street, #1350
Sacramento, CA 95814-2920

State Air Resources Board
Stationary Resource Division
P.O. Box 2815
Sacramento, CA 95812

So. San Joaquin Valley Arch Info Ctr
California State University of Bkfd
9001 Stockdale Highway
Bakersfield, CA 93311

Caltrans/Dist 6
Planning/Land Bank Bldg.
P.O. Box 12616
Fresno, CA 93778

Caltrans/
Division of Aeronautics, MS #40
P.O. Box 942873
Sacramento, CA 94273-0001

State Dept of Conservation
Director's Office
801 "K" Street, MS 24-01
Sacramento, CA 95814-3528

State Dept of Conservation
Geologic Energy Management Division
11000 River Run Boulevard
Bakersfield, CA 93311

California Energy Commission
James W. Reed, Jr.
1516 Ninth Street Mail Stop 17
Sacramento, CA 95814

California Fish & Wildlife
1234 East Shaw Avenue
Fresno, CA 93710

California Highway Patrol
Planning & Analysis Division
P.O. Box 942898
Sacramento, CA 94298-0001

State Dept of Toxic Substance Control
Environmental Protection Agency
1515 Tollhouse Road
Clovis, CA 93612

Cal Environmental Protection Agency/
Dept of Toxic Substances Control, Reg 1
Attn: Dave Kereazis, Permit Div - CEQA
8800 Cal Center Drive, 2nd Floor
Sacramento, CA 95826

Kern County
Agriculture Department

Kern County Public Works Department/
Building& Development/Development Review

Kern County Airports Department

Kern County Administrative Officer

Kern County Public Works Department/
Building & Development/Floodplain

Kern County Public Works Department/
Building & Development/Survey

Kern County
Env Health Services Department

Kern County Fire Dept
Cary Wright, Fire Marshall

Kern County Library/Beale
Local History Room

Kern County Library/Beale
Andie Sullivan

Kern County Library
Rathbun Branch
200 West China Grade Loop
Bakersfield, CA 93308

Kern County Parks & Recreation

Kern County Sheriff's Dept
Administration

Kern County Public Works
Department/Operations&
Maintenance/Regulatory Monitoring &
Reporting

Kern County Public Works Department/
Building & Development/Code
Compliance

Beardsley School Dist
1001 Roberts Lane
Bakersfield, CA 93308

Standard School Dist
1200 North Chester Avenue
Oildale, CA 93308

Kern High School Dist
5801 Sundale Avenue
Bakersfield, CA 93309

Kern County Superintendent of Schools
Attention School District Facility Services
1300 - 17th Street
Bakersfield, CA 93301

KernCOG
1401 19th Street - Suite 300
Bakersfield, CA 93301

Oildale Mutual Water Co
P.O. Box 5638
Bakersfield, CA 93388

North of the River Muni Water Dist
P.O. Box 5638
Bakersfield, CA 93388-5638

Kern County Water Agency
3200 Rio Mirada Drive
Bakersfield, CA 93308

North Edwards Water Dist
13001 Claymine Road
North Edwards, CA 93523

San Joaquin Valley
Air Pollution Control District
1990 East Gettysburg Avenue
Fresno, CA 93726

Golden Empire Transit
1830 Golden State Avenue
Bakersfield, CA 93301

Kern Mosquito Abatement Dist
4705 Allen Road
Bakersfield, CA 93314

North of the River Rec & Parks Dist
3825 Riverlakes Dr.
Bakersfield, CA 93312

California State University
Bakersfield - Library
9001 Stockdale Highway
Bakersfield, CA 93309

Bakersfield Municipal Airport
4101 Truxtun Avenue
Bakersfield, CA 93309

Adams, Broadwell, Joseph & Cardozo
Attention: Janet M. Laurain
601 Gateway Boulevard, Suite 1000
South San Francisco, CA 94080

Center on Race, Poverty
& the Environment
5901 Christie Avenue, Suit 208
Emeryville, CA 94608

AT&T California
OSP Engineering/Right-of-Way
4901 Ashe Road
Bakersfield, CA 93313

Kern Audubon Society
Attn: Frank Bedard, Chairman
4124 Chardonnay Drive
Bakersfield, CA 93306

Los Angeles Audubon
926 Citrus Avenue
Los Angeles, CA 90036-4929

Verizon California, Inc.
Attention Engineering Department
520 South China Lake Boulevard
Ridgecrest, CA 93555

Center on Race, Poverty
& the Environmental/
CA Rural Legal Assistance Foundation
1012 Jefferson Street
Delano, CA 93215

Defenders of Wildlife/
Kim Delfino, California Dir
980 - 9th Street, Suite 1730
Sacramento, CA 95814

Nature Conservancy West Reg Office
201 Mission Street, 4th Floor
San Francisco, CA 94105

Pacific Gas & Electric Co
Matt Coleman, Land Mgt
1918 "H" Street
Bakersfield, CA 93301-4319

Sierra Club/Kern Kaweah Chapter
P.O. Box 3357
Bakersfield, CA 93385

Southern California Gas Co
35118 McMurtrey Avenue
Bakersfield, CA 93308-9477

Southern California Gas Co
Transportation Dept
9400 Oakdale Avenue
Chatsworth, CA 91313-6511

David Laughing Horse Robinson
P.O. Box 20849
Bakersfield, CA 93390

Kern Valley Indian Council
Attn: Robert Robinson, Chairperson
P.O. Box 401
Weldon, CA 93283

Kern Valley Indian Council
Historic Preservation Office
P.O. Box 401
Weldon, CA 93283

Carol Bender
13340 Smoke Creek Avenue
Bakersfield, CA 93314-9025

Indian Wells Valley Groundwater
Authority
500 West Ridgecrest Boulevard
Ridgecrest, CA 93555

LIUNA
Attn: Danny Zaragoza
2201 "H" Street
Bakersfield, CA 93301

Native American Heritage Council
of Kern County
Attn: Gene Albitre
18169 Highway 155
Woody, CA 93287

Lozeau Drury LLP
1939 Harrison Street, Suite 150
Oakland, CA 94612

A E Corporation
Planning Department
901 Via Piemonte, 5th Floor
Ontario, CA 91764

Kevin Johnston
2476 Buena Vista Avenue
Livermore, CA 94550

Leadership Counsel for Justice &
Accountability
85350 Bagdad Ave.
Coachella, CA 92236

Indian Wells Valley Groundwater Authority
500 West Ridgecrest Boulevard
Ridgecrest, CA 93555

Kern River Groundwater
Sustainability Agency
1600 Truxton Avenue
Bakersfield, CA 93301

Lorelei H. Oviatt, AICP, Director
2700 "M" Street, Suite 100
Bakersfield, CA 93301-2323
Phone: (661) 862-8600
Fax: (661) 862-8601 **TTY Relay 1-800-735-2929**
Email: planning@kerncounty.com
Web Address: http://kernplanning.com/

PLANNING AND NATURAL RESOURCES DEPARTMENT

Planning
Community Development
Administrative Operations

DATE: November 16, 2023

TO: Surrounding Property Owners within 1,000 Feet of Project Boundary; and Interested Parties

FROM: Kern County Planning and Natural Resources Department
2700 "M" Street, Suite 100
Bakersfield, CA 93311

SUBJECT: Notice of Preparation of an Environmental Impact Report – IPG Industrial Project by IPG Kern County 52 Holdings, LLC. (PP23405).

Dear Sir or Madam:

The Kern County Planning and Natural Resources Department has determined that preparation of an Environmental Impact Report (EIR) is necessary for the proposed project identified below. The purpose of this letter is to notify interested parties and surrounding property owners within 1,000 feet of the project boundaries of this determination. A copy of the Initial Study/Notice of Preparation (IS/NOP) prepared for this proposed project is available for viewing at the following Kern County website:

https.//kernplanning.com/planning/notices-of-preparation/

The purpose of the IS/NOP is to describe the proposed project, specify the project location, and to identify the potential environmental impacts of the project so that Responsible Agencies and interested persons can provide a meaningful response related to potential environmental concerns that should be analyzed in the Environmental Impact Report.

You are invited to view the NOP and submit written comments regarding the scope and content of the environmental information in connection with the proposed project should you wish to do so. Due to the limits mandated by State law, your response must be received by **December 18, 2023 at 5:00 p.m**. Comments can be submitted to the Kern County Planning and Natural Resources Department at the address shown above or to britoal@kerncounty.com. A Scoping Meeting will be held on **Wednesday, December 6, 2023 at 1:30 p.m.**, at the address listed above.

Please be advised that any comments received after the dates listed above will still be included in the public record for this project and made available to decision makers when this project is scheduled for consideration at a public hearing. Please also be advised that you will receive an additional notice in the mail once a public hearing date is scheduled for this project. You will also be provided additional opportunities to submit comments at that time.

PROJECT TITLE: IPG Industrial Project by IPG Kern County 52 Holdings, LLC (PP23405); PD Plan 72, Map 102; ZV 57, Map 102

PROJECT LOCATION: The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the

project site, and the unincorporated community of Oildale is directly bordering the east side of the project site. The project site is situated approximately 1.4 miles northeast of State Route (SR) 99. The project site is located on the *Oildale, California* United States Geological Survey (USGS) 7.5-minute Topographic Quadrangle Map, Township 29 South, Range 27 East, Section 2.

PROJECT DESCRIPTION: The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Should you have any questions regarding this project, or the Initial Study/Notice of Preparation, please feel free to me directly by phone at (661) 862-5029 or email BritoAL@kerncounty.com.

Sincerely,

Alexis Brito, Planner I
Planning and Natural Resources Department

Attachments: Figure 1 – Regional Vicinity

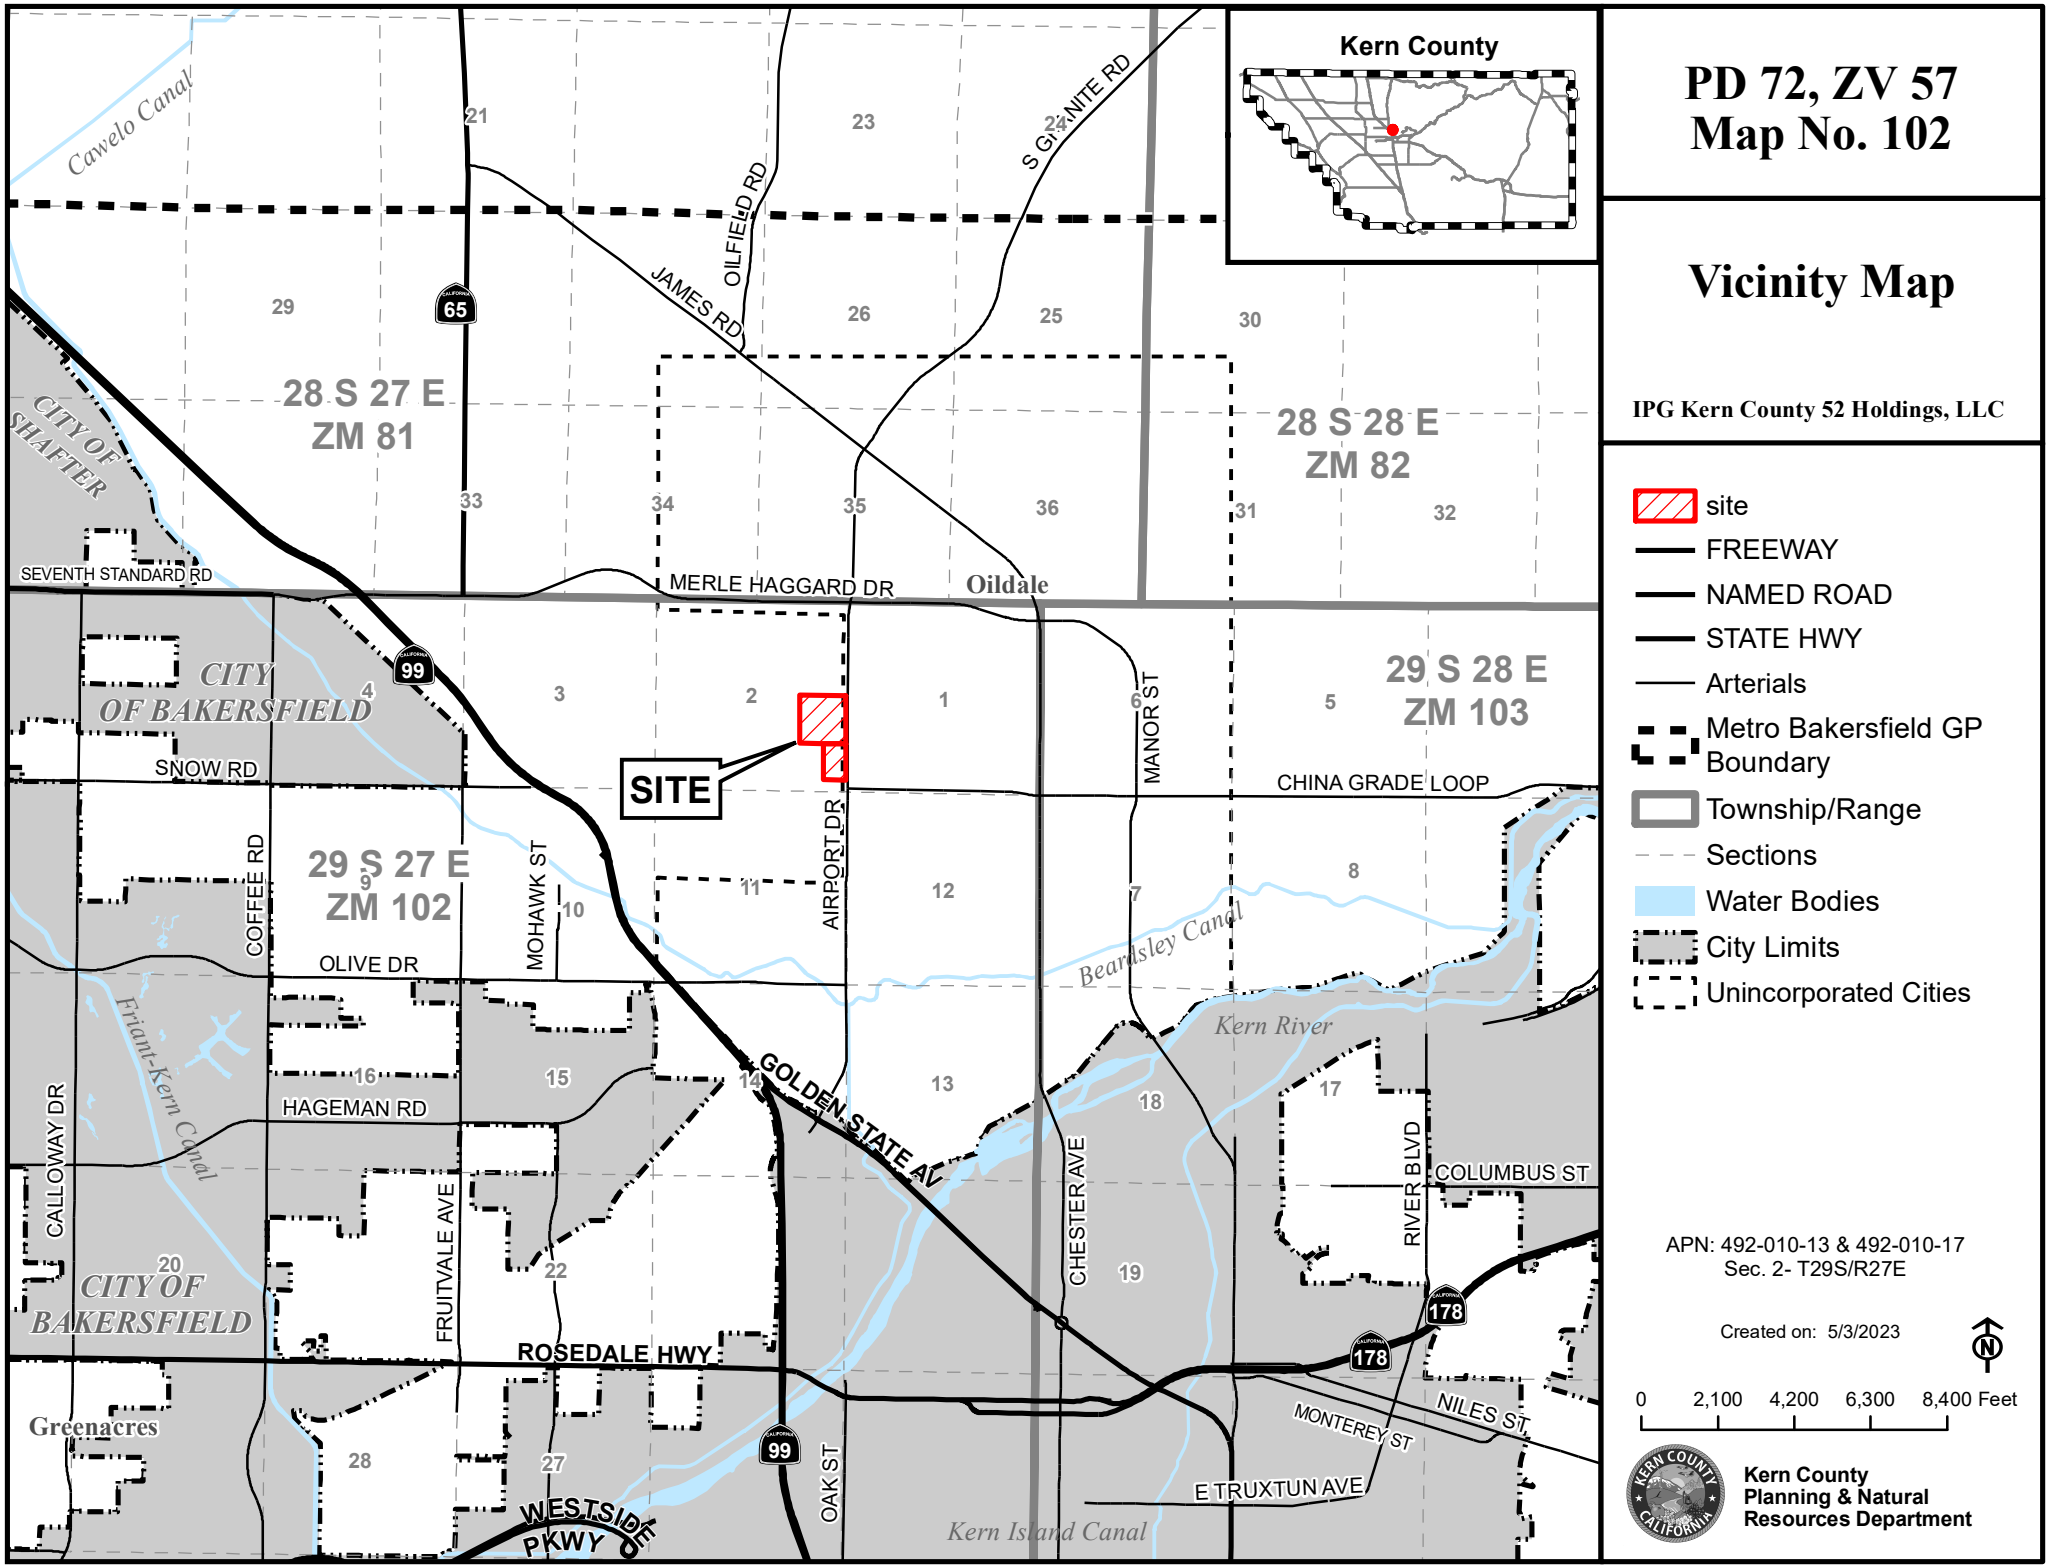
Kern County
SITE
28 S 27 E
ZM 81
28 S 28 E
ZM 82
29 S 28 E
ZM 103
29 S 27 E
ZM 102
CITY OF SHAFTER
CITY OF BAKERSFIELD
CITY OF BAKERSFIELD
Greenacres
Oildale
Cawelo Canal
Friant-Kern Canal
Beardsley Canal
Kern River
Kern Island Canal
SEVENTH STANDARD RD
MERLE HAGGARD DR
SNOW RD
CHINA GRADE LOOP
OLIVE DR
HAGEMAN RD
ROSEDALE HWY
WESTSIDE PKWY
GOLDEN STATE AV
JAMES RD
OILFIELD RD
S GIANNINI RD
COFFEE RD
MOHAWK ST
AIRPORT DR
MANOR ST
CHESTER AVE
RIVER BLVD
COLUMBUS ST
CALLOWAY DR
FRUITVALE AVE
OAK ST
MONTEREY ST
NILES ST
E TRUXTUN AVE
65
99
178
PD 72, ZV 57
Map No. 102
Vicinity Map
IPG Kern County 52 Holdings, LLC
site
FREEWAY
NAMED ROAD
STATE HWY
Arterials
Metro Bakersfield GP Boundary
Township/Range
Sections
Water Bodies
City Limits
Unincorporated Cities
APN: 492-010-13 & 492-010-17
Sec. 2- T29S/R27E
Created on: 5/3/2023
0 2,100 4,200 6,300 8,400 Feet
Kern County
Planning & Natural
Resources Department

This page intentionally left blank

I:\Planning\WORKGRPS\WP\LABELS\IP G Kern County Holdings LLC .docx
IPG Kern County Holdings LLC PD 72, ZV 57, Map 102
cc: 11/07/2023

491 461 11 00 3
ALDAPE RAUL & LORENA
849 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 461 10 00 0
AMADOR RICHARD A
843 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 420 22 00 6
ANGELES LOUIE M & GLENDA T
818 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

112 020 09 00 9
ANTONINO JOHN C
PO BOX 489
BAKERSFIELD CA 93302

112 040 16 00 5
ASHBY MARY JANETTE
2144 WINGLAND DR
BAKERSFIELD CA 93308-1612

491 461 07 00 2
BAILEY JERROD
829 SUNSET MEADOW LN
BAKERSFIELD CA 93308

112 020 08 00 6
BAKER JOYCE ANN
2131 WINGLAND DR
BAKERSFIELD CA 93308-1611

491 420 12 00 7
BAKER MEDLOCK DELBERT & LARRY JASON
2501 GARDEN ST
WASCO CA 93280-9833

491 084 04 00 4
BEL COURT APARTMENTS LLC
8020 DEERING AV
CANOGA PARK CA 91304-5010

491 420 11 00 4
BOWER LAWRENCE L
847 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 412 52 00 4
BR PATEL PROP LLC
8714 SKYE ISLE WY
BAKERSFIELD CA 93312

112 040 11 00 0
BRASHEAR FAMILY TRUST
2124 WINGLAND DR
BAKERSFIELD CA 93308-1612

491 491 08 00 4
BRIER INVESTMENTS LLC
12107 HURST PARK DR
BAKERSFIELD CA 93311

112 020 01 00 5
BROWN RUSSEL C & PHYLLIS ANN
1600 AIRPORT DR
BAKERSFIELD CA 93308-2250

491 011 04 00 2
CALIFORNIA RESOURCES PETROLEUM CORPORATION
27200 TOURNEY RD STE 200
SANTA CLARITA CA 91355-4910

491 492 01 00 0
CAMINI INVESTMENTS LLC
12107 HURTS PARK DR
BAKERSFIELD CA 93311

491 011 15 00 4
CHEVRON LAND & DEVELOPMENT CO
P O BOX 1392
BAKERSFIELD CA 93302

491 420 16 00 9
CLARK CHARLES S & KAREN E
12708 OVERTON ST
BAKERSFIELD CA 93312

492 010 14 00 1
COUNTY OF KERN
1115 TRUXTUN AV
BAKERSFIELD CA 93301

112 020 05 00 7
DANIEL AMY
2115 WINGLAND DR
BAKERSFIELD CA 93308

112 020 07 00 3
DELGADO ALONDRA
2125 WINGLAND DR
BAKERSFIELD CA 93308-1611

112 020 02 00 8
ENGLE CARLA ERICA
2105 WINGLAND DR
BAKERSFIELD CA 93308

491 420 13 00 0
EVANS MEREDITH
855 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 461 08 00 5
FEERO ADRIEN BEAUMONT
835 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 420 15 00 6
FORDYCE TRACY RICHARD DARREL & AZARAE MISHEL
850 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 461 09 00 8
GUERRA DAYANARA
839 SUNSET MEADOW LN
BAKERSFIELD CA 93308

491 420 07 00 3
HANDA FAMILY TRUST
1465 AVENIDA DE LOS PADRE
MORGAN HILL CA 95037

112 040 13 00 6
HAWKINS STEVE E
2132 WINGLAND DR
BAKERSFIELD CA 93308

491 420 14 00 3
HUEBNER ANDREW A
854 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

492 010 13 00 8
IPG KERN CO 52 HOLDINGS LLC
14832 HIGHLAND VALLEY RD
ESCONDIDO CA 92025

111 010 02 00 8
KERN CO DEPT OF AIRPORTS
3701 WINGS WY STE 300
BAKERSFIELD CA 93308-7026

491 420 17 00 2
LIVING BRIGHT INVS LLC
19801 WARDLOW LN
HUNTINGTON BEAC CA 92646-3457

491 412 47 00 0
MC DONALD PROP MANAGEMENT LLC
6006 INVERWOOD DR
BAKERSFIELD CA 93314-8046

112 020 03 00 1
MILLER FAMILY TRUST
6305 KELVIN GROVE
BAKERSFIELD CA 93312-6268

112 020 11 00 4
NADER DEV INC
828 23RD ST
SANTA MONICA CA 90403

491 011 06 00 8
PARK MEADOWS LP
140 NEWPORT CENTER DR STE 270
NEWPORT BEACH CA 92660

491 420 21 00 3
PRANDI ELLEN CHARLOTTE TRUST
20878 JACK RD
SARATOGA CA 95070

491 461 13 00 9
REEVES WILLIAM SHAD
857 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 420 03 00 1
RUNIA JANICE V TRUST
809 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 420 23 00 9
JASSO DEAN E & PERRY HANNAH
814 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 491 01 00 3
KLASSEN FAMILY LIMITED PARTNERSHIP
2019 COVERDALE ST
BAKERSFIELD CA 93311

491 412 48 00 3
LU WANG KIEN & TERESA THAI FAM TR
1022 S DANCOVE DR
WEST COVINA CA 91791-3719

112 040 17 00 8
METZNER FLOYD J & JANICE O
2121 DIANE DR
BAKERSFIELD CA 93308-1601

491 011 19 00 6
MONTEREY BAKERSFIELD L P
25871 PASEO REAL
MONTEREY CA 93940-2706

112 040 15 00 2
OILDALE MUTUAL WATER CO
P O BOX 5638
BAKERSFIELD CA 93308

491 420 09 00 9
PATEL DIVYANG & RUPAL
4681 SETTING SUN DR
EL SOBRANTE CA 94803

491 420 05 00 7
RAMOS MARIA M
PO BOX 81374
BAKERSFIELD CA 93380

491 461 12 00 6
RIVAS SHANTE
853 SUNSET MEADOW LN
BAKERSFIELD CA 93308

112 020 06 00 0
SALAS ANASTACIO ORTEGA
2119 WINGLAND DR
BAKERSFIELD CA 93308

491 420 08 00 6
KAUR GURMEET
9345 VAL DI CHIANA DR
BAKERSFIELD CA 93314

491 491 03 00 9 **DUP**
KLASSEN FAMILY LTD PARTNERSHIP
2019 COVERDALE ST
BAKERSFIELD CA 93311

491 011 43 00 5
MARCIAL JOSE & MARIA TR
15930 STREBOR DR
BAKERSFIELD CA 93314-9326

491 420 01 00 5
MILLER CHRISTINA L & SHOFNER CAREY H JR
761 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9815

491 420 04 00 4
MORTON JESSE W FAM TR
3569 MILITARY AV
LOS ANGELES CA 90034-6103

491 412 34 00 2
OUR TAPASYA LLC
3207 HILLTOP DR
VENTURA CA 93003

112 040 14 00 9
PEDROZA ESTELA OSCAR
407 17TH ST
BAKERSFIELD CA 93301-4917

491 420 06 00 0
RAYA AGUSTIN RAFAEL
825 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 420 10 00 1
RUEDA MAURICIO
841 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

112 020 10 00 1
SANCHEZ JOSE A & COFFMAN M RENEE
2143 WINGLAND DR
BAKERSFIELD CA 93308-1611

491 412 49 00 6
SMITH ADOBE RANCH FAMILY L P
1547 34TH AV
SAN FRANCISCO CA 94122

491 420 18 00 5
SORENSEN JOSEPH L
836 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 420 19 00 8
SPARKS PROP LLC
9206 BRUNELLO CT
BAKERSFIELD CA 93314

112 020 04 00 4
STUTZ BROOKE
2113 WINGLAND DR
BAKERSFIELD CA 93308-1611

491 011 42 00 2
TAKSBAK L P
3239 W ASHLAN AV
FRESNO CA 93722

491 420 24 00 2
TAMAYO NORMA CARILLO
808 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 420 02 00 8
TEJADA JULIO & GUADALUPE
803 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 011 05 00 5
TSIBOUKAS CHRIS FAM TR
3301 W ROSECRANS AV
HAWTHORNE CA 90250-8226

492 010 12 00 5
VANDER WEERD INVESTMENTS
837 COMMERCIAL AV
TULARE CA 93274

491 420 20 00 0
VEREBELY SHANGELA D
13089 PEYTON DR APT C176
CHINO HILLS CA 91709-6018

491 540 01 00 0
WEST DAY LLC
6501 FRUITVALE AV
BAKERSFIELD CA 93308-2712

112 040 12 00 3
ZANINOVICH DOMINIC
200 EL CERRITO DR
BAKERSFIELD CA 93305-1304

491 492 08 00 1
13418 LIVINGSTON TR
PO BOX 261
PORT HUENEME CA 93044-0261

This page intentionally left blank

Notice of Completion & Environmental Document Transmittal

Mail to: State Clearinghouse, P.O. Box 3044, Sacramento, CA 95812-3044 (916) 445-0613
For Hand Delivery/Street Address: 1400 Tenth Street, Sacramento, CA 95814

SCH #

Project Title: IPG Industrial Project by IPG Kern County 52 Holdings, LLC

Lead Agency: Kern County Planning and Natural Resources Department | Contact Person: Alexis Brito

Mailing Address: 2700 M Street, Suite 100 | Phone: 661-862-5029

City: Bakersfield | Zip: 93301 | County: Kern County

Project Location: County: Kern | City/Nearest Community: Bakersfield

Cross Streets: Airport Drive & Boughton Drive | Zip Code:

Longitude/Latitude (degrees, minutes and seconds): 35 ° 25 ′ 59.3394 ″ N / 119 ° 2 ′ 29.5074 ″ W Total Acres: 49

Assessor's Parcel No.: 492-010-13 and 492-010-17 | Section: 2 | Twp.: 29S | Range: 27E | Base: MDBM

Within 2 Miles: State Hwy #: SR-99 | Waterways:

Airports: Meadows Field | Railways: BNSF | Schools: Wingland Elementary, North High School

Document Type:

CEQA: ☒ NOP ☐ Draft EIR ☐ Early Cons ☐ Supplement/Subsequent EIR ☐ Neg Dec (Prior SCH No.) ☐ Mit Neg Dec Other:

NEPA: ☐ NOI ☐ EA ☐ Draft EIS ☐ FONSI

Other: ☐ Joint Document ☐ Final Document ☐ Other:

Local Action Type:

☐ General Plan Update ☐ General Plan Amendment ☐ General Plan Element ☐ Community Plan
☐ Specific Plan ☐ Master Plan ☐ Planned Unit Development ☒ Site Plan
☐ Rezone ☐ Prezone ☐ Use Permit ☐ Land Division (Subdivision, etc.)
☐ Annexation ☐ Redevelopment ☐ Coastal Permit ☒ Other: Zone Variance

Development Type:

☐ Residential: Units ____ Acres ____
☐ Office: Sq.ft. ____ Acres ____ Employees ____
☐ Commercial: Sq.ft. ____ Acres ____ Employees ____
☒ Industrial: Sq.ft. 923,128 Acres 49.05 Employees 525
☐ Educational:
☐ Recreational:
☐ Water Facilities: Type ____ MGD ____
☐ Transportation: Type
☐ Mining: Mineral
☐ Power: Type ____ MW
☐ Waste Treatment: Type ____ MGD
☐ Hazardous Waste: Type
☐ Other:

Project Issues Discussed in Document:

☒ Aesthetic/Visual ☒ Agricultural Land ☒ Air Quality ☒ Archeological/Historical ☒ Biological Resources ☐ Coastal Zone ☒ Drainage/Absorption ☒ Economic/Jobs
☒ Fiscal ☒ Flood Plain/Flooding ☒ Forest Land/Fire Hazard ☒ Geologic/Seismic ☒ Minerals ☒ Noise ☒ Population/Housing Balance ☒ Public Services/Facilities
☒ Recreation/Parks ☒ Schools/Universities ☒ Septic Systems ☒ Sewer Capacity ☒ Soil Erosion/Compaction/Grading ☒ Solid Waste ☒ Toxic/Hazardous ☒ Traffic/Circulation
☒ Vegetation ☒ Water Quality ☒ Water Supply/Groundwater ☒ Wetland/Riparian ☒ Growth Inducement ☒ Land Use ☒ Cumulative Effects ☐ Other: Tribal Cultural, Green House Gas

Present Land Use/Zoning/General Plan Designation:

Vacant/Light Industrial Precise Development Airport Approach Height Combining District (M-1 PD H)/ LI (Light Industrial)

Project Description: *(please use a separate page if necessary)*

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County. Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.
- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Note: The State Clearinghouse will assign identification numbers for all new projects. If a SCH number already exists for a project (e.g. Notice of Preparation or previous draft document) please fill in.

Reviewing Agencies Checklist

Lead Agencies may recommend State Clearinghouse distribution by marking agencies below with and "**X**".
If you have already sent your document to the agency please denote that with an "**S**".

S	Air Resources Board		Office of Historic Preservation
	Boating & Waterways, Department of		Office of Public School Construction
	California Emergency Management Agency		Parks & Recreation, Department of
	California Highway Patrol		Pesticide Regulation, Department of
S	Caltrans District # 6		Public Utilities Commission
	Caltrans Division of Aeronautics	X	Regional WQCB # Central
S	Caltrans Planning	X	Resources Agency
	Central Valley Flood Protection Board		Resources Recycling and Recovery, Department of
	Coachella Valley Mtns. Conservancy		S.F. Bay Conservation & Development Comm.
	Coastal Commission		San Gabriel & Lower L.A. Rivers & Mtns. Conservancy
	Colorado River Board		San Joaquin River Conservancy
X	Conservation, Department of		Santa Monica Mtns. Conservancy
	Corrections, Department of		State Lands Commission
	Delta Protection Commission		SWRCB: Clean Water Grants
	Education, Department of	X	SWRCB: Water Quality
	Energy Commission		SWRCB: Water Rights
S	Fish & Game Region # Fresno		Tahoe Regional Planning Agency
	Food & Agriculture, Department of	S	Toxic Substances Control, Department of
	Forestry and Fire Protection, Department of	S	Water Resources, Department of
	General Services, Department of		
	Health Services, Department of		Other:
	Housing & Community Development		Other:
X	Native American Heritage Commission		

Local Public Review Period (to be filled in by lead agency)

Starting Date November 16, 2023 Ending Date December 18, 2023

Lead Agency (Complete if applicable):

Consulting Firm: _____ Applicant: _____
Address: _____ Address: _____
City/State/Zip: _____ City/State/Zip: _____
Contact: _____ Phone: _____
Phone: _____

Signature of Lead Agency Representative: **/s/** **Date:** 11/16/2023

Authority cited: Section 21083, Public Resources Code. Reference: Section 21161, Public Resources Code.

NOTICE OF PREPARATION/INITIAL STUDY CHECKLIST

IPG Industrial Project
by IPG Kern County 52 Holdings, LLC

Precise Development Plan No. 72, Map No. 102
Zone Variance No. 57, Map No. 102

PLN22-01027
(PP23405)

LEAD AGENCY:

Kern County Planning and Natural Resources Department
2700 M Street, Suite 100
Bakersfield, CA 93301-2370

Contact: Alexis Brito, Planner I
(661) 862-5029
Britoal@kerncounty.com

November 2023

This page intentionally left blank

TABLE OF CONTENTS

INTRODUCTION **2**
1. Project Description **2**
1.1. Project Location 2
1.2. Environmental Setting 2
1.3. Project Description 4
1.4 Project Facilities, Construction Activities, and Operations 5
Project Facilities 5
Construction Activities 7
Operations 8
1.5. Project Objectives 9
1.6. Proposed Discretionary Actions/Required Approvals 10
2. Kern County Environmental Checklist Form **22**
2.1. Environmental Factors Potentially Affected 22
2.2. Determination 22

List of Figures

Figure 1 – Vicinity Map 12
Figure 2 – Aerial Landscape 13
Figure 3 – Airport Land Use Compatibility Plan Map 14
Figure 4 – Existing General Plan Map 15
Figure 5 – Existing Zone Classifications 16
Figure 6a – Proposed Precise Development Plan – Overall Site Plan 17
Figure 6b – Proposed Precise Development Plan – Building One 18
Figure 6c – Proposed Precise Development Plan – Building One Landscaping 19
Figure 6d – Proposed Precise Development Plan – Building Two 20
Figure 6e – Proposed Precise Development Plan – Building Two Landscaping 21

List of Tables

Table 1: Project Site and Surrounding Land Uses 4

Table 2: Project Assessor's Parcel Number, Existing Land Uses, and Acreage 5

Table 3: Project Summary 5

Table 4: Truck Door Summary 6

Table 5: Parking Summary 6

INTRODUCTION

Pursuant to the California Environmental Quality Act (CEQA), the Kern County Planning and Natural Resources Department (County) will initiate the preparation of an Environmental Impact Report (EIR) for the IPG Industrial Project in the unincorporated area of central Kern County, California.

1. Project Description

1.1. Project Location

The IPG Industrial Project (proposed project) is a proposal by IPG Kern County 52 Holdings, LLC (project proponent) for the construction and operation of a logistics facility. The proposed project would include the construction of two single-story warehouses totaling approximately 923,128-square-foot (including 15,000 square-feet for dedicated office space) and related site improvements. The proposed project is located on two (2) parcels totaling approximately 49.05 acres (Assessor's Parcel Number (APN) 492-010-13 & 492-010-17) of privately owned land at the southern end of the San Joaquin Valley in unincorporated Kern County, California as shown in **Figure 1**, *Vicinity Map.* The project site is bounded by Boughton Drive (north), Airport Drive (east), Skyway Drive (south), and Hanger Way(west) as shown in **Figure 2**, *Aerial Landscape.*

The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the project site, and the unincorporated community of Oildale is directly bordering the east side of the project site. The project site is situated approximately 1.4 miles northeast of State Route (SR) 99. Regional access to the project site is available from SR-99 via the Airport Drive exit. Local access to the project site is available from Airport Drive and Boughton Drive.

The project vicinity is characterized by industrial and commercial uses (distribution, storage, and shipping centers), transportation, vacant land, as well as residential uses. The Wingland Elementary School is located approximately 0.25 miles southeast of the project site at Douglas Street and Diane Drive, the California Aeronautical University is located approximately 0.25 miles west of the project site at Boughton Drive and an unnamed paved street, and the North High School is located approximately 0.65 miles east of the project site at West China Grade Loop and McCray Street.

The project site is located on the *Oildale, California* United States Geological Survey (USGS) 7.5-minute Topographic Quadrangle Map, Township 29 South, Range 27 East, Section 2. **Figures 6a - 6f**, *Proposed PD Plan* depicts the proposed project and the project boundaries.

1.2. Environmental Setting

The project site is situated in the southern end of the San Joaquin Valley, in unincorporated Kern County. Kern County and City of Bakersfield have jointly adopted a general plan for the metropolitan area (Metropolitan Bakersfield General Plan 2002). Kern County is California's third largest county in land area and encompasses approximately 8,202 square miles. The County's geography includes, among others, mountainous areas, agricultural lands, and deserts. According to the California Department of Finance's 2023 Population estimates, Kern County's current estimated population is 907,476 residents and Bakersfield is the largest city in the County with a current estimated population of 408,373 residents.

The project site is relatively flat. Elevation on the project site is approximately 500 feet at the above mean sea level (AMSL) with a gradually increasing topographic gradient to the north ranging from 495 feet AMSL in the southwest to 540 feet AMSL to the northeast of the project site; there are numerous stockpiles of soil with varying elevations on the southeast portion of the project site. While this area may be generally characterized as "open flats," outside of leveled fields and orchards, it is better described as an uneven plain consisting of extensive alluvial fans, debris flows, and over-bank deposits. Vegetation on the valley floor is predominated by modern cultigens and other non-native species, such as Russian thistle (tumbleweed) and grasses, but also includes cheatgrass and doveweed.

Land uses within the region and the immediate area of the site primarily consist of industrial, commercial, transportation, and residential uses. Land uses surrounding the site include the following:

North–Boughton Drive and vacant undeveloped land is located north of the project site on the opposite side of Boughton Drive.

South–Skyway Drive, FedEx Ship Center, Epic Jet Center, and Airman Flight Training are located south of the project site on the opposite side of Skyway Drive. The properties include a shipping logistics facility and airplane hangars.

West–Hanger Way, Meadows Field Airport, and transportation related services are located immediately west of the project site on the opposite side of Hanger Way. The facilities include several single-story structures and an airport runway.

East–Airport Drive, Derrel's Mini Storage, Park Meadows Apartments, and Fabulous Burgers are located east of the project site on the opposite side of Airport Drive. The properties include several columns of storage units, an apartment complex, and a fast-food restaurant.

Table 1, *Project Site and Surrounding Land Uses,* **Figure 4,** *Existing General Plan Map,* and **Figure 5,** *Existing Zoning Classifications,* presents the existing land uses, Metropolitan Bakersfield General Plan designations, and Zoning classification for the project site and surrounding area. The immediate project area has nearby single- and multi-family residences, mostly east of the project site. The nearest residence is approximately 100 feet directly east. The nearest existing schools include Wingland Elementary School 0.25 miles southeast from the proposed project site, California Aeronautical University located approximately 0.25 miles west of the project site, North High School is located approximately 0.65 miles east of the project site, North Beardsley Elementary School is located approximately 0.85 miles south of the project site, Golden State Baptist School is located approximately 1 mile southwest of the project site, Standard Elementary School is located approximately 1.2 miles southwest of the project site, Highland Elementary School is located approximately 1.3 miles west of the project site, Beardsley Junior High School is located approximately 1.33 miles south of the project site, Lifehouse Christian Academy is located approximately 1.35 miles northwest of the project site, Legacy Christian Academy is located approximately 1.6 miles southwest of the project site, and San Lauren Elementary School is located approximately 1.72 miles southwest of the project site.

Table 1. Project Site and Surrounding Land Uses

	Existing Land Use	Existing Map Code Designation	Existing Zone Classification
Project Site	Vacant	Light Industrial (LI)	Light Industrial Precise Development Airport Approach Height Combining District (M-1 PD H)
North	Vacant	Light Industrial (LI)	Light Industrial Precise Development Airport Approach Height Combining District (M-1 PD H)
East	Residential, Storage, Restaurant	Major Commercial (MC), General Commercial (GC)	General Commercial Precise Development Combining District (C2 PD)
South	Shipping Centers, Transportation services	Public Transportation (PT)	Medium Industrial Airport Approach Height Combining District (M-2 H)
West	Airport, Transportation Services	Public Transportation (PT)	Medium Industrial Airport Approach Height Combining District (M-2 H)

Through review of the Kern County Airport Land Use Compatibility plan (ALUCP), the proposed project is located within the Sphere of Influence (SOI) for the Meadows Field Airport. The Meadows Field Airport is located approximately 0.6 miles west of the project. The project site is located within the Airport Approach Height Combining overlay and, as shown on **Figure 3,** *Airport Land Use Compatibility Plan Map*, is designated in the "B1" and "C" Zone. The closest public use runway has a length of approximately 2 miles, with distance of approximately 0.3 miles from the nearest point of the runway to the project site.

The project site is not located within an area that is designated by the California Department of Conservation (CDC) as Prime Farmland, Farmland of Statewide Importance, or Unique Farmland. No lands within the project boundary are subject to a Williamson Act Land Use contract. The proposed project site is not part of an Agricultural Preserve. In addition, the project site is not located within the boundaries of an adopted Habitat Conservation Plan.

1.3. Project Description

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

The proposed project site lies within the boundaries of the Metro Bakersfield General Plan (MBGP). The existing MBGP designations are listed in **Table 2**, below, and depicted in **Figure 2**, *General Designations*. The entire project site is also subject to the provisions of the Kern County Zoning Ordinance and is zoned as specified in **Table 2**, below, and depicted in **Figure 3**, *Existing Zoning Classifications*.

Table 2: Project Assessor's Parcel Number, Existing Land Uses, and Acreages

Parcel	APN	Zone Map	General Plan	Existing Map Code Designation	Existing Zoning	Acres
1.	492-010-13	102	Metro Bakersfield	LI	M-1 PD H	35.17
2.	492-010-17	102	Metro Bakersfield	LI	M-1 PD H	13.88
Metropolitan Bakersfield General Plan (MBGP) Map Code Designation: *LI (Light Industrial)* *Kern County Zoning District:* *M-1 PD H (Light Industrial, Precise Development Combining Airport Approach Height Combining)*						

1.4. Project Facilities, Construction Activities, and Operations

Project Facilities

The overall proposed development consists of two single-story warehouses totaling approximately 923,128-square-foot (including 15,000 square-feet for dedicated office space) and related site improvements. Its primary function will be high cube warehouse storage, to facilitate material handling equipment and storage uses, with a secondary application of cold storage occupying up to 20% of the facility, as shown in **Figures 6a - 6f**, *Proposed PD Plan*. **Table 3**, *Project Summary,* provides a project summary of the proposed project.

Table 3: Project Summary

Acreage	Proposed End Use	Maximum Building Footprint	Maximum Building Height	Truck Dock Trailer Parking Spaces	Automobile Parking Spaces	Truck Trailer Spaces
49.05 acres	Approximately 923,128 square foot high-cube and cold storage warehouse	923,128	+/- 56 feet	124	547 stalls	307 stalls

Source: IPG Kern County 52 Holdings, LLC, October 2023.

The warehouse buildings will be primarily constructed from architecturally enhanced concrete panels with a maximum height of 56' above the finish floor elevation. Architectural glazing will be integrated at key locations to enhance the internal office lighting and exterior appearance.

The warehouses would be exclusively truck-served, meaning it would be utilized by delivery trucks. **Table 4**, *Truck Door Summary*, is a summary of the assignment of truck doors by type.

Table 4: Truck Door Summary

Type	Doors (approximately)
Dock-High Doors	114
Grade-Level Doors	10
Total	124
Source: IPG Kern County 52 Holdings, LLC, October 2023.	

Parking

Table 5, *Parking Summary*, is a summary of the assignment of parking spaces by type.

Table 5. Parking Summary

Type	Stalls (approximately)
Automobile	547
Truck Trailer	307
Accessible	14
Electric Vehicle Charging Stations (EVCS)	108
Motorcycle	None
Bicycle	None
Source: IPG Kern County 52 Holdings, LLC, October 2023.	

Vehicular Access and Circulation

The proposed project would include off-site improvements along Boughton Road, Airport Road and Hanger Way. Such improvements would be necessary to meet applicable Kern County Public Works Department development standards.

The existing roadswould be improved with new pavement, curb and gutter, and sidewalk. Additionally, signing and markings would be constructed for the new pavement delineations.

Landscaping

The proposed project would include approximately 359,286 square feet (8.25 acres) of landscaping and irrigation, which would consist primarily of drought tolerant and low maintenance plants. Islands with canopy trees would be provided to reduce heat island effect. Landscaping would also be utilized to provide visual screening where needed. Landscaping would exceed the 5 percent landscaping requirement of

Section 19.86.060 of the Kern County Zoning Ordinance. There are no existing trees on-site, and therefore no trees would be required to be removed.

Lighting

The proposed project would operate 24 hours a day, 7 days a week as a warehouse facility. Therefore, lighting would be designed to maximize employee safety and security while complying with County standards to confine light spread within the project site. Proposed lighting would adhere to the requirements of Chapter 19.81 Outdoor Lighting "Dark Skies Ordinance" of the Kern County Municipal Code, which promotes the reduction of unnecessary light and flare, the reduction of light spillover onto adjacent properties, and energy conservation through the reduction of excessive or unwanted outdoor lighting. Lighting would be located throughout the proposed parking areas.

Construction Activities

Schedule and Workforce

For the purposes of this environmental analysis, the following construction schedule was assumed to last approximately 16 months. The project applicant anticipates that grading of the proposed project would start in July 2024 and would last approximately 60 days. Construction would be completed in a single phase, beginning in September 2024, and concluding in November 2025. It is anticipated that the proposed project would be operational in 2025. Should commencement of construction be delayed, the utilization of July 2024 represents a conservative estimate for the purpose of this document.

Construction would primarily occur during daylight hours, Monday through Friday, between 7:00 a.m. and 8:00 p.m., as required to meet the construction schedule. Additional hours/days may be necessary to facilitate the schedule. Any construction work performed outside of the normal work schedule would be coordinated with the appropriate agencies and would conform to the MBGP and the Kern County Noise Ordinance (Chapter 8.36).

The on-site construction workforce would consist of up to 100 individuals; however, the average daily workforce would vary depending upon the stage in construction. The average daily workforce would include construction, supervisory, support, and construction management personnel on-site during construction. It is anticipated that the construction workforce would commute to the project site each day from local communities and report to the designated construction staging yards prior to the beginning of each workday. Parking for construction personnel would be provided on-site. Portable toilets would be used and would be maintained by a private off-site company during the construction period.

Construction Activities and Equipment

Construction activities would consist of site preparation, grading, building construction, paving, and architectural coating. Typical equipment associated with these construction activities will be used.

Construction Water Use and Wastewater

During construction of the proposed project, water would be required for common construction-related purposes, including but not limited to dust suppression, soil compaction, and grading. Dust-control water may be used for ingress and egress of on-site construction vehicle equipment traffic and for the construction of the warehouse infrastructure. A sanitary water supply would not be required during construction, because restroom facilities would be provided by portable units to be serviced by licensed providers.

Solid and Non-hazardous Waste Disposal

During construction, the building contractor would arrange to have trash, construction recycling, and regular recycling bins delivered to the site in accordance with Kern County Building Code requirements and guidelines. During construction, every effort would be made to minimize packaging and construction waste.

Construction recycling, regular recycling, and nonrecyclable trash would be regularly picked up during the construction period.

Hazards and Hazardous Materials Compliance

The hazardous materials used for construction would be typical of most construction projects of this type. Materials would include small quantities of gasoline, diesel fuel, oils, lubricants, solvents, detergents, degreasers, paints, ethylene glycol, dust palliative, herbicides, and welding materials/supplies. A hazardous materials business plan would be provided to the Kern County Environmental Health Services Division/Hazardous Materials Section. The hazardous materials business plan would include a complete list of all materials used on-site and information regarding how the materials would be transported and in what form they would be used. This information would be recorded to maintain safety and prevent possible environmental contamination or worker exposure. During project construction, safety data sheets for all applicable materials present at the site would be made readily available to on-site personnel.

To ensure minimum exposure of construction workers to hazardous materials (e.g., construction-related fuels and paints) and other hazardous materials, construction activities would comply with applicable worker protection laws and regulations, including the Occupational Safety and Health Act (OSHA), Title 9 of the Code of Federal Regulations, and Title 8 of the California Code of Regulations. The construction contractor selected for the project would be responsible for ensuring that construction workers are trained in accordance with local, state, and federal requirements for handling hazardous materials.

Operations

The proposed facility would operate 24 hours a day, 365 days a year and typically consist of three shifts rotating throughout the day and night. The facility would employ approximately 525 employees over the course of three shifts . Once operational, the proposed project would utilize standard equipment such as electric forklifts and pallet jacks.

Vehicular Access and Circulation

The proposed project would generate approximately 371 daily truck trips. Ingress to the proposed project would be taken from five entrances off of Airport Drive and three off of Hanger Way.

Utilities and Infrastructure

The proposed project would be served with potable water provided by the Oildale Mutual Water Company. Service laterals would be extended from an existing water line located within Airport Road.

The proposed project would be served by the North of River Sanitary District. Electricity service would be provided by PG&E. Natural Gas service is to be provided by So Cal Gas. Service laterals would be extended to the project site from existing utility facilities along Boughton Drive and Airport Drive.

The proposed project would install an on-site storm drainage system consisting of inlets, underground piping, and surface and underground basins. Runoff would drain to retention basins located on the south side of each building within the boundaries of the project site. The basins would be designed to accommodate a 100-year storm event and would detain runoff and release it at a rate no greater than the pre-development condition of the project site. The proposed project would be required to retain the stormwater per Kern County's drainage requirements and all other applicable standards.

Solid and Non-hazardous Waste Disposal

The proposed project would produce a small amount of waste associated with maintenance activities, which could include typical refuse generated by office and warehouse uses. Most of these materials would be collected and delivered back to the manufacturer or to recyclers. Nonrecyclable waste would be placed in covered dumpsters and removed on a regular basis by a certified waste-handling contractor for disposal at a Class III landfill. The closest Class III municipal landfill is the BENA Sanitary Landfill.

Hazards and Hazardous Materials Compliance

The proposed project would produce a small amount of hazardous waste associated with maintenance activities, which could include paint, solvents, cleaners, and waste oil. Workers would be trained to properly identify and handle all hazardous wastes. Fuels and lubricants used in operations would be subject to the Spill Prevention, Containment, and Countermeasure Plan to be prepared for the proposed project.

Hazardous waste would be either recycled or disposed of at a permitted and licensed treatment and/or disposal facility. All hazardous waste shipped off-site for recycling or disposal would be transported by a licensed and permitted hazardous waste hauler and disposed of at an approved location.

1.5. Applicant Provided Project Objectives

State CEQA Guidelines Section 15124(b) requires that a project description include a clearly written statement of objectives. The statement of objectives should include the underlying purpose of the project and may discuss the project benefits. The following are the applicant objectives for the proposed project:

- Develop state of the art warehouse and distribution facilities near major transportation corridor.
- Meet regional demand for Class A industrial facilities which address local traffic patterns and needs. Develop a visually appealing industrial project that is consistent with the provisions of the Kern County Zoning Ordinance, Land Division Ordinance, and Development Standards.
- Promote land use compatibility with adjacent airport related uses by developing a warehouse and distribution facility. .
- Positively contribute to the local economy through new capital investment, the creation of new employment opportunities, expansion of the tax base, economic growth and development, and payment of development fees.
- Site an industrial project in a location consistent with current and future market demands which minimizes conflicts with surrounding uses.

1.6. Proposed Discretionary Actions/Required Approvals

The Kern County Planning and Natural Resources Department as the CEQA Lead Agency (per CEQA Guidelines Section 15052) has discretionary responsibility for the IPG Industrial Project owned by IPG Kern County 52 Holdings, LLC. To implement this project, the project proponent may need to obtain the following discretionary and ministerial permits/approvals, but not be limited to:

- **State**
    - Central Valley Regional Water Quality Control Board (RWQCB)
        - National Pollution Discharge Elimination System (NPDES) Construction General Permit
        - General Construction Stormwater Permit (Preparation of a SWPPP)
    - California Department of Transportation (Caltrans)
        - Right-of-Way Encroachment Permit (if required)
        - Permit for Transport of Oversized Loads (if required)
- **Local**
    - Kern County
        - Certification of Final Environmental Impact Report
        - Adoption of 15091 Findings of Fact and 15093 Statement of Overriding Considerations
        - Adoption of Mitigation Monitoring and Reporting Program
        - Approval of Precise Development Plan
        - Approval of Zone Variance
        - Approval of Kern County Grading and Building Permits
        - Approval of Kern County Encroachment Permits
        - Approval of Fire Safety Plan
    - San Joaquin Valley Air Pollution Control District
        - Authority to Construct (ATC)
        - Construction Fugitive Dust Control Plan
        - Permit to Operate (PTO)
        - Indirect Source Rule and Voluntary Emission Reduction Agreement
        - Other permits as required

The preceding discretionary actions/approvals are potentially required and do not necessarily represent a comprehensive list of all possible discretionary permits/approvals required. Other additional permits or approvals from responsible agencies may be required for the proposed project.

Figure 1 – Vicinity Map

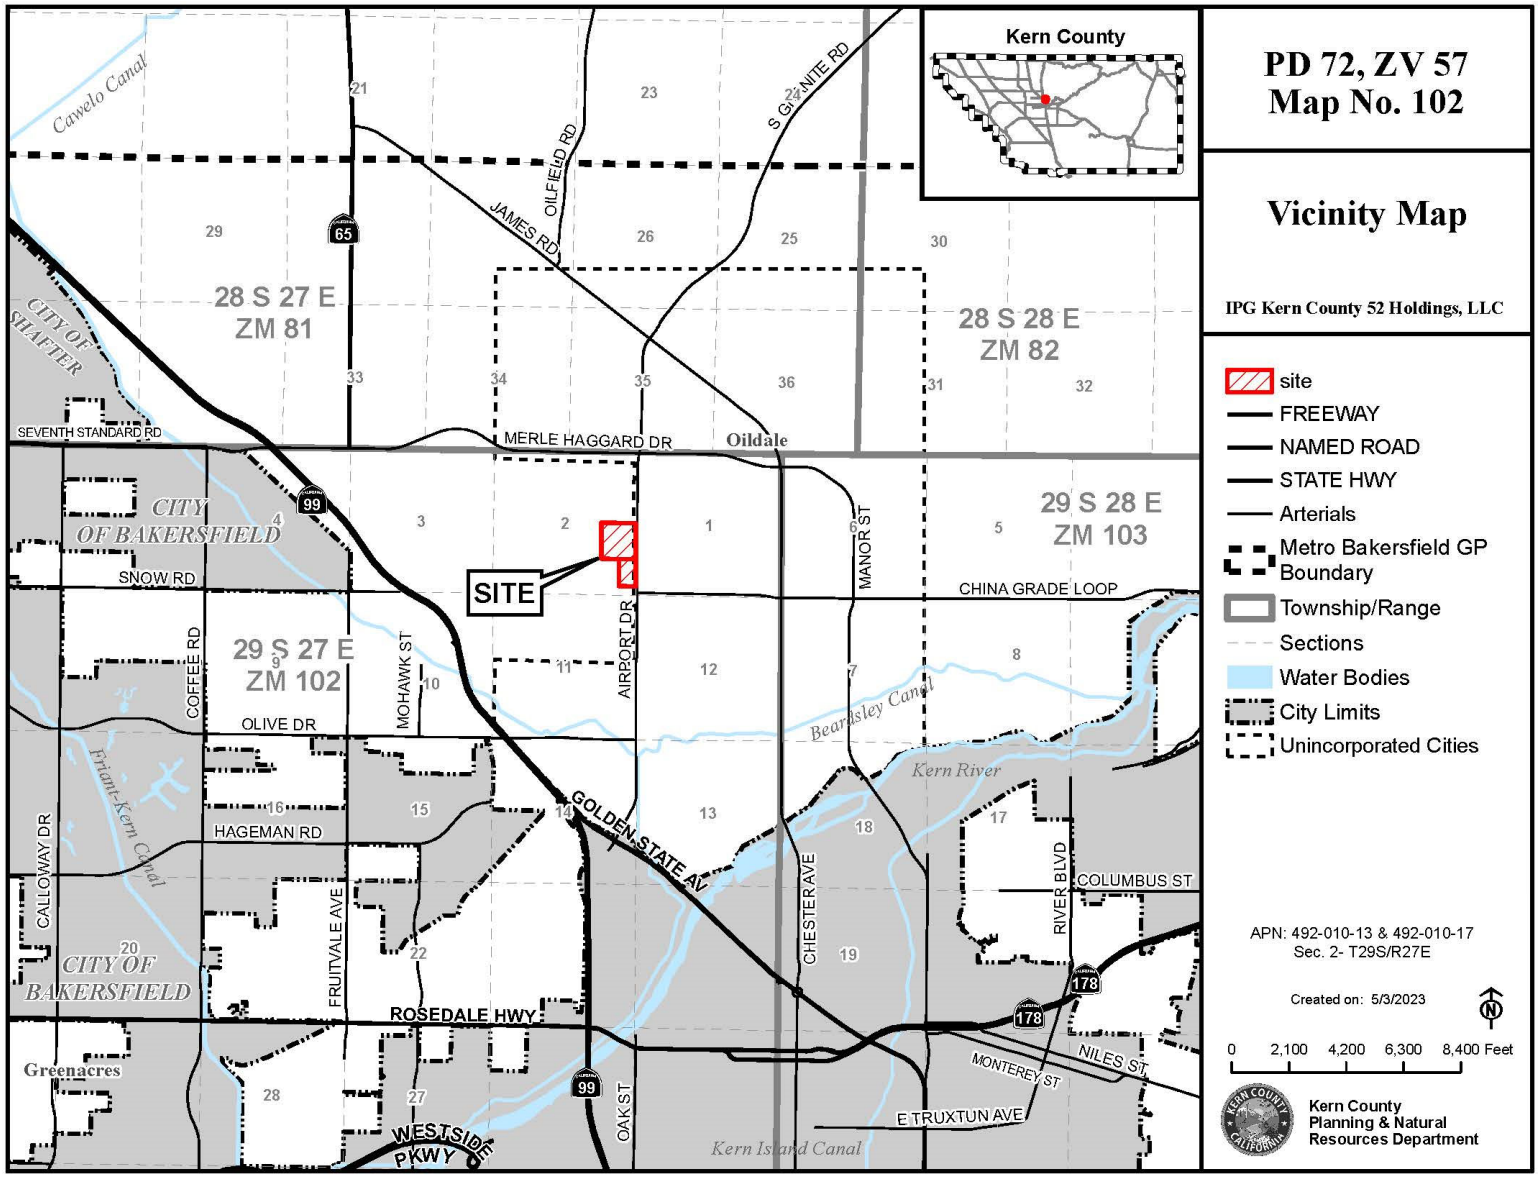

Figure 2 – Aerial Landscape

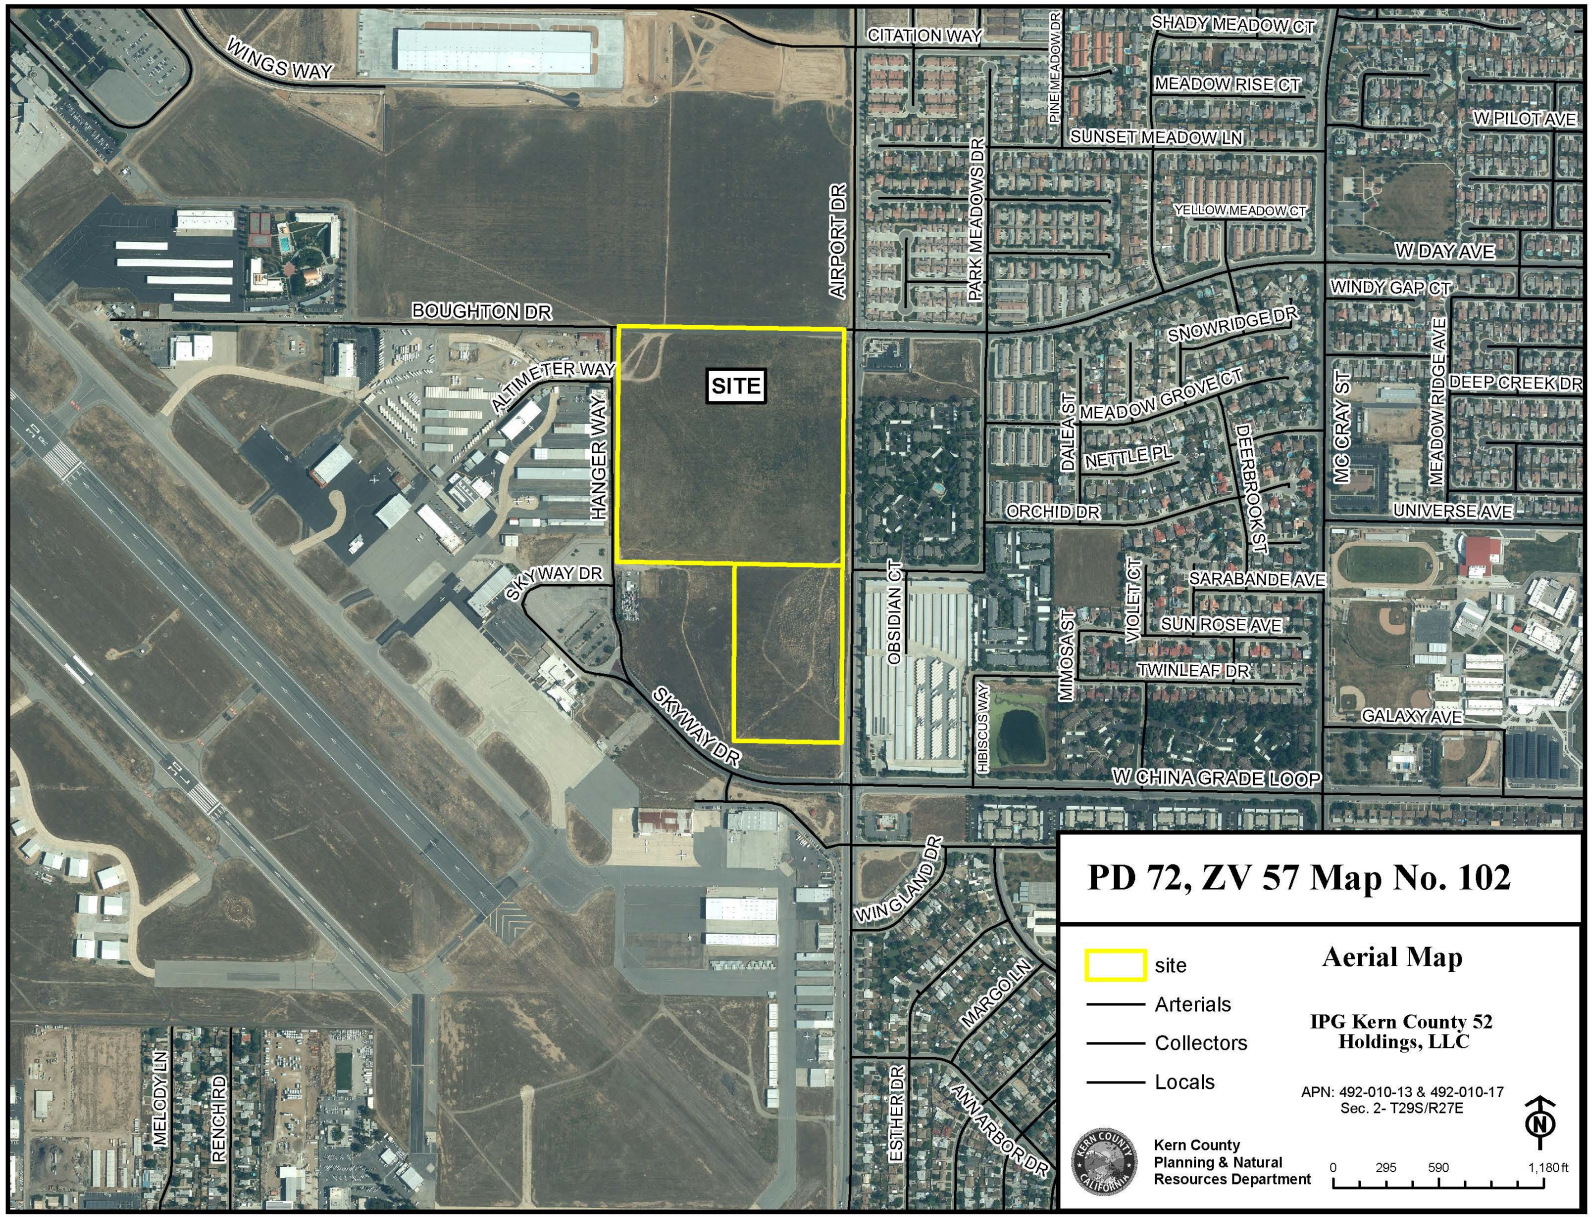

Figure 3 – Airport Land Use Compatibility Plan Map

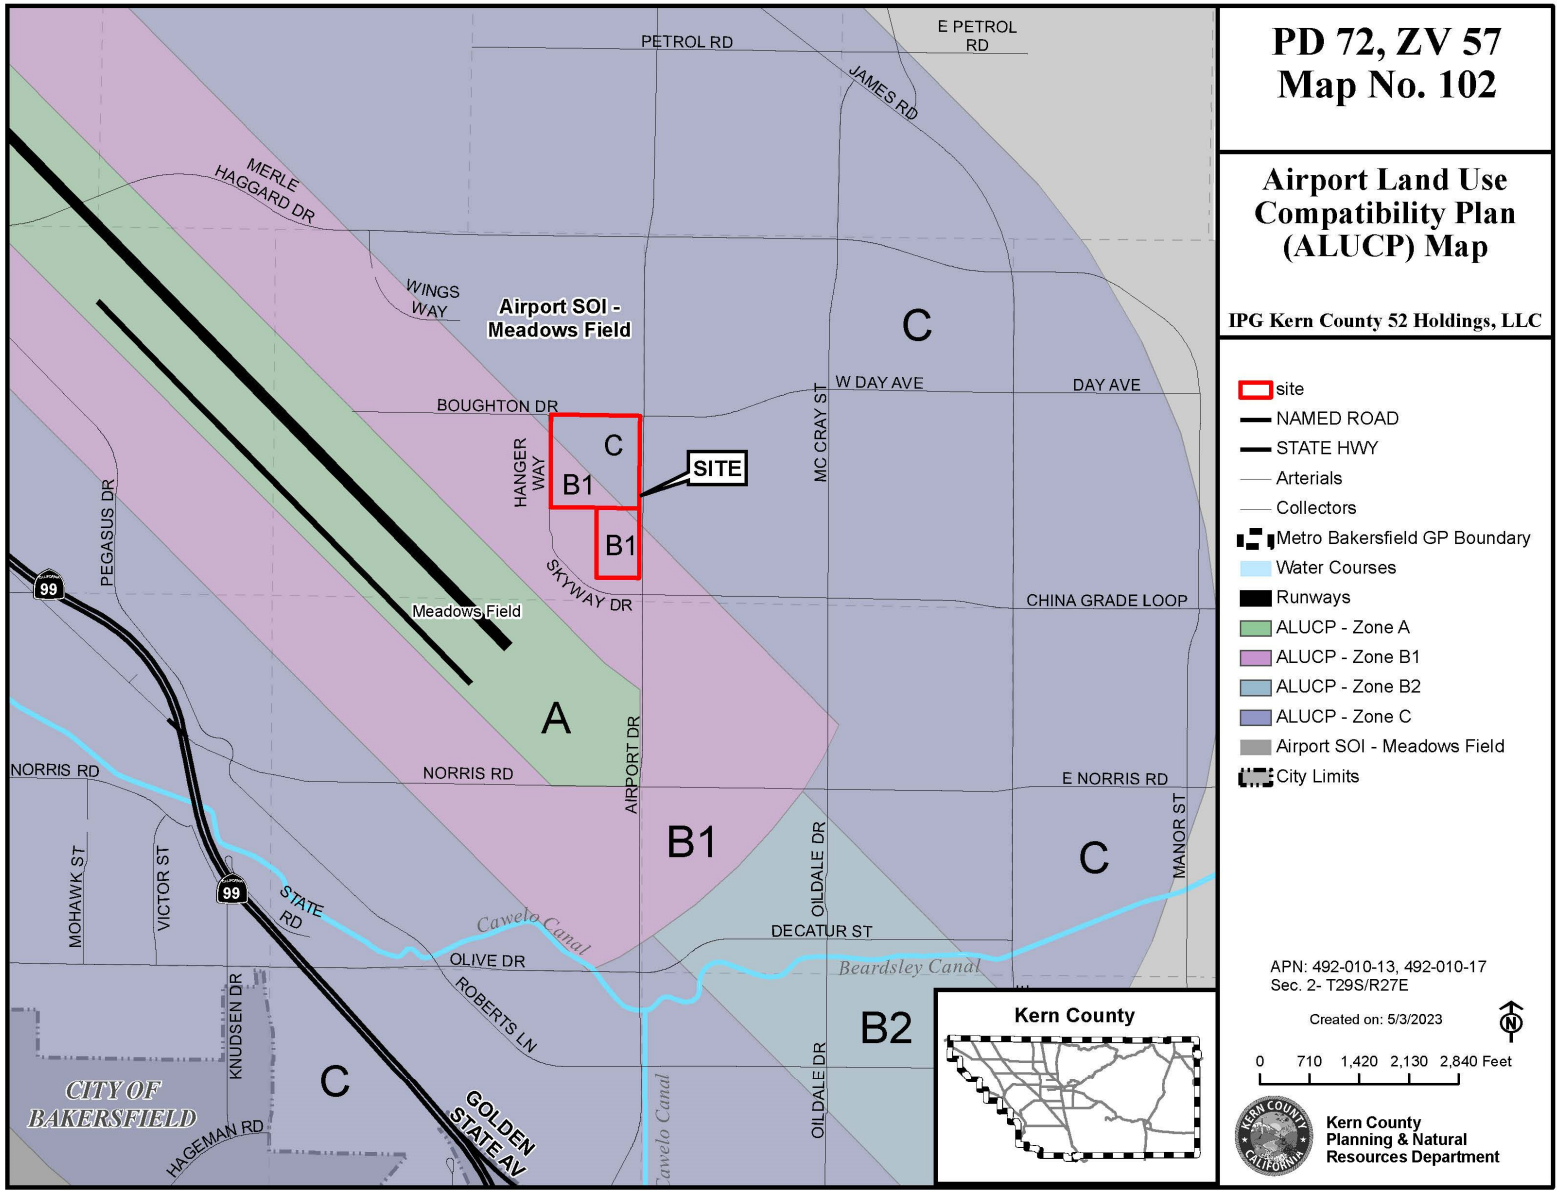

Figure 4 – Existing General Plan Map

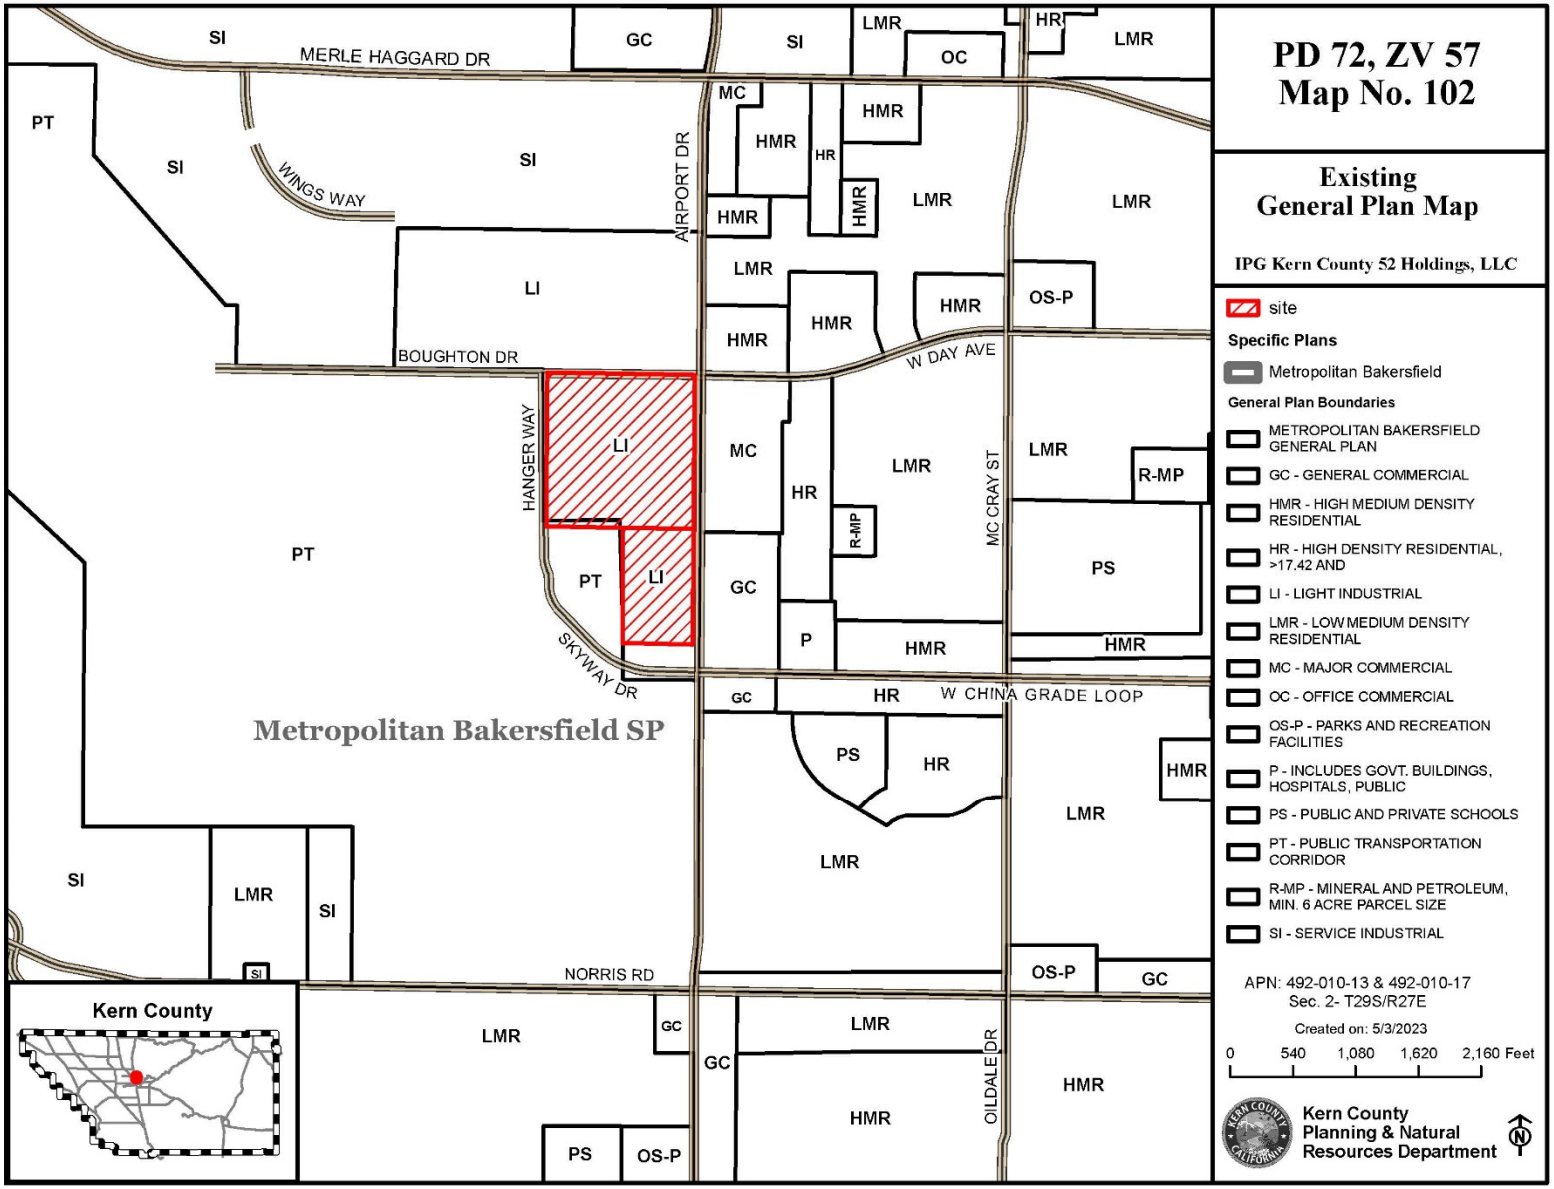

Figure 5 – Existing Zoning Classifications

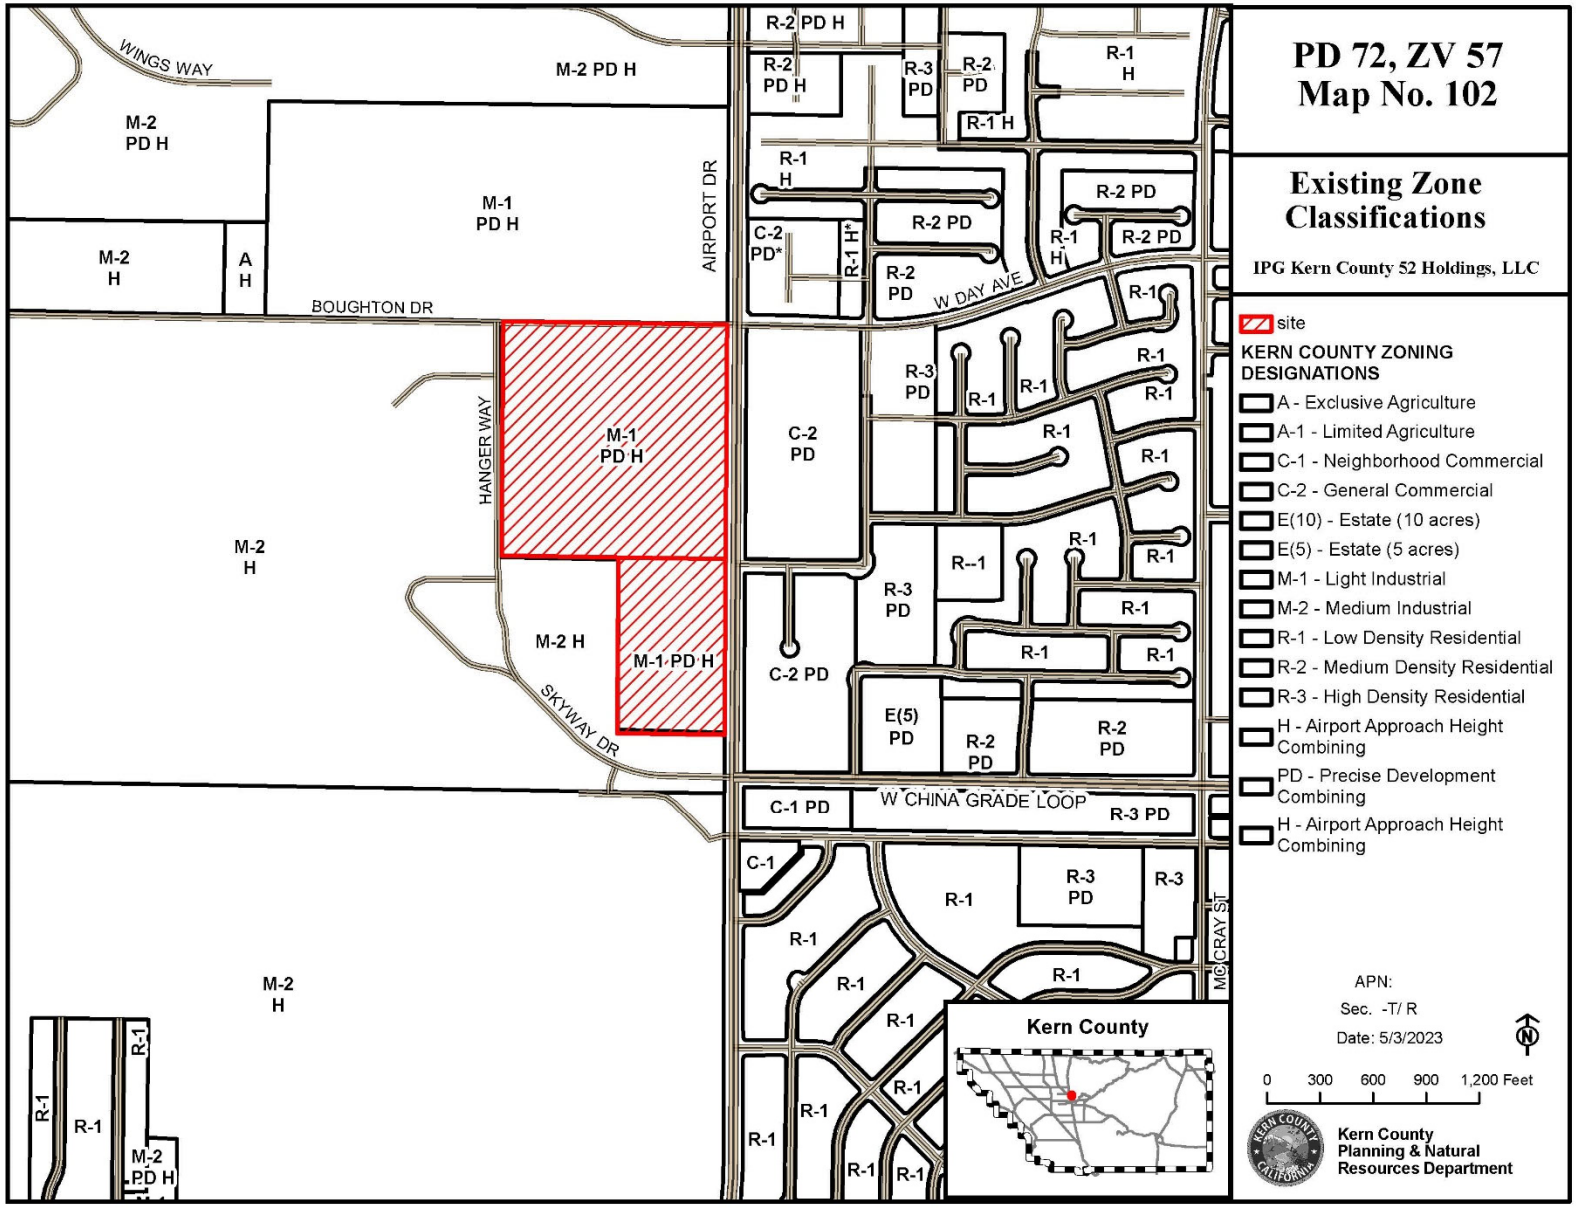
WINGS WAY
M-2 PD H
M-2 PD H
M-1 PD H
M-2 H
A H
BOUGHTON DR
AIRPORT DR
HANGER WAY
M-1 PD H
M-2 H
M-2 H
M-1 PD H
SKYWAY DR
M-2 H
R-2 PD H
R-2 PD H
R-3 PD
R-2 PD
R-1 H
R-1 H
C-2 PD*
R-1 H*
R-2 PD
R-2 PD
R-1 H
R-2 PD
W DAY AVE
C-2 PD
R-3 PD
R-1
R-1
R-1

Figure 6a – Proposed PD Plan – Overall Site Plan

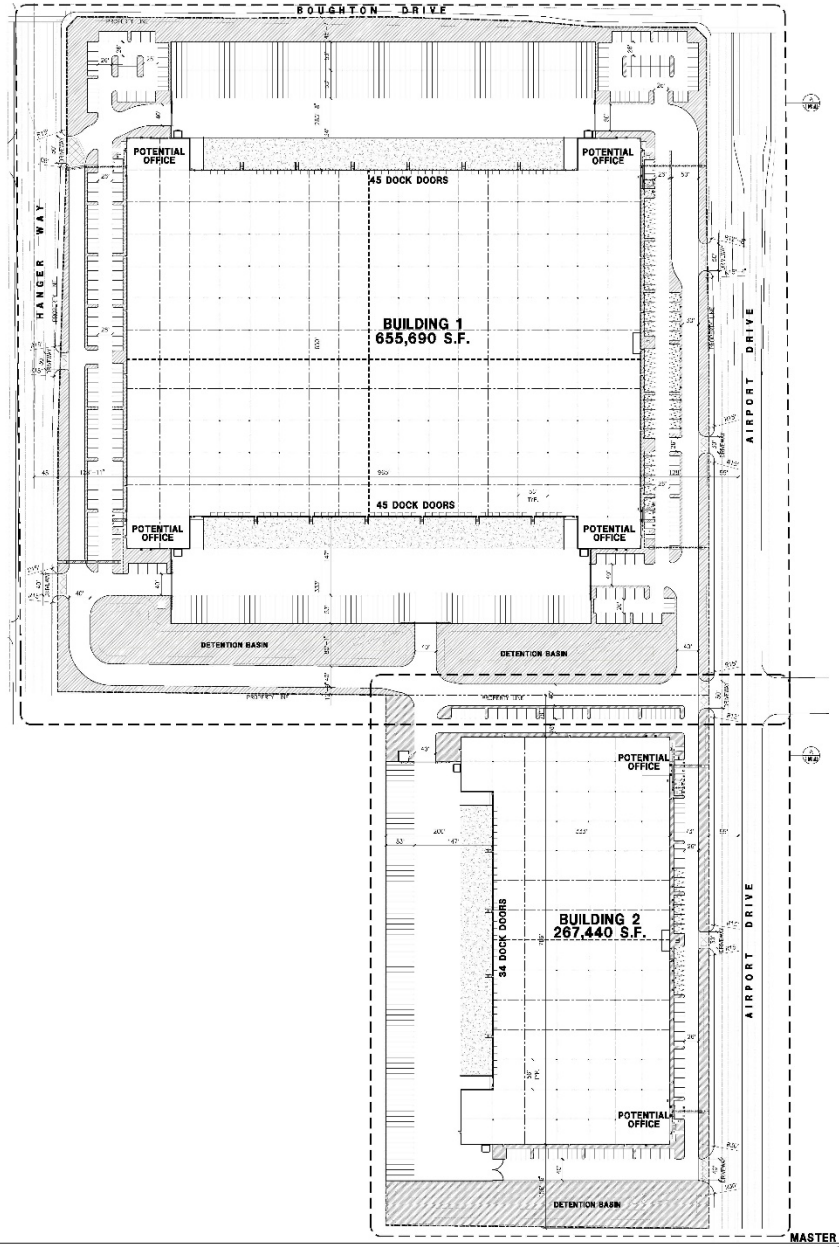

MASTER SITE PLAN (A)

PROPERTY OWNER

IPG KERN COUNTY 52 HOLDINGS LLC
991C LOMAS SANTA FE DRIVE, STE 469
SOLANA BEACH, CA 92075

ADDRESS OF THE PROPERTY

TBD | SW CORNER OF BOUGHTON DR & AIRPORT DRIVE)

ASSESSOR'S PARCEL NUMBER

492 010 13/492 010 17

ZONING

M1-PD-H
SEE PROJECT DATA

LEGAL DESCRIPTION

SEE CIVIL DRAWINGS

APPLICANT

IPG KERN COUNTY 52 HOLDINGS LLC
991C LOMAS SANTA FE DRIVE, STE 469
SOLANA BEACH, CA 92075

APPLICANT'S REPRESENTATIVE

CHAIG WILDE
PHONE: 314-713-9516
EMAIL: CRAIG@INDUSTRIALPG.COM
991C LOMAS SANTA FE DR STE 469
SOLANA BEACH CA, 92075

VICINITY MAP

PROJECT DATA

	BLDG. 1	BLDG. 2	TOTAL
SITE AREA			
In s.f.	1,531,912	604,768	2,136,680 sf
In acres	35.17	13.88	49.05 ac
BUILDING AREA			
Office	10,000	5,000	15,000 sf
Warehouse	845,690	262,440	908,130 sf
TOTAL	655,690	267,440	923,130 sf
FLOOR AREA RATIO			
Maximum Allowed	to be verified		
Actual	0.428	0.442	0.432
SITE COVERAGE			
Maximum Allowed	to be verified		
Actual	42.8%	44.2%	43.2%
AUTO PARKING REQUIRED			
Office: 1/250 s.f.	40	20	60 stalls
Whse: 1st 10K @ 1/1,000 s.f.	10	10	20 stalls
above 10K @ 1/3,000 s.f.	212	84	296 stalls
TOTAL	262	114	376 stalls
REQUIRED ACCESSIBLE PARKING FOR DISABLED			
Standard Accessible (9' X 20')	8	4	12 stalls
Van Accessible (12' x 20')	1	1	2 stalls
Total	**9**	**5**	**14** stalls
REQUIRED EV PARKING			
EV Capable Space (9' X 20')	61	17	78 stalls
EVCS Provided (9' X 20')	18	6	24 stalls
EVCS Standard Accessible (9' X 20')	3	1	4 stalls
EVCS Van Access ble (9' X 20')	1	1	2 stalls
EVCS Ambulatory (10' x 20')	3	0	n/a stalls
Total	**86**	**25**	**108** stalls
PROVIDED PARKING BREAKDOWN			
Standard (9' X 20')	312	113	425 stalls
Standard Accessible (9' X 20')	8	4	12 stalls
Van Accessible (9' X 20')	1	1	2 stalls
EV Capable Space (9' X 20')	61	17	78 stalls
EVCS Provided (9' X 20')	18	6	24 stalls
EVCS Standard Accessible (9' X 20')	3	1	4 stalls
EVCS Van Access ble (9' X 20')	1	1	2 stalls
EVCS Ambulatory (10' x 20')	3	0	
Total	**407**	**143**	**547** stalls
TRAILER PARKING PROVIDED			
Trailer (10' x 53')	**229**	**78**	**307** stalls
ZONING ORDINANCE			
Zoning - Light Industrial (M1 - PD - H)			
PD - Precise Development Combining District			
H- Airport Approach height Combining District			
MAXIMUM BUILDING HEIGHT ALLOWED			
Height - Buildings and structures shall not exceed six (6) stories or one hundred (100) feet, unless the building is set back from lot line at least one (1) foot for each three (3) feet of height above six (6) stories or seventy-five (75) feet.B.No building or structure shall exceed ten (10) stories or one hundred thirty-five (135) feet.			
LANDSCAPE REQUIREMENT			
Percentage - 5 %			
LANDSCAPE PROVIDED			
In s.f.	264,066	95,220	359,286 sf
Percentage	17.2%	15.7%	16.8%
SETBACKS			
Building			
Boughton Drive/ Airport Dr- 40 from street centerline			
Airport Drive - 45 from street centerline			
Side / Rear - None required			

Figure 6b – Proposed PD Plan – Building One

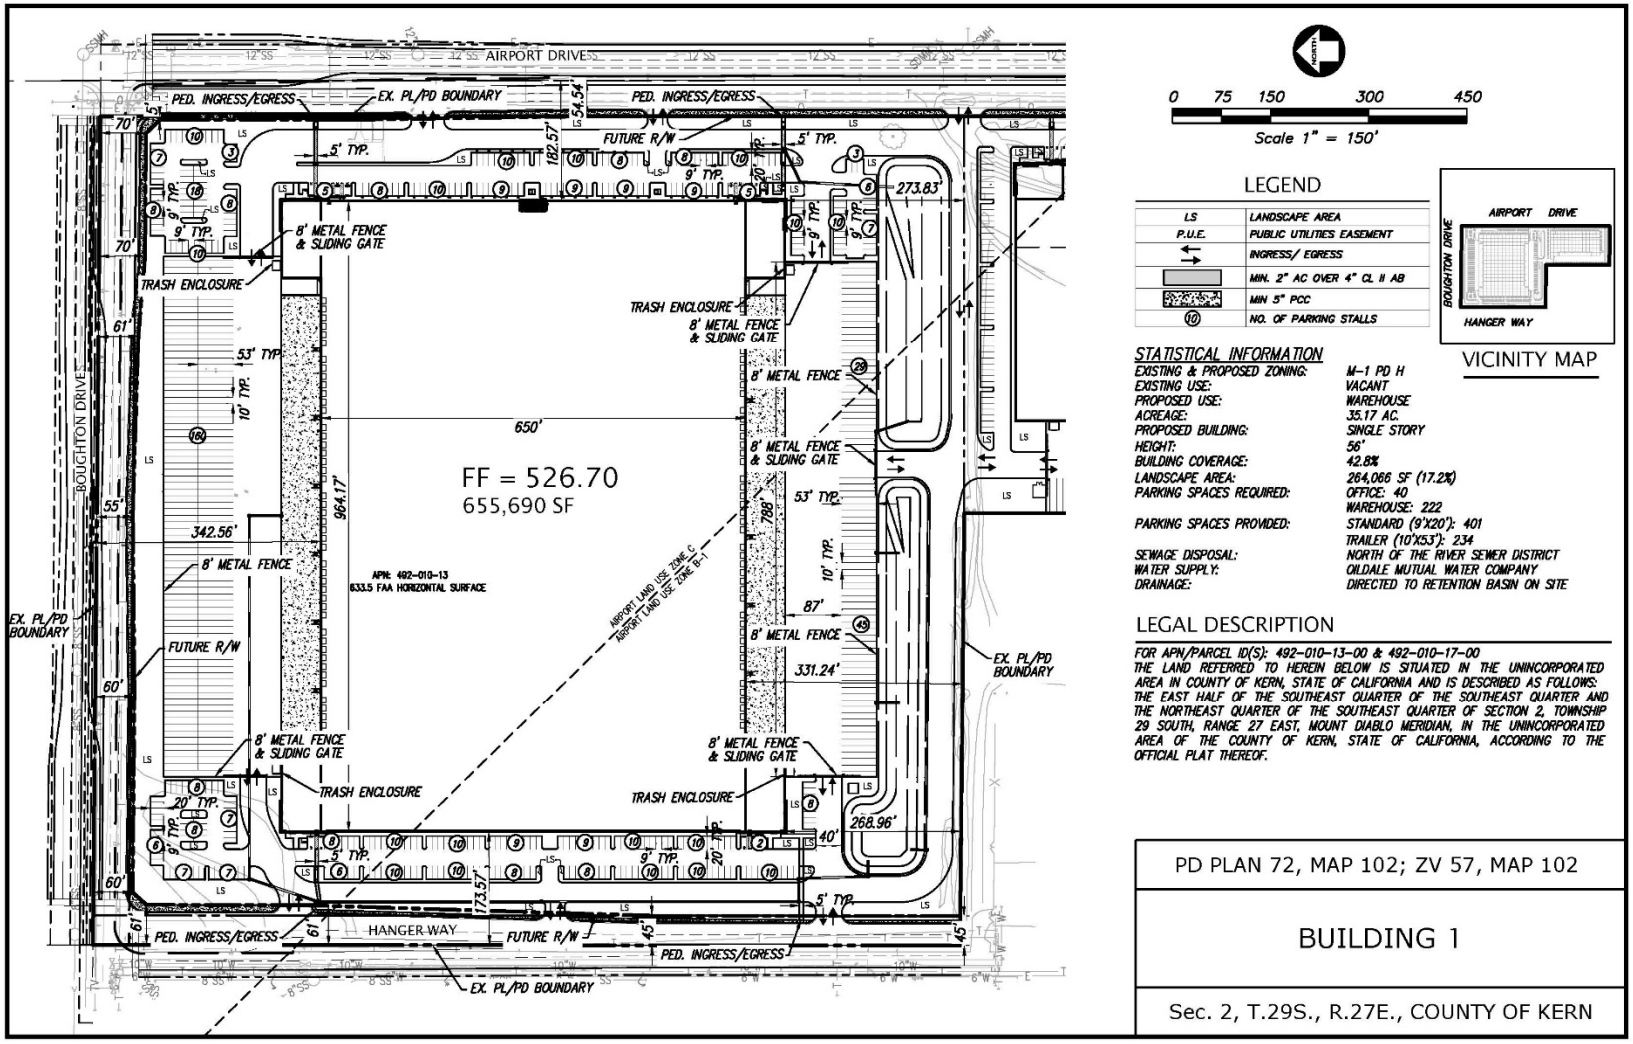

Figure 6c – Proposed PD Plan – Building One Landscaping

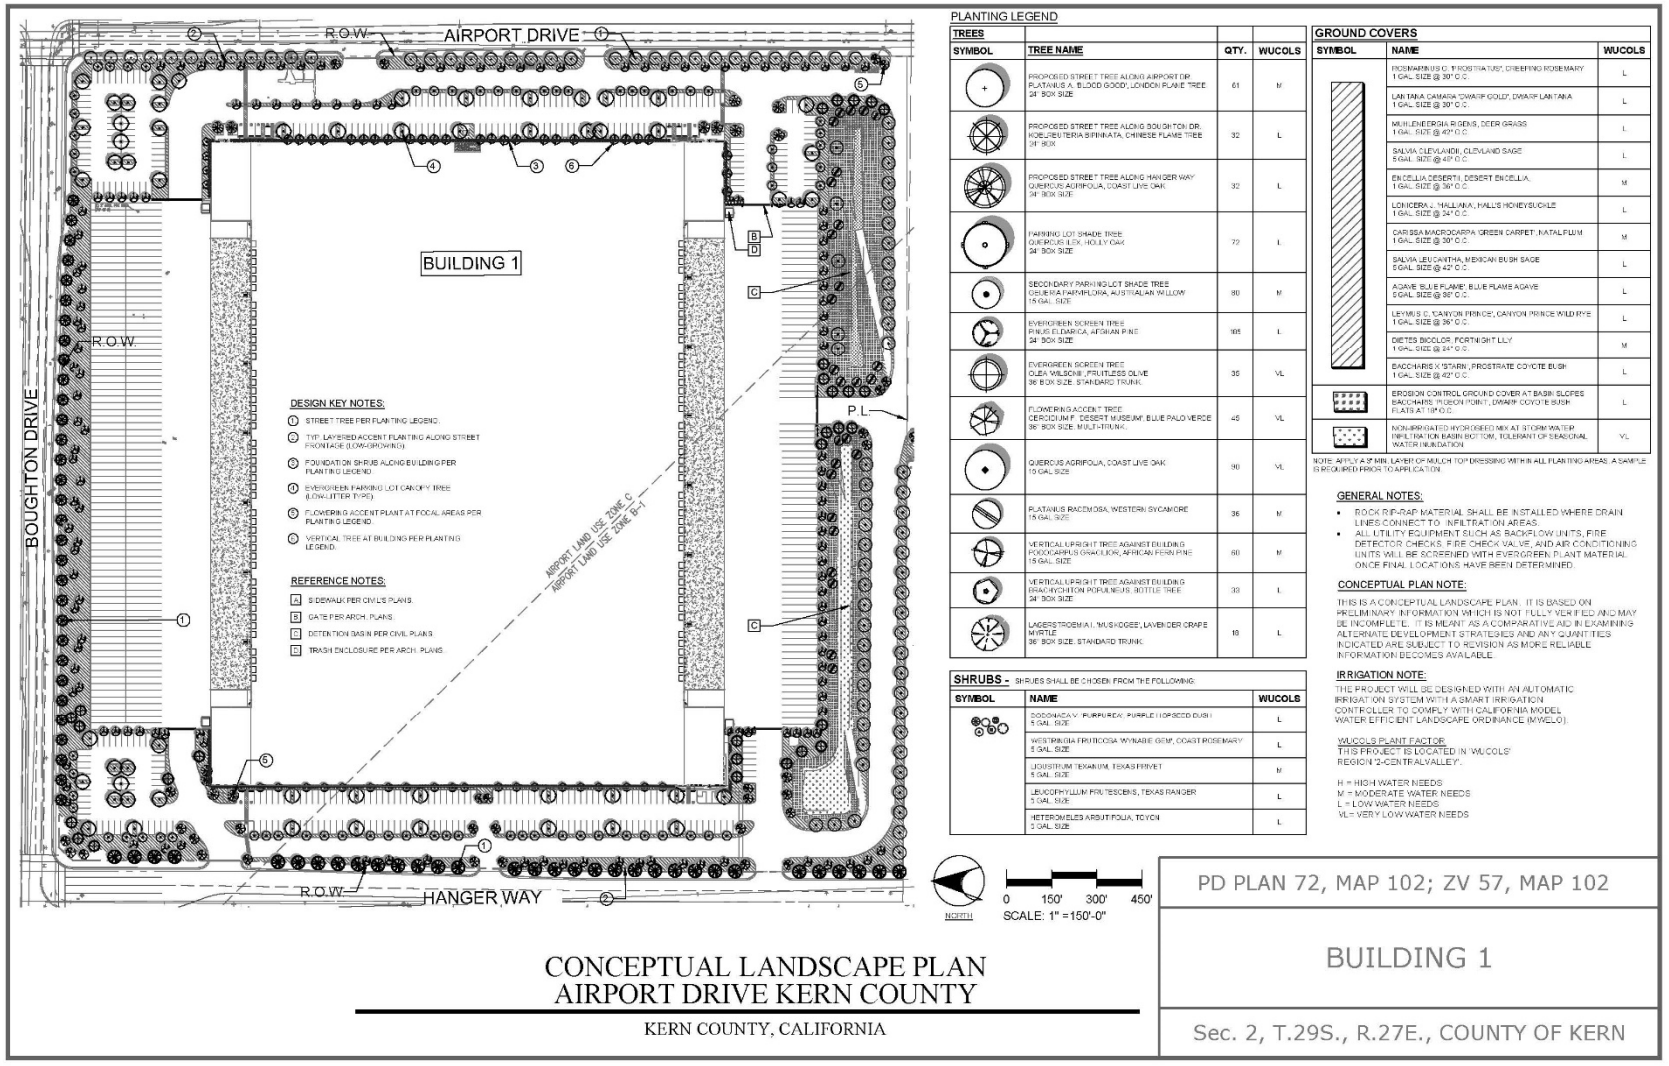

Figure 6d – Proposed PD Plan – Building Two

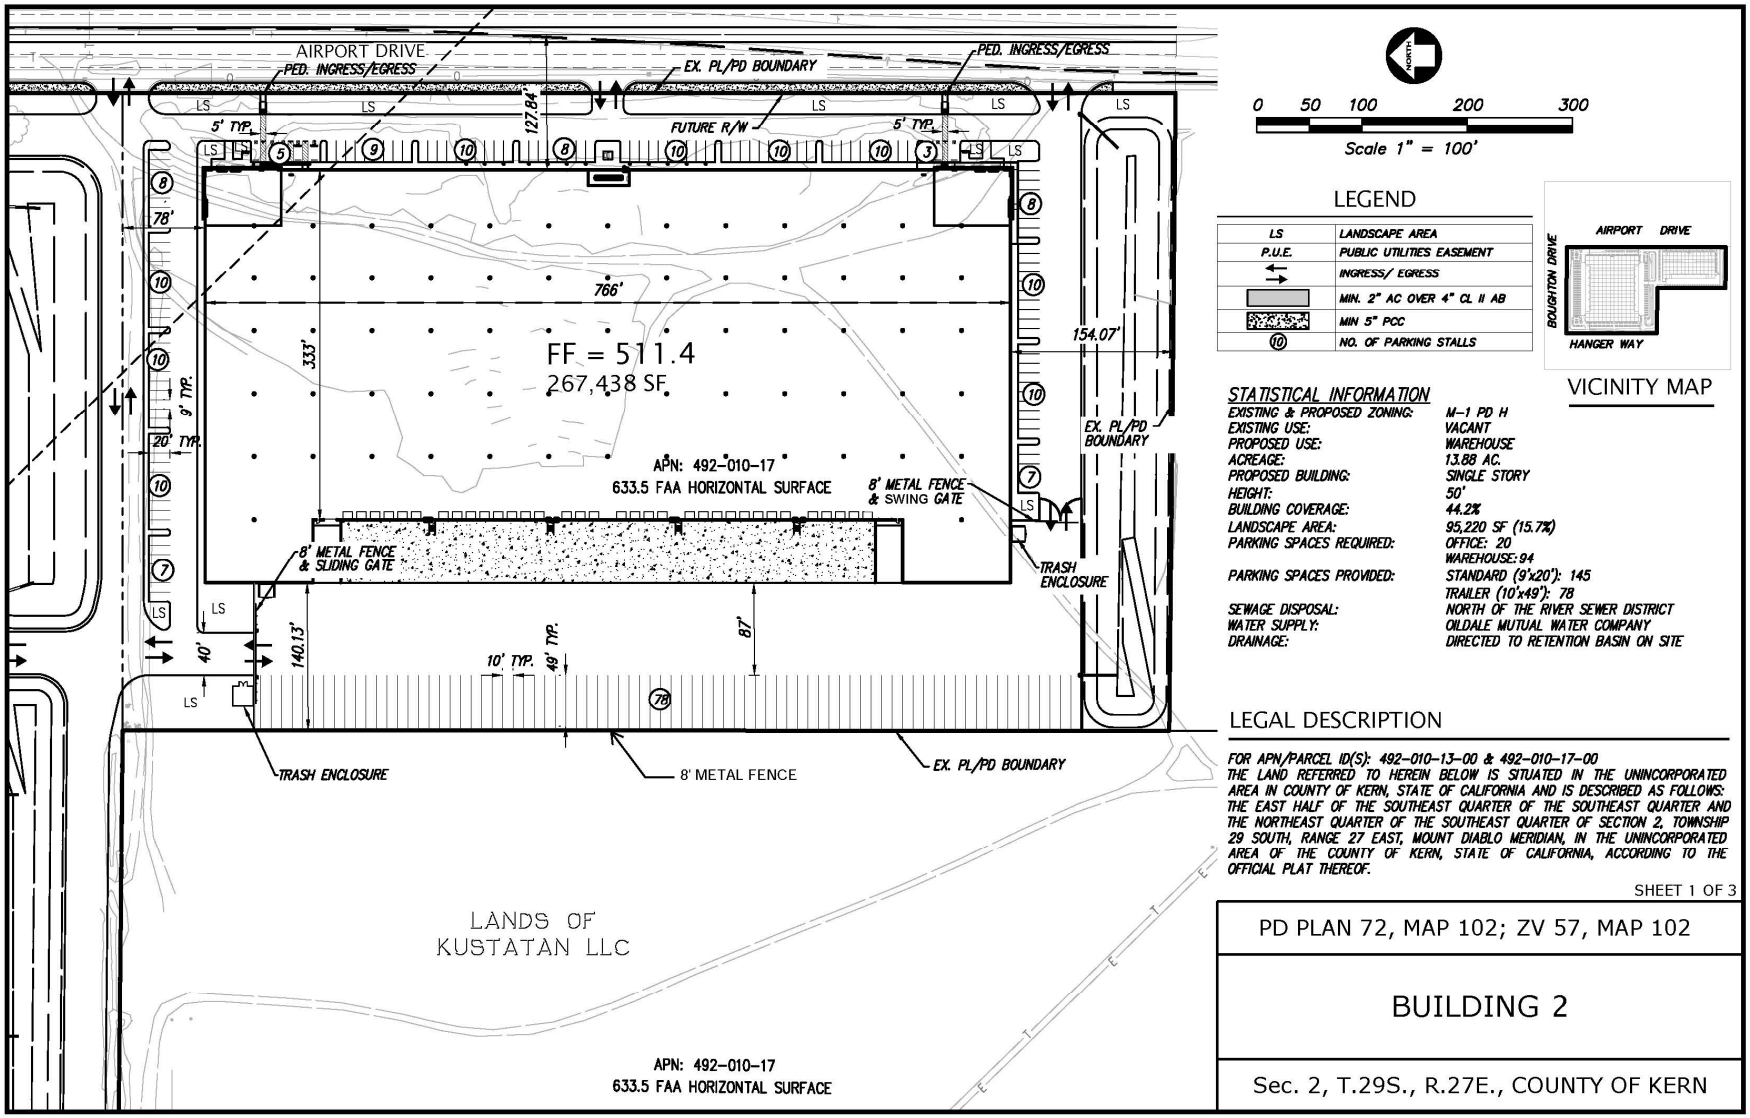

Figure 6e – Proposed PD Plan – Building Two Landscaping

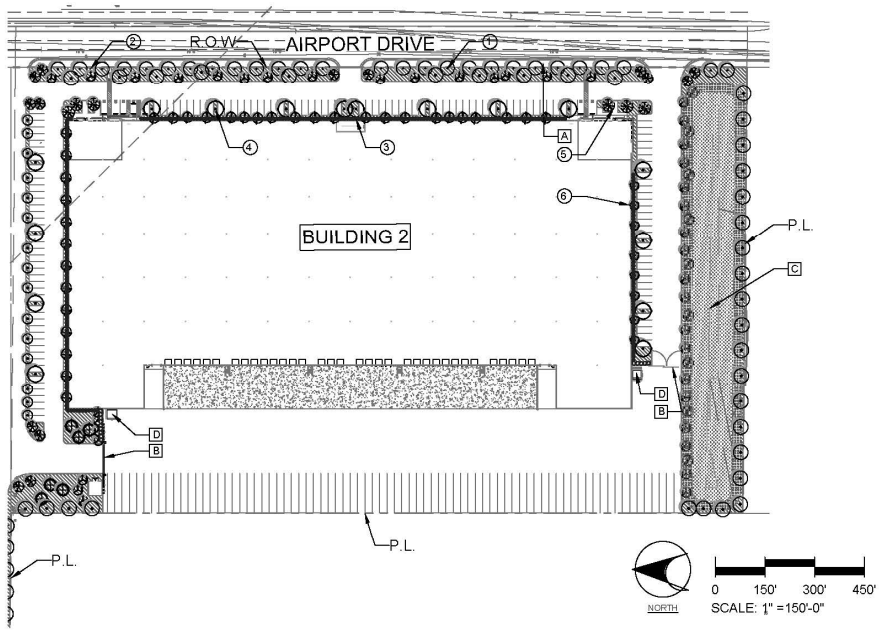

PLANTING LEGEND

TREES			
SYMBOL	TREE NAME	QTY.	WUCOLS
	PROPOSED STREET TREE ALONG AIRPORT DR. PLATANUS A. 'BLOOD GOOD', LONDON PLANE TREE 24" BOX SIZE	61	M
	PROPOSED STREET TREE ALONG BOUGHTON DR. KOELREUTERIA BIPINNATA, CHINESE FLAME TREE 24" BOX	32	L
	PROPOSED STREET TREE ALONG HANGER WAY QUERCUS AGRIFOLIA, COAST LIVE OAK 24" BOX SIZE	32	L
	PARKING LOT SHADE TREE QUERCUS ILEX, HOLLY OAK 24" BOX SIZE	72	L
	SECONDARY PARKING LOT SHADE TREE GEIJERIA PARVIFLORA, AUSTRALIAN WILLOW 15 GAL. SIZE	80	M
	EVERGREEN SCREEN TREE PINUS ELDARICA, AFGHAN PINE 24" BOX SIZE	185	L
	EVERGREEN SCREEN TREE OLEA 'WILSONII', FRUITLESS OLIVE 36" BOX SIZE. STANDARD TRUNK	35	VL
	FLOWERING ACCENT TREE CERCIDIUM F. 'DESERT MUSEUM', BLUE PALO VERDE 36" BOX SIZE. MULTI-TRUNK.	45	VL
	QUERCUS AGRIFOLIA, COAST LIVE OAK 15 GAL SIZE	90	VL
	PLATANUS RACEMOSA, WESTERN SYCAMORE 15 GAL SIZE	36	M
	VERTICAL UPRIGHT TREE AGAINST BUILDING PODOCARPUS GRACILIOR, AFRICAN FERN PINE 15 GAL. SIZE	60	M
	VERTICAL UPRIGHT TREE AGAINST BUILDING BRACHYCHITON POPULNEUS, BOTTLE TREE 24" BOX SIZE	33	L
	LAGERSTROEMIA I. 'MUSKOGEE', LAVENDER CRAPE MYRTLE 36" BOX SIZE. STANDARD TRUNK.	18	L

SHRUBS - SHRUBS SHALL BE CHOSEN FROM THE FOLLOWING:		
SYMBOL	NAME	WUCOLS
	DODONAEA V. 'PURPUREA', PURPLE HOPSEED BUSH 5 GAL SIZE	L
	WESTRINGIA FRUTICOSA 'WYNABIE GEM', COAST ROSEMARY 5 GAL. SIZE	L
	LIGUSTRUM TEXANUM, TEXAS PRIVET 5 GAL. SIZE	M
	LEUCOPHYLLUM FRUTESCENS, TEXAS RANGER 5 GAL. SIZE	L
	HETEROMELES ARBUTIFOLIA, TOYON 5 GAL. SIZE	L

GROUND COVERS

SYMBOL	NAME	WUCOLS
	ROSMARINUS O. 'PROSTRATUS', CREEPING ROSEMARY 1 GAL. SIZE @ 30" O.C.	L
	LANTANA CAMARA 'DWARF GOLD', DWARF LANTANA 1 GAL. SIZE @ 30" O.C.	L
	MUHLENBERGIA RIGENS, DEER GRASS 1 GAL. SIZE @ 42" O.C.	L
	SALVIA CLEVLANDII, CLEVLAND SAGE 5 GAL. SIZE @ 48" O.C.	L
	ENCELIJA DESERTII, DESERT ENCELLIA, 1 GAL. SIZE @ 36" O.C.	M
	LONICERA J. 'HALLIANA', HALL'S HONEYSUCKLE 1 GAL. SIZE @ 24" O.C.	L
	CARISSA MACROCARPA 'GREEN CARPET', NATAL PLUM 1 GAL. SIZE @ 30" O.C.	M
	SALVIA LEUCANTHA, MEXICAN BUSH SAGE 5 GAL. SIZE @ 42" O.C.	L
	AGAVE 'BLUE FLAME', BLUE FLAME AGAVE 5 GAL. SIZE @ 36" O.C.	L
	LEYMUS C. 'CANYON PRINCE', CANYON PRINCE WILD RYE 1 GAL. SIZE @ 36" O.C.	L
	DIETES BICOLOR, FORTNIGHT LILY 1 GAL. SIZE @ 24" O.C.	M
	BACCHARIS X 'STARN', PROSTRATE COYOTE BUSH 1 GAL. SIZE @ 42" O.C.	L
	EROSION CONTROL GROUND COVER AT BASIN SLOPES BACCHARIS 'PIGEON POINT', DWARF COYOTE BUSH FLATS AT 18" O.C.	L
	NON-IRRIGATED HYDROSEED MIX AT STORM WATER INFILTRATION BASIN BOTTOM, TOLERANT OF SEASONAL WATER INUNDATION	VL

NOTE: APPLY A 3" MIN. LAYER OF MULCH TOP DRESSING WITHIN ALL PLANTING AREAS. A SAMPLE IS REQUIRED PRIOR TO APPLICATION.

DESIGN KEY NOTES:

1. STREET TREE PER PLANTING LEGEND.
2. TYP. LAYERED ACCENT PLANTING ALONG STREET FRONTAGE (LOW-GROWING).
3. FOUNDATION SHRUB ALONG BUILDING PER PLANTING LEGEND.
4. EVERGREEN PARKING LOT CANOPY TREE (LOW-LITTER TYPE).
5. FLOWERING ACCENT PLANT AT FOCAL AREAS PER PLANTING LEGEND.
6. VERTICAL TREE AT BUILDING PER PLANTING LEGEND.

REFERENCE NOTES:

- A. SIDEWALK PER CIVIL'S PLANS.
- B. GATE PER ARCH. PLANS.
- C. DETENTION BASIN PER CIVIL PLANS.
- D. TRASH ENCLOSURE PER ARCH. PLANS.

WUCOLS PLANT FACTOR
THIS PROJECT IS LOCATED IN 'WUCOLS' REGION '2-CENTRALVALLEY'.

H = HIGH WATER NEEDS
M = MODERATE WATER NEEDS
L = LOW WATER NEEDS
VL= VERY LOW WATER NEEDS

GENERAL NOTES:

- ROCK RIP-RAP MATERIAL SHALL BE INSTALLED WHERE DRAIN LINES CONNECT TO INFILTRATION AREAS.
- ALL UTILITY EQUIPMENT SUCH AS BACKFLOW UNITS, FIRE DETECTOR CHECKS, FIRE CHECK VALVE, AND AIR CONDITIONING UNITS WILL BE SCREENED WITH EVERGREEN PLANT MATERIAL ONCE FINAL LOCATIONS HAVE BEEN DETERMINED.

CONCEPTUAL PLAN NOTE:

THIS IS A CONCEPTUAL LANDSCAPE PLAN. IT IS BASED ON PRELIMINARY INFORMATION WHICH IS NOT FULLY VERIFIED AND MAY BE INCOMPLETE. IT IS MEANT AS A COMPARATIVE AID IN EXAMINING ALTERNATE DEVELOPMENT STRATEGIES AND ANY QUANTITIES INDICATED ARE SUBJECT TO REVISION AS MORE RELIABLE INFORMATION BECOMES AVAILABLE.

IRRIGATION NOTE:

THE PROJECT WILL BE DESIGNED WITH AN AUTOMATIC IRRIGATION SYSTEM WITH A SMART IRRIGATION CONTROLLER TO COMPLY WITH CALIFORNIA MODEL WATER EFFICIENT LANDSCAPE ORDINANCE (MWELO).

WUCOLS PLANT FACTOR
THIS PROJECT IS LOCATED IN 'WUCOLS' REGION '2-CENTRALVALLEY'.

H = HIGH WATER NEEDS
M = MODERATE WATER NEEDS
L = LOW WATER NEEDS
VL= VERY LOW WATER NEEDS

CONCEPTUAL LANDSCAPE PLAN
AIRPORT DRIVE KERN COUNTY

KERN COUNTY, CALIFORNIA

PD PLAN 72, MAP 102; ZV 57, MAP 102

BUILDING 2

Sec. 2, T.29S., R.27E., COUNTY OF KERN

2. Kern County Environmental Checklist Form

2.1. Environmental Factors Potentially Affected

In accordance with CEQA Guidelines, the County intends to prepare an Environmental Impact Report (EIR) to evaluate potential environmental effects of the project and to propose mitigation measures to reduce any significant effects identified.

The environmental factors checked below would be potentially affected by this project, involving at least one impact that is a "potentially significant impact" as indicated by the Kern County Environmental Checklist. As such, the analysis contained within the EIR will focus on these issue areas.

☒ Aesthetics	☒ Agricultural and Forestry Resources	☒ Air Quality
☒ Biological Resources	☒ Cultural Resources	☒ Energy
☒ Geology and Soils	☒ Greenhouse Gas Emissions	☒ Hazards and Hazardous Materials
☒ Hydrology and Water Quality	☒ Land Use and Planning	☒ Mineral Resources
☒ Noise	☒ Population and Housing	☒ Public Services
☒ Recreation	☒ Transportation and Traffic	☒ Tribal Cultural Resources
☒ Utilities/Service Systems	☒ Wildfire	☒ Mandatory Findings of Significance

2.2. Determination

(To be completed by the Lead Agency)

Based on this initial evaluation:

☐ I find that the proposed project COULD NOT have a significant effect on the environment, and a NEGATIVE DECLARATION will be prepared.

☐ I find that although the proposed project could have a significant effect on the environment, there will not be a significant effect in this case because revisions in the project have been made by or agreed to by the project proponent. A MITIGATED NEGATIVE DECLARATION will be prepared.

☒ I find that the proposed project MAY have a significant effect on the environment, and an ENVIRONMENTAL IMPACT REPORT is required.

☐ I find that the proposed project MAY have a "potentially significant impact" or "potentially significant unless mitigated" impact on the environment, but at least one effect (a) has been adequately analyzed in an earlier document pursuant to applicable legal standards, and (b) has been addressed by mitigation measures based on the earlier analysis as described on attached sheets. An ENVIRONMENT IMPACT REPORT is required, but it must analyze only the effects that remain to be addressed.

☐ I find that although the proposed project could have a significant effect on the environment, because all potentially significant effects (a) have been analyzed adequately in an earlier EIR or NEGATIVE DECLARATION pursuant to applicable standards, and (b) have been avoided or mitigated pursuant to that earlier EIR or NEGATIVE DECLARATION, including revisions or mitigation measures that are imposed upon the proposed project, nothing further is required.

Signature:

Date:
November 16, 2023

Printed Name:
Alexis Brito

Title:
Planner I

P: (626) 314-3821
F: (626) 389-5414
E: info@mitchtsailaw.com

Mitchell M. Tsai
Law Firm

139 South Hudson Avenue
Suite 200
Pasadena, California 91101

VIA E-MAIL

December 6, 2023

Alexis Brito, Planner
Kern County Planning and Natural Resources Department
2700 "M" Street, Suite 100
Bakersfield, CA 93301
Em: BritoAL@kerncounty.com

RE: County of Kern's IPG Industrial Project (SCH# 2023110442:).

Dear Alexis Brito,

On behalf of the Western States Regional Council of Carpenters ("**Western Carpenters**" or "**WSRCC**"), my Office is submitting these comments for the County of Kern's ("**County**") December 6, 2023 Scoping Meeting for the IPG Industrial Project ("**Project**").

The Western States Regional Council of Carpenters is a labor union representing almost 90,000 union carpenters in 12 states, including California, and has a strong interest in well-ordered land use planning and in addressing the environmental impacts of development projects.

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

• Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

• Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Individual members of the Western Carpenters live, work, and recreate in the County and surrounding communities and would be directly affected by the Project's environmental impacts.

The Western Carpenters expressly reserves the right to supplement these comments at or prior to hearings on the Project, and at any later hearing and proceeding related to this Project. Gov. Code, § 65009, subd. (b); Pub. Res. Code, § 21177, subd. (a); see *Bakersfield Citizens for Local Control v. Bakersfield* (2004) 124 Cal.App.4th 1184, 1199-1203; see also *Galante Vineyards v. Monterey Water Dist.* (1997) 60 Cal.App.4th 1109, 1121.

The Western Carpenters incorporates by reference all comments raising issues regarding the Environmental Impact Report (EIR) submitted prior to certification of the EIR for the Project. See *Citizens for Clean Energy v City of Woodland* (2014) 225 Cal.App.4th 173, 191 (finding that any party who has objected to the project's environmental documentation may assert any issue timely raised by other parties).

Moreover, the Western Carpenters requests that the County provide notice for any and all notices referring or related to the Project issued under the California Environmental Quality Act (**CEQA**) (Pub. Res. Code, § 21000 *et seq.*), and the California Planning and Zoning Law ("**Planning and Zoning Law**") (Gov. Code, §§ 65000–65010). California Public Resources Code Sections 21092.2, and 21167(f) and California Government Code Section 65092 require agencies to mail such notices to any person who has filed a written request for them with the clerk of the agency's governing body.

I. THE COUNTY SHOULD REQUIRE THE USE OF A LOCAL WORKFORCE TO BENEFIT THE COMMUNITY'S ECONOMIC DEVELOPMENT AND ENVIRONMENT

The County should require the Project to be built using local workers who have graduated from a Joint Labor-Management Apprenticeship Program approved by the State of California, have at least as many hours of on-the-job experience in the applicable craft which would be required to graduate from such a state-approved apprenticeship training program, or who are registered apprentices in a state-approved apprenticeship training program.

Community benefits such as local hire can also be helpful to reduce environmental impacts and improve the positive economic impact of the Project. Local hire

provisions requiring that a certain percentage of workers reside within 10 miles or less of the Project site can reduce the length of vendor trips, reduce greenhouse gas emissions, and provide localized economic benefits. As environmental consultants Matt Hagemann and Paul E. Rosenfeld note:

> [A]ny local hire requirement that results in a decreased worker trip length from the default value has the potential to result in a reduction of construction-related GHG emissions, though the significance of the reduction would vary based on the location and urbanization level of the project site.

March 8, 2021 SWAPE Letter to Mitchell M. Tsai re Local Hire Requirements and Considerations for Greenhouse Gas Modeling.

Workforce requirements promote the development of skilled trades that yield sustainable economic development. As the California Workforce Development Board and the University of California, Berkeley Center for Labor Research and Education concluded:

> [L]abor should be considered an investment rather than a cost—and investments in growing, diversifying, and upskilling California's workforce can positively affect returns on climate mitigation efforts. In other words, well-trained workers are key to delivering emissions reductions and moving California closer to its climate targets.[1]

Furthermore, workforce policies have significant environmental benefits given that they improve an area's jobs-housing balance, decreasing the amount and length of job commutes and the associated greenhouse gas (GHG) emissions. In fact, on May 7, 2021, the South Coast Air Quality Management District found that that the "[u]se of a local state-certified apprenticeship program" can result in air pollutant reductions.[2]

---

[1] California Workforce Development Board (2020) Putting California on the High Road: A Jobs and Climate Action Plan for 2030 at p. ii, *available at* https://laborcenter.berkeley.edu/wp-content/uploads/2020/09/Putting-California-on-the-High-Road.pdf.

[2] South Coast Air Quality Management District (May 7, 2021) Certify Final Environmental Assessment and Adopt Proposed Rule 2305 – Warehouse Indirect Source Rule – Warehouse Actions and Investments to Reduce Emissions Program, and Proposed Rule 316 – Fees for Rule 2305, Submit Rule 2305 for Inclusion Into the SIP, and Approve Supporting Budget Actions, *available at* http://www.aqmd.gov/docs/default-source/Agendas/Governing-Board/2021/2021-May7-027.pdf?sfvrsn=10.

Locating jobs closer to residential areas can have significant environmental benefits. As the California Planning Roundtable noted in 2008:

> People who live and work in the same jurisdiction would be more likely to take transit, walk, or bicycle to work than residents of less balanced communities and their vehicle trips would be shorter. Benefits would include potential reductions in both vehicle miles traveled and vehicle hours traveled.[3]

Moreover, local hire mandates and skill-training are critical facets of a strategy to reduce vehicle miles traveled (VMT). As planning experts Robert Cervero and Michael Duncan have noted, simply placing jobs near housing stock is insufficient to achieve VMT reductions given that the skill requirements of available local jobs must match those held by local residents.[4] Some municipalities have even tied local hire and other workforce policies to local development permits to address transportation issues. Cervero and Duncan note that:

> In nearly built-out Berkeley, CA, the approach to balancing jobs and housing is to create local jobs rather than to develop new housing. The city's First Source program encourages businesses to hire local residents, especially for entry- and intermediate-level jobs, and sponsors vocational training to ensure residents are employment-ready. While the program is voluntary, some 300 businesses have used it to date, placing more than 3,000 city residents in local jobs since it was launched in 1986. When needed, these carrots are matched by sticks, since the city is not shy about negotiating corporate participation in First Source as a condition of approval for development permits.

Recently, the State of California verified its commitment towards workforce development through the Affordable Housing and High Road Jobs Act of 2022, otherwise known as Assembly Bill No. 2011 ("**AB2011**"). AB2011 amended the

---

[3] California Planning Roundtable (2008) Deconstructing Jobs-Housing Balance at p. 6, *available at* https://cproundtable.org/static/media/uploads/publications/cpr-jobs-housing.pdf

[4] Cervero, Robert and Duncan, Michael (2006) Which Reduces Vehicle Travel More: Jobs-Housing Balance or Retail-Housing Mixing? Journal of the American Planning Association 72 (4), 475-490, 482, *available at* http://reconnectingamerica.org/assets/Uploads/UTCT-825.pdf.

Planning and Zoning Law to allow ministerial, by-right approval for projects being built alongside commercial corridors that meet affordability and labor requirements.

The County should consider utilizing local workforce policies and requirements to benefit the local area economically and to mitigate greenhouse gas, improve air quality, and reduce transportation impacts.

II. THE COUNTY SHOULD IMPOSE TRAINING REQUIREMENTS FOR THE PROJECT'S CONSTRUCTION ACTIVITIES TO PREVENT COMMUNITY SPREAD OF COVID-19 AND OTHER INFECTIOUS DISEASES

Construction work has been defined as a Lower to High-risk activity for COVID-19 spread by the Occupations Safety and Health Administration. Recently, several construction sites have been identified as sources of community spread of COVID-19.[5]

Western Carpenters recommend that the Lead Agency adopt additional requirements to mitigate public health risks from the Project's construction activities. Western Carpenters requests that the Lead Agency require safe on-site construction work practices as well as training and certification for any construction workers on the Project Site.

In particular, based upon Western Carpenters' experience with safe construction site work practices, Western Carpenters recommends that the Lead Agency require that while construction activities are being conducted at the Project Site:

Construction Site Design:

- The Project Site will be limited to two controlled entry points.
- Entry points will have temperature screening technicians taking temperature readings when the entry point is open.

[5] Santa Clara County Public Health (June 12, 2020) COVID-19 CASES AT CONSTRUCTION SITES HIGHLIGHT NEED FOR CONTINUED VIGILANCE IN SECTORS THAT HAVE REOPENED, *available at* https://www.sccgov.org/sites/covid19/Pages/press-release-06-12-2020-cases-at-construction-sites.aspx.

- The Temperature Screening Site Plan shows details regarding access to the Project Site and Project Site logistics for conducting temperature screening.
- A 48-hour advance notice will be provided to all trades prior to the first day of temperature screening.
- The perimeter fence directly adjacent to the entry points will be clearly marked indicating the appropriate 6-foot social distancing position for when you approach the screening area. Please reference the Apex temperature screening site map for additional details.
- There will be clear signage posted at the project site directing you through temperature screening.
- Provide hand washing stations throughout the construction site.

Testing Procedures:

- The temperature screening being used are non-contact devices.
- Temperature readings will not be recorded.
- Personnel will be screened upon entering the testing center and should only take 1-2 seconds per individual.
- Hard hats, head coverings, sweat, dirt, sunscreen or any other cosmetics must be removed on the forehead before temperature screening.
- Anyone who refuses to submit to a temperature screening or does not answer the health screening questions will be refused access to the Project Site.
- Screening will be performed at both entrances from 5:30 am to 7:30 am.; main gate [ZONE 1] and personnel gate [ZONE 2]
- After 7:30 am only the main gate entrance [ZONE 1] will continue to be used for temperature testing for anybody

gaining entry to the project site such as returning personnel, deliveries, and visitors.

- If the digital thermometer displays a temperature reading above 100.0 degrees Fahrenheit, a second reading will be taken to verify an accurate reading.
- If the second reading confirms an elevated temperature, DHS will instruct the individual that he/she will not be allowed to enter the Project Site. DHS will also instruct the individual to promptly notify his/her supervisor and his/her human resources (HR) representative and provide them with a copy of Annex A.

Planning

- Require the development of an Infectious Disease Preparedness and Response Plan that will include basic infection prevention measures (requiring the use of personal protection equipment), policies and procedures for prompt identification and isolation of sick individuals, social distancing (prohibiting gatherings of no more than 10 people including all-hands meetings and all-hands lunches) communication and training and workplace controls that meet standards that may be promulgated by the Center for Disease Control, Occupational Safety and Health Administration, Cal/OSHA, California Department of Public Health or applicable local public health agencies.[6]

The United Brotherhood of Carpenters and Carpenters International Training Fund has developed COVID-19 Training and Certification to ensure that Carpenter union members and apprentices conduct safe work practices. The Agency should require that

[6] *See also* The Center for Construction Research and Training, North America's Building Trades Unions (April 27 2020) NABTU and CPWR COVIC-19 Standards for U.S Constructions Sites, *available at* https://www.cpwr.com/sites/default/files/NABTU_CPWR_Standards_COVID-19.pdf; Los Angeles County Department of Public Works (2020) Guidelines for Construction Sites During COVID-19 Pandemic, *available at* https://dpw.lacounty.gov/building-and-safety/docs/pw_guidelines-construction-sites.pdf.

all construction workers undergo COVID-19 Training and Certification before being allowed to conduct construction activities at the Project Site.

Western Carpenters has also developed a rigorous Infection Control Risk Assessment ("**ICRA**") training program to ensure it delivers a workforce that understands how to identify and control infection risks by implementing protocols to protect themselves and all others during renovation and construction projects in healthcare environments.[7]

ICRA protocols are intended to contain pathogens, control airflow, and protect patients during the construction, maintenance and renovation of healthcare facilities. ICRA protocols prevent cross contamination, minimizing the risk of secondary infections in patients at hospital facilities.

The County should require the Project to be built using a workforce trained in ICRA protocols.

Sincerely,



Mitchell M. Tsai
Attorneys for Western States Regional Council of Carpenters

Attached:

March 8, 2021 SWAPE Letter to Mitchell M. Tsai re Local Hire Requirements and Considerations for Greenhouse Gas Modeling (Exhibit A);

Air Quality and GHG Expert Paul Rosenfeld CV (Exhibit B); and

Air Quality and GHG Expert Matt Hagemann CV (Exhibit C).

[7] For details concerning Western Carpenters' ICRA training program, *see* https://icrahealthcare.com/.

EXHIBIT A

SWAPE Technical Consultation, Data Analysis and Litigation Support for the Environment

2656 29th Street, Suite 201
Santa Monica, CA 90405

Matt Hagemann, P.G, C.Hg.
(949) 887-9013
mhagemann@swape.com

Paul E. Rosenfeld, PhD
(310) 795-2335
prosenfeld@swape.com

March 8, 2021

Mitchell M. Tsai
155 South El Molino, Suite 104
Pasadena, CA 91101

Subject: Local Hire Requirements and Considerations for Greenhouse Gas Modeling

Dear Mr. Tsai,

Soil Water Air Protection Enterprise ("SWAPE") is pleased to provide the following draft technical report explaining the significance of worker trips required for construction of land use development projects with respect to the estimation of greenhouse gas ("GHG") emissions. The report will also discuss the potential for local hire requirements to reduce the length of worker trips, and consequently, reduced or mitigate the potential GHG impacts.

Worker Trips and Greenhouse Gas Calculations

The California Emissions Estimator Model ("CalEEMod") is a "statewide land use emissions computer model designed to provide a uniform platform for government agencies, land use planners, and environmental professionals to quantify potential criteria pollutant and greenhouse gas (GHG) emissions associated with both construction and operations from a variety of land use projects."[1] CalEEMod quantifies construction-related emissions associated with land use projects resulting from off-road construction equipment; on-road mobile equipment associated with workers, vendors, and hauling; fugitive dust associated with grading, demolition, truck loading, and on-road vehicles traveling along paved and unpaved roads; and architectural coating activities; and paving.[2]

The number, length, and vehicle class of worker trips are utilized by CalEEMod to calculate emissions associated with the on-road vehicle trips required to transport workers to and from the Project site during construction.[3]

[1] "California Emissions Estimator Model." CAPCOA, 2017, *available at:* http://www.aqmd.gov/caleemod/home.
[2] "California Emissions Estimator Model." CAPCOA, 2017, *available at:* http://www.aqmd.gov/caleemod/home.
[3] "CalEEMod User's Guide." CAPCOA, November 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4, p. 34.

Specifically, the number and length of vehicle trips is utilized to estimate the vehicle miles travelled ("VMT") associated with construction. Then, utilizing vehicle-class specific EMFAC 2014 emission factors, CalEEMod calculates the vehicle exhaust, evaporative, and dust emissions resulting from construction-related VMT, including personal vehicles for worker commuting.[4]

Specifically, in order to calculate VMT, CalEEMod multiplies the average daily trip rate by the average overall trip length (see excerpt below):

> "$VMT_d = \Sigma(\text{Average Daily Trip Rate}_i * \text{Average Overall Trip Length}_i)_n$
>
> Where:
>
> n = Number of land uses being modeled."[5]

Furthermore, to calculate the on-road emissions associated with worker trips, CalEEMod utilizes the following equation (see excerpt below):

> "$\text{Emissions}_{pollutant} = VMT * EF_{running,pollutant}$
>
> Where:
>
> $\text{Emissions}_{pollutant}$ = emissions from vehicle running for each pollutant
>
> VMT = vehicle miles traveled
>
> $EF_{running,pollutant}$ = emission factor for running emissions."[6]

Thus, there is a direct relationship between trip length and VMT, as well as a direct relationship between VMT and vehicle running emissions. In other words, when the trip length is increased, the VMT and vehicle running emissions increase as a result. Thus, vehicle running emissions can be reduced by decreasing the average overall trip length, by way of a local hire requirement or otherwise.

Default Worker Trip Parameters and Potential Local Hire Requirements

As previously discussed, the number, length, and vehicle class of worker trips are utilized by CalEEMod to calculate emissions associated with the on-road vehicle trips required to transport workers to and from the Project site during construction.[7] In order to understand how local hire requirements and associated worker trip length reductions impact GHG emissions calculations, it is important to consider the CalEEMod default worker trip parameters. CalEEMod provides recommended default values based on site-specific information, such as land use type, meteorological data, total lot acreage, project type and typical equipment associated with project type. If more specific project information is known, the user can change the default values and input project-specific values, but the California Environmental Quality Act ("CEQA") requires that such changes be justified by substantial evidence.[8] The default number of construction-related worker trips is calculated by multiplying the

[4] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 14-15.
[5] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 23.
[6] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 15.
[7] "CalEEMod User's Guide." CAPCOA, November 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4, p. 34.
[8] CalEEMod User Guide, *available at:* http://www.caleemod.com/, p. 1, 9.

number of pieces of equipment for all phases by 1.25, with the exception of worker trips required for the building construction and architectural coating phases.[9] Furthermore, the worker trip vehicle class is a 50/25/25 percent mix of light duty autos, light duty truck class 1 and light duty truck class 2, respectively."[10] Finally, the default worker trip length is consistent with the length of the operational home-to-work vehicle trips.[11] The operational home-to-work vehicle trip lengths are:

> "[B]ased on the *location* and *urbanization* selected on the project characteristic screen. These values were *supplied by the air districts or use a default average for the state*. Each district (or county) also assigns trip lengths for urban and rural settings" (emphasis added). [12]

Thus, the default worker trip length is based on the location and urbanization level selected by the User when modeling emissions. The below table shows the CalEEMod default rural and urban worker trip lengths by air basin (see excerpt below and Attachment A).[13]

Worker Trip Length by Air Basin		
Air Basin	**Rural (miles)**	**Urban (miles)**
Great Basin Valleys	16.8	10.8
Lake County	16.8	10.8
Lake Tahoe	16.8	10.8
Mojave Desert	16.8	10.8
Mountain Counties	16.8	10.8
North Central Coast	17.1	12.3
North Coast	16.8	10.8
Northeast Plateau	16.8	10.8
Sacramento Valley	16.8	10.8
Salton Sea	14.6	11
San Diego	16.8	10.8
San Francisco Bay Area	10.8	10.8
San Joaquin Valley	16.8	10.8
South Central Coast	16.8	10.8
South Coast	19.8	14.7
Average	**16.47**	**11.17**
Minimum	**10.80**	**10.80**
Maximum	**19.80**	**14.70**
Range	**9.00**	**3.90**

[9] "CalEEMod User's Guide." CAPCOA, November 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4, p. 34.
[10] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 15.
[11] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 14.
[12] "Appendix A Calculation Details for CalEEMod." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6, p. 21.
[13] "Appendix D Default Data Tables." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/05_appendix-d2016-3-2.pdf?sfvrsn=4, p. D-84 – D-86.

As demonstrated above, default rural worker trip lengths for air basins in California vary from 10.8- to 19.8-miles, with an average of 16.47 miles. Furthermore, default urban worker trip lengths vary from 10.8- to 14.7-miles, with an average of 11.17 miles. Thus, while default worker trip lengths vary by location, default urban worker trip lengths tend to be shorter in length. Based on these trends evident in the CalEEMod default worker trip lengths, we can reasonably assume that the efficacy of a local hire requirement is especially dependent upon the urbanization of the project site, as well as the project location.

Practical Application of a Local Hire Requirement and Associated Impact

To provide an example of the potential impact of a local hire provision on construction-related GHG emissions, we estimated the significance of a local hire provision for the Village South Specific Plan ("Project") located in the City of Claremont ("City"). The Project proposed to construct 1,000 residential units, 100,000-SF of retail space, 45,000-SF of office space, as well as a 50-room hotel, on the 24-acre site. The Project location is classified as Urban and lies within the Los Angeles-South Coast County. As a result, the Project has a default worker trip length of 14.7 miles.[14] In an effort to evaluate the potential for a local hire provision to reduce the Project's construction-related GHG emissions, we prepared an updated model, reducing all worker trip lengths to 10 miles (see Attachment B). Our analysis estimates that if a local hire provision with a 10-mile radius were to be implemented, the GHG emissions associated with Project construction would decrease by approximately 17% (see table below and Attachment C).

Local Hire Provision Net Change	
Without Local Hire Provision	
Total Construction GHG Emissions (MT CO_2e)	3,623
Amortized Construction GHG Emissions (MT CO_2e/year)	120.77
With Local Hire Provision	
Total Construction GHG Emissions (MT CO2e)	3,024
Amortized Construction GHG Emissions (MT CO_2e/year)	100.80
% Decrease in Construction-related GHG Emissions	***17%***

As demonstrated above, by implementing a local hire provision requiring 10 mile worker trip lengths, the Project could reduce potential GHG emissions associated with construction worker trips. More broadly, any local hire requirement that results in a decreased worker trip length from the default value has the potential to result in a reduction of construction-related GHG emissions, though the significance of the reduction would vary based on the location and urbanization level of the project site.

This serves as an example of the potential impacts of local hire requirements on estimated project-level GHG emissions, though it does not indicate that local hire requirements would result in reduced construction-related GHG emission for all projects. As previously described, the significance of a local hire requirement depends on the worker trip length enforced and the default worker trip length for the project's urbanization level and location.

[14] "Appendix D Default Data Tables." CAPCOA, October 2017, *available at:* http://www.aqmd.gov/docs/default-source/caleemod/05_appendix-d2016-3-2.pdf?sfvrsn=4, p. D-85.

Disclaimer

SWAPE has received limited discovery. Additional information may become available in the future; thus, we retain the right to revise or amend this report when additional information becomes available. Our professional services have been performed using that degree of care and skill ordinarily exercised, under similar circumstances, by reputable environmental consultants practicing in this or similar localities at the time of service. No other warranty, expressed or implied, is made as to the scope of work, work methodologies and protocols, site conditions, analytical testing results, and findings presented. This report reflects efforts which were limited to information that was reasonably accessible at the time of the work, and may contain informational gaps, inconsistencies, or otherwise be incomplete due to the unavailability or uncertainty of information obtained or provided by third parties.

Sincerely,

Matt Hagemann, P.G., C.Hg.

Paul E. Rosenfeld, Ph.D.

Location Type	Location Name	Rural H-W (miles)	Urban H-W (miles)
Air Basin	Great Basin	16.8	10.8
Air Basin	Lake County	16.8	10.8
Air Basin	Lake Tahoe	16.8	10.8
Air Basin	Mojave Desert	16.8	10.8
Air Basin	Mountain	16.8	10.8
Air Basin	North Central	17.1	12.3
Air Basin	North Coast	16.8	10.8
Air Basin	Northeast	16.8	10.8
Air Basin	Sacramento	16.8	10.8
Air Basin	Salton Sea	14.6	11
Air Basin	San Diego	16.8	10.8
Air Basin	San Francisco	10.8	10.8
Air Basin	San Joaquin	16.8	10.8
Air Basin	South Central	16.8	10.8
Air Basin	South Coast	19.8	14.7
Air District	Amador County	16.8	10.8
Air District	Antelope Valley	16.8	10.8
Air District	Bay Area AQMD	10.8	10.8
Air District	Butte County	12.54	12.54
Air District	Calaveras	16.8	10.8
Air District	Colusa County	16.8	10.8
Air District	El Dorado	16.8	10.8
Air District	Feather River	16.8	10.8
Air District	Glenn County	16.8	10.8
Air District	Great Basin	16.8	10.8
Air District	Imperial County	10.2	7.3
Air District	Kern County	16.8	10.8
Air District	Lake County	16.8	10.8
Air District	Lassen County	16.8	10.8
Air District	Mariposa	16.8	10.8
Air District	Mendocino	16.8	10.8
Air District	Modoc County	16.8	10.8
Air District	Mojave Desert	16.8	10.8
Air District	Monterey Bay	16.8	10.8
Air District	North Coast	16.8	10.8
Air District	Northern Sierra	16.8	10.8
Air District	Northern	16.8	10.8
Air District	Placer County	16.8	10.8
Air District	Sacramento	15	10

Air District	San Diego	16.8	10.8
Air District	San Joaquin	16.8	10.8
Air District	San Luis Obispo	13	13
Air District	Santa Barbara	8.3	8.3
Air District	Shasta County	16.8	10.8
Air District	Siskiyou County	16.8	10.8
Air District	South Coast	19.8	14.7
Air District	Tehama County	16.8	10.8
Air District	Tuolumne	16.8	10.8
Air District	Ventura County	16.8	10.8
Air District	Yolo/Solano	15	10
County	Alameda	10.8	10.8
County	Alpine	16.8	10.8
County	Amador	16.8	10.8
County	Butte	12.54	12.54
County	Calaveras	16.8	10.8
County	Colusa	16.8	10.8
County	Contra Costa	10.8	10.8
County	Del Norte	16.8	10.8
County	El Dorado-Lake	16.8	10.8
County	El Dorado-	16.8	10.8
County	Fresno	16.8	10.8
County	Glenn	16.8	10.8
County	Humboldt	16.8	10.8
County	Imperial	10.2	7.3
County	Inyo	16.8	10.8
County	Kern-Mojave	16.8	10.8
County	Kern-San	16.8	10.8
County	Kings	16.8	10.8
County	Lake	16.8	10.8
County	Lassen	16.8	10.8
County	Los Angeles-	16.8	10.8
County	Los Angeles-	19.8	14.7
County	Madera	16.8	10.8
County	Marin	10.8	10.8
County	Mariposa	16.8	10.8
County	Mendocino-	16.8	10.8
County	Mendocino-	16.8	10.8
County	Mendocino-	16.8	10.8
County	Mendocino-	16.8	10.8
County	Merced	16.8	10.8
County	Modoc	16.8	10.8
County	Mono	16.8	10.8
County	Monterey	16.8	10.8
County	Napa	10.8	10.8

County	Nevada	16.8	10.8
County	Orange	19.8	14.7
County	Placer-Lake	16.8	10.8
County	Placer-Mountain	16.8	10.8
County	Placer-	16.8	10.8
County	Plumas	16.8	10.8
County	Riverside-	16.8	10.8
County	Riverside-	19.8	14.7
County	Riverside-Salton	14.6	11
County	Riverside-South	19.8	14.7
County	Sacramento	15	10
County	San Benito	16.8	10.8
County	San Bernardino-	16.8	10.8
County	San Bernardino-	19.8	14.7
County	San Diego	16.8	10.8
County	San Francisco	10.8	10.8
County	San Joaquin	16.8	10.8
County	San Luis Obispo	13	13
County	San Mateo	10.8	10.8
County	Santa Barbara-	8.3	8.3
County	Santa Barbara-	8.3	8.3
County	Santa Clara	10.8	10.8
County	Santa Cruz	16.8	10.8
County	Shasta	16.8	10.8
County	Sierra	16.8	10.8
County	Siskiyou	16.8	10.8
County	Solano-	15	10
County	Solano-San	16.8	10.8
County	Sonoma-North	16.8	10.8
County	Sonoma-San	10.8	10.8
County	Stanislaus	16.8	10.8
County	Sutter	16.8	10.8
County	Tehama	16.8	10.8
County	Trinity	16.8	10.8
County	Tulare	16.8	10.8
County	Tuolumne	16.8	10.8
County	Ventura	16.8	10.8
County	Yolo	15	10
County	Yuba	16.8	10.8
Statewide	Statewide	16.8	10.8

Worker Trip Length by Air Basin		
Air Basin	**Rural (miles)**	**Urban (miles)**
Great Basin Valleys	16.8	10.8
Lake County	16.8	10.8
Lake Tahoe	16.8	10.8
Mojave Desert	16.8	10.8
Mountain Counties	16.8	10.8
North Central Coast	17.1	12.3
North Coast	16.8	10.8
Northeast Plateau	16.8	10.8
Sacramento Valley	16.8	10.8
Salton Sea	14.6	11
San Diego	16.8	10.8
San Francisco Bay Area	10.8	10.8
San Joaquin Valley	16.8	10.8
South Central Coast	16.8	10.8
South Coast	19.8	14.7
Average	**16.47**	**11.17**
Mininum	**10.80**	**10.80**
Maximum	**19.80**	**14.70**
Range	**9.00**	**3.90**

Village South Specific Plan (Proposed)

Los Angeles-South Coast County, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Office Building	45.00	1000sqft	1.03	45,000.00	0
High Turnover (Sit Down Restaurant)	36.00	1000sqft	0.83	36,000.00	0
Hotel	50.00	Room	1.67	72,600.00	0
Quality Restaurant	8.00	1000sqft	0.18	8,000.00	0
Apartments Low Rise	25.00	Dwelling Unit	1.56	25,000.00	72
Apartments Mid Rise	975.00	Dwelling Unit	25.66	975,000.00	2789
Regional Shopping Center	56.00	1000sqft	1.29	56,000.00	0

1.2 Other Project Characteristics

Urbanization	Urban	**Wind Speed (m/s)**	2.2	**Precipitation Freq (Days)**	33
Climate Zone	9			**Operational Year**	2028
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	702.44	**CH4 Intensity (lb/MWhr)**	0.029	**N2O Intensity (lb/MWhr)**	0.006

1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Table Name	Column Name	Default Value	New Value
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberWood	1.25	0.00
tblFireplaces	NumberWood	48.75	0.00
tblVehicleTrips	ST_TR	7.16	6.17
tblVehicleTrips	ST_TR	6.39	3.87
tblVehicleTrips	ST_TR	2.46	1.39
tblVehicleTrips	ST_TR	158.37	79.82
tblVehicleTrips	ST_TR	8.19	3.75
tblVehicleTrips	ST_TR	94.36	63.99
tblVehicleTrips	ST_TR	49.97	10.74
tblVehicleTrips	SU_TR	6.07	6.16
tblVehicleTrips	SU_TR	5.86	4.18
tblVehicleTrips	SU_TR	1.05	0.69
tblVehicleTrips	SU_TR	131.84	78.27

tblVehicleTrips	SU_TR	5.95	3.20
tblVehicleTrips	SU_TR	72.16	57.65
tblVehicleTrips	SU_TR	25.24	6.39
tblVehicleTrips	WD_TR	6.59	5.83
tblVehicleTrips	WD_TR	6.65	4.13
tblVehicleTrips	WD_TR	11.03	6.41
tblVehicleTrips	WD_TR	127.15	65.80
tblVehicleTrips	WD_TR	8.17	3.84
tblVehicleTrips	WD_TR	89.95	62.64
tblVehicleTrips	WD_TR	42.70	9.43
tblWoodstoves	NumberCatalytic	1.25	0.00
tblWoodstoves	NumberCatalytic	48.75	0.00
tblWoodstoves	NumberNoncatalytic	1.25	0.00
tblWoodstoves	NumberNoncatalytic	48.75	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2021	0.1713	1.8242	1.1662	2.4000e-003	0.4169	0.0817	0.4986	0.1795	0.0754	0.2549	0.0000	213.1969	213.1969	0.0601	0.0000	214.6993
2022	0.6904	4.1142	6.1625	0.0189	1.3058	0.1201	1.4259	0.3460	0.1128	0.4588	0.0000	1,721.6826	1,721.6826	0.1294	0.0000	1,724.9187
2023	0.6148	3.3649	5.6747	0.0178	1.1963	0.0996	1.2959	0.3203	0.0935	0.4138	0.0000	1,627.5295	1,627.5295	0.1185	0.0000	1,630.4925
2024	4.1619	0.1335	0.2810	5.9000e-004	0.0325	6.4700e-003	0.0390	8.6300e-003	6.0400e-003	0.0147	0.0000	52.9078	52.9078	8.0200e-003	0.0000	53.1082
Maximum	**4.1619**	**4.1142**	**6.1625**	**0.0189**	**1.3058**	**0.1201**	**1.4259**	**0.3460**	**0.1128**	**0.4588**	**0.0000**	**1,721.6826**	**1,721.6826**	**0.1294**	**0.0000**	**1,724.9187**

2.1 Overall Construction

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2021	0.1713	1.8242	1.1662	2.4000e-003	0.4169	0.0817	0.4986	0.1795	0.0754	0.2549	0.0000	213.1967	213.1967	0.0601	0.0000	214.6991
2022	0.6904	4.1142	6.1625	0.0189	1.3058	0.1201	1.4259	0.3460	0.1128	0.4588	0.0000	1,721.6823	1,721.6823	0.1294	0.0000	1,724.9183
2023	0.6148	3.3648	5.6747	0.0178	1.1963	0.0996	1.2959	0.3203	0.0935	0.4138	0.0000	1,627.5291	1,627.5291	0.1185	0.0000	1,630.4921
2024	4.1619	0.1335	0.2810	5.9000e-004	0.0325	6.4700e-003	0.0390	8.6300e-003	6.0400e-003	0.0147	0.0000	52.9077	52.9077	8.0200e-003	0.0000	53.1082
Maximum	**4.1619**	**4.1142**	**6.1625**	**0.0189**	**1.3058**	**0.1201**	**1.4259**	**0.3460**	**0.1128**	**0.4588**	**0.0000**	**1,721.6823**	**1,721.6823**	**0.1294**	**0.0000**	**1,724.9183**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	**9-1-2021**	**11-30-2021**	1.4103	1.4103
2	**12-1-2021**	**2-28-2022**	1.3613	1.3613
3	**3-1-2022**	**5-31-2022**	1.1985	1.1985
4	**6-1-2022**	**8-31-2022**	1.1921	1.1921
5	**9-1-2022**	**11-30-2022**	1.1918	1.1918
6	**12-1-2022**	**2-28-2023**	1.0774	1.0774
7	**3-1-2023**	**5-31-2023**	1.0320	1.0320
8	**6-1-2023**	**8-31-2023**	1.0260	1.0260

9	**9-1-2023**	**11-30-2023**	1.0265	1.0265
10	**12-1-2023**	**2-29-2024**	2.8857	2.8857
11	**3-1-2024**	**5-31-2024**	1.6207	1.6207
		Highest	2.8857	2.8857

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835
Energy	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	3,896.0732	3,896.0732	0.1303	0.0468	3,913.2833
Mobile	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162
Waste						0.0000	0.0000		0.0000	0.0000	207.8079	0.0000	207.8079	12.2811	0.0000	514.8354
Water						0.0000	0.0000		0.0000	0.0000	29.1632	556.6420	585.8052	3.0183	0.0755	683.7567
Total	**6.8692**	**9.5223**	**30.3407**	**0.0914**	**7.7979**	**0.2260**	**8.0240**	**2.0895**	**0.2219**	**2.3114**	**236.9712**	**12,294.1807**	**12,531.1519**	**15.7904**	**0.1260**	**12,963.4751**

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835
Energy	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	3,896.0732	3,896.0732	0.1303	0.0468	3,913.2833
Mobile	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162
Waste						0.0000	0.0000		0.0000	0.0000	207.8079	0.0000	207.8079	12.2811	0.0000	514.8354
Water						0.0000	0.0000		0.0000	0.0000	29.1632	556.6420	585.8052	3.0183	0.0755	683.7567
Total	**6.8692**	**9.5223**	**30.3407**	**0.0914**	**7.7979**	**0.2260**	**8.0240**	**2.0895**	**0.2219**	**2.3114**	**236.9712**	**12,294.1807**	**12,531.1519**	**15.7904**	**0.1260**	**12,963.4751**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

3.0 Construction Detail

Construction Phase

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	9/1/2021	10/12/2021	5	30	
2	Site Preparation	Site Preparation	10/13/2021	11/9/2021	5	20	
3	Grading	Grading	11/10/2021	1/11/2022	5	45	
4	Building Construction	Building Construction	1/12/2022	12/12/2023	5	500	
5	Paving	Paving	12/13/2023	1/30/2024	5	35	
6	Architectural Coating	Architectural Coating	1/31/2024	3/19/2024	5	35	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 112.5

Acres of Paving: 0

Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	458.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	801.00	143.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	160.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 Demolition - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0496	0.0000	0.0496	7.5100e-003	0.0000	7.5100e-003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0475	0.4716	0.3235	5.8000e-004		0.0233	0.0233		0.0216	0.0216	0.0000	51.0012	51.0012	0.0144	0.0000	51.3601
Total	**0.0475**	**0.4716**	**0.3235**	**5.8000e-004**	**0.0496**	**0.0233**	**0.0729**	**7.5100e-003**	**0.0216**	**0.0291**	**0.0000**	**51.0012**	**51.0012**	**0.0144**	**0.0000**	**51.3601**

3.2 Demolition - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.9300e-003	0.0634	0.0148	1.8000e-004	3.9400e-003	1.9000e-004	4.1300e-003	1.0800e-003	1.8000e-004	1.2600e-003	0.0000	17.4566	17.4566	1.2100e-003	0.0000	17.4869
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	9.7000e-004	7.5000e-004	8.5100e-003	2.0000e-005	2.4700e-003	2.0000e-005	2.4900e-003	6.5000e-004	2.0000e-005	6.7000e-004	0.0000	2.2251	2.2251	7.0000e-005	0.0000	2.2267
Total	**2.9000e-003**	**0.0641**	**0.0233**	**2.0000e-004**	**6.4100e-003**	**2.1000e-004**	**6.6200e-003**	**1.7300e-003**	**2.0000e-004**	**1.9300e-003**	**0.0000**	**19.6816**	**19.6816**	**1.2800e-003**	**0.0000**	**19.7136**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0496	0.0000	0.0496	7.5100e-003	0.0000	7.5100e-003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0475	0.4716	0.3235	5.8000e-004		0.0233	0.0233		0.0216	0.0216	0.0000	51.0011	51.0011	0.0144	0.0000	51.3600
Total	**0.0475**	**0.4716**	**0.3235**	**5.8000e-004**	**0.0496**	**0.0233**	**0.0729**	**7.5100e-003**	**0.0216**	**0.0291**	**0.0000**	**51.0011**	**51.0011**	**0.0144**	**0.0000**	**51.3600**

3.2 Demolition - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.9300e-003	0.0634	0.0148	1.8000e-004	3.9400e-003	1.9000e-004	4.1300e-003	1.0800e-003	1.8000e-004	1.2600e-003	0.0000	17.4566	17.4566	1.2100e-003	0.0000	17.4869
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	9.7000e-004	7.5000e-004	8.5100e-003	2.0000e-005	2.4700e-003	2.0000e-005	2.4900e-003	6.5000e-004	2.0000e-005	6.7000e-004	0.0000	2.2251	2.2251	7.0000e-005	0.0000	2.2267
Total	**2.9000e-003**	**0.0641**	**0.0233**	**2.0000e-004**	**6.4100e-003**	**2.1000e-004**	**6.6200e-003**	**1.7300e-003**	**2.0000e-004**	**1.9300e-003**	**0.0000**	**19.6816**	**19.6816**	**1.2800e-003**	**0.0000**	**19.7136**

3.3 Site Preparation - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1807	0.0000	0.1807	0.0993	0.0000	0.0993	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0389	0.4050	0.2115	3.8000e-004		0.0204	0.0204		0.0188	0.0188	0.0000	33.4357	33.4357	0.0108	0.0000	33.7061
Total	**0.0389**	**0.4050**	**0.2115**	**3.8000e-004**	**0.1807**	**0.0204**	**0.2011**	**0.0993**	**0.0188**	**0.1181**	**0.0000**	**33.4357**	**33.4357**	**0.0108**	**0.0000**	**33.7061**

3.3 Site Preparation - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.7000e-004	6.0000e-004	6.8100e-003	2.0000e-005	1.9700e-003	2.0000e-005	1.9900e-003	5.2000e-004	1.0000e-005	5.4000e-004	0.0000	1.7801	1.7801	5.0000e-005	0.0000	1.7814
Total	**7.7000e-004**	**6.0000e-004**	**6.8100e-003**	**2.0000e-005**	**1.9700e-003**	**2.0000e-005**	**1.9900e-003**	**5.2000e-004**	**1.0000e-005**	**5.4000e-004**	**0.0000**	**1.7801**	**1.7801**	**5.0000e-005**	**0.0000**	**1.7814**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1807	0.0000	0.1807	0.0993	0.0000	0.0993	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0389	0.4050	0.2115	3.8000e-004		0.0204	0.0204		0.0188	0.0188	0.0000	33.4357	33.4357	0.0108	0.0000	33.7060
Total	**0.0389**	**0.4050**	**0.2115**	**3.8000e-004**	**0.1807**	**0.0204**	**0.2011**	**0.0993**	**0.0188**	**0.1181**	**0.0000**	**33.4357**	**33.4357**	**0.0108**	**0.0000**	**33.7060**

3.3 Site Preparation - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.7000e-004	6.0000e-004	6.8100e-003	2.0000e-005	1.9700e-003	2.0000e-005	1.9900e-003	5.2000e-004	1.0000e-005	5.4000e-004	0.0000	1.7801	1.7801	5.0000e-005	0.0000	1.7814
Total	**7.7000e-004**	**6.0000e-004**	**6.8100e-003**	**2.0000e-005**	**1.9700e-003**	**2.0000e-005**	**1.9900e-003**	**5.2000e-004**	**1.0000e-005**	**5.4000e-004**	**0.0000**	**1.7801**	**1.7801**	**5.0000e-005**	**0.0000**	**1.7814**

3.4 Grading - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1741	0.0000	0.1741	0.0693	0.0000	0.0693	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0796	0.8816	0.5867	1.1800e-003		0.0377	0.0377		0.0347	0.0347	0.0000	103.5405	103.5405	0.0335	0.0000	104.3776
Total	**0.0796**	**0.8816**	**0.5867**	**1.1800e-003**	**0.1741**	**0.0377**	**0.2118**	**0.0693**	**0.0347**	**0.1040**	**0.0000**	**103.5405**	**103.5405**	**0.0335**	**0.0000**	**104.3776**

3.4 Grading - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.6400e-003	1.2700e-003	0.0144	4.0000e-005	4.1600e-003	3.0000e-005	4.2000e-003	1.1100e-003	3.0000e-005	1.1400e-003	0.0000	3.7579	3.7579	1.1000e-004	0.0000	3.7607
Total	**1.6400e-003**	**1.2700e-003**	**0.0144**	**4.0000e-005**	**4.1600e-003**	**3.0000e-005**	**4.2000e-003**	**1.1100e-003**	**3.0000e-005**	**1.1400e-003**	**0.0000**	**3.7579**	**3.7579**	**1.1000e-004**	**0.0000**	**3.7607**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1741	0.0000	0.1741	0.0693	0.0000	0.0693	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0796	0.8816	0.5867	1.1800e-003		0.0377	0.0377		0.0347	0.0347	0.0000	103.5403	103.5403	0.0335	0.0000	104.3775
Total	**0.0796**	**0.8816**	**0.5867**	**1.1800e-003**	**0.1741**	**0.0377**	**0.2118**	**0.0693**	**0.0347**	**0.1040**	**0.0000**	**103.5403**	**103.5403**	**0.0335**	**0.0000**	**104.3775**

3.4 Grading - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.6400e-003	1.2700e-003	0.0144	4.0000e-005	4.1600e-003	3.0000e-005	4.2000e-003	1.1100e-003	3.0000e-005	1.1400e-003	0.0000	3.7579	3.7579	1.1000e-004	0.0000	3.7607
Total	**1.6400e-003**	**1.2700e-003**	**0.0144**	**4.0000e-005**	**4.1600e-003**	**3.0000e-005**	**4.2000e-003**	**1.1100e-003**	**3.0000e-005**	**1.1400e-003**	**0.0000**	**3.7579**	**3.7579**	**1.1000e-004**	**0.0000**	**3.7607**

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0807	0.0000	0.0807	0.0180	0.0000	0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0127	0.1360	0.1017	2.2000e-004		5.7200e-003	5.7200e-003		5.2600e-003	5.2600e-003	0.0000	19.0871	19.0871	6.1700e-003	0.0000	19.2414
Total	**0.0127**	**0.1360**	**0.1017**	**2.2000e-004**	**0.0807**	**5.7200e-003**	**0.0865**	**0.0180**	**5.2600e-003**	**0.0233**	**0.0000**	**19.0871**	**19.0871**	**6.1700e-003**	**0.0000**	**19.2414**

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.8000e-004	2.1000e-004	2.4400e-003	1.0000e-005	7.7000e-004	1.0000e-005	7.7000e-004	2.0000e-004	1.0000e-005	2.1000e-004	0.0000	0.6679	0.6679	2.0000e-005	0.0000	0.6684
Total	**2.8000e-004**	**2.1000e-004**	**2.4400e-003**	**1.0000e-005**	**7.7000e-004**	**1.0000e-005**	**7.7000e-004**	**2.0000e-004**	**1.0000e-005**	**2.1000e-004**	**0.0000**	**0.6679**	**0.6679**	**2.0000e-005**	**0.0000**	**0.6684**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0807	0.0000	0.0807	0.0180	0.0000	0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0127	0.1360	0.1017	2.2000e-004		5.7200e-003	5.7200e-003		5.2600e-003	5.2600e-003	0.0000	19.0871	19.0871	6.1700e-003	0.0000	19.2414
Total	**0.0127**	**0.1360**	**0.1017**	**2.2000e-004**	**0.0807**	**5.7200e-003**	**0.0865**	**0.0180**	**5.2600e-003**	**0.0233**	**0.0000**	**19.0871**	**19.0871**	**6.1700e-003**	**0.0000**	**19.2414**

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.8000e-004	2.1000e-004	2.4400e-003	1.0000e-005	7.7000e-004	1.0000e-005	7.7000e-004	2.0000e-004	1.0000e-005	2.1000e-004	0.0000	0.6679	0.6679	2.0000e-005	0.0000	0.6684
Total	**2.8000e-004**	**2.1000e-004**	**2.4400e-003**	**1.0000e-005**	**7.7000e-004**	**1.0000e-005**	**7.7000e-004**	**2.0000e-004**	**1.0000e-005**	**2.1000e-004**	**0.0000**	**0.6679**	**0.6679**	**2.0000e-005**	**0.0000**	**0.6684**

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.2158	1.9754	2.0700	3.4100e-003		0.1023	0.1023		0.0963	0.0963	0.0000	293.1324	293.1324	0.0702	0.0000	294.8881
Total	**0.2158**	**1.9754**	**2.0700**	**3.4100e-003**		**0.1023**	**0.1023**		**0.0963**	**0.0963**	**0.0000**	**293.1324**	**293.1324**	**0.0702**	**0.0000**	**294.8881**

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0527	1.6961	0.4580	4.5500e-003	0.1140	3.1800e-003	0.1171	0.0329	3.0400e-003	0.0359	0.0000	441.9835	441.9835	0.0264	0.0000	442.6435
Worker	0.4088	0.3066	3.5305	0.0107	1.1103	8.8700e-003	1.1192	0.2949	8.1700e-003	0.3031	0.0000	966.8117	966.8117	0.0266	0.0000	967.4773
Total	**0.4616**	**2.0027**	**3.9885**	**0.0152**	**1.2243**	**0.0121**	**1.2363**	**0.3278**	**0.0112**	**0.3390**	**0.0000**	**1,408.7952**	**1,408.7952**	**0.0530**	**0.0000**	**1,410.1208**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.2158	1.9754	2.0700	3.4100e-003		0.1023	0.1023		0.0963	0.0963	0.0000	293.1321	293.1321	0.0702	0.0000	294.8877
Total	**0.2158**	**1.9754**	**2.0700**	**3.4100e-003**		**0.1023**	**0.1023**		**0.0963**	**0.0963**	**0.0000**	**293.1321**	**293.1321**	**0.0702**	**0.0000**	**294.8877**

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0527	1.6961	0.4580	4.5500e-003	0.1140	3.1800e-003	0.1171	0.0329	3.0400e-003	0.0359	0.0000	441.9835	441.9835	0.0264	0.0000	442.6435
Worker	0.4088	0.3066	3.5305	0.0107	1.1103	8.8700e-003	1.1192	0.2949	8.1700e-003	0.3031	0.0000	966.8117	966.8117	0.0266	0.0000	967.4773
Total	**0.4616**	**2.0027**	**3.9885**	**0.0152**	**1.2243**	**0.0121**	**1.2363**	**0.3278**	**0.0112**	**0.3390**	**0.0000**	**1,408.7952**	**1,408.7952**	**0.0530**	**0.0000**	**1,410.1208**

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1942	1.7765	2.0061	3.3300e-003		0.0864	0.0864		0.0813	0.0813	0.0000	286.2789	286.2789	0.0681	0.0000	287.9814
Total	**0.1942**	**1.7765**	**2.0061**	**3.3300e-003**		**0.0864**	**0.0864**		**0.0813**	**0.0813**	**0.0000**	**286.2789**	**286.2789**	**0.0681**	**0.0000**	**287.9814**

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0382	1.2511	0.4011	4.3000e-003	0.1113	1.4600e-003	0.1127	0.0321	1.4000e-003	0.0335	0.0000	417.9930	417.9930	0.0228	0.0000	418.5624
Worker	0.3753	0.2708	3.1696	0.0101	1.0840	8.4100e-003	1.0924	0.2879	7.7400e-003	0.2957	0.0000	909.3439	909.3439	0.0234	0.0000	909.9291
Total	**0.4135**	**1.5218**	**3.5707**	**0.0144**	**1.1953**	**9.8700e-003**	**1.2051**	**0.3200**	**9.1400e-003**	**0.3292**	**0.0000**	**1,327.3369**	**1,327.3369**	**0.0462**	**0.0000**	**1,328.4916**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1942	1.7765	2.0061	3.3300e-003		0.0864	0.0864		0.0813	0.0813	0.0000	286.2785	286.2785	0.0681	0.0000	287.9811
Total	**0.1942**	**1.7765**	**2.0061**	**3.3300e-003**		**0.0864**	**0.0864**		**0.0813**	**0.0813**	**0.0000**	**286.2785**	**286.2785**	**0.0681**	**0.0000**	**287.9811**

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0382	1.2511	0.4011	4.3000e-003	0.1113	1.4600e-003	0.1127	0.0321	1.4000e-003	0.0335	0.0000	417.9930	417.9930	0.0228	0.0000	418.5624
Worker	0.3753	0.2708	3.1696	0.0101	1.0840	8.4100e-003	1.0924	0.2879	7.7400e-003	0.2957	0.0000	909.3439	909.3439	0.0234	0.0000	909.9291
Total	**0.4135**	**1.5218**	**3.5707**	**0.0144**	**1.1953**	**9.8700e-003**	**1.2051**	**0.3200**	**9.1400e-003**	**0.3292**	**0.0000**	**1,327.3369**	**1,327.3369**	**0.0462**	**0.0000**	**1,328.4916**

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	6.7100e-003	0.0663	0.0948	1.5000e-004		3.3200e-003	3.3200e-003		3.0500e-003	3.0500e-003	0.0000	13.0175	13.0175	4.2100e-003	0.0000	13.1227
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**6.7100e-003**	**0.0663**	**0.0948**	**1.5000e-004**		**3.3200e-003**	**3.3200e-003**		**3.0500e-003**	**3.0500e-003**	**0.0000**	**13.0175**	**13.0175**	**4.2100e-003**	**0.0000**	**13.1227**

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.7000e-004	2.7000e-004	3.1200e-003	1.0000e-005	1.0700e-003	1.0000e-005	1.0800e-003	2.8000e-004	1.0000e-005	2.9000e-004	0.0000	0.8963	0.8963	2.0000e-005	0.0000	0.8968
Total	**3.7000e-004**	**2.7000e-004**	**3.1200e-003**	**1.0000e-005**	**1.0700e-003**	**1.0000e-005**	**1.0800e-003**	**2.8000e-004**	**1.0000e-005**	**2.9000e-004**	**0.0000**	**0.8963**	**0.8963**	**2.0000e-005**	**0.0000**	**0.8968**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	6.7100e-003	0.0663	0.0948	1.5000e-004		3.3200e-003	3.3200e-003		3.0500e-003	3.0500e-003	0.0000	13.0175	13.0175	4.2100e-003	0.0000	13.1227
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**6.7100e-003**	**0.0663**	**0.0948**	**1.5000e-004**		**3.3200e-003**	**3.3200e-003**		**3.0500e-003**	**3.0500e-003**	**0.0000**	**13.0175**	**13.0175**	**4.2100e-003**	**0.0000**	**13.1227**

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.7000e-004	2.7000e-004	3.1200e-003	1.0000e-005	1.0700e-003	1.0000e-005	1.0800e-003	2.8000e-004	1.0000e-005	2.9000e-004	0.0000	0.8963	0.8963	2.0000e-005	0.0000	0.8968
Total	**3.7000e-004**	**2.7000e-004**	**3.1200e-003**	**1.0000e-005**	**1.0700e-003**	**1.0000e-005**	**1.0800e-003**	**2.8000e-004**	**1.0000e-005**	**2.9000e-004**	**0.0000**	**0.8963**	**0.8963**	**2.0000e-005**	**0.0000**	**0.8968**

3.6 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0109	0.1048	0.1609	2.5000e-004		5.1500e-003	5.1500e-003		4.7400e-003	4.7400e-003	0.0000	22.0292	22.0292	7.1200e-003	0.0000	22.2073
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**0.0109**	**0.1048**	**0.1609**	**2.5000e-004**		**5.1500e-003**	**5.1500e-003**		**4.7400e-003**	**4.7400e-003**	**0.0000**	**22.0292**	**22.0292**	**7.1200e-003**	**0.0000**	**22.2073**

3.6 Paving - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.9000e-004	4.1000e-004	4.9200e-003	2.0000e-005	1.8100e-003	1.0000e-005	1.8200e-003	4.8000e-004	1.0000e-005	4.9000e-004	0.0000	1.4697	1.4697	4.0000e-005	0.0000	1.4706
Total	**5.9000e-004**	**4.1000e-004**	**4.9200e-003**	**2.0000e-005**	**1.8100e-003**	**1.0000e-005**	**1.8200e-003**	**4.8000e-004**	**1.0000e-005**	**4.9000e-004**	**0.0000**	**1.4697**	**1.4697**	**4.0000e-005**	**0.0000**	**1.4706**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0109	0.1048	0.1609	2.5000e-004		5.1500e-003	5.1500e-003		4.7400e-003	4.7400e-003	0.0000	22.0292	22.0292	7.1200e-003	0.0000	22.2073
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**0.0109**	**0.1048**	**0.1609**	**2.5000e-004**		**5.1500e-003**	**5.1500e-003**		**4.7400e-003**	**4.7400e-003**	**0.0000**	**22.0292**	**22.0292**	**7.1200e-003**	**0.0000**	**22.2073**

3.6 Paving - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.9000e-004	4.1000e-004	4.9200e-003	2.0000e-005	1.8100e-003	1.0000e-005	1.8200e-003	4.8000e-004	1.0000e-005	4.9000e-004	0.0000	1.4697	1.4697	4.0000e-005	0.0000	1.4706
Total	**5.9000e-004**	**4.1000e-004**	**4.9200e-003**	**2.0000e-005**	**1.8100e-003**	**1.0000e-005**	**1.8200e-003**	**4.8000e-004**	**1.0000e-005**	**4.9000e-004**	**0.0000**	**1.4697**	**1.4697**	**4.0000e-005**	**0.0000**	**1.4706**

3.7 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	4.1372					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	3.1600e-003	0.0213	0.0317	5.0000e-005		1.0700e-003	1.0700e-003		1.0700e-003	1.0700e-003	0.0000	4.4682	4.4682	2.5000e-004	0.0000	4.4745
Total	**4.1404**	**0.0213**	**0.0317**	**5.0000e-005**		**1.0700e-003**	**1.0700e-003**		**1.0700e-003**	**1.0700e-003**	**0.0000**	**4.4682**	**4.4682**	**2.5000e-004**	**0.0000**	**4.4745**

3.7 Architectural Coating - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0101	6.9900e-003	0.0835	2.8000e-004	0.0307	2.3000e-004	0.0309	8.1500e-003	2.2000e-004	8.3700e-003	0.0000	24.9407	24.9407	6.1000e-004	0.0000	24.9558
Total	**0.0101**	**6.9900e-003**	**0.0835**	**2.8000e-004**	**0.0307**	**2.3000e-004**	**0.0309**	**8.1500e-003**	**2.2000e-004**	**8.3700e-003**	**0.0000**	**24.9407**	**24.9407**	**6.1000e-004**	**0.0000**	**24.9558**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	4.1372					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	3.1600e-003	0.0213	0.0317	5.0000e-005		1.0700e-003	1.0700e-003		1.0700e-003	1.0700e-003	0.0000	4.4682	4.4682	2.5000e-004	0.0000	4.4745
Total	**4.1404**	**0.0213**	**0.0317**	**5.0000e-005**		**1.0700e-003**	**1.0700e-003**		**1.0700e-003**	**1.0700e-003**	**0.0000**	**4.4682**	**4.4682**	**2.5000e-004**	**0.0000**	**4.4745**

3.7 Architectural Coating - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0101	6.9900e-003	0.0835	2.8000e-004	0.0307	2.3000e-004	0.0309	8.1500e-003	2.2000e-004	8.3700e-003	0.0000	24.9407	24.9407	6.1000e-004	0.0000	24.9558
Total	**0.0101**	**6.9900e-003**	**0.0835**	**2.8000e-004**	**0.0307**	**2.3000e-004**	**0.0309**	**8.1500e-003**	**2.2000e-004**	**8.3700e-003**	**0.0000**	**24.9407**	**24.9407**	**6.1000e-004**	**0.0000**	**24.9558**

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162
Unmitigated	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162

4.2 Trip Summary Information

	Average Daily Trip Rate			Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	145.75	154.25	154.00	506,227	506,227
Apartments Mid Rise	4,026.75	3,773.25	4075.50	13,660,065	13,660,065
General Office Building	288.45	62.55	31.05	706,812	706,812
High Turnover (Sit Down Restaurant)	2,368.80	2,873.52	2817.72	3,413,937	3,413,937
Hotel	192.00	187.50	160.00	445,703	445,703
Quality Restaurant	501.12	511.92	461.20	707,488	707,488
Regional Shopping Center	528.08	601.44	357.84	1,112,221	1,112,221
Total	8,050.95	8,164.43	8,057.31	20,552,452	20,552,452

4.3 Trip Type Information

	Miles			Trip %			Trip Purpose %		
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
General Office Building	16.60	8.40	6.90	33.00	48.00	19.00	77	19	4
High Turnover (Sit Down	16.60	8.40	6.90	8.50	72.50	19.00	37	20	43
Hotel	16.60	8.40	6.90	19.40	61.60	19.00	58	38	4
Quality Restaurant	16.60	8.40	6.90	12.00	69.00	19.00	38	18	44
Regional Shopping Center	16.60	8.40	6.90	16.30	64.70	19.00	54	35	11

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Apartments Mid Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
General Office Building	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
High Turnover (Sit Down Restaurant)	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Hotel	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Quality Restaurant	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Regional Shopping Center	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	2,512.6465	2,512.6465	0.1037	0.0215	2,521.6356
Electricity Unmitigated						0.0000	0.0000		0.0000	0.0000	0.0000	2,512.6465	2,512.6465	0.1037	0.0215	2,521.6356
NaturalGas Mitigated	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	1,383.4267	1,383.4267	0.0265	0.0254	1,391.6478
NaturalGas Unmitigated	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	1,383.4267	1,383.4267	0.0265	0.0254	1,391.6478

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Low Rise	408494	2.2000e-003	0.0188	8.0100e-003	1.2000e-004		1.5200e-003	1.5200e-003		1.5200e-003	1.5200e-003	0.0000	21.7988	21.7988	4.2000e-004	4.0000e-004	21.9284
Apartments Mid Rise	1.30613e+007	0.0704	0.6018	0.2561	3.8400e-003		0.0487	0.0487		0.0487	0.0487	0.0000	696.9989	696.9989	0.0134	0.0128	701.1408
General Office Building	468450	2.5300e-003	0.0230	0.0193	1.4000e-004		1.7500e-003	1.7500e-003		1.7500e-003	1.7500e-003	0.0000	24.9983	24.9983	4.8000e-004	4.6000e-004	25.1468
High Turnover (Sit Down Restaurant)	8.30736e+006	0.0448	0.4072	0.3421	2.4400e-003		0.0310	0.0310		0.0310	0.0310	0.0000	443.3124	443.3124	8.5000e-003	8.1300e-003	445.9468
Hotel	1.74095e+006	9.3900e-003	0.0853	0.0717	5.1000e-004		6.4900e-003	6.4900e-003		6.4900e-003	6.4900e-003	0.0000	92.9036	92.9036	1.7800e-003	1.7000e-003	93.4557
Quality Restaurant	1.84608e+006	9.9500e-003	0.0905	0.0760	5.4000e-004		6.8800e-003	6.8800e-003		6.8800e-003	6.8800e-003	0.0000	98.5139	98.5139	1.8900e-003	1.8100e-003	99.0993
Regional Shopping Center	91840	5.0000e-004	4.5000e-003	3.7800e-003	3.0000e-005		3.4000e-004	3.4000e-004		3.4000e-004	3.4000e-004	0.0000	4.9009	4.9009	9.0000e-005	9.0000e-005	4.9301
Total		**0.1398**	**1.2312**	**0.7770**	**7.6200e-003**		**0.0966**	**0.0966**		**0.0966**	**0.0966**	**0.0000**	**1,383.4268**	**1,383.4268**	**0.0265**	**0.0254**	**1,391.6478**

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Low Rise	408494	2.2000e-003	0.0188	8.0100e-003	1.2000e-004		1.5200e-003	1.5200e-003		1.5200e-003	1.5200e-003	0.0000	21.7988	21.7988	4.2000e-004	4.0000e-004	21.9284
Apartments Mid Rise	1.30613e+007	0.0704	0.6018	0.2561	3.8400e-003		0.0487	0.0487		0.0487	0.0487	0.0000	696.9989	696.9989	0.0134	0.0128	701.1408
General Office Building	468450	2.5300e-003	0.0230	0.0193	1.4000e-004		1.7500e-003	1.7500e-003		1.7500e-003	1.7500e-003	0.0000	24.9983	24.9983	4.8000e-004	4.6000e-004	25.1468
High Turnover (Sit Down Restaurant)	8.30736e+006	0.0448	0.4072	0.3421	2.4400e-003		0.0310	0.0310		0.0310	0.0310	0.0000	443.3124	443.3124	8.5000e-003	8.1300e-003	445.9468
Hotel	1.74095e+006	9.3900e-003	0.0853	0.0717	5.1000e-004		6.4900e-003	6.4900e-003		6.4900e-003	6.4900e-003	0.0000	92.9036	92.9036	1.7800e-003	1.7000e-003	93.4557
Quality Restaurant	1.84608e+006	9.9500e-003	0.0905	0.0760	5.4000e-004		6.8800e-003	6.8800e-003		6.8800e-003	6.8800e-003	0.0000	98.5139	98.5139	1.8900e-003	1.8100e-003	99.0993
Regional Shopping Center	91840	5.0000e-004	4.5000e-003	3.7800e-003	3.0000e-005		3.4000e-004	3.4000e-004		3.4000e-004	3.4000e-004	0.0000	4.9009	4.9009	9.0000e-005	9.0000e-005	4.9301
Total		**0.1398**	**1.2312**	**0.7770**	**7.6200e-003**		**0.0966**	**0.0966**		**0.0966**	**0.0966**	**0.0000**	**1,383.4268**	**1,383.4268**	**0.0265**	**0.0254**	**1,391.6478**

5.3 Energy by Land Use - Electricity

Unmitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Low Rise	106010	33.7770	1.3900e-003	2.9000e-004	33.8978
Apartments Mid Rise	3.94697e+006	1,257.5879	0.0519	0.0107	1,262.0869
General Office Building	584550	186.2502	7.6900e-003	1.5900e-003	186.9165
High Turnover (Sit Down Restaurant)	1.58904e+006	506.3022	0.0209	4.3200e-003	508.1135
Hotel	550308	175.3399	7.2400e-003	1.5000e-003	175.9672
Quality Restaurant	353120	112.5116	4.6500e-003	9.6000e-004	112.9141
Regional Shopping Center	756000	240.8778	9.9400e-003	2.0600e-003	241.7395
Total		**2,512.6465**	**0.1037**	**0.0215**	**2,521.6356**

5.3 Energy by Land Use - Electricity

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Low Rise	106010	33.7770	1.3900e-003	2.9000e-004	33.8978
Apartments Mid Rise	3.94697e+006	1,257.5879	0.0519	0.0107	1,262.0869
General Office Building	584550	186.2502	7.6900e-003	1.5900e-003	186.9165
High Turnover (Sit Down Restaurant)	1.58904e+006	506.3022	0.0209	4.3200e-003	508.1135
Hotel	550308	175.3399	7.2400e-003	1.5000e-003	175.9672
Quality Restaurant	353120	112.5116	4.6500e-003	9.6000e-004	112.9141
Regional Shopping Center	756000	240.8778	9.9400e-003	2.0600e-003	241.7395
Total		**2,512.6465**	**0.1037**	**0.0215**	**2,521.6356**

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835
Unmitigated	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.4137					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	4.3998					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0206	0.1763	0.0750	1.1200e-003		0.0143	0.0143		0.0143	0.0143	0.0000	204.1166	204.1166	3.9100e-003	3.7400e-003	205.3295
Landscaping	0.3096	0.1187	10.3054	5.4000e-004		0.0572	0.0572		0.0572	0.0572	0.0000	16.8504	16.8504	0.0161	0.0000	17.2540
Total	**5.1437**	**0.2950**	**10.3804**	**1.6600e-003**		**0.0714**	**0.0714**		**0.0714**	**0.0714**	**0.0000**	**220.9670**	**220.9670**	**0.0201**	**3.7400e-003**	**222.5835**

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.4137					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	4.3998					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0206	0.1763	0.0750	1.1200e-003		0.0143	0.0143		0.0143	0.0143	0.0000	204.1166	204.1166	3.9100e-003	3.7400e-003	205.3295
Landscaping	0.3096	0.1187	10.3054	5.4000e-004		0.0572	0.0572		0.0572	0.0572	0.0000	16.8504	16.8504	0.0161	0.0000	17.2540
Total	**5.1437**	**0.2950**	**10.3804**	**1.6600e-003**		**0.0714**	**0.0714**		**0.0714**	**0.0714**	**0.0000**	**220.9670**	**220.9670**	**0.0201**	**3.7400e-003**	**222.5835**

7.0 Water Detail

7.1 Mitigation Measures Water

	Total CO2	CH4	N2O	CO2e
Category	MT/yr			
Mitigated	585.8052	3.0183	0.0755	683.7567
Unmitigated	585.8052	3.0183	0.0755	683.7567

7.2 Water by Land Use

Unmitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Low Rise	1.62885 / 1.02688	10.9095	0.0535	1.3400e-003	12.6471
Apartments Mid Rise	63.5252 / 40.0485	425.4719	2.0867	0.0523	493.2363
General Office Building	7.99802 / 4.90201	53.0719	0.2627	6.5900e-003	61.6019
High Turnover (Sit Down Restaurant)	10.9272 / 0.697482	51.2702	0.3580	8.8200e-003	62.8482
Hotel	1.26834 / 0.140927	6.1633	0.0416	1.0300e-003	7.5079
Quality Restaurant	2.42827 / 0.154996	11.3934	0.0796	1.9600e-003	13.9663
Regional Shopping Center	4.14806 / 2.54236	27.5250	0.1363	3.4200e-003	31.9490
Total		**585.8052**	**3.0183**	**0.0755**	**683.7567**

7.2 Water by Land Use

Mitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Low Rise	1.62885 / 1.02688	10.9095	0.0535	1.3400e-003	12.6471
Apartments Mid Rise	63.5252 / 40.0485	425.4719	2.0867	0.0523	493.2363
General Office Building	7.99802 / 4.90201	53.0719	0.2627	6.5900e-003	61.6019
High Turnover (Sit Down Restaurant)	10.9272 / 0.697482	51.2702	0.3580	8.8200e-003	62.8482
Hotel	1.26834 / 0.140927	6.1633	0.0416	1.0300e-003	7.5079
Quality Restaurant	2.42827 / 0.154996	11.3934	0.0796	1.9600e-003	13.9663
Regional Shopping Center	4.14806 / 2.54236	27.5250	0.1363	3.4200e-003	31.9490
Total		**585.8052**	**3.0183**	**0.0755**	**683.7567**

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e
	MT/yr			
Mitigated	207.8079	12.2811	0.0000	514.8354
Unmitigated	207.8079	12.2811	0.0000	514.8354

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Low Rise	11.5	2.3344	0.1380	0.0000	5.7834
Apartments Mid Rise	448.5	91.0415	5.3804	0.0000	225.5513
General Office Building	41.85	8.4952	0.5021	0.0000	21.0464
High Turnover (Sit Down Restaurant)	428.4	86.9613	5.1393	0.0000	215.4430
Hotel	27.38	5.5579	0.3285	0.0000	13.7694
Quality Restaurant	7.3	1.4818	0.0876	0.0000	3.6712
Regional Shopping Center	58.8	11.9359	0.7054	0.0000	29.5706
Total		**207.8079**	**12.2811**	**0.0000**	**514.8354**

8.2 Waste by Land Use

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Low Rise	11.5	2.3344	0.1380	0.0000	5.7834
Apartments Mid Rise	448.5	91.0415	5.3804	0.0000	225.5513
General Office Building	41.85	8.4952	0.5021	0.0000	21.0464
High Turnover (Sit Down Restaurant)	428.4	86.9613	5.1393	0.0000	215.4430
Hotel	27.38	5.5579	0.3285	0.0000	13.7694
Quality Restaurant	7.3	1.4818	0.0876	0.0000	3.6712
Regional Shopping Center	58.8	11.9359	0.7054	0.0000	29.5706
Total		**207.8079**	**12.2811**	**0.0000**	**514.8354**

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

Village South Specific Plan (Proposed)

Los Angeles-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Office Building	45.00	1000sqft	1.03	45,000.00	0
High Turnover (Sit Down Restaurant)	36.00	1000sqft	0.83	36,000.00	0
Hotel	50.00	Room	1.67	72,600.00	0
Quality Restaurant	8.00	1000sqft	0.18	8,000.00	0
Apartments Low Rise	25.00	Dwelling Unit	1.56	25,000.00	72
Apartments Mid Rise	975.00	Dwelling Unit	25.66	975,000.00	2789
Regional Shopping Center	56.00	1000sqft	1.29	56,000.00	0

1.2 Other Project Characteristics

Urbanization	Urban	**Wind Speed (m/s)**	2.2	**Precipitation Freq (Days)**	33
Climate Zone	9			**Operational Year**	2028
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	702.44	**CH4 Intensity (lb/MWhr)**	0.029	**N2O Intensity (lb/MWhr)**	0.006

1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Table Name	Column Name	Default Value	New Value
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberWood	1.25	0.00
tblFireplaces	NumberWood	48.75	0.00
tblVehicleTrips	ST_TR	7.16	6.17
tblVehicleTrips	ST_TR	6.39	3.87
tblVehicleTrips	ST_TR	2.46	1.39
tblVehicleTrips	ST_TR	158.37	79.82
tblVehicleTrips	ST_TR	8.19	3.75
tblVehicleTrips	ST_TR	94.36	63.99
tblVehicleTrips	ST_TR	49.97	10.74
tblVehicleTrips	SU_TR	6.07	6.16
tblVehicleTrips	SU_TR	5.86	4.18
tblVehicleTrips	SU_TR	1.05	0.69
tblVehicleTrips	SU_TR	131.84	78.27

tblVehicleTrips	SU_TR	5.95	3.20
tblVehicleTrips	SU_TR	72.16	57.65
tblVehicleTrips	SU_TR	25.24	6.39
tblVehicleTrips	WD_TR	6.59	5.83
tblVehicleTrips	WD_TR	6.65	4.13
tblVehicleTrips	WD_TR	11.03	6.41
tblVehicleTrips	WD_TR	127.15	65.80
tblVehicleTrips	WD_TR	8.17	3.84
tblVehicleTrips	WD_TR	89.95	62.64
tblVehicleTrips	WD_TR	42.70	9.43
tblWoodstoves	NumberCatalytic	1.25	0.00
tblWoodstoves	NumberCatalytic	48.75	0.00
tblWoodstoves	NumberNoncatalytic	1.25	0.00
tblWoodstoves	NumberNoncatalytic	48.75	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2769	46.4588	31.6840	0.0643	18.2675	2.0461	20.3135	9.9840	1.8824	11.8664	0.0000	6,234.7974	6,234.7974	1.9495	0.0000	6,283.5352
2022	5.3304	38.8967	49.5629	0.1517	9.8688	1.6366	10.7727	3.6558	1.5057	5.1615	0.0000	15,251.5674	15,251.5674	1.9503	0.0000	15,278.5288
2023	4.8957	26.3317	46.7567	0.1472	9.8688	0.7794	10.6482	2.6381	0.7322	3.3702	0.0000	14,807.5269	14,807.5269	1.0250	0.0000	14,833.1521
2024	237.1630	9.5575	15.1043	0.0244	1.7884	0.4698	1.8628	0.4743	0.4322	0.5476	0.0000	2,361.3989	2,361.3989	0.7177	0.0000	2,379.3421
Maximum	**237.1630**	**46.4588**	**49.5629**	**0.1517**	**18.2675**	**2.0461**	**20.3135**	**9.9840**	**1.8824**	**11.8664**	**0.0000**	**15,251.5674**	**15,251.5674**	**1.9503**	**0.0000**	**15,278.5288**

2.1 Overall Construction (Maximum Daily Emission)

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2769	46.4588	31.6840	0.0643	18.2675	2.0461	20.3135	9.9840	1.8824	11.8664	0.0000	6,234.7974	6,234.7974	1.9495	0.0000	6,283.5352
2022	5.3304	38.8967	49.5629	0.1517	9.8688	1.6366	10.7727	3.6558	1.5057	5.1615	0.0000	15,251.5674	15,251.5674	1.9503	0.0000	15,278.5288
2023	4.8957	26.3317	46.7567	0.1472	9.8688	0.7794	10.6482	2.6381	0.7322	3.3702	0.0000	14,807.5269	14,807.5269	1.0250	0.0000	14,833.1520
2024	237.1630	9.5575	15.1043	0.0244	1.7884	0.4698	1.8628	0.4743	0.4322	0.5476	0.0000	2,361.3989	2,361.3989	0.7177	0.0000	2,379.3421
Maximum	**237.1630**	**46.4588**	**49.5629**	**0.1517**	**18.2675**	**2.0461**	**20.3135**	**9.9840**	**1.8824**	**11.8664**	**0.0000**	**15,251.5674**	**15,251.5674**	**1.9503**	**0.0000**	**15,278.5288**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208
Total	**41.1168**	**67.2262**	**207.5497**	**0.6278**	**45.9592**	**2.4626**	**48.4217**	**12.2950**	**2.4385**	**14.7336**	**0.0000**	**76,811.1816**	**76,811.1816**	**2.8282**	**0.4832**	**77,025.8786**

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208
Total	**41.1168**	**67.2262**	**207.5497**	**0.6278**	**45.9592**	**2.4626**	**48.4217**	**12.2950**	**2.4385**	**14.7336**	**0.0000**	**76,811.1816**	**76,811.1816**	**2.8282**	**0.4832**	**77,025.8786**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	9/1/2021	10/12/2021	5	30	
2	Site Preparation	Site Preparation	10/13/2021	11/9/2021	5	20	
3	Grading	Grading	11/10/2021	1/11/2022	5	45	
4	Building Construction	Building Construction	1/12/2022	12/12/2023	5	500	
5	Paving	Paving	12/13/2023	1/30/2024	5	35	
6	Architectural Coating	Architectural Coating	1/31/2024	3/19/2024	5	35	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 112.5

Acres of Paving: 0

Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	458.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	801.00	143.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	160.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 Demolition - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411		3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**		**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1273	4.0952	0.9602	0.0119	0.2669	0.0126	0.2795	0.0732	0.0120	0.0852		1,292.2413	1,292.2413	0.0877		1,294.4337
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0643	0.0442	0.6042	1.7100e-003	0.1677	1.3500e-003	0.1690	0.0445	1.2500e-003	0.0457		170.8155	170.8155	5.0300e-003		170.9413
Total	**0.1916**	**4.1394**	**1.5644**	**0.0136**	**0.4346**	**0.0139**	**0.4485**	**0.1176**	**0.0133**	**0.1309**		**1,463.0568**	**1,463.0568**	**0.0927**		**1,465.3750**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411	0.0000	3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**	**0.0000**	**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1273	4.0952	0.9602	0.0119	0.2669	0.0126	0.2795	0.0732	0.0120	0.0852		1,292.2413	1,292.2413	0.0877		1,294.4337
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0643	0.0442	0.6042	1.7100e-003	0.1677	1.3500e-003	0.1690	0.0445	1.2500e-003	0.0457		170.8155	170.8155	5.0300e-003		170.9413
Total	**0.1916**	**4.1394**	**1.5644**	**0.0136**	**0.4346**	**0.0139**	**0.4485**	**0.1176**	**0.0133**	**0.1309**		**1,463.0568**	**1,463.0568**	**0.0927**		**1,465.3750**

3.3 Site Preparation - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809		3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**		**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0772	0.0530	0.7250	2.0600e-003	0.2012	1.6300e-003	0.2028	0.0534	1.5000e-003	0.0549		204.9786	204.9786	6.0400e-003		205.1296
Total	**0.0772**	**0.0530**	**0.7250**	**2.0600e-003**	**0.2012**	**1.6300e-003**	**0.2028**	**0.0534**	**1.5000e-003**	**0.0549**		**204.9786**	**204.9786**	**6.0400e-003**		**205.1296**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809	0.0000	3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**	**0.0000**	**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0772	0.0530	0.7250	2.0600e-003	0.2012	1.6300e-003	0.2028	0.0534	1.5000e-003	0.0549		204.9786	204.9786	6.0400e-003		205.1296
Total	**0.0772**	**0.0530**	**0.7250**	**2.0600e-003**	**0.2012**	**1.6300e-003**	**0.2028**	**0.0534**	**1.5000e-003**	**0.0549**		**204.9786**	**204.9786**	**6.0400e-003**		**205.1296**

3.4 Grading - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265		6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**		**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0857	0.0589	0.8056	2.2900e-003	0.2236	1.8100e-003	0.2254	0.0593	1.6600e-003	0.0610		227.7540	227.7540	6.7100e-003		227.9217
Total	**0.0857**	**0.0589**	**0.8056**	**2.2900e-003**	**0.2236**	**1.8100e-003**	**0.2254**	**0.0593**	**1.6600e-003**	**0.0610**		**227.7540**	**227.7540**	**6.7100e-003**		**227.9217**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265	0.0000	6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**	**0.0000**	**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0857	0.0589	0.8056	2.2900e-003	0.2236	1.8100e-003	0.2254	0.0593	1.6600e-003	0.0610		227.7540	227.7540	6.7100e-003		227.9217
Total	**0.0857**	**0.0589**	**0.8056**	**2.2900e-003**	**0.2236**	**1.8100e-003**	**0.2254**	**0.0593**	**1.6600e-003**	**0.0610**		**227.7540**	**227.7540**	**6.7100e-003**		**227.9217**

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**		**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0803	0.0532	0.7432	2.2100e-003	0.2236	1.7500e-003	0.2253	0.0593	1.6100e-003	0.0609		219.7425	219.7425	6.0600e-003		219.8941
Total	**0.0803**	**0.0532**	**0.7432**	**2.2100e-003**	**0.2236**	**1.7500e-003**	**0.2253**	**0.0593**	**1.6100e-003**	**0.0609**		**219.7425**	**219.7425**	**6.0600e-003**		**219.8941**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**	**0.0000**	**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0803	0.0532	0.7432	2.2100e-003	0.2236	1.7500e-003	0.2253	0.0593	1.6100e-003	0.0609		219.7425	219.7425	6.0600e-003		219.8941
Total	**0.0803**	**0.0532**	**0.7432**	**2.2100e-003**	**0.2236**	**1.7500e-003**	**0.2253**	**0.0593**	**1.6100e-003**	**0.0609**		**219.7425**	**219.7425**	**6.0600e-003**		**219.8941**

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**		**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4079	13.2032	3.4341	0.0364	0.9155	0.0248	0.9404	0.2636	0.0237	0.2873		3,896.5482	3,896.5482	0.2236		3,902.1384
Worker	3.2162	2.1318	29.7654	0.0883	8.9533	0.0701	9.0234	2.3745	0.0646	2.4390		8,800.6857	8,800.6857	0.2429		8,806.7582
Total	**3.6242**	**15.3350**	**33.1995**	**0.1247**	**9.8688**	**0.0949**	**9.9637**	**2.6381**	**0.0883**	**2.7263**		**12,697.2339**	**12,697.2339**	**0.4665**		**12,708.8966**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**	**0.0000**	**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4079	13.2032	3.4341	0.0364	0.9155	0.0248	0.9404	0.2636	0.0237	0.2873		3,896.5482	3,896.5482	0.2236		3,902.1384
Worker	3.2162	2.1318	29.7654	0.0883	8.9533	0.0701	9.0234	2.3745	0.0646	2.4390		8,800.6857	8,800.6857	0.2429		8,806.7582
Total	**3.6242**	**15.3350**	**33.1995**	**0.1247**	**9.8688**	**0.0949**	**9.9637**	**2.6381**	**0.0883**	**2.7263**		**12,697.2339**	**12,697.2339**	**0.4665**		**12,708.8966**

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**		**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3027	10.0181	3.1014	0.0352	0.9156	0.0116	0.9271	0.2636	0.0111	0.2747		3,773.8762	3,773.8762	0.1982		3,778.8300
Worker	3.0203	1.9287	27.4113	0.0851	8.9533	0.0681	9.0214	2.3745	0.0627	2.4372		8,478.4408	8,478.4408	0.2190		8,483.9160
Total	**3.3229**	**11.9468**	**30.5127**	**0.1203**	**9.8688**	**0.0797**	**9.9485**	**2.6381**	**0.0738**	**2.7118**		**12,252.3170**	**12,252.3170**	**0.4172**		**12,262.7460**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**	**0.0000**	**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3027	10.0181	3.1014	0.0352	0.9156	0.0116	0.9271	0.2636	0.0111	0.2747		3,773.8762	3,773.8762	0.1982		3,778.8300
Worker	3.0203	1.9287	27.4113	0.0851	8.9533	0.0681	9.0214	2.3745	0.0627	2.4372		8,478.4408	8,478.4408	0.2190		8,483.9160
Total	**3.3229**	**11.9468**	**30.5127**	**0.1203**	**9.8688**	**0.0797**	**9.9485**	**2.6381**	**0.0738**	**2.7118**		**12,252.3170**	**12,252.3170**	**0.4172**		**12,262.7460**

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**		**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0566	0.0361	0.5133	1.5900e-003	0.1677	1.2800e-003	0.1689	0.0445	1.1700e-003	0.0456		158.7723	158.7723	4.1000e-003		158.8748
Total	**0.0566**	**0.0361**	**0.5133**	**1.5900e-003**	**0.1677**	**1.2800e-003**	**0.1689**	**0.0445**	**1.1700e-003**	**0.0456**		**158.7723**	**158.7723**	**4.1000e-003**		**158.8748**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**	**0.0000**	**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0566	0.0361	0.5133	1.5900e-003	0.1677	1.2800e-003	0.1689	0.0445	1.1700e-003	0.0456		158.7723	158.7723	4.1000e-003		158.8748
Total	**0.0566**	**0.0361**	**0.5133**	**1.5900e-003**	**0.1677**	**1.2800e-003**	**0.1689**	**0.0445**	**1.1700e-003**	**0.0456**		**158.7723**	**158.7723**	**4.1000e-003**		**158.8748**

3.6 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310		2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**		**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0535	0.0329	0.4785	1.5400e-003	0.1677	1.2600e-003	0.1689	0.0445	1.1600e-003	0.0456		153.8517	153.8517	3.7600e-003		153.9458
Total	**0.0535**	**0.0329**	**0.4785**	**1.5400e-003**	**0.1677**	**1.2600e-003**	**0.1689**	**0.0445**	**1.1600e-003**	**0.0456**		**153.8517**	**153.8517**	**3.7600e-003**		**153.9458**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310	0.0000	2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**	**0.0000**	**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0535	0.0329	0.4785	1.5400e-003	0.1677	1.2600e-003	0.1689	0.0445	1.1600e-003	0.0456		153.8517	153.8517	3.7600e-003		153.9458
Total	**0.0535**	**0.0329**	**0.4785**	**1.5400e-003**	**0.1677**	**1.2600e-003**	**0.1689**	**0.0445**	**1.1600e-003**	**0.0456**		**153.8517**	**153.8517**	**3.7600e-003**		**153.9458**

3.7 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609		281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**		**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.5707	0.3513	5.1044	0.0165	1.7884	0.0134	1.8018	0.4743	0.0123	0.4866		1,641.0852	1,641.0852	0.0401		1,642.0886
Total	**0.5707**	**0.3513**	**5.1044**	**0.0165**	**1.7884**	**0.0134**	**1.8018**	**0.4743**	**0.0123**	**0.4866**		**1,641.0852**	**1,641.0852**	**0.0401**		**1,642.0886**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609	0.0000	281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**	**0.0000**	**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.5707	0.3513	5.1044	0.0165	1.7884	0.0134	1.8018	0.4743	0.0123	0.4866		1,641.0852	1,641.0852	0.0401		1,642.0886
Total	**0.5707**	**0.3513**	**5.1044**	**0.0165**	**1.7884**	**0.0134**	**1.8018**	**0.4743**	**0.0123**	**0.4866**		**1,641.0852**	**1,641.0852**	**0.0401**		**1,642.0886**

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208
Unmitigated	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208

4.2 Trip Summary Information

	Average Daily Trip Rate			Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	145.75	154.25	154.00	506,227	506,227
Apartments Mid Rise	4,026.75	3,773.25	4075.50	13,660,065	13,660,065
General Office Building	288.45	62.55	31.05	706,812	706,812
High Turnover (Sit Down Restaurant)	2,368.80	2,873.52	2817.72	3,413,937	3,413,937
Hotel	192.00	187.50	160.00	445,703	445,703
Quality Restaurant	501.12	511.92	461.20	707,488	707,488
Regional Shopping Center	528.08	601.44	357.84	1,112,221	1,112,221
Total	8,050.95	8,164.43	8,057.31	20,552,452	20,552,452

4.3 Trip Type Information

	Miles			Trip %			Trip Purpose %		
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
General Office Building	16.60	8.40	6.90	33.00	48.00	19.00	77	19	4
High Turnover (Sit Down	16.60	8.40	6.90	8.50	72.50	19.00	37	20	43
Hotel	16.60	8.40	6.90	19.40	61.60	19.00	58	38	4
Quality Restaurant	16.60	8.40	6.90	12.00	69.00	19.00	38	18	44
Regional Shopping Center	16.60	8.40	6.90	16.30	64.70	19.00	54	35	11

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Apartments Mid Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
General Office Building	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
High Turnover (Sit Down Restaurant)	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Hotel	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Quality Restaurant	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Regional Shopping Center	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
NaturalGas Unmitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1119.16	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35784.3	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1283.42	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22759.9	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4769.72	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5057.75	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	251.616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1.11916	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35.7843	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1.28342	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22.7599	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4.76972	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5.05775	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	0.251616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Unmitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

Village South Specific Plan (Proposed)

Los Angeles-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Office Building	45.00	1000sqft	1.03	45,000.00	0
High Turnover (Sit Down Restaurant)	36.00	1000sqft	0.83	36,000.00	0
Hotel	50.00	Room	1.67	72,600.00	0
Quality Restaurant	8.00	1000sqft	0.18	8,000.00	0
Apartments Low Rise	25.00	Dwelling Unit	1.56	25,000.00	72
Apartments Mid Rise	975.00	Dwelling Unit	25.66	975,000.00	2789
Regional Shopping Center	56.00	1000sqft	1.29	56,000.00	0

1.2 Other Project Characteristics

Urbanization	Urban	**Wind Speed (m/s)**	2.2	**Precipitation Freq (Days)**	33
Climate Zone	9			**Operational Year**	2028
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	702.44	**CH4 Intensity (lb/MWhr)**	0.029	**N2O Intensity (lb/MWhr)**	0.006

1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Table Name	Column Name	Default Value	New Value
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberWood	1.25	0.00
tblFireplaces	NumberWood	48.75	0.00
tblVehicleTrips	ST_TR	7.16	6.17
tblVehicleTrips	ST_TR	6.39	3.87
tblVehicleTrips	ST_TR	2.46	1.39
tblVehicleTrips	ST_TR	158.37	79.82
tblVehicleTrips	ST_TR	8.19	3.75
tblVehicleTrips	ST_TR	94.36	63.99
tblVehicleTrips	ST_TR	49.97	10.74
tblVehicleTrips	SU_TR	6.07	6.16
tblVehicleTrips	SU_TR	5.86	4.18
tblVehicleTrips	SU_TR	1.05	0.69
tblVehicleTrips	SU_TR	131.84	78.27

tblVehicleTrips	SU_TR	5.95	3.20
tblVehicleTrips	SU_TR	72.16	57.65
tblVehicleTrips	SU_TR	25.24	6.39
tblVehicleTrips	WD_TR	6.59	5.83
tblVehicleTrips	WD_TR	6.65	4.13
tblVehicleTrips	WD_TR	11.03	6.41
tblVehicleTrips	WD_TR	127.15	65.80
tblVehicleTrips	WD_TR	8.17	3.84
tblVehicleTrips	WD_TR	89.95	62.64
tblVehicleTrips	WD_TR	42.70	9.43
tblWoodstoves	NumberCatalytic	1.25	0.00
tblWoodstoves	NumberCatalytic	48.75	0.00
tblWoodstoves	NumberNoncatalytic	1.25	0.00
tblWoodstoves	NumberNoncatalytic	48.75	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2865	46.4651	31.6150	0.0642	18.2675	2.0461	20.3135	9.9840	1.8824	11.8664	0.0000	6,221.4937	6,221.4937	1.9491	0.0000	6,270.2214
2022	5.7218	38.9024	47.3319	0.1455	9.8688	1.6366	10.7736	3.6558	1.5057	5.1615	0.0000	14,630.3099	14,630.3099	1.9499	0.0000	14,657.2663
2023	5.2705	26.4914	44.5936	0.1413	9.8688	0.7800	10.6488	2.6381	0.7328	3.3708	0.0000	14,210.3424	14,210.3424	1.0230	0.0000	14,235.9160
2024	237.2328	9.5610	15.0611	0.0243	1.7884	0.4698	1.8628	0.4743	0.4322	0.5476	0.0000	2,352.4178	2,352.4178	0.7175	0.0000	2,370.3550
Maximum	**237.2328**	**46.4651**	**47.3319**	**0.1455**	**18.2675**	**2.0461**	**20.3135**	**9.9840**	**1.8824**	**11.8664**	**0.0000**	**14,630.3099**	**14,630.3099**	**1.9499**	**0.0000**	**14,657.2663**

2.1 Overall Construction (Maximum Daily Emission)

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2865	46.4651	31.6150	0.0642	18.2675	2.0461	20.3135	9.9840	1.8824	11.8664	0.0000	6,221.4937	6,221.4937	1.9491	0.0000	6,270.2214
2022	5.7218	38.9024	47.3319	0.1455	9.8688	1.6366	10.7736	3.6558	1.5057	5.1615	0.0000	14,630.3099	14,630.3099	1.9499	0.0000	14,657.2663
2023	5.2705	26.4914	44.5936	0.1413	9.8688	0.7800	10.6488	2.6381	0.7328	3.3708	0.0000	14,210.3424	14,210.3424	1.0230	0.0000	14,235.9160
2024	237.2328	9.5610	15.0611	0.0243	1.7884	0.4698	1.8628	0.4743	0.4322	0.5476	0.0000	2,352.4178	2,352.4178	0.7175	0.0000	2,370.3550
Maximum	**237.2328**	**46.4651**	**47.3319**	**0.1455**	**18.2675**	**2.0461**	**20.3135**	**9.9840**	**1.8824**	**11.8664**	**0.0000**	**14,630.3099**	**14,630.3099**	**1.9499**	**0.0000**	**14,657.2663**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839
Total	**40.7912**	**67.7872**	**202.7424**	**0.6043**	**45.9592**	**2.4640**	**48.4231**	**12.2950**	**2.4399**	**14.7349**	**0.0000**	**74,422.3787**	**74,422.3787**	**2.8429**	**0.4832**	**74,637.4417**

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839
Total	**40.7912**	**67.7872**	**202.7424**	**0.6043**	**45.9592**	**2.4640**	**48.4231**	**12.2950**	**2.4399**	**14.7349**	**0.0000**	**74,422.3787**	**74,422.3787**	**2.8429**	**0.4832**	**74,637.4417**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	9/1/2021	10/12/2021	5	30	
2	Site Preparation	Site Preparation	10/13/2021	11/9/2021	5	20	
3	Grading	Grading	11/10/2021	1/11/2022	5	45	
4	Building Construction	Building Construction	1/12/2022	12/12/2023	5	500	
5	Paving	Paving	12/13/2023	1/30/2024	5	35	
6	Architectural Coating	Architectural Coating	1/31/2024	3/19/2024	5	35	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 112.5

Acres of Paving: 0

Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	458.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	801.00	143.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	160.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 Demolition - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411		3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**		**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1304	4.1454	1.0182	0.0117	0.2669	0.0128	0.2797	0.0732	0.0122	0.0854		1,269.8555	1,269.8555	0.0908		1,272.1252
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0715	0.0489	0.5524	1.6100e-003	0.1677	1.3500e-003	0.1690	0.0445	1.2500e-003	0.0457		160.8377	160.8377	4.7300e-003		160.9560
Total	**0.2019**	**4.1943**	**1.5706**	**0.0133**	**0.4346**	**0.0141**	**0.4487**	**0.1176**	**0.0135**	**0.1311**		**1,430.6932**	**1,430.6932**	**0.0955**		**1,433.0812**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411	0.0000	3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**	**0.0000**	**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1304	4.1454	1.0182	0.0117	0.2669	0.0128	0.2797	0.0732	0.0122	0.0854		1,269.8555	1,269.8555	0.0908		1,272.1252
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0715	0.0489	0.5524	1.6100e-003	0.1677	1.3500e-003	0.1690	0.0445	1.2500e-003	0.0457		160.8377	160.8377	4.7300e-003		160.9560
Total	**0.2019**	**4.1943**	**1.5706**	**0.0133**	**0.4346**	**0.0141**	**0.4487**	**0.1176**	**0.0135**	**0.1311**		**1,430.6932**	**1,430.6932**	**0.0955**		**1,433.0812**

3.3 Site Preparation - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809		3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**		**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0858	0.0587	0.6629	1.9400e-003	0.2012	1.6300e-003	0.2028	0.0534	1.5000e-003	0.0549		193.0052	193.0052	5.6800e-003		193.1472
Total	**0.0858**	**0.0587**	**0.6629**	**1.9400e-003**	**0.2012**	**1.6300e-003**	**0.2028**	**0.0534**	**1.5000e-003**	**0.0549**		**193.0052**	**193.0052**	**5.6800e-003**		**193.1472**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809	0.0000	3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**	**0.0000**	**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0858	0.0587	0.6629	1.9400e-003	0.2012	1.6300e-003	0.2028	0.0534	1.5000e-003	0.0549		193.0052	193.0052	5.6800e-003		193.1472
Total	**0.0858**	**0.0587**	**0.6629**	**1.9400e-003**	**0.2012**	**1.6300e-003**	**0.2028**	**0.0534**	**1.5000e-003**	**0.0549**		**193.0052**	**193.0052**	**5.6800e-003**		**193.1472**

3.4 Grading - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265		6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**		**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0954	0.0652	0.7365	2.1500e-003	0.2236	1.8100e-003	0.2254	0.0593	1.6600e-003	0.0610		214.4502	214.4502	6.3100e-003		214.6080
Total	**0.0954**	**0.0652**	**0.7365**	**2.1500e-003**	**0.2236**	**1.8100e-003**	**0.2254**	**0.0593**	**1.6600e-003**	**0.0610**		**214.4502**	**214.4502**	**6.3100e-003**		**214.6080**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265	0.0000	6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**	**0.0000**	**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0954	0.0652	0.7365	2.1500e-003	0.2236	1.8100e-003	0.2254	0.0593	1.6600e-003	0.0610		214.4502	214.4502	6.3100e-003		214.6080
Total	**0.0954**	**0.0652**	**0.7365**	**2.1500e-003**	**0.2236**	**1.8100e-003**	**0.2254**	**0.0593**	**1.6600e-003**	**0.0610**		**214.4502**	**214.4502**	**6.3100e-003**		**214.6080**

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**		**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0896	0.0589	0.6784	2.0800e-003	0.2236	1.7500e-003	0.2253	0.0593	1.6100e-003	0.0609		206.9139	206.9139	5.7000e-003		207.0563
Total	**0.0896**	**0.0589**	**0.6784**	**2.0800e-003**	**0.2236**	**1.7500e-003**	**0.2253**	**0.0593**	**1.6100e-003**	**0.0609**		**206.9139**	**206.9139**	**5.7000e-003**		**207.0563**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**	**0.0000**	**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0896	0.0589	0.6784	2.0800e-003	0.2236	1.7500e-003	0.2253	0.0593	1.6100e-003	0.0609		206.9139	206.9139	5.7000e-003		207.0563
Total	**0.0896**	**0.0589**	**0.6784**	**2.0800e-003**	**0.2236**	**1.7500e-003**	**0.2253**	**0.0593**	**1.6100e-003**	**0.0609**		**206.9139**	**206.9139**	**5.7000e-003**		**207.0563**

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**		**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4284	13.1673	3.8005	0.0354	0.9155	0.0256	0.9412	0.2636	0.0245	0.2881		3,789.0750	3,789.0750	0.2381		3,795.0283
Worker	3.5872	2.3593	27.1680	0.0832	8.9533	0.0701	9.0234	2.3745	0.0646	2.4390		8,286.9013	8,286.9013	0.2282		8,292.6058
Total	**4.0156**	**15.5266**	**30.9685**	**0.1186**	**9.8688**	**0.0957**	**9.9645**	**2.6381**	**0.0891**	**2.7271**		**12,075.9763**	**12,075.9763**	**0.4663**		**12,087.6341**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**	**0.0000**	**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4284	13.1673	3.8005	0.0354	0.9155	0.0256	0.9412	0.2636	0.0245	0.2881		3,789.0750	3,789.0750	0.2381		3,795.0283
Worker	3.5872	2.3593	27.1680	0.0832	8.9533	0.0701	9.0234	2.3745	0.0646	2.4390		8,286.9013	8,286.9013	0.2282		8,292.6058
Total	**4.0156**	**15.5266**	**30.9685**	**0.1186**	**9.8688**	**0.0957**	**9.9645**	**2.6381**	**0.0891**	**2.7271**		**12,075.9763**	**12,075.9763**	**0.4663**		**12,087.6341**

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**		**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3183	9.9726	3.3771	0.0343	0.9156	0.0122	0.9277	0.2636	0.0116	0.2752		3,671.4007	3,671.4007	0.2096		3,676.6417
Worker	3.3795	2.1338	24.9725	0.0801	8.9533	0.0681	9.0214	2.3745	0.0627	2.4372		7,983.7318	7,983.7318	0.2055		7,988.8683
Total	**3.6978**	**12.1065**	**28.3496**	**0.1144**	**9.8688**	**0.0803**	**9.9491**	**2.6381**	**0.0743**	**2.7124**		**11,655.1325**	**11,655.1325**	**0.4151**		**11,665.5099**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**	**0.0000**	**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3183	9.9726	3.3771	0.0343	0.9156	0.0122	0.9277	0.2636	0.0116	0.2752		3,671.4007	3,671.4007	0.2096		3,676.6417
Worker	3.3795	2.1338	24.9725	0.0801	8.9533	0.0681	9.0214	2.3745	0.0627	2.4372		7,983.7318	7,983.7318	0.2055		7,988.8683
Total	**3.6978**	**12.1065**	**28.3496**	**0.1144**	**9.8688**	**0.0803**	**9.9491**	**2.6381**	**0.0743**	**2.7124**		**11,655.1325**	**11,655.1325**	**0.4151**		**11,665.5099**

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**		**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0633	0.0400	0.4677	1.5000e-003	0.1677	1.2800e-003	0.1689	0.0445	1.1700e-003	0.0456		149.5081	149.5081	3.8500e-003		149.6043
Total	**0.0633**	**0.0400**	**0.4677**	**1.5000e-003**	**0.1677**	**1.2800e-003**	**0.1689**	**0.0445**	**1.1700e-003**	**0.0456**		**149.5081**	**149.5081**	**3.8500e-003**		**149.6043**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**	**0.0000**	**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0633	0.0400	0.4677	1.5000e-003	0.1677	1.2800e-003	0.1689	0.0445	1.1700e-003	0.0456		149.5081	149.5081	3.8500e-003		149.6043
Total	**0.0633**	**0.0400**	**0.4677**	**1.5000e-003**	**0.1677**	**1.2800e-003**	**0.1689**	**0.0445**	**1.1700e-003**	**0.0456**		**149.5081**	**149.5081**	**3.8500e-003**		**149.6043**

3.6 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310		2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**		**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0601	0.0364	0.4354	1.4500e-003	0.1677	1.2600e-003	0.1689	0.0445	1.1600e-003	0.0456		144.8706	144.8706	3.5300e-003		144.9587
Total	**0.0601**	**0.0364**	**0.4354**	**1.4500e-003**	**0.1677**	**1.2600e-003**	**0.1689**	**0.0445**	**1.1600e-003**	**0.0456**		**144.8706**	**144.8706**	**3.5300e-003**		**144.9587**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310	0.0000	2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**	**0.0000**	**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0601	0.0364	0.4354	1.4500e-003	0.1677	1.2600e-003	0.1689	0.0445	1.1600e-003	0.0456		144.8706	144.8706	3.5300e-003		144.9587
Total	**0.0601**	**0.0364**	**0.4354**	**1.4500e-003**	**0.1677**	**1.2600e-003**	**0.1689**	**0.0445**	**1.1600e-003**	**0.0456**		**144.8706**	**144.8706**	**3.5300e-003**		**144.9587**

3.7 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609		281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**		**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.6406	0.3886	4.6439	0.0155	1.7884	0.0134	1.8018	0.4743	0.0123	0.4866		1,545.2860	1,545.2860	0.0376		1,546.2262
Total	**0.6406**	**0.3886**	**4.6439**	**0.0155**	**1.7884**	**0.0134**	**1.8018**	**0.4743**	**0.0123**	**0.4866**		**1,545.2860**	**1,545.2860**	**0.0376**		**1,546.2262**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609	0.0000	281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**	**0.0000**	**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.6406	0.3886	4.6439	0.0155	1.7884	0.0134	1.8018	0.4743	0.0123	0.4866		1,545.2860	1,545.2860	0.0376		1,546.2262
Total	**0.6406**	**0.3886**	**4.6439**	**0.0155**	**1.7884**	**0.0134**	**1.8018**	**0.4743**	**0.0123**	**0.4866**		**1,545.2860**	**1,545.2860**	**0.0376**		**1,546.2262**

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839
Unmitigated	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839

4.2 Trip Summary Information

	Average Daily Trip Rate			Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	145.75	154.25	154.00	506,227	506,227
Apartments Mid Rise	4,026.75	3,773.25	4075.50	13,660,065	13,660,065
General Office Building	288.45	62.55	31.05	706,812	706,812
High Turnover (Sit Down Restaurant)	2,368.80	2,873.52	2817.72	3,413,937	3,413,937
Hotel	192.00	187.50	160.00	445,703	445,703
Quality Restaurant	501.12	511.92	461.20	707,488	707,488
Regional Shopping Center	528.08	601.44	357.84	1,112,221	1,112,221
Total	8,050.95	8,164.43	8,057.31	20,552,452	20,552,452

4.3 Trip Type Information

	Miles			Trip %			Trip Purpose %		
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
General Office Building	16.60	8.40	6.90	33.00	48.00	19.00	77	19	4
High Turnover (Sit Down	16.60	8.40	6.90	8.50	72.50	19.00	37	20	43
Hotel	16.60	8.40	6.90	19.40	61.60	19.00	58	38	4
Quality Restaurant	16.60	8.40	6.90	12.00	69.00	19.00	38	18	44
Regional Shopping Center	16.60	8.40	6.90	16.30	64.70	19.00	54	35	11

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Apartments Mid Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
General Office Building	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
High Turnover (Sit Down Restaurant)	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Hotel	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Quality Restaurant	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Regional Shopping Center	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
NaturalGas Unmitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1119.16	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35784.3	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1283.42	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22759.9	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4769.72	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5057.75	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	251.616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1.11916	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35.7843	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1.28342	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22.7599	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4.76972	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5.05775	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	0.251616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Unmitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

6.2 Area by SubCategory

Mitigated

SubCategory	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

Village South Specific Plan (Proposed)

Los Angeles-South Coast County, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Office Building	45.00	1000sqft	1.03	45,000.00	0
High Turnover (Sit Down Restaurant)	36.00	1000sqft	0.83	36,000.00	0
Hotel	50.00	Room	1.67	72,600.00	0
Quality Restaurant	8.00	1000sqft	0.18	8,000.00	0
Apartments Low Rise	25.00	Dwelling Unit	1.56	25,000.00	72
Apartments Mid Rise	975.00	Dwelling Unit	25.66	975,000.00	2789
Regional Shopping Center	56.00	1000sqft	1.29	56,000.00	0

1.2 Other Project Characteristics

Urbanization	Urban	**Wind Speed (m/s)**	2.2	**Precipitation Freq (Days)**	33
Climate Zone	9			**Operational Year**	2028
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	702.44	**CH4 Intensity (lb/MWhr)**	0.029	**N2O Intensity (lb/MWhr)**	0.006

1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Trips and VMT - Local hire provision

Table Name	Column Name	Default Value	New Value
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberWood	1.25	0.00
tblFireplaces	NumberWood	48.75	0.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblVehicleTrips	ST_TR	7.16	6.17
tblVehicleTrips	ST_TR	6.39	3.87
tblVehicleTrips	ST_TR	2.46	1.39
tblVehicleTrips	ST_TR	158.37	79.82

tblVehicleTrips	ST_TR	8.19	3.75
tblVehicleTrips	ST_TR	94.36	63.99
tblVehicleTrips	ST_TR	49.97	10.74
tblVehicleTrips	SU_TR	6.07	6.16
tblVehicleTrips	SU_TR	5.86	4.18
tblVehicleTrips	SU_TR	1.05	0.69
tblVehicleTrips	SU_TR	131.84	78.27
tblVehicleTrips	SU_TR	5.95	3.20
tblVehicleTrips	SU_TR	72.16	57.65
tblVehicleTrips	SU_TR	25.24	6.39
tblVehicleTrips	WD_TR	6.59	5.83
tblVehicleTrips	WD_TR	6.65	4.13
tblVehicleTrips	WD_TR	11.03	6.41
tblVehicleTrips	WD_TR	127.15	65.80
tblVehicleTrips	WD_TR	8.17	3.84
tblVehicleTrips	WD_TR	89.95	62.64
tblVehicleTrips	WD_TR	42.70	9.43
tblWoodstoves	NumberCatalytic	1.25	0.00
tblWoodstoves	NumberCatalytic	48.75	0.00
tblWoodstoves	NumberNoncatalytic	1.25	0.00
tblWoodstoves	NumberNoncatalytic	48.75	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2021	0.1704	1.8234	1.1577	2.3800e-003	0.4141	0.0817	0.4958	0.1788	0.0754	0.2542	0.0000	210.7654	210.7654	0.0600	0.0000	212.2661
2022	0.5865	4.0240	5.1546	0.0155	0.9509	0.1175	1.0683	0.2518	0.1103	0.3621	0.0000	1,418.6554	1,418.6554	0.1215	0.0000	1,421.6925
2023	0.5190	3.2850	4.7678	0.0147	0.8497	0.0971	0.9468	0.2283	0.0912	0.3195	0.0000	1,342.4412	1,342.4412	0.1115	0.0000	1,345.2291
2024	4.1592	0.1313	0.2557	5.0000e-004	0.0221	6.3900e-003	0.0285	5.8700e-003	5.9700e-003	0.0118	0.0000	44.6355	44.6355	7.8300e-003	0.0000	44.8311
Maximum	**4.1592**	**4.0240**	**5.1546**	**0.0155**	**0.9509**	**0.1175**	**1.0683**	**0.2518**	**0.1103**	**0.3621**	**0.0000**	**1,418.6554**	**1,418.6554**	**0.1215**	**0.0000**	**1,421.6925**

2.1 Overall Construction

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2021	0.1704	1.8234	1.1577	2.3800e-003	0.4141	0.0817	0.4958	0.1788	0.0754	0.2542	0.0000	210.7651	210.7651	0.0600	0.0000	212.2658
2022	0.5865	4.0240	5.1546	0.0155	0.9509	0.1175	1.0683	0.2518	0.1103	0.3621	0.0000	1,418.6550	1,418.6550	0.1215	0.0000	1,421.6921
2023	0.5190	3.2850	4.7678	0.0147	0.8497	0.0971	0.9468	0.2283	0.0912	0.3195	0.0000	1,342.4409	1,342.4409	0.1115	0.0000	1,345.2287
2024	4.1592	0.1313	0.2557	5.0000e-004	0.0221	6.3900e-003	0.0285	5.8700e-003	5.9700e-003	0.0118	0.0000	44.6354	44.6354	7.8300e-003	0.0000	44.8311
Maximum	**4.1592**	**4.0240**	**5.1546**	**0.0155**	**0.9509**	**0.1175**	**1.0683**	**0.2518**	**0.1103**	**0.3621**	**0.0000**	**1,418.6550**	**1,418.6550**	**0.1215**	**0.0000**	**1,421.6921**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	**9-1-2021**	**11-30-2021**	1.4091	1.4091
2	**12-1-2021**	**2-28-2022**	1.3329	1.3329
3	**3-1-2022**	**5-31-2022**	1.1499	1.1499
4	**6-1-2022**	**8-31-2022**	1.1457	1.1457
5	**9-1-2022**	**11-30-2022**	1.1415	1.1415
6	**12-1-2022**	**2-28-2023**	1.0278	1.0278
7	**3-1-2023**	**5-31-2023**	0.9868	0.9868
8	**6-1-2023**	**8-31-2023**	0.9831	0.9831

9	**9-1-2023**	**11-30-2023**	0.9798	0.9798
10	**12-1-2023**	**2-29-2024**	2.8757	2.8757
11	**3-1-2024**	**5-31-2024**	1.6188	1.6188
		Highest	2.8757	2.8757

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835
Energy	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	3,896.0732	3,896.0732	0.1303	0.0468	3,913.2833
Mobile	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162
Waste						0.0000	0.0000		0.0000	0.0000	207.8079	0.0000	207.8079	12.2811	0.0000	514.8354
Water						0.0000	0.0000		0.0000	0.0000	29.1632	556.6420	585.8052	3.0183	0.0755	683.7567
Total	**6.8692**	**9.5223**	**30.3407**	**0.0914**	**7.7979**	**0.2260**	**8.0240**	**2.0895**	**0.2219**	**2.3114**	**236.9712**	**12,294.1807**	**12,531.1519**	**15.7904**	**0.1260**	**12,963.4751**

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835
Energy	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	3,896.0732	3,896.0732	0.1303	0.0468	3,913.2833
Mobile	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162
Waste						0.0000	0.0000		0.0000	0.0000	207.8079	0.0000	207.8079	12.2811	0.0000	514.8354
Water						0.0000	0.0000		0.0000	0.0000	29.1632	556.6420	585.8052	3.0183	0.0755	683.7567
Total	**6.8692**	**9.5223**	**30.3407**	**0.0914**	**7.7979**	**0.2260**	**8.0240**	**2.0895**	**0.2219**	**2.3114**	**236.9712**	**12,294.1807**	**12,531.1519**	**15.7904**	**0.1260**	**12,963.4751**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

3.0 Construction Detail

Construction Phase

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	9/1/2021	10/12/2021	5	30	
2	Site Preparation	Site Preparation	10/13/2021	11/9/2021	5	20	
3	Grading	Grading	11/10/2021	1/11/2022	5	45	
4	Building Construction	Building Construction	1/12/2022	12/12/2023	5	500	
5	Paving	Paving	12/13/2023	1/30/2024	5	35	
6	Architectural Coating	Architectural Coating	1/31/2024	3/19/2024	5	35	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 112.5

Acres of Paving: 0

Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	458.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	801.00	143.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	160.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 Demolition - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0496	0.0000	0.0496	7.5100e-003	0.0000	7.5100e-003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0475	0.4716	0.3235	5.8000e-004		0.0233	0.0233		0.0216	0.0216	0.0000	51.0012	51.0012	0.0144	0.0000	51.3601
Total	**0.0475**	**0.4716**	**0.3235**	**5.8000e-004**	**0.0496**	**0.0233**	**0.0729**	**7.5100e-003**	**0.0216**	**0.0291**	**0.0000**	**51.0012**	**51.0012**	**0.0144**	**0.0000**	**51.3601**

3.2 Demolition - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.9300e-003	0.0634	0.0148	1.8000e-004	3.9400e-003	1.9000e-004	4.1300e-003	1.0800e-003	1.8000e-004	1.2600e-003	0.0000	17.4566	17.4566	1.2100e-003	0.0000	17.4869
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.2000e-004	5.3000e-004	6.0900e-003	2.0000e-005	1.6800e-003	1.0000e-005	1.6900e-003	4.5000e-004	1.0000e-005	4.6000e-004	0.0000	1.5281	1.5281	5.0000e-005	0.0000	1.5293
Total	**2.6500e-003**	**0.0639**	**0.0209**	**2.0000e-004**	**5.6200e-003**	**2.0000e-004**	**5.8200e-003**	**1.5300e-003**	**1.9000e-004**	**1.7200e-003**	**0.0000**	**18.9847**	**18.9847**	**1.2600e-003**	**0.0000**	**19.0161**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0496	0.0000	0.0496	7.5100e-003	0.0000	7.5100e-003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0475	0.4716	0.3235	5.8000e-004		0.0233	0.0233		0.0216	0.0216	0.0000	51.0011	51.0011	0.0144	0.0000	51.3600
Total	**0.0475**	**0.4716**	**0.3235**	**5.8000e-004**	**0.0496**	**0.0233**	**0.0729**	**7.5100e-003**	**0.0216**	**0.0291**	**0.0000**	**51.0011**	**51.0011**	**0.0144**	**0.0000**	**51.3600**

3.2 Demolition - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.9300e-003	0.0634	0.0148	1.8000e-004	3.9400e-003	1.9000e-004	4.1300e-003	1.0800e-003	1.8000e-004	1.2600e-003	0.0000	17.4566	17.4566	1.2100e-003	0.0000	17.4869
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.2000e-004	5.3000e-004	6.0900e-003	2.0000e-005	1.6800e-003	1.0000e-005	1.6900e-003	4.5000e-004	1.0000e-005	4.6000e-004	0.0000	1.5281	1.5281	5.0000e-005	0.0000	1.5293
Total	**2.6500e-003**	**0.0639**	**0.0209**	**2.0000e-004**	**5.6200e-003**	**2.0000e-004**	**5.8200e-003**	**1.5300e-003**	**1.9000e-004**	**1.7200e-003**	**0.0000**	**18.9847**	**18.9847**	**1.2600e-003**	**0.0000**	**19.0161**

3.3 Site Preparation - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1807	0.0000	0.1807	0.0993	0.0000	0.0993	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0389	0.4050	0.2115	3.8000e-004		0.0204	0.0204		0.0188	0.0188	0.0000	33.4357	33.4357	0.0108	0.0000	33.7061
Total	**0.0389**	**0.4050**	**0.2115**	**3.8000e-004**	**0.1807**	**0.0204**	**0.2011**	**0.0993**	**0.0188**	**0.1181**	**0.0000**	**33.4357**	**33.4357**	**0.0108**	**0.0000**	**33.7061**

3.3 Site Preparation - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.8000e-004	4.3000e-004	4.8700e-003	1.0000e-005	1.3400e-003	1.0000e-005	1.3500e-003	3.6000e-004	1.0000e-005	3.7000e-004	0.0000	1.2225	1.2225	4.0000e-005	0.0000	1.2234
Total	**5.8000e-004**	**4.3000e-004**	**4.8700e-003**	**1.0000e-005**	**1.3400e-003**	**1.0000e-005**	**1.3500e-003**	**3.6000e-004**	**1.0000e-005**	**3.7000e-004**	**0.0000**	**1.2225**	**1.2225**	**4.0000e-005**	**0.0000**	**1.2234**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1807	0.0000	0.1807	0.0993	0.0000	0.0993	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0389	0.4050	0.2115	3.8000e-004		0.0204	0.0204		0.0188	0.0188	0.0000	33.4357	33.4357	0.0108	0.0000	33.7060
Total	**0.0389**	**0.4050**	**0.2115**	**3.8000e-004**	**0.1807**	**0.0204**	**0.2011**	**0.0993**	**0.0188**	**0.1181**	**0.0000**	**33.4357**	**33.4357**	**0.0108**	**0.0000**	**33.7060**

3.3 Site Preparation - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.8000e-004	4.3000e-004	4.8700e-003	1.0000e-005	1.3400e-003	1.0000e-005	1.3500e-003	3.6000e-004	1.0000e-005	3.7000e-004	0.0000	1.2225	1.2225	4.0000e-005	0.0000	1.2234
Total	**5.8000e-004**	**4.3000e-004**	**4.8700e-003**	**1.0000e-005**	**1.3400e-003**	**1.0000e-005**	**1.3500e-003**	**3.6000e-004**	**1.0000e-005**	**3.7000e-004**	**0.0000**	**1.2225**	**1.2225**	**4.0000e-005**	**0.0000**	**1.2234**

3.4 Grading - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1741	0.0000	0.1741	0.0693	0.0000	0.0693	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0796	0.8816	0.5867	1.1800e-003		0.0377	0.0377		0.0347	0.0347	0.0000	103.5405	103.5405	0.0335	0.0000	104.3776
Total	**0.0796**	**0.8816**	**0.5867**	**1.1800e-003**	**0.1741**	**0.0377**	**0.2118**	**0.0693**	**0.0347**	**0.1040**	**0.0000**	**103.5405**	**103.5405**	**0.0335**	**0.0000**	**104.3776**

3.4 Grading - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.2200e-003	9.0000e-004	0.0103	3.0000e-005	2.8300e-003	2.0000e-005	2.8600e-003	7.5000e-004	2.0000e-005	7.8000e-004	0.0000	2.5808	2.5808	8.0000e-005	0.0000	2.5828
Total	**1.2200e-003**	**9.0000e-004**	**0.0103**	**3.0000e-005**	**2.8300e-003**	**2.0000e-005**	**2.8600e-003**	**7.5000e-004**	**2.0000e-005**	**7.8000e-004**	**0.0000**	**2.5808**	**2.5808**	**8.0000e-005**	**0.0000**	**2.5828**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1741	0.0000	0.1741	0.0693	0.0000	0.0693	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0796	0.8816	0.5867	1.1800e-003		0.0377	0.0377		0.0347	0.0347	0.0000	103.5403	103.5403	0.0335	0.0000	104.3775
Total	**0.0796**	**0.8816**	**0.5867**	**1.1800e-003**	**0.1741**	**0.0377**	**0.2118**	**0.0693**	**0.0347**	**0.1040**	**0.0000**	**103.5403**	**103.5403**	**0.0335**	**0.0000**	**104.3775**

3.4 Grading - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.2200e-003	9.0000e-004	0.0103	3.0000e-005	2.8300e-003	2.0000e-005	2.8600e-003	7.5000e-004	2.0000e-005	7.8000e-004	0.0000	2.5808	2.5808	8.0000e-005	0.0000	2.5828
Total	**1.2200e-003**	**9.0000e-004**	**0.0103**	**3.0000e-005**	**2.8300e-003**	**2.0000e-005**	**2.8600e-003**	**7.5000e-004**	**2.0000e-005**	**7.8000e-004**	**0.0000**	**2.5808**	**2.5808**	**8.0000e-005**	**0.0000**	**2.5828**

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0807	0.0000	0.0807	0.0180	0.0000	0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0127	0.1360	0.1017	2.2000e-004		5.7200e-003	5.7200e-003		5.2600e-003	5.2600e-003	0.0000	19.0871	19.0871	6.1700e-003	0.0000	19.2414
Total	**0.0127**	**0.1360**	**0.1017**	**2.2000e-004**	**0.0807**	**5.7200e-003**	**0.0865**	**0.0180**	**5.2600e-003**	**0.0233**	**0.0000**	**19.0871**	**19.0871**	**6.1700e-003**	**0.0000**	**19.2414**

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.1000e-004	1.5000e-004	1.7400e-003	1.0000e-005	5.2000e-004	0.0000	5.3000e-004	1.4000e-004	0.0000	1.4000e-004	0.0000	0.4587	0.4587	1.0000e-005	0.0000	0.4590
Total	**2.1000e-004**	**1.5000e-004**	**1.7400e-003**	**1.0000e-005**	**5.2000e-004**	**0.0000**	**5.3000e-004**	**1.4000e-004**	**0.0000**	**1.4000e-004**	**0.0000**	**0.4587**	**0.4587**	**1.0000e-005**	**0.0000**	**0.4590**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0807	0.0000	0.0807	0.0180	0.0000	0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0127	0.1360	0.1017	2.2000e-004		5.7200e-003	5.7200e-003		5.2600e-003	5.2600e-003	0.0000	19.0871	19.0871	6.1700e-003	0.0000	19.2414
Total	**0.0127**	**0.1360**	**0.1017**	**2.2000e-004**	**0.0807**	**5.7200e-003**	**0.0865**	**0.0180**	**5.2600e-003**	**0.0233**	**0.0000**	**19.0871**	**19.0871**	**6.1700e-003**	**0.0000**	**19.2414**

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.1000e-004	1.5000e-004	1.7400e-003	1.0000e-005	5.2000e-004	0.0000	5.3000e-004	1.4000e-004	0.0000	1.4000e-004	0.0000	0.4587	0.4587	1.0000e-005	0.0000	0.4590
Total	**2.1000e-004**	**1.5000e-004**	**1.7400e-003**	**1.0000e-005**	**5.2000e-004**	**0.0000**	**5.3000e-004**	**1.4000e-004**	**0.0000**	**1.4000e-004**	**0.0000**	**0.4587**	**0.4587**	**1.0000e-005**	**0.0000**	**0.4590**

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.2158	1.9754	2.0700	3.4100e-003		0.1023	0.1023		0.0963	0.0963	0.0000	293.1324	293.1324	0.0702	0.0000	294.8881
Total	**0.2158**	**1.9754**	**2.0700**	**3.4100e-003**		**0.1023**	**0.1023**		**0.0963**	**0.0963**	**0.0000**	**293.1324**	**293.1324**	**0.0702**	**0.0000**	**294.8881**

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0527	1.6961	0.4580	4.5500e-003	0.1140	3.1800e-003	0.1171	0.0329	3.0400e-003	0.0359	0.0000	441.9835	441.9835	0.0264	0.0000	442.6435
Worker	0.3051	0.2164	2.5233	7.3500e-003	0.7557	6.2300e-003	0.7619	0.2007	5.7400e-003	0.2065	0.0000	663.9936	663.9936	0.0187	0.0000	664.4604
Total	**0.3578**	**1.9125**	**2.9812**	**0.0119**	**0.8696**	**9.4100e-003**	**0.8790**	**0.2336**	**8.7800e-003**	**0.2424**	**0.0000**	**1,105.9771**	**1,105.9771**	**0.0451**	**0.0000**	**1,107.1039**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.2158	1.9754	2.0700	3.4100e-003		0.1023	0.1023		0.0963	0.0963	0.0000	293.1321	293.1321	0.0702	0.0000	294.8877
Total	**0.2158**	**1.9754**	**2.0700**	**3.4100e-003**		**0.1023**	**0.1023**		**0.0963**	**0.0963**	**0.0000**	**293.1321**	**293.1321**	**0.0702**	**0.0000**	**294.8877**

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0527	1.6961	0.4580	4.5500e-003	0.1140	3.1800e-003	0.1171	0.0329	3.0400e-003	0.0359	0.0000	441.9835	441.9835	0.0264	0.0000	442.6435
Worker	0.3051	0.2164	2.5233	7.3500e-003	0.7557	6.2300e-003	0.7619	0.2007	5.7400e-003	0.2065	0.0000	663.9936	663.9936	0.0187	0.0000	664.4604
Total	**0.3578**	**1.9125**	**2.9812**	**0.0119**	**0.8696**	**9.4100e-003**	**0.8790**	**0.2336**	**8.7800e-003**	**0.2424**	**0.0000**	**1,105.9771**	**1,105.9771**	**0.0451**	**0.0000**	**1,107.1039**

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1942	1.7765	2.0061	3.3300e-003		0.0864	0.0864		0.0813	0.0813	0.0000	286.2789	286.2789	0.0681	0.0000	287.9814
Total	**0.1942**	**1.7765**	**2.0061**	**3.3300e-003**		**0.0864**	**0.0864**		**0.0813**	**0.0813**	**0.0000**	**286.2789**	**286.2789**	**0.0681**	**0.0000**	**287.9814**

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0382	1.2511	0.4011	4.3000e-003	0.1113	1.4600e-003	0.1127	0.0321	1.4000e-003	0.0335	0.0000	417.9930	417.9930	0.0228	0.0000	418.5624
Worker	0.2795	0.1910	2.2635	6.9100e-003	0.7377	5.9100e-003	0.7436	0.1960	5.4500e-003	0.2014	0.0000	624.5363	624.5363	0.0164	0.0000	624.9466
Total	**0.3177**	**1.4420**	**2.6646**	**0.0112**	**0.8490**	**7.3700e-003**	**0.8564**	**0.2281**	**6.8500e-003**	**0.2349**	**0.0000**	**1,042.5294**	**1,042.5294**	**0.0392**	**0.0000**	**1,043.5090**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1942	1.7765	2.0061	3.3300e-003		0.0864	0.0864		0.0813	0.0813	0.0000	286.2785	286.2785	0.0681	0.0000	287.9811
Total	**0.1942**	**1.7765**	**2.0061**	**3.3300e-003**		**0.0864**	**0.0864**		**0.0813**	**0.0813**	**0.0000**	**286.2785**	**286.2785**	**0.0681**	**0.0000**	**287.9811**

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0382	1.2511	0.4011	4.3000e-003	0.1113	1.4600e-003	0.1127	0.0321	1.4000e-003	0.0335	0.0000	417.9930	417.9930	0.0228	0.0000	418.5624
Worker	0.2795	0.1910	2.2635	6.9100e-003	0.7377	5.9100e-003	0.7436	0.1960	5.4500e-003	0.2014	0.0000	624.5363	624.5363	0.0164	0.0000	624.9466
Total	**0.3177**	**1.4420**	**2.6646**	**0.0112**	**0.8490**	**7.3700e-003**	**0.8564**	**0.2281**	**6.8500e-003**	**0.2349**	**0.0000**	**1,042.5294**	**1,042.5294**	**0.0392**	**0.0000**	**1,043.5090**

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	6.7100e-003	0.0663	0.0948	1.5000e-004		3.3200e-003	3.3200e-003		3.0500e-003	3.0500e-003	0.0000	13.0175	13.0175	4.2100e-003	0.0000	13.1227
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**6.7100e-003**	**0.0663**	**0.0948**	**1.5000e-004**		**3.3200e-003**	**3.3200e-003**		**3.0500e-003**	**3.0500e-003**	**0.0000**	**13.0175**	**13.0175**	**4.2100e-003**	**0.0000**	**13.1227**

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.8000e-004	1.9000e-004	2.2300e-003	1.0000e-005	7.3000e-004	1.0000e-005	7.3000e-004	1.9000e-004	1.0000e-005	2.0000e-004	0.0000	0.6156	0.6156	2.0000e-005	0.0000	0.6160
Total	**2.8000e-004**	**1.9000e-004**	**2.2300e-003**	**1.0000e-005**	**7.3000e-004**	**1.0000e-005**	**7.3000e-004**	**1.9000e-004**	**1.0000e-005**	**2.0000e-004**	**0.0000**	**0.6156**	**0.6156**	**2.0000e-005**	**0.0000**	**0.6160**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	6.7100e-003	0.0663	0.0948	1.5000e-004		3.3200e-003	3.3200e-003		3.0500e-003	3.0500e-003	0.0000	13.0175	13.0175	4.2100e-003	0.0000	13.1227
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**6.7100e-003**	**0.0663**	**0.0948**	**1.5000e-004**		**3.3200e-003**	**3.3200e-003**		**3.0500e-003**	**3.0500e-003**	**0.0000**	**13.0175**	**13.0175**	**4.2100e-003**	**0.0000**	**13.1227**

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	2.8000e-004	1.9000e-004	2.2300e-003	1.0000e-005	7.3000e-004	1.0000e-005	7.3000e-004	1.9000e-004	1.0000e-005	2.0000e-004	0.0000	0.6156	0.6156	2.0000e-005	0.0000	0.6160
Total	**2.8000e-004**	**1.9000e-004**	**2.2300e-003**	**1.0000e-005**	**7.3000e-004**	**1.0000e-005**	**7.3000e-004**	**1.9000e-004**	**1.0000e-005**	**2.0000e-004**	**0.0000**	**0.6156**	**0.6156**	**2.0000e-005**	**0.0000**	**0.6160**

3.6 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0109	0.1048	0.1609	2.5000e-004		5.1500e-003	5.1500e-003		4.7400e-003	4.7400e-003	0.0000	22.0292	22.0292	7.1200e-003	0.0000	22.2073
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**0.0109**	**0.1048**	**0.1609**	**2.5000e-004**		**5.1500e-003**	**5.1500e-003**		**4.7400e-003**	**4.7400e-003**	**0.0000**	**22.0292**	**22.0292**	**7.1200e-003**	**0.0000**	**22.2073**

3.6 Paving - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	4.4000e-004	2.9000e-004	3.5100e-003	1.0000e-005	1.2300e-003	1.0000e-005	1.2400e-003	3.3000e-004	1.0000e-005	3.4000e-004	0.0000	1.0094	1.0094	3.0000e-005	0.0000	1.0100
Total	**4.4000e-004**	**2.9000e-004**	**3.5100e-003**	**1.0000e-005**	**1.2300e-003**	**1.0000e-005**	**1.2400e-003**	**3.3000e-004**	**1.0000e-005**	**3.4000e-004**	**0.0000**	**1.0094**	**1.0094**	**3.0000e-005**	**0.0000**	**1.0100**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0109	0.1048	0.1609	2.5000e-004		5.1500e-003	5.1500e-003		4.7400e-003	4.7400e-003	0.0000	22.0292	22.0292	7.1200e-003	0.0000	22.2073
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	**0.0109**	**0.1048**	**0.1609**	**2.5000e-004**		**5.1500e-003**	**5.1500e-003**		**4.7400e-003**	**4.7400e-003**	**0.0000**	**22.0292**	**22.0292**	**7.1200e-003**	**0.0000**	**22.2073**

3.6 Paving - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	4.4000e-004	2.9000e-004	3.5100e-003	1.0000e-005	1.2300e-003	1.0000e-005	1.2400e-003	3.3000e-004	1.0000e-005	3.4000e-004	0.0000	1.0094	1.0094	3.0000e-005	0.0000	1.0100
Total	**4.4000e-004**	**2.9000e-004**	**3.5100e-003**	**1.0000e-005**	**1.2300e-003**	**1.0000e-005**	**1.2400e-003**	**3.3000e-004**	**1.0000e-005**	**3.4000e-004**	**0.0000**	**1.0094**	**1.0094**	**3.0000e-005**	**0.0000**	**1.0100**

3.7 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	4.1372					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	3.1600e-003	0.0213	0.0317	5.0000e-005		1.0700e-003	1.0700e-003		1.0700e-003	1.0700e-003	0.0000	4.4682	4.4682	2.5000e-004	0.0000	4.4745
Total	**4.1404**	**0.0213**	**0.0317**	**5.0000e-005**		**1.0700e-003**	**1.0700e-003**		**1.0700e-003**	**1.0700e-003**	**0.0000**	**4.4682**	**4.4682**	**2.5000e-004**	**0.0000**	**4.4745**

3.7 Architectural Coating - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.4800e-003	4.9300e-003	0.0596	1.9000e-004	0.0209	1.6000e-004	0.0211	5.5500e-003	1.5000e-004	5.7000e-003	0.0000	17.1287	17.1287	4.3000e-004	0.0000	17.1394
Total	**7.4800e-003**	**4.9300e-003**	**0.0596**	**1.9000e-004**	**0.0209**	**1.6000e-004**	**0.0211**	**5.5500e-003**	**1.5000e-004**	**5.7000e-003**	**0.0000**	**17.1287**	**17.1287**	**4.3000e-004**	**0.0000**	**17.1394**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	4.1372					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	3.1600e-003	0.0213	0.0317	5.0000e-005		1.0700e-003	1.0700e-003		1.0700e-003	1.0700e-003	0.0000	4.4682	4.4682	2.5000e-004	0.0000	4.4745
Total	**4.1404**	**0.0213**	**0.0317**	**5.0000e-005**		**1.0700e-003**	**1.0700e-003**		**1.0700e-003**	**1.0700e-003**	**0.0000**	**4.4682**	**4.4682**	**2.5000e-004**	**0.0000**	**4.4745**

3.7 Architectural Coating - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.4800e-003	4.9300e-003	0.0596	1.9000e-004	0.0209	1.6000e-004	0.0211	5.5500e-003	1.5000e-004	5.7000e-003	0.0000	17.1287	17.1287	4.3000e-004	0.0000	17.1394
Total	**7.4800e-003**	**4.9300e-003**	**0.0596**	**1.9000e-004**	**0.0209**	**1.6000e-004**	**0.0211**	**5.5500e-003**	**1.5000e-004**	**5.7000e-003**	**0.0000**	**17.1287**	**17.1287**	**4.3000e-004**	**0.0000**	**17.1394**

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162
Unmitigated	1.5857	7.9962	19.1834	0.0821	7.7979	0.0580	7.8559	2.0895	0.0539	2.1434	0.0000	7,620.4986	7,620.4986	0.3407	0.0000	7,629.0162

4.2 Trip Summary Information

	Average Daily Trip Rate			Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	145.75	154.25	154.00	506,227	506,227
Apartments Mid Rise	4,026.75	3,773.25	4075.50	13,660,065	13,660,065
General Office Building	288.45	62.55	31.05	706,812	706,812
High Turnover (Sit Down Restaurant)	2,368.80	2,873.52	2817.72	3,413,937	3,413,937
Hotel	192.00	187.50	160.00	445,703	445,703
Quality Restaurant	501.12	511.92	461.20	707,488	707,488
Regional Shopping Center	528.08	601.44	357.84	1,112,221	1,112,221
Total	8,050.95	8,164.43	8,057.31	20,552,452	20,552,452

4.3 Trip Type Information

	Miles			Trip %			Trip Purpose %		
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
General Office Building	16.60	8.40	6.90	33.00	48.00	19.00	77	19	4
High Turnover (Sit Down	16.60	8.40	6.90	8.50	72.50	19.00	37	20	43
Hotel	16.60	8.40	6.90	19.40	61.60	19.00	58	38	4
Quality Restaurant	16.60	8.40	6.90	12.00	69.00	19.00	38	18	44
Regional Shopping Center	16.60	8.40	6.90	16.30	64.70	19.00	54	35	11

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Apartments Mid Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
General Office Building	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
High Turnover (Sit Down Restaurant)	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Hotel	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Quality Restaurant	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Regional Shopping Center	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	2,512.6465	2,512.6465	0.1037	0.0215	2,521.6356
Electricity Unmitigated						0.0000	0.0000		0.0000	0.0000	0.0000	2,512.6465	2,512.6465	0.1037	0.0215	2,521.6356
NaturalGas Mitigated	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	1,383.4267	1,383.4267	0.0265	0.0254	1,391.6478
NaturalGas Unmitigated	0.1398	1.2312	0.7770	7.6200e-003		0.0966	0.0966		0.0966	0.0966	0.0000	1,383.4267	1,383.4267	0.0265	0.0254	1,391.6478

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Low Rise	408494	2.2000e-003	0.0188	8.0100e-003	1.2000e-004		1.5200e-003	1.5200e-003		1.5200e-003	1.5200e-003	0.0000	21.7988	21.7988	4.2000e-004	4.0000e-004	21.9284
Apartments Mid Rise	1.30613e+007	0.0704	0.6018	0.2561	3.8400e-003		0.0487	0.0487		0.0487	0.0487	0.0000	696.9989	696.9989	0.0134	0.0128	701.1408
General Office Building	468450	2.5300e-003	0.0230	0.0193	1.4000e-004		1.7500e-003	1.7500e-003		1.7500e-003	1.7500e-003	0.0000	24.9983	24.9983	4.8000e-004	4.6000e-004	25.1468
High Turnover (Sit Down Restaurant)	8.30736e+006	0.0448	0.4072	0.3421	2.4400e-003		0.0310	0.0310		0.0310	0.0310	0.0000	443.3124	443.3124	8.5000e-003	8.1300e-003	445.9468
Hotel	1.74095e+006	9.3900e-003	0.0853	0.0717	5.1000e-004		6.4900e-003	6.4900e-003		6.4900e-003	6.4900e-003	0.0000	92.9036	92.9036	1.7800e-003	1.7000e-003	93.4557
Quality Restaurant	1.84608e+006	9.9500e-003	0.0905	0.0760	5.4000e-004		6.8800e-003	6.8800e-003		6.8800e-003	6.8800e-003	0.0000	98.5139	98.5139	1.8900e-003	1.8100e-003	99.0993
Regional Shopping Center	91840	5.0000e-004	4.5000e-003	3.7800e-003	3.0000e-005		3.4000e-004	3.4000e-004		3.4000e-004	3.4000e-004	0.0000	4.9009	4.9009	9.0000e-005	9.0000e-005	4.9301
Total		**0.1398**	**1.2312**	**0.7770**	**7.6200e-003**		**0.0966**	**0.0966**		**0.0966**	**0.0966**	**0.0000**	**1,383.4268**	**1,383.4268**	**0.0265**	**0.0254**	**1,391.6478**

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Low Rise	408494	2.2000e-003	0.0188	8.0100e-003	1.2000e-004		1.5200e-003	1.5200e-003		1.5200e-003	1.5200e-003	0.0000	21.7988	21.7988	4.2000e-004	4.0000e-004	21.9284
Apartments Mid Rise	1.30613e+007	0.0704	0.6018	0.2561	3.8400e-003		0.0487	0.0487		0.0487	0.0487	0.0000	696.9989	696.9989	0.0134	0.0128	701.1408
General Office Building	468450	2.5300e-003	0.0230	0.0193	1.4000e-004		1.7500e-003	1.7500e-003		1.7500e-003	1.7500e-003	0.0000	24.9983	24.9983	4.8000e-004	4.6000e-004	25.1468
High Turnover (Sit Down Restaurant)	8.30736e+006	0.0448	0.4072	0.3421	2.4400e-003		0.0310	0.0310		0.0310	0.0310	0.0000	443.3124	443.3124	8.5000e-003	8.1300e-003	445.9468
Hotel	1.74095e+006	9.3900e-003	0.0853	0.0717	5.1000e-004		6.4900e-003	6.4900e-003		6.4900e-003	6.4900e-003	0.0000	92.9036	92.9036	1.7800e-003	1.7000e-003	93.4557
Quality Restaurant	1.84608e+006	9.9500e-003	0.0905	0.0760	5.4000e-004		6.8800e-003	6.8800e-003		6.8800e-003	6.8800e-003	0.0000	98.5139	98.5139	1.8900e-003	1.8100e-003	99.0993
Regional Shopping Center	91840	5.0000e-004	4.5000e-003	3.7800e-003	3.0000e-005		3.4000e-004	3.4000e-004		3.4000e-004	3.4000e-004	0.0000	4.9009	4.9009	9.0000e-005	9.0000e-005	4.9301
Total		**0.1398**	**1.2312**	**0.7770**	**7.6200e-003**		**0.0966**	**0.0966**		**0.0966**	**0.0966**	**0.0000**	**1,383.4268**	**1,383.4268**	**0.0265**	**0.0254**	**1,391.6478**

5.3 Energy by Land Use - Electricity

Unmitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Low Rise	106010	33.7770	1.3900e-003	2.9000e-004	33.8978
Apartments Mid Rise	3.94697e+006	1,257.5879	0.0519	0.0107	1,262.0869
General Office Building	584550	186.2502	7.6900e-003	1.5900e-003	186.9165
High Turnover (Sit Down Restaurant)	1.58904e+006	506.3022	0.0209	4.3200e-003	508.1135
Hotel	550308	175.3399	7.2400e-003	1.5000e-003	175.9672
Quality Restaurant	353120	112.5116	4.6500e-003	9.6000e-004	112.9141
Regional Shopping Center	756000	240.8778	9.9400e-003	2.0600e-003	241.7395
Total		**2,512.6465**	**0.1037**	**0.0215**	**2,521.6356**

5.3 Energy by Land Use - Electricity

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Low Rise	106010	33.7770	1.3900e-003	2.9000e-004	33.8978
Apartments Mid Rise	3.94697e+006	1,257.5879	0.0519	0.0107	1,262.0869
General Office Building	584550	186.2502	7.6900e-003	1.5900e-003	186.9165
High Turnover (Sit Down Restaurant)	1.58904e+006	506.3022	0.0209	4.3200e-003	508.1135
Hotel	550308	175.3399	7.2400e-003	1.5000e-003	175.9672
Quality Restaurant	353120	112.5116	4.6500e-003	9.6000e-004	112.9141
Regional Shopping Center	756000	240.8778	9.9400e-003	2.0600e-003	241.7395
Total		**2,512.6465**	**0.1037**	**0.0215**	**2,521.6356**

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835
Unmitigated	5.1437	0.2950	10.3804	1.6700e-003		0.0714	0.0714		0.0714	0.0714	0.0000	220.9670	220.9670	0.0201	3.7400e-003	222.5835

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.4137					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	4.3998					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0206	0.1763	0.0750	1.1200e-003		0.0143	0.0143		0.0143	0.0143	0.0000	204.1166	204.1166	3.9100e-003	3.7400e-003	205.3295
Landscaping	0.3096	0.1187	10.3054	5.4000e-004		0.0572	0.0572		0.0572	0.0572	0.0000	16.8504	16.8504	0.0161	0.0000	17.2540
Total	**5.1437**	**0.2950**	**10.3804**	**1.6600e-003**		**0.0714**	**0.0714**		**0.0714**	**0.0714**	**0.0000**	**220.9670**	**220.9670**	**0.0201**	**3.7400e-003**	**222.5835**

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.4137					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	4.3998					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0206	0.1763	0.0750	1.1200e-003		0.0143	0.0143		0.0143	0.0143	0.0000	204.1166	204.1166	3.9100e-003	3.7400e-003	205.3295
Landscaping	0.3096	0.1187	10.3054	5.4000e-004		0.0572	0.0572		0.0572	0.0572	0.0000	16.8504	16.8504	0.0161	0.0000	17.2540
Total	**5.1437**	**0.2950**	**10.3804**	**1.6600e-003**		**0.0714**	**0.0714**		**0.0714**	**0.0714**	**0.0000**	**220.9670**	**220.9670**	**0.0201**	**3.7400e-003**	**222.5835**

7.0 Water Detail

7.1 Mitigation Measures Water

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Annual

	Total CO2	CH4	N2O	CO2e
Category	MT/yr			
Mitigated	585.8052	3.0183	0.0755	683.7567
Unmitigated	585.8052	3.0183	0.0755	683.7567

7.2 Water by Land Use

Unmitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Low Rise	1.62885 / 1.02688	10.9095	0.0535	1.3400e-003	12.6471
Apartments Mid Rise	63.5252 / 40.0485	425.4719	2.0867	0.0523	493.2363
General Office Building	7.99802 / 4.90201	53.0719	0.2627	6.5900e-003	61.6019
High Turnover (Sit Down Restaurant)	10.9272 / 0.697482	51.2702	0.3580	8.8200e-003	62.8482
Hotel	1.26834 / 0.140927	6.1633	0.0416	1.0300e-003	7.5079
Quality Restaurant	2.42827 / 0.154996	11.3934	0.0796	1.9600e-003	13.9663
Regional Shopping Center	4.14806 / 2.54236	27.5250	0.1363	3.4200e-003	31.9490
Total		**585.8052**	**3.0183**	**0.0755**	**683.7567**

7.2 Water by Land Use

Mitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Low Rise	1.62885 / 1.02688	10.9095	0.0535	1.3400e-003	12.6471
Apartments Mid Rise	63.5252 / 40.0485	425.4719	2.0867	0.0523	493.2363
General Office Building	7.99802 / 4.90201	53.0719	0.2627	6.5900e-003	61.6019
High Turnover (Sit Down Restaurant)	10.9272 / 0.697482	51.2702	0.3580	8.8200e-003	62.8482
Hotel	1.26834 / 0.140927	6.1633	0.0416	1.0300e-003	7.5079
Quality Restaurant	2.42827 / 0.154996	11.3934	0.0796	1.9600e-003	13.9663
Regional Shopping Center	4.14806 / 2.54236	27.5250	0.1363	3.4200e-003	31.9490
Total		**585.8052**	**3.0183**	**0.0755**	**683.7567**

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e
	MT/yr			
Mitigated	207.8079	12.2811	0.0000	514.8354
Unmitigated	207.8079	12.2811	0.0000	514.8354

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Low Rise	11.5	2.3344	0.1380	0.0000	5.7834
Apartments Mid Rise	448.5	91.0415	5.3804	0.0000	225.5513
General Office Building	41.85	8.4952	0.5021	0.0000	21.0464
High Turnover (Sit Down Restaurant)	428.4	86.9613	5.1393	0.0000	215.4430
Hotel	27.38	5.5579	0.3285	0.0000	13.7694
Quality Restaurant	7.3	1.4818	0.0876	0.0000	3.6712
Regional Shopping Center	58.8	11.9359	0.7054	0.0000	29.5706
Total		**207.8079**	**12.2811**	**0.0000**	**514.8354**

8.2 Waste by Land Use

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Low Rise	11.5	2.3344	0.1380	0.0000	5.7834
Apartments Mid Rise	448.5	91.0415	5.3804	0.0000	225.5513
General Office Building	41.85	8.4952	0.5021	0.0000	21.0464
High Turnover (Sit Down Restaurant)	428.4	86.9613	5.1393	0.0000	215.4430
Hotel	27.38	5.5579	0.3285	0.0000	13.7694
Quality Restaurant	7.3	1.4818	0.0876	0.0000	3.6712
Regional Shopping Center	58.8	11.9359	0.7054	0.0000	29.5706
Total		**207.8079**	**12.2811**	**0.0000**	**514.8354**

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

Village South Specific Plan (Proposed)

Los Angeles-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Office Building	45.00	1000sqft	1.03	45,000.00	0
High Turnover (Sit Down Restaurant)	36.00	1000sqft	0.83	36,000.00	0
Hotel	50.00	Room	1.67	72,600.00	0
Quality Restaurant	8.00	1000sqft	0.18	8,000.00	0
Apartments Low Rise	25.00	Dwelling Unit	1.56	25,000.00	72
Apartments Mid Rise	975.00	Dwelling Unit	25.66	975,000.00	2789
Regional Shopping Center	56.00	1000sqft	1.29	56,000.00	0

1.2 Other Project Characteristics

Urbanization	Urban	**Wind Speed (m/s)**	2.2	**Precipitation Freq (Days)**	33
Climate Zone	9			**Operational Year**	2028
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	702.44	**CH4 Intensity (lb/MWhr)**	0.029	**N2O Intensity (lb/MWhr)**	0.006

1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Trips and VMT - Local hire provision

Table Name	Column Name	Default Value	New Value
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberWood	1.25	0.00
tblFireplaces	NumberWood	48.75	0.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblVehicleTrips	ST_TR	7.16	6.17
tblVehicleTrips	ST_TR	6.39	3.87
tblVehicleTrips	ST_TR	2.46	1.39
tblVehicleTrips	ST_TR	158.37	79.82

tblVehicleTrips	ST_TR	8.19	3.75
tblVehicleTrips	ST_TR	94.36	63.99
tblVehicleTrips	ST_TR	49.97	10.74
tblVehicleTrips	SU_TR	6.07	6.16
tblVehicleTrips	SU_TR	5.86	4.18
tblVehicleTrips	SU_TR	1.05	0.69
tblVehicleTrips	SU_TR	131.84	78.27
tblVehicleTrips	SU_TR	5.95	3.20
tblVehicleTrips	SU_TR	72.16	57.65
tblVehicleTrips	SU_TR	25.24	6.39
tblVehicleTrips	WD_TR	6.59	5.83
tblVehicleTrips	WD_TR	6.65	4.13
tblVehicleTrips	WD_TR	11.03	6.41
tblVehicleTrips	WD_TR	127.15	65.80
tblVehicleTrips	WD_TR	8.17	3.84
tblVehicleTrips	WD_TR	89.95	62.64
tblVehicleTrips	WD_TR	42.70	9.43
tblWoodstoves	NumberCatalytic	1.25	0.00
tblWoodstoves	NumberCatalytic	48.75	0.00
tblWoodstoves	NumberNoncatalytic	1.25	0.00
tblWoodstoves	NumberNoncatalytic	48.75	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2561	46.4415	31.4494	0.0636	18.2032	2.0456	20.2488	9.9670	1.8820	11.8490	0.0000	6,163.4166	6,163.4166	1.9475	0.0000	6,212.1039
2022	4.5441	38.8811	40.8776	0.1240	8.8255	1.6361	10.4616	3.6369	1.5052	5.1421	0.0000	12,493.4403	12,493.4403	1.9485	0.0000	12,518.5707
2023	4.1534	25.7658	38.7457	0.1206	7.0088	0.7592	7.7679	1.8799	0.7136	2.5935	0.0000	12,150.4890	12,150.4890	0.9589	0.0000	12,174.4615
2024	237.0219	9.5478	14.9642	0.0239	1.2171	0.4694	1.2875	0.3229	0.4319	0.4621	0.0000	2,313.1808	2,313.1808	0.7166	0.0000	2,331.0956
Maximum	**237.0219**	**46.4415**	**40.8776**	**0.1240**	**18.2032**	**2.0456**	**20.2488**	**9.9670**	**1.8820**	**11.8490**	**0.0000**	**12,493.4403**	**12,493.4403**	**1.9485**	**0.0000**	**12,518.5707**

2.1 Overall Construction (Maximum Daily Emission)

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2561	46.4415	31.4494	0.0636	18.2032	2.0456	20.2488	9.9670	1.8820	11.8490	0.0000	6,163.4166	6,163.4166	1.9475	0.0000	6,212.1039
2022	4.5441	38.8811	40.8776	0.1240	8.8255	1.6361	10.4616	3.6369	1.5052	5.1421	0.0000	12,493.4403	12,493.4403	1.9485	0.0000	12,518.5707
2023	4.1534	25.7658	38.7457	0.1206	7.0088	0.7592	7.7679	1.8799	0.7136	2.5935	0.0000	12,150.4890	12,150.4890	0.9589	0.0000	12,174.4615
2024	237.0219	9.5478	14.9642	0.0239	1.2171	0.4694	1.2875	0.3229	0.4319	0.4621	0.0000	2,313.1808	2,313.1808	0.7166	0.0000	2,331.0955
Maximum	**237.0219**	**46.4415**	**40.8776**	**0.1240**	**18.2032**	**2.0456**	**20.2488**	**9.9670**	**1.8820**	**11.8490**	**0.0000**	**12,493.4403**	**12,493.4403**	**1.9485**	**0.0000**	**12,518.5707**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208
Total	**41.1168**	**67.2262**	**207.5497**	**0.6278**	**45.9592**	**2.4626**	**48.4217**	**12.2950**	**2.4385**	**14.7336**	**0.0000**	**76,811.1816**	**76,811.1816**	**2.8282**	**0.4832**	**77,025.8786**

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208
Total	**41.1168**	**67.2262**	**207.5497**	**0.6278**	**45.9592**	**2.4626**	**48.4217**	**12.2950**	**2.4385**	**14.7336**	**0.0000**	**76,811.1816**	**76,811.1816**	**2.8282**	**0.4832**	**77,025.8786**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	9/1/2021	10/12/2021	5	30	
2	Site Preparation	Site Preparation	10/13/2021	11/9/2021	5	20	
3	Grading	Grading	11/10/2021	1/11/2022	5	45	
4	Building Construction	Building Construction	1/12/2022	12/12/2023	5	500	
5	Paving	Paving	12/13/2023	1/30/2024	5	35	
6	Architectural Coating	Architectural Coating	1/31/2024	3/19/2024	5	35	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 112.5

Acres of Paving: 0

Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	458.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	801.00	143.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	160.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 Demolition - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411		3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**		**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1273	4.0952	0.9602	0.0119	0.2669	0.0126	0.2795	0.0732	0.0120	0.0852		1,292.2413	1,292.2413	0.0877		1,294.4337
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0487	0.0313	0.4282	1.1800e-003	0.1141	9.5000e-004	0.1151	0.0303	8.8000e-004	0.0311		117.2799	117.2799	3.5200e-003		117.3678
Total	**0.1760**	**4.1265**	**1.3884**	**0.0131**	**0.3810**	**0.0135**	**0.3946**	**0.1034**	**0.0129**	**0.1163**		**1,409.5212**	**1,409.5212**	**0.0912**		**1,411.8015**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411	0.0000	3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**	**0.0000**	**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1273	4.0952	0.9602	0.0119	0.2669	0.0126	0.2795	0.0732	0.0120	0.0852		1,292.2413	1,292.2413	0.0877		1,294.4337
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0487	0.0313	0.4282	1.1800e-003	0.1141	9.5000e-004	0.1151	0.0303	8.8000e-004	0.0311		117.2799	117.2799	3.5200e-003		117.3678
Total	**0.1760**	**4.1265**	**1.3884**	**0.0131**	**0.3810**	**0.0135**	**0.3946**	**0.1034**	**0.0129**	**0.1163**		**1,409.5212**	**1,409.5212**	**0.0912**		**1,411.8015**

3.3 Site Preparation - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809		3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**		**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0584	0.0375	0.5139	1.4100e-003	0.1369	1.1400e-003	0.1381	0.0363	1.0500e-003	0.0374		140.7359	140.7359	4.2200e-003		140.8414
Total	**0.0584**	**0.0375**	**0.5139**	**1.4100e-003**	**0.1369**	**1.1400e-003**	**0.1381**	**0.0363**	**1.0500e-003**	**0.0374**		**140.7359**	**140.7359**	**4.2200e-003**		**140.8414**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809	0.0000	3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**	**0.0000**	**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0584	0.0375	0.5139	1.4100e-003	0.1369	1.1400e-003	0.1381	0.0363	1.0500e-003	0.0374		140.7359	140.7359	4.2200e-003		140.8414
Total	**0.0584**	**0.0375**	**0.5139**	**1.4100e-003**	**0.1369**	**1.1400e-003**	**0.1381**	**0.0363**	**1.0500e-003**	**0.0374**		**140.7359**	**140.7359**	**4.2200e-003**		**140.8414**

3.4 Grading - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265		6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**		**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0649	0.0417	0.5710	1.5700e-003	0.1521	1.2700e-003	0.1534	0.0404	1.1700e-003	0.0415		156.3732	156.3732	4.6900e-003		156.4904
Total	**0.0649**	**0.0417**	**0.5710**	**1.5700e-003**	**0.1521**	**1.2700e-003**	**0.1534**	**0.0404**	**1.1700e-003**	**0.0415**		**156.3732**	**156.3732**	**4.6900e-003**		**156.4904**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265	0.0000	6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**	**0.0000**	**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0649	0.0417	0.5710	1.5700e-003	0.1521	1.2700e-003	0.1534	0.0404	1.1700e-003	0.0415		156.3732	156.3732	4.6900e-003		156.4904
Total	**0.0649**	**0.0417**	**0.5710**	**1.5700e-003**	**0.1521**	**1.2700e-003**	**0.1534**	**0.0404**	**1.1700e-003**	**0.0415**		**156.3732**	**156.3732**	**4.6900e-003**		**156.4904**

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**		**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0607	0.0376	0.5263	1.5100e-003	0.1521	1.2300e-003	0.1534	0.0404	1.1300e-003	0.0415		150.8754	150.8754	4.2400e-003		150.9813
Total	**0.0607**	**0.0376**	**0.5263**	**1.5100e-003**	**0.1521**	**1.2300e-003**	**0.1534**	**0.0404**	**1.1300e-003**	**0.0415**		**150.8754**	**150.8754**	**4.2400e-003**		**150.9813**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**	**0.0000**	**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0607	0.0376	0.5263	1.5100e-003	0.1521	1.2300e-003	0.1534	0.0404	1.1300e-003	0.0415		150.8754	150.8754	4.2400e-003		150.9813
Total	**0.0607**	**0.0376**	**0.5263**	**1.5100e-003**	**0.1521**	**1.2300e-003**	**0.1534**	**0.0404**	**1.1300e-003**	**0.0415**		**150.8754**	**150.8754**	**4.2400e-003**		**150.9813**

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**		**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4079	13.2032	3.4341	0.0364	0.9155	0.0248	0.9404	0.2636	0.0237	0.2873		3,896.5482	3,896.5482	0.2236		3,902.1384
Worker	2.4299	1.5074	21.0801	0.0607	6.0932	0.0493	6.1425	1.6163	0.0454	1.6617		6,042.5585	6,042.5585	0.1697		6,046.8000
Total	**2.8378**	**14.7106**	**24.5142**	**0.0971**	**7.0087**	**0.0741**	**7.0828**	**1.8799**	**0.0691**	**1.9490**		**9,939.1067**	**9,939.1067**	**0.3933**		**9,948.9384**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**	**0.0000**	**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4079	13.2032	3.4341	0.0364	0.9155	0.0248	0.9404	0.2636	0.0237	0.2873		3,896.5482	3,896.5482	0.2236		3,902.1384
Worker	2.4299	1.5074	21.0801	0.0607	6.0932	0.0493	6.1425	1.6163	0.0454	1.6617		6,042.5585	6,042.5585	0.1697		6,046.8000
Total	**2.8378**	**14.7106**	**24.5142**	**0.0971**	**7.0087**	**0.0741**	**7.0828**	**1.8799**	**0.0691**	**1.9490**		**9,939.1067**	**9,939.1067**	**0.3933**		**9,948.9384**

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**		**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3027	10.0181	3.1014	0.0352	0.9156	0.0116	0.9271	0.2636	0.0111	0.2747		3,773.8762	3,773.8762	0.1982		3,778.8300
Worker	2.2780	1.3628	19.4002	0.0584	6.0932	0.0479	6.1411	1.6163	0.0441	1.6604		5,821.4028	5,821.4028	0.1529		5,825.2254
Total	**2.5807**	**11.3809**	**22.5017**	**0.0936**	**7.0088**	**0.0595**	**7.0682**	**1.8799**	**0.0552**	**1.9350**		**9,595.2790**	**9,595.2790**	**0.3511**		**9,604.0554**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**	**0.0000**	**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3027	10.0181	3.1014	0.0352	0.9156	0.0116	0.9271	0.2636	0.0111	0.2747		3,773.8762	3,773.8762	0.1982		3,778.8300
Worker	2.2780	1.3628	19.4002	0.0584	6.0932	0.0479	6.1411	1.6163	0.0441	1.6604		5,821.4028	5,821.4028	0.1529		5,825.2254
Total	**2.5807**	**11.3809**	**22.5017**	**0.0936**	**7.0088**	**0.0595**	**7.0682**	**1.8799**	**0.0552**	**1.9350**		**9,595.2790**	**9,595.2790**	**0.3511**		**9,604.0554**

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**		**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0427	0.0255	0.3633	1.0900e-003	0.1141	9.0000e-004	0.1150	0.0303	8.3000e-004	0.0311		109.0150	109.0150	2.8600e-003		109.0866
Total	**0.0427**	**0.0255**	**0.3633**	**1.0900e-003**	**0.1141**	**9.0000e-004**	**0.1150**	**0.0303**	**8.3000e-004**	**0.0311**		**109.0150**	**109.0150**	**2.8600e-003**		**109.0866**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**	**0.0000**	**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0427	0.0255	0.3633	1.0900e-003	0.1141	9.0000e-004	0.1150	0.0303	8.3000e-004	0.0311		109.0150	109.0150	2.8600e-003		109.0866
Total	**0.0427**	**0.0255**	**0.3633**	**1.0900e-003**	**0.1141**	**9.0000e-004**	**0.1150**	**0.0303**	**8.3000e-004**	**0.0311**		**109.0150**	**109.0150**	**2.8600e-003**		**109.0866**

3.6 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310		2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**		**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0403	0.0233	0.3384	1.0600e-003	0.1141	8.8000e-004	0.1150	0.0303	8.1000e-004	0.0311		105.6336	105.6336	2.6300e-003		105.6992
Total	**0.0403**	**0.0233**	**0.3384**	**1.0600e-003**	**0.1141**	**8.8000e-004**	**0.1150**	**0.0303**	**8.1000e-004**	**0.0311**		**105.6336**	**105.6336**	**2.6300e-003**		**105.6992**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310	0.0000	2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**	**0.0000**	**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0403	0.0233	0.3384	1.0600e-003	0.1141	8.8000e-004	0.1150	0.0303	8.1000e-004	0.0311		105.6336	105.6336	2.6300e-003		105.6992
Total	**0.0403**	**0.0233**	**0.3384**	**1.0600e-003**	**0.1141**	**8.8000e-004**	**0.1150**	**0.0303**	**8.1000e-004**	**0.0311**		**105.6336**	**105.6336**	**2.6300e-003**		**105.6992**

3.7 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609		281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**		**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.4296	0.2481	3.6098	0.0113	1.2171	9.4300e-003	1.2266	0.3229	8.6800e-003	0.3315		1,126.7583	1,126.7583	0.0280		1,127.4583
Total	**0.4296**	**0.2481**	**3.6098**	**0.0113**	**1.2171**	**9.4300e-003**	**1.2266**	**0.3229**	**8.6800e-003**	**0.3315**		**1,126.7583**	**1,126.7583**	**0.0280**		**1,127.4583**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609	0.0000	281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**	**0.0000**	**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.4296	0.2481	3.6098	0.0113	1.2171	9.4300e-003	1.2266	0.3229	8.6800e-003	0.3315		1,126.7583	1,126.7583	0.0280		1,127.4583
Total	**0.4296**	**0.2481**	**3.6098**	**0.0113**	**1.2171**	**9.4300e-003**	**1.2266**	**0.3229**	**8.6800e-003**	**0.3315**		**1,126.7583**	**1,126.7583**	**0.0280**		**1,127.4583**

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208
Unmitigated	9.8489	45.4304	114.8495	0.4917	45.9592	0.3360	46.2951	12.2950	0.3119	12.6070		50,306.6034	50,306.6034	2.1807		50,361.1208

4.2 Trip Summary Information

	Average Daily Trip Rate			Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	145.75	154.25	154.00	506,227	506,227
Apartments Mid Rise	4,026.75	3,773.25	4075.50	13,660,065	13,660,065
General Office Building	288.45	62.55	31.05	706,812	706,812
High Turnover (Sit Down Restaurant)	2,368.80	2,873.52	2817.72	3,413,937	3,413,937
Hotel	192.00	187.50	160.00	445,703	445,703
Quality Restaurant	501.12	511.92	461.20	707,488	707,488
Regional Shopping Center	528.08	601.44	357.84	1,112,221	1,112,221
Total	8,050.95	8,164.43	8,057.31	20,552,452	20,552,452

4.3 Trip Type Information

	Miles			Trip %			Trip Purpose %		
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
General Office Building	16.60	8.40	6.90	33.00	48.00	19.00	77	19	4
High Turnover (Sit Down	16.60	8.40	6.90	8.50	72.50	19.00	37	20	43
Hotel	16.60	8.40	6.90	19.40	61.60	19.00	58	38	4
Quality Restaurant	16.60	8.40	6.90	12.00	69.00	19.00	38	18	44
Regional Shopping Center	16.60	8.40	6.90	16.30	64.70	19.00	54	35	11

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Apartments Mid Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
General Office Building	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
High Turnover (Sit Down Restaurant)	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Hotel	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Quality Restaurant	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Regional Shopping Center	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Summer

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
NaturalGas Unmitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1119.16	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35784.3	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1283.42	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22759.9	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4769.72	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5057.75	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	251.616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1.11916	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35.7843	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1.28342	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22.7599	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4.76972	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5.05775	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	0.251616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Unmitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

Village South Specific Plan (Proposed)

Los Angeles-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
General Office Building	45.00	1000sqft	1.03	45,000.00	0
High Turnover (Sit Down Restaurant)	36.00	1000sqft	0.83	36,000.00	0
Hotel	50.00	Room	1.67	72,600.00	0
Quality Restaurant	8.00	1000sqft	0.18	8,000.00	0
Apartments Low Rise	25.00	Dwelling Unit	1.56	25,000.00	72
Apartments Mid Rise	975.00	Dwelling Unit	25.66	975,000.00	2789
Regional Shopping Center	56.00	1000sqft	1.29	56,000.00	0

1.2 Other Project Characteristics

Urbanization	Urban	**Wind Speed (m/s)**	2.2	**Precipitation Freq (Days)**	33
Climate Zone	9			**Operational Year**	2028
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	702.44	**CH4 Intensity (lb/MWhr)**	0.029	**N2O Intensity (lb/MWhr)**	0.006

1.3 User Entered Comments & Non-Default Data

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

Project Characteristics - Consistent with the DEIR's model.

Land Use - See SWAPE comment regarding residential and retail land uses.

Construction Phase - See SWAPE comment regarding individual construction phase lengths.

Demolition - Consistent with the DEIR's model. See SWAPE comment regarding demolition.

Vehicle Trips - Saturday trips consistent with the DEIR's model. See SWAPE comment regarding weekday and Sunday trips.

Woodstoves - Woodstoves and wood-burning fireplaces consistent with the DEIR's model. See SWAPE comment regarding gas fireplaces.

Energy Use -

Construction Off-road Equipment Mitigation - See SWAPE comment on construction-related mitigation.

Area Mitigation - See SWAPE comment regarding operational mitigation measures.

Water Mitigation - See SWAPE comment regarding operational mitigation measures.

Trips and VMT - Local hire provision

Table Name	Column Name	Default Value	New Value
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	FireplaceWoodMass	1,019.20	0.00
tblFireplaces	NumberWood	1.25	0.00
tblFireplaces	NumberWood	48.75	0.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblTripsAndVMT	WorkerTripLength	14.70	10.00
tblVehicleTrips	ST_TR	7.16	6.17
tblVehicleTrips	ST_TR	6.39	3.87
tblVehicleTrips	ST_TR	2.46	1.39
tblVehicleTrips	ST_TR	158.37	79.82

tblVehicleTrips	ST_TR	8.19	3.75
tblVehicleTrips	ST_TR	94.36	63.99
tblVehicleTrips	ST_TR	49.97	10.74
tblVehicleTrips	SU_TR	6.07	6.16
tblVehicleTrips	SU_TR	5.86	4.18
tblVehicleTrips	SU_TR	1.05	0.69
tblVehicleTrips	SU_TR	131.84	78.27
tblVehicleTrips	SU_TR	5.95	3.20
tblVehicleTrips	SU_TR	72.16	57.65
tblVehicleTrips	SU_TR	25.24	6.39
tblVehicleTrips	WD_TR	6.59	5.83
tblVehicleTrips	WD_TR	6.65	4.13
tblVehicleTrips	WD_TR	11.03	6.41
tblVehicleTrips	WD_TR	127.15	65.80
tblVehicleTrips	WD_TR	8.17	3.84
tblVehicleTrips	WD_TR	89.95	62.64
tblVehicleTrips	WD_TR	42.70	9.43
tblWoodstoves	NumberCatalytic	1.25	0.00
tblWoodstoves	NumberCatalytic	48.75	0.00
tblWoodstoves	NumberNoncatalytic	1.25	0.00
tblWoodstoves	NumberNoncatalytic	48.75	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2621	46.4460	31.4068	0.0635	18.2032	2.0456	20.2488	9.9670	1.8820	11.8490	0.0000	6,154.3377	6,154.3377	1.9472	0.0000	6,203.0186
2022	4.7966	38.8851	39.6338	0.1195	8.8255	1.6361	10.4616	3.6369	1.5052	5.1421	0.0000	12,035.3440	12,035.3440	1.9482	0.0000	12,060.6013
2023	4.3939	25.8648	37.5031	0.1162	7.0088	0.7598	7.7685	1.8799	0.7142	2.5940	0.0000	11,710.4080	11,710.4080	0.9617	0.0000	11,734.4497
2024	237.0656	9.5503	14.9372	0.0238	1.2171	0.4694	1.2875	0.3229	0.4319	0.4621	0.0000	2,307.0517	2,307.0517	0.7164	0.0000	2,324.9627
Maximum	**237.0656**	**46.4460**	**39.6338**	**0.1195**	**18.2032**	**2.0456**	**20.2488**	**9.9670**	**1.8820**	**11.8490**	**0.0000**	**12,035.3440**	**12,035.3440**	**1.9482**	**0.0000**	**12,060.6013**

2.1 Overall Construction (Maximum Daily Emission)

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2021	4.2621	46.4460	31.4068	0.0635	18.2032	2.0456	20.2488	9.9670	1.8820	11.8490	0.0000	6,154.3377	6,154.3377	1.9472	0.0000	6,203.0186
2022	4.7966	38.8851	39.6338	0.1195	8.8255	1.6361	10.4616	3.6369	1.5052	5.1421	0.0000	12,035.3440	12,035.3440	1.9482	0.0000	12,060.6013
2023	4.3939	25.8648	37.5031	0.1162	7.0088	0.7598	7.7685	1.8799	0.7142	2.5940	0.0000	11,710.4080	11,710.4080	0.9617	0.0000	11,734.4497
2024	237.0656	9.5503	14.9372	0.0238	1.2171	0.4694	1.2875	0.3229	0.4319	0.4621	0.0000	2,307.0517	2,307.0517	0.7164	0.0000	2,324.9627
Maximum	**237.0656**	**46.4460**	**39.6338**	**0.1195**	**18.2032**	**2.0456**	**20.2488**	**9.9670**	**1.8820**	**11.8490**	**0.0000**	**12,035.3440**	**12,035.3440**	**1.9482**	**0.0000**	**12,060.6013**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839
Total	**40.7912**	**67.7872**	**202.7424**	**0.6043**	**45.9592**	**2.4640**	**48.4231**	**12.2950**	**2.4399**	**14.7349**	**0.0000**	**74,422.3787**	**74,422.3787**	**2.8429**	**0.4832**	**74,637.4417**

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Energy	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
Mobile	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839
Total	**40.7912**	**67.7872**	**202.7424**	**0.6043**	**45.9592**	**2.4640**	**48.4231**	**12.2950**	**2.4399**	**14.7349**	**0.0000**	**74,422.3787**	**74,422.3787**	**2.8429**	**0.4832**	**74,637.4417**

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**	**0.00**

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	9/1/2021	10/12/2021	5	30	
2	Site Preparation	Site Preparation	10/13/2021	11/9/2021	5	20	
3	Grading	Grading	11/10/2021	1/11/2022	5	45	
4	Building Construction	Building Construction	1/12/2022	12/12/2023	5	500	
5	Paving	Paving	12/13/2023	1/30/2024	5	35	
6	Architectural Coating	Architectural Coating	1/31/2024	3/19/2024	5	35	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 112.5

Acres of Paving: 0

Residential Indoor: 2,025,000; Residential Outdoor: 675,000; Non-Residential Indoor: 326,400; Non-Residential Outdoor: 108,800; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Excavators	3	8.00	158	0.38
Demolition	Rubber Tired Dozers	2	8.00	247	0.40
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	97	0.37
Grading	Excavators	2	8.00	158	0.38
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Grading	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Building Construction	Cranes	1	7.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	7.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	6	15.00	0.00	458.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	7	18.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	801.00	143.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	160.00	0.00	0.00	10.00	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

3.2 Demolition - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411		3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**		**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1304	4.1454	1.0182	0.0117	0.2669	0.0128	0.2797	0.0732	0.0122	0.0854		1,269.8555	1,269.8555	0.0908		1,272.1252
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0532	0.0346	0.3963	1.1100e-003	0.1141	9.5000e-004	0.1151	0.0303	8.8000e-004	0.0311		110.4707	110.4707	3.3300e-003		110.5539
Total	**0.1835**	**4.1800**	**1.4144**	**0.0128**	**0.3810**	**0.0137**	**0.3948**	**0.1034**	**0.0131**	**0.1165**		**1,380.3262**	**1,380.3262**	**0.0941**		**1,382.6791**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					3.3074	0.0000	3.3074	0.5008	0.0000	0.5008			0.0000			0.0000
Off-Road	3.1651	31.4407	21.5650	0.0388		1.5513	1.5513		1.4411	1.4411	0.0000	3,747.9449	3,747.9449	1.0549		3,774.3174
Total	**3.1651**	**31.4407**	**21.5650**	**0.0388**	**3.3074**	**1.5513**	**4.8588**	**0.5008**	**1.4411**	**1.9419**	**0.0000**	**3,747.9449**	**3,747.9449**	**1.0549**		**3,774.3174**

3.2 Demolition - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1304	4.1454	1.0182	0.0117	0.2669	0.0128	0.2797	0.0732	0.0122	0.0854		1,269.8555	1,269.8555	0.0908		1,272.1252
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0532	0.0346	0.3963	1.1100e-003	0.1141	9.5000e-004	0.1151	0.0303	8.8000e-004	0.0311		110.4707	110.4707	3.3300e-003		110.5539
Total	**0.1835**	**4.1800**	**1.4144**	**0.0128**	**0.3810**	**0.0137**	**0.3948**	**0.1034**	**0.0131**	**0.1165**		**1,380.3262**	**1,380.3262**	**0.0941**		**1,382.6791**

3.3 Site Preparation - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809		3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**		**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0638	0.0415	0.4755	1.3300e-003	0.1369	1.1400e-003	0.1381	0.0363	1.0500e-003	0.0374		132.5649	132.5649	3.9900e-003		132.6646
Total	**0.0638**	**0.0415**	**0.4755**	**1.3300e-003**	**0.1369**	**1.1400e-003**	**0.1381**	**0.0363**	**1.0500e-003**	**0.0374**		**132.5649**	**132.5649**	**3.9900e-003**		**132.6646**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					18.0663	0.0000	18.0663	9.9307	0.0000	9.9307			0.0000			0.0000
Off-Road	3.8882	40.4971	21.1543	0.0380		2.0445	2.0445		1.8809	1.8809	0.0000	3,685.6569	3,685.6569	1.1920		3,715.4573
Total	**3.8882**	**40.4971**	**21.1543**	**0.0380**	**18.0663**	**2.0445**	**20.1107**	**9.9307**	**1.8809**	**11.8116**	**0.0000**	**3,685.6569**	**3,685.6569**	**1.1920**		**3,715.4573**

3.3 Site Preparation - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0638	0.0415	0.4755	1.3300e-003	0.1369	1.1400e-003	0.1381	0.0363	1.0500e-003	0.0374		132.5649	132.5649	3.9900e-003		132.6646
Total	**0.0638**	**0.0415**	**0.4755**	**1.3300e-003**	**0.1369**	**1.1400e-003**	**0.1381**	**0.0363**	**1.0500e-003**	**0.0374**		**132.5649**	**132.5649**	**3.9900e-003**		**132.6646**

3.4 Grading - 2021

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265		6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**		**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0709	0.0462	0.5284	1.4800e-003	0.1521	1.2700e-003	0.1534	0.0404	1.1700e-003	0.0415		147.2943	147.2943	4.4300e-003		147.4051
Total	**0.0709**	**0.0462**	**0.5284**	**1.4800e-003**	**0.1521**	**1.2700e-003**	**0.1534**	**0.0404**	**1.1700e-003**	**0.0415**		**147.2943**	**147.2943**	**4.4300e-003**		**147.4051**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	4.1912	46.3998	30.8785	0.0620		1.9853	1.9853		1.8265	1.8265	0.0000	6,007.0434	6,007.0434	1.9428		6,055.6134
Total	**4.1912**	**46.3998**	**30.8785**	**0.0620**	**8.6733**	**1.9853**	**10.6587**	**3.5965**	**1.8265**	**5.4230**	**0.0000**	**6,007.0434**	**6,007.0434**	**1.9428**		**6,055.6134**

3.4 Grading - 2021

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0709	0.0462	0.5284	1.4800e-003	0.1521	1.2700e-003	0.1534	0.0404	1.1700e-003	0.0415		147.2943	147.2943	4.4300e-003		147.4051
Total	**0.0709**	**0.0462**	**0.5284**	**1.4800e-003**	**0.1521**	**1.2700e-003**	**0.1534**	**0.0404**	**1.1700e-003**	**0.0415**		**147.2943**	**147.2943**	**4.4300e-003**		**147.4051**

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041		6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**		**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0665	0.0416	0.4861	1.4300e-003	0.1521	1.2300e-003	0.1534	0.0404	1.1300e-003	0.0415		142.1207	142.1207	4.0000e-003		142.2207
Total	**0.0665**	**0.0416**	**0.4861**	**1.4300e-003**	**0.1521**	**1.2300e-003**	**0.1534**	**0.0404**	**1.1300e-003**	**0.0415**		**142.1207**	**142.1207**	**4.0000e-003**		**142.2207**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					8.6733	0.0000	8.6733	3.5965	0.0000	3.5965			0.0000			0.0000
Off-Road	3.6248	38.8435	29.0415	0.0621		1.6349	1.6349		1.5041	1.5041	0.0000	6,011.4105	6,011.4105	1.9442		6,060.0158
Total	**3.6248**	**38.8435**	**29.0415**	**0.0621**	**8.6733**	**1.6349**	**10.3082**	**3.5965**	**1.5041**	**5.1006**	**0.0000**	**6,011.4105**	**6,011.4105**	**1.9442**		**6,060.0158**

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0665	0.0416	0.4861	1.4300e-003	0.1521	1.2300e-003	0.1534	0.0404	1.1300e-003	0.0415		142.1207	142.1207	4.0000e-003		142.2207
Total	**0.0665**	**0.0416**	**0.4861**	**1.4300e-003**	**0.1521**	**1.2300e-003**	**0.1534**	**0.0404**	**1.1300e-003**	**0.0415**		**142.1207**	**142.1207**	**4.0000e-003**		**142.2207**

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**		**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4284	13.1673	3.8005	0.0354	0.9155	0.0256	0.9412	0.2636	0.0245	0.2881		3,789.0750	3,789.0750	0.2381		3,795.0283
Worker	2.6620	1.6677	19.4699	0.0571	6.0932	0.0493	6.1425	1.6163	0.0454	1.6617		5,691.9354	5,691.9354	0.1602		5,695.9408
Total	**3.0904**	**14.8350**	**23.2704**	**0.0926**	**7.0087**	**0.0749**	**7.0836**	**1.8799**	**0.0699**	**1.9498**		**9,481.0104**	**9,481.0104**	**0.3984**		**9,490.9691**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.7062	15.6156	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612	0.0000	2,554.3336	2,554.3336	0.6120		2,569.6322
Total	**1.7062**	**15.6156**	**16.3634**	**0.0269**		**0.8090**	**0.8090**		**0.7612**	**0.7612**	**0.0000**	**2,554.3336**	**2,554.3336**	**0.6120**		**2,569.6322**

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.4284	13.1673	3.8005	0.0354	0.9155	0.0256	0.9412	0.2636	0.0245	0.2881		3,789.0750	3,789.0750	0.2381		3,795.0283
Worker	2.6620	1.6677	19.4699	0.0571	6.0932	0.0493	6.1425	1.6163	0.0454	1.6617		5,691.9354	5,691.9354	0.1602		5,695.9408
Total	**3.0904**	**14.8350**	**23.2704**	**0.0926**	**7.0087**	**0.0749**	**7.0836**	**1.8799**	**0.0699**	**1.9498**		**9,481.0104**	**9,481.0104**	**0.3984**		**9,490.9691**

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584		2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**		**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3183	9.9726	3.3771	0.0343	0.9156	0.0122	0.9277	0.2636	0.0116	0.2752		3,671.4007	3,671.4007	0.2096		3,676.6417
Worker	2.5029	1.5073	17.8820	0.0550	6.0932	0.0479	6.1411	1.6163	0.0441	1.6604		5,483.7974	5,483.7974	0.1442		5,487.4020
Total	**2.8211**	**11.4799**	**21.2591**	**0.0893**	**7.0088**	**0.0601**	**7.0688**	**1.8799**	**0.0557**	**1.9356**		**9,155.1981**	**9,155.1981**	**0.3538**		**9,164.0437**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.5728	14.3849	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.2099	2,555.2099	0.6079		2,570.4061
Total	**1.5728**	**14.3849**	**16.2440**	**0.0269**		**0.6997**	**0.6997**		**0.6584**	**0.6584**	**0.0000**	**2,555.2099**	**2,555.2099**	**0.6079**		**2,570.4061**

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.3183	9.9726	3.3771	0.0343	0.9156	0.0122	0.9277	0.2636	0.0116	0.2752		3,671.4007	3,671.4007	0.2096		3,676.6417
Worker	2.5029	1.5073	17.8820	0.0550	6.0932	0.0479	6.1411	1.6163	0.0441	1.6604		5,483.7974	5,483.7974	0.1442		5,487.4020
Total	**2.8211**	**11.4799**	**21.2591**	**0.0893**	**7.0088**	**0.0601**	**7.0688**	**1.8799**	**0.0557**	**1.9356**		**9,155.1981**	**9,155.1981**	**0.3538**		**9,164.0437**

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**		**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0469	0.0282	0.3349	1.0300e-003	0.1141	9.0000e-004	0.1150	0.0303	8.3000e-004	0.0311		102.6928	102.6928	2.7000e-003		102.7603
Total	**0.0469**	**0.0282**	**0.3349**	**1.0300e-003**	**0.1141**	**9.0000e-004**	**0.1150**	**0.0303**	**8.3000e-004**	**0.0311**		**102.6928**	**102.6928**	**2.7000e-003**		**102.7603**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	1.0327	10.1917	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.5841	2,207.5841	0.7140		2,225.4336
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**1.0327**	**10.1917**	**14.5842**	**0.0228**		**0.5102**	**0.5102**		**0.4694**	**0.4694**	**0.0000**	**2,207.5841**	**2,207.5841**	**0.7140**		**2,225.4336**

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0469	0.0282	0.3349	1.0300e-003	0.1141	9.0000e-004	0.1150	0.0303	8.3000e-004	0.0311		102.6928	102.6928	2.7000e-003		102.7603
Total	**0.0469**	**0.0282**	**0.3349**	**1.0300e-003**	**0.1141**	**9.0000e-004**	**0.1150**	**0.0303**	**8.3000e-004**	**0.0311**		**102.6928**	**102.6928**	**2.7000e-003**		**102.7603**

3.6 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310		2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**		**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0444	0.0257	0.3114	1.0000e-003	0.1141	8.8000e-004	0.1150	0.0303	8.1000e-004	0.0311		99.5045	99.5045	2.4700e-003		99.5663
Total	**0.0444**	**0.0257**	**0.3114**	**1.0000e-003**	**0.1141**	**8.8000e-004**	**0.1150**	**0.0303**	**8.1000e-004**	**0.0311**		**99.5045**	**99.5045**	**2.4700e-003**		**99.5663**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9882	9.5246	14.6258	0.0228		0.4685	0.4685		0.4310	0.4310	0.0000	2,207.5472	2,207.5472	0.7140		2,225.3963
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	**0.9882**	**9.5246**	**14.6258**	**0.0228**		**0.4685**	**0.4685**		**0.4310**	**0.4310**	**0.0000**	**2,207.5472**	**2,207.5472**	**0.7140**		**2,225.3963**

3.6 Paving - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.0444	0.0257	0.3114	1.0000e-003	0.1141	8.8000e-004	0.1150	0.0303	8.1000e-004	0.0311		99.5045	99.5045	2.4700e-003		99.5663
Total	**0.0444**	**0.0257**	**0.3114**	**1.0000e-003**	**0.1141**	**8.8000e-004**	**0.1150**	**0.0303**	**8.1000e-004**	**0.0311**		**99.5045**	**99.5045**	**2.4700e-003**		**99.5663**

3.7 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609		281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**		**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.4734	0.2743	3.3220	0.0107	1.2171	9.4300e-003	1.2266	0.3229	8.6800e-003	0.3315		1,061.3818	1,061.3818	0.0264		1,062.0410
Total	**0.4734**	**0.2743**	**3.3220**	**0.0107**	**1.2171**	**9.4300e-003**	**1.2266**	**0.3229**	**8.6800e-003**	**0.3315**		**1,061.3818**	**1,061.3818**	**0.0264**		**1,062.0410**

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	236.4115					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.1808	1.2188	1.8101	2.9700e-003		0.0609	0.0609		0.0609	0.0609	0.0000	281.4481	281.4481	0.0159		281.8443
Total	**236.5923**	**1.2188**	**1.8101**	**2.9700e-003**		**0.0609**	**0.0609**		**0.0609**	**0.0609**	**0.0000**	**281.4481**	**281.4481**	**0.0159**		**281.8443**

3.7 Architectural Coating - 2024

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000		0.0000
Worker	0.4734	0.2743	3.3220	0.0107	1.2171	9.4300e-003	1.2266	0.3229	8.6800e-003	0.3315		1,061.3818	1,061.3818	0.0264		1,062.0410
Total	**0.4734**	**0.2743**	**3.3220**	**0.0107**	**1.2171**	**9.4300e-003**	**1.2266**	**0.3229**	**8.6800e-003**	**0.3315**		**1,061.3818**	**1,061.3818**	**0.0264**		**1,062.0410**

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839
Unmitigated	9.5233	45.9914	110.0422	0.4681	45.9592	0.3373	46.2965	12.2950	0.3132	12.6083		47,917.8005	47,917.8005	2.1953		47,972.6839

4.2 Trip Summary Information

	Average Daily Trip Rate			Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	145.75	154.25	154.00	506,227	506,227
Apartments Mid Rise	4,026.75	3,773.25	4075.50	13,660,065	13,660,065
General Office Building	288.45	62.55	31.05	706,812	706,812
High Turnover (Sit Down Restaurant)	2,368.80	2,873.52	2817.72	3,413,937	3,413,937
Hotel	192.00	187.50	160.00	445,703	445,703
Quality Restaurant	501.12	511.92	461.20	707,488	707,488
Regional Shopping Center	528.08	601.44	357.84	1,112,221	1,112,221
Total	8,050.95	8,164.43	8,057.31	20,552,452	20,552,452

4.3 Trip Type Information

	Miles			Trip %			Trip Purpose %		
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
General Office Building	16.60	8.40	6.90	33.00	48.00	19.00	77	19	4
High Turnover (Sit Down	16.60	8.40	6.90	8.50	72.50	19.00	37	20	43
Hotel	16.60	8.40	6.90	19.40	61.60	19.00	58	38	4
Quality Restaurant	16.60	8.40	6.90	12.00	69.00	19.00	38	18	44
Regional Shopping Center	16.60	8.40	6.90	16.30	64.70	19.00	54	35	11

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Apartments Mid Rise	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
General Office Building	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
High Turnover (Sit Down Restaurant)	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Hotel	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Quality Restaurant	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821
Regional Shopping Center	0.543088	0.044216	0.209971	0.116369	0.014033	0.006332	0.021166	0.033577	0.002613	0.001817	0.005285	0.000712	0.000821

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Village South Specific Plan (Proposed) - Los Angeles-South Coast County, Winter

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387
NaturalGas Unmitigated	0.7660	6.7462	4.2573	0.0418		0.5292	0.5292		0.5292	0.5292		8,355.9832	8,355.9832	0.1602	0.1532	8,405.6387

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1119.16	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35784.3	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1283.42	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22759.9	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4769.72	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5057.75	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	251.616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Low Rise	1.11916	0.0121	0.1031	0.0439	6.6000e-004		8.3400e-003	8.3400e-003		8.3400e-003	8.3400e-003		131.6662	131.6662	2.5200e-003	2.4100e-003	132.4486
Apartments Mid Rise	35.7843	0.3859	3.2978	1.4033	0.0211		0.2666	0.2666		0.2666	0.2666		4,209.9164	4,209.9164	0.0807	0.0772	4,234.9339
General Office Building	1.28342	0.0138	0.1258	0.1057	7.5000e-004		9.5600e-003	9.5600e-003		9.5600e-003	9.5600e-003		150.9911	150.9911	2.8900e-003	2.7700e-003	151.8884
High Turnover (Sit Down Restaurant)	22.7599	0.2455	2.2314	1.8743	0.0134		0.1696	0.1696		0.1696	0.1696		2,677.6342	2,677.6342	0.0513	0.0491	2,693.5460
Hotel	4.76972	0.0514	0.4676	0.3928	2.8100e-003		0.0355	0.0355		0.0355	0.0355		561.1436	561.1436	0.0108	0.0103	564.4782
Quality Restaurant	5.05775	0.0545	0.4959	0.4165	2.9800e-003		0.0377	0.0377		0.0377	0.0377		595.0298	595.0298	0.0114	0.0109	598.5658
Regional Shopping Center	0.251616	2.7100e-003	0.0247	0.0207	1.5000e-004		1.8700e-003	1.8700e-003		1.8700e-003	1.8700e-003		29.6019	29.6019	5.7000e-004	5.4000e-004	29.7778
Total		**0.7660**	**6.7463**	**4.2573**	**0.0418**		**0.5292**	**0.5292**		**0.5292**	**0.5292**		**8,355.9832**	**8,355.9832**	**0.1602**	**0.1532**	**8,405.6387**

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192
Unmitigated	30.5020	15.0496	88.4430	0.0944		1.5974	1.5974		1.5974	1.5974	0.0000	18,148.5950	18,148.5950	0.4874	0.3300	18,259.1192

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	2.2670					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	24.1085					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	1.6500	14.1000	6.0000	0.0900		1.1400	1.1400		1.1400	1.1400	0.0000	18,000.0000	18,000.0000	0.3450	0.3300	18,106.9650
Landscaping	2.4766	0.9496	82.4430	4.3600e-003		0.4574	0.4574		0.4574	0.4574		148.5950	148.5950	0.1424		152.1542
Total	**30.5020**	**15.0496**	**88.4430**	**0.0944**		**1.5974**	**1.5974**		**1.5974**	**1.5974**	**0.0000**	**18,148.5950**	**18,148.5950**	**0.4874**	**0.3300**	**18,259.1192**

7.0 Water Detail

7.1 Mitigation Measures Water

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

Attachment C

Local Hire Provision Net Change	
Without Local Hire Provision	
Total Construction GHG Emissions (MT CO2e)	3,623
Amortized (MT CO2e/year)	120.77
With Local Hire Provision	
Total Construction GHG Emissions (MT CO2e)	3,024
Amortized (MT CO2e/year)	100.80
% Decrease in Construction-related GHG Emissions	***17%***

EXHIBIT B

SWAPE Technical Consultation, Data Analysis and Litigation Support for the Environment

SOIL WATER AIR PROTECTION ENTERPRISE
2656 29th Street, Suite 201
Santa Monica, California 90405
Attn: Paul Rosenfeld, Ph.D.
Mobil: (310) 795-2335
Office: (310) 452-5555
Fax: (310) 452-5550
Email: prosenfeld@swape.com

Paul Rosenfeld, Ph.D.

Chemical Fate and Transport & Air Dispersion Modeling

Principal Environmental Chemist

Risk Assessment & Remediation Specialist

Education

Ph.D. Soil Chemistry, University of Washington, 1999. Dissertation on volatile organic compound filtration.

M.S. Environmental Science, U.C. Berkeley, 1995. Thesis on organic waste economics.

B.A. Environmental Studies, U.C. Santa Barbara, 1991. Thesis on wastewater treatment.

Professional Experience

Dr. Rosenfeld has over 25 years' experience conducting environmental investigations and risk assessments for evaluating impacts to human health, property, and ecological receptors. His expertise focuses on the fate and transport of environmental contaminants, human health risk, exposure assessment, and ecological restoration. Dr. Rosenfeld has evaluated and modeled emissions from unconventional oil drilling operations, oil spills, landfills, boilers and incinerators, process stacks, storage tanks, confined animal feeding operations, and many other industrial and agricultural sources. His project experience ranges from monitoring and modeling of pollution sources to evaluating impacts of pollution on workers at industrial facilities and residents in surrounding communities.

Dr. Rosenfeld has investigated and designed remediation programs and risk assessments for contaminated sites containing lead, heavy metals, mold, bacteria, particulate matter, petroleum hydrocarbons, chlorinated solvents, pesticides, radioactive waste, dioxins and furans, semi- and volatile organic compounds, PCBs, PAHs, perchlorate, asbestos, per- and poly-fluoroalkyl substances (PFOA/PFOS), unusual polymers, fuel oxygenates (MTBE), among other pollutants. Dr. Rosenfeld also has experience evaluating greenhouse gas emissions from various projects and is an expert on the assessment of odors from industrial and agricultural sites, as well as the evaluation of odor nuisance impacts and technologies for abatement of odorous emissions. As a principal scientist at SWAPE, Dr. Rosenfeld directs air dispersion modeling and exposure assessments. He has served as an expert witness and testified about pollution sources causing nuisance and/or personal injury at dozens of sites and has testified as an expert witness on more than ten cases involving exposure to air contaminants from industrial sources.

Professional History:

Soil Water Air Protection Enterprise (SWAPE); 2003 to present; Principal and Founding Partner
UCLA School of Public Health; 2007 to 2011; Lecturer (Assistant Researcher)
UCLA School of Public Health; 2003 to 2006; Adjunct Professor
UCLA Environmental Science and Engineering Program; 2002-2004; Doctoral Intern Coordinator
UCLA Institute of the Environment, 2001-2002; Research Associate
Komex H_2O Science, 2001 to 2003; Senior Remediation Scientist
National Groundwater Association, 2002-2004; Lecturer
San Diego State University, 1999-2001; Adjunct Professor
Anteon Corp., San Diego, 2000-2001; Remediation Project Manager
Ogden (now Amec), San Diego, 2000-2000; Remediation Project Manager
Bechtel, San Diego, California, 1999 – 2000; Risk Assessor
King County, Seattle, 1996 – 1999; Scientist
James River Corp., Washington, 1995-96; Scientist
Big Creek Lumber, Davenport, California, 1995; Scientist
Plumas Corp., California and USFS, Tahoe 1993-1995; Scientist
Peace Corps and World Wildlife Fund, St. Kitts, West Indies, 1991-1993; Scientist

Publications:

Remy, L.L., Clay T., Byers, V., **Rosenfeld P. E.** (2019) Hospital, Health, and Community Burden After Oil Refinery Fires, Richmond, California 2007 and 2012. *Environmental Health.* 18:48

Simons, R.A., Seo, Y. **Rosenfeld, P**., (2015) Modeling the Effect of Refinery Emission On Residential Property Value. Journal of Real Estate Research. 27(3):321-342

Chen, J. A, Zapata A. R., Sutherland A. J., Molmen, D.R., Chow, B. S., Wu, L. E., **Rosenfeld, P. E.,** Hesse, R. C., (2012) Sulfur Dioxide and Volatile Organic Compound Exposure To A Community In Texas City Texas Evaluated Using Aermod and Empirical Data. *American Journal of Environmental Science*, 8(6), 622-632.

Rosenfeld, P.E. & Feng, L. (2011). *The Risks of Hazardous Waste.* Amsterdam: Elsevier Publishing.

Cheremisinoff, N.P., & **Rosenfeld, P.E.** (2011). *Handbook of Pollution Prevention and Cleaner Production: Best Practices in the Agrochemical Industry*, Amsterdam: Elsevier Publishing.

Gonzalez, J., Feng, L., Sutherland, A., Waller, C., Sok, H., Hesse, R., **Rosenfeld, P.** (2010). PCBs and Dioxins/Furans in Attic Dust Collected Near Former PCB Production and Secondary Copper Facilities in Sauget, IL. *Procedia Environmental Sciences*. 113–125.

Feng, L., Wu, C., Tam, L., Sutherland, A.J., Clark, J.J., **Rosenfeld, P.E.** (2010). Dioxin and Furan Blood Lipid and Attic Dust Concentrations in Populations Living Near Four Wood Treatment Facilities in the United States. *Journal of Environmental Health*. 73(6), 34-46.

Cheremisinoff, N.P., & **Rosenfeld, P.E.** (2010). *Handbook of Pollution Prevention and Cleaner Production: Best Practices in the Wood and Paper Industries.* Amsterdam: Elsevier Publishing.

Cheremisinoff, N.P., & **Rosenfeld, P.E.** (2009). *Handbook of Pollution Prevention and Cleaner Production: Best Practices in the Petroleum Industry*. Amsterdam: Elsevier Publishing.

Wu, C., Tam, L., Clark, J., **Rosenfeld, P**. (2009). Dioxin and furan blood lipid concentrations in populations living near four wood treatment facilities in the United States. *WIT Transactions on Ecology and the Environment, Air Pollution,* 123 (17), 319-327.

Tam L. K.., Wu C. D., Clark J. J. and **Rosenfeld, P.E.** (2008). A Statistical Analysis Of Attic Dust And Blood Lipid Concentrations Of Tetrachloro-p-Dibenzodioxin (TCDD) Toxicity Equivalency Quotients (TEQ) In Two Populations Near Wood Treatment Facilities. *Organohalogen Compounds*, 70, 002252-002255.

Tam L. K.., Wu C. D., Clark J. J. and **Rosenfeld, P.E.** (2008). Methods For Collect Samples For Assessing Dioxins And Other Environmental Contaminants In Attic Dust: A Review. *Organohalogen Compounds*, 70, 000527-000530.

Hensley, A.R. A. Scott, J. J. J. Clark, **Rosenfeld, P.E.** (2007). Attic Dust and Human Blood Samples Collected near a Former Wood Treatment Facility. *Environmental Research*. 105, 194-197.

Rosenfeld, P.E., J. J. J. Clark, A. R. Hensley, M. Suffet. (2007). The Use of an Odor Wheel Classification for Evaluation of Human Health Risk Criteria for Compost Facilities. *Water Science & Technology* 55(5), 345-357.

Rosenfeld, P. E., M. Suffet. (2007). The Anatomy Of Odour Wheels For Odours Of Drinking Water, Wastewater, Compost And The Urban Environment. *Water Science & Technology* 55(5), 335-344.

Sullivan, P. J. Clark, J.J.J., Agardy, F. J., **Rosenfeld, P.E.** (2007). *Toxic Legacy, Synthetic Toxins in the Food, Water, and Air in American Cities.* Boston Massachusetts: Elsevier Publishing

Rosenfeld, P.E., and Suffet I.H. (2004). Control of Compost Odor Using High Carbon Wood Ash. *Water Science and Technology*. 49(9),171-178.

Rosenfeld P. E., J.J. Clark, I.H. (Mel) Suffet (2004). The Value of An Odor-Quality-Wheel Classification Scheme For The Urban Environment. *Water Environment Federation's Technical Exhibition and Conference (WEFTEC) 2004.* New Orleans, October 2-6, 2004.

Rosenfeld, P.E., and Suffet, I.H. (2004). Understanding Odorants Associated With Compost, Biomass Facilities, and the Land Application of Biosolids. *Water Science and Technology*. 49(9), 193-199.

Rosenfeld, P.E., and Suffet I.H. (2004). Control of Compost Odor Using High Carbon Wood Ash, *Water Science and Technology*, 49(9), 171-178.

Rosenfeld, P. E., Grey, M. A., Sellew, P. (2004). Measurement of Biosolids Odor and Odorant Emissions from Windrows, Static Pile and Biofilter. *Water Environment Research*. 76(4), 310-315.

Rosenfeld, P.E., Grey, M and Suffet, M. (2002). Compost Demonstration Project, Sacramento California Using High-Carbon Wood Ash to Control Odor at a Green Materials Composting Facility. *Integrated Waste Management Board Public Affairs Office*, Publications Clearinghouse (MS–6), Sacramento, CA Publication #442-02-008.

Rosenfeld, P.E., and C.L. Henry. (2001). Characterization of odor emissions from three different biosolids. *Water Soil and Air Pollution*. 127(1-4), 173-191.

Rosenfeld, P.E., and Henry C. L., (2000). Wood ash control of odor emissions from biosolids application. *Journal of Environmental Quality.* 29, 1662-1668.

Rosenfeld, P.E., C.L. Henry and D. Bennett. (2001). Wastewater dewatering polymer affect on biosolids odor emissions and microbial activity. *Water Environment Research*. 73(4), 363-367.

Rosenfeld, P.E., and C.L. Henry. (2001). Activated Carbon and Wood Ash Sorption of Wastewater, Compost, and Biosolids Odorants. *Water Environment Research*, 73, 388-393.

Rosenfeld, P.E., and Henry C. L., (2001). High carbon wood ash effect on biosolids microbial activity and odor. *Water Environment Research*. 131(1-4), 247-262.

Chollack, T. and **P. Rosenfeld. (**1998). Compost Amendment Handbook For Landscaping. Prepared for and distributed by the City of Redmond, Washington State.

Rosenfeld, P. E. (1992). The Mount Liamuiga Crater Trail. *Heritage Magazine of St. Kitts*, 3(2).

Rosenfeld, P. E. (1993). High School Biogas Project to Prevent Deforestation On St. Kitts. *Biomass Users Network*, 7(1).

Rosenfeld, P. E. (1998). Characterization, Quantification, and Control of Odor Emissions From Biosolids Application To Forest Soil. Doctoral Thesis. University of Washington College of Forest Resources.

Rosenfeld, P. E. (1994). Potential Utilization of Small Diameter Trees on Sierra County Public Land. Masters thesis reprinted by the Sierra County Economic Council. Sierra County, California.

Rosenfeld, P. E. (1991). How to Build a Small Rural Anaerobic Digester & Uses Of Biogas In The First And Third World. Bachelors Thesis. University of California.

Presentations:

Rosenfeld, P.E., Sutherland, A; Hesse, R.; Zapata, A. (October 3-6, 2013). Air dispersion modeling of volatile organic emissions from multiple natural gas wells in Decatur, TX. *44th Western Regional Meeting, American Chemical Society.* Lecture conducted from Santa Clara, CA.

Sok, H.L.; Waller, C.C.; Feng, L.; Gonzalez, J.; Sutherland, A.J.; Wisdom-Stack, T.; Sahai, R.K.; Hesse, R.C.; **Rosenfeld, P.E.** (June 20-23, 2010). Atrazine: A Persistent Pesticide in Urban Drinking Water. *Urban Environmental Pollution*. Lecture conducted from Boston, MA.

Feng, L.; Gonzalez, J.; Sok, H.L.; Sutherland, A.J.; Waller, C.C.; Wisdom-Stack, T.; Sahai, R.K.; La, M.; Hesse, R.C.; **Rosenfeld, P.E.** (June 20-23, 2010). Bringing Environmental Justice to East St. Louis, Illinois. *Urban Environmental Pollution.* Lecture conducted from Boston, MA.

Rosenfeld, P.E. (April 19-23, 2009). Perfluoroctanoic Acid (PFOA) and Perfluoroactane Sulfonate (PFOS) Contamination in Drinking Water From the Use of Aqueous Film Forming Foams (AFFF) at Airports in the United States. *2009 Ground Water Summit and 2009 Ground Water Protection Council Spring Meeting*, Lecture conducted from Tuscon, AZ.

Rosenfeld, P.E. (April 19-23, 2009). Cost to Filter Atrazine Contamination from Drinking Water in the United States" Contamination in Drinking Water From the Use of Aqueous Film Forming Foams (AFFF) at Airports in the United States. *2009 Ground Water Summit and 2009 Ground Water Protection Council Spring Meeting*. Lecture conducted from Tuscon, AZ.

Wu, C., Tam, L., Clark, J., **Rosenfeld, P**. (20-22 July, 2009). Dioxin and furan blood lipid concentrations in populations living near four wood treatment facilities in the United States. Brebbia, C.A. and Popov, V., eds., *Air Pollution XVII: Proceedings of the Seventeenth International Conference on Modeling, Monitoring and Management of Air Pollution*. Lecture conducted from Tallinn, Estonia.

Rosenfeld, P. E. (October 15-18, 2007). Moss Point Community Exposure To Contaminants From A Releasing Facility. *The 23rd Annual International Conferences on Soils Sediment and Water.* Platform lecture conducted from University of Massachusetts, Amherst MA.

Rosenfeld, P. E. (October 15-18, 2007). The Repeated Trespass of Tritium-Contaminated Water Into A Surrounding Community Form Repeated Waste Spills From A Nuclear Power Plant. *The 23rd Annual International Conferences on Soils Sediment and Water*. Platform lecture conducted from University of Massachusetts, Amherst MA.

Rosenfeld, P. E. (October 15-18, 2007). Somerville Community Exposure To Contaminants From Wood Treatment Facility Emissions. The *23rd Annual International Conferences on Soils Sediment and Water*. Lecture conducted from University of Massachusetts, Amherst MA.

Rosenfeld P. E. (March 2007). Production, Chemical Properties, Toxicology, & Treatment Case Studies of 1,2,3-Trichloropropane (TCP). *The Association for Environmental Health and Sciences (AEHS) Annual Meeting*. Lecture conducted from San Diego, CA.

Rosenfeld P. E. (March 2007). Blood and Attic Sampling for Dioxin/Furan, PAH, and Metal Exposure in Florala, Alabama. *The AEHS Annual Meeting.* Lecture conducted from San Diego, CA.

Hensley A.R., Scott, A., **Rosenfeld P.E.,** Clark, J.J.J. (August 21 – 25, 2006). Dioxin Containing Attic Dust And Human Blood Samples Collected Near A Former Wood Treatment Facility. *The 26th International Symposium on Halogenated Persistent Organic Pollutants – DIOXIN2006*. Lecture conducted from Radisson SAS Scandinavia Hotel in Oslo Norway.

Hensley A.R., Scott, A., **Rosenfeld P.E.,** Clark, J.J.J. (November 4-8, 2006). Dioxin Containing Attic Dust And Human Blood Samples Collected Near A Former Wood Treatment Facility. *APHA 134 Annual Meeting & Exposition.* Lecture conducted from Boston Massachusetts.

Paul Rosenfeld Ph.D. (October 24-25, 2005). Fate, Transport and Persistence of PFOA and Related Chemicals. Mealey's C8/PFOA. *Science, Risk & Litigation Conference.* Lecture conducted from The Rittenhouse Hotel, Philadelphia, PA.

Paul Rosenfeld Ph.D. (September 19, 2005). Brominated Flame Retardants in Groundwater: Pathways to Human Ingestion, *Toxicology and Remediation PEMA Emerging Contaminant Conference*. Lecture conducted from Hilton Hotel, Irvine California.

Paul Rosenfeld Ph.D. (September 19, 2005). Fate, Transport, Toxicity, And Persistence of 1,2,3-TCP. *PEMA Emerging Contaminant Conference.* Lecture conducted from Hilton Hotel in Irvine, California.

Paul Rosenfeld Ph.D. (September 26-27, 2005). Fate, Transport and Persistence of PDBEs. *Mealey's Groundwater Conference.* Lecture conducted from Ritz Carlton Hotel, Marina Del Ray, California.

Paul Rosenfeld Ph.D. (June 7-8, 2005). Fate, Transport and Persistence of PFOA and Related Chemicals. *International Society of Environmental Forensics: Focus On Emerging Contaminants*. Lecture conducted from Sheraton Oceanfront Hotel, Virginia Beach, Virginia.

Paul Rosenfeld Ph.D. (July 21-22, 2005). Fate Transport, Persistence and Toxicology of PFOA and Related Perfluorochemicals. *2005 National Groundwater Association Ground Water And Environmental Law Conference*. Lecture conducted from Wyndham Baltimore Inner Harbor, Baltimore Maryland.

Paul Rosenfeld Ph.D. (July 21-22, 2005). Brominated Flame Retardants in Groundwater: Pathways to Human Ingestion, Toxicology and Remediation. *2005 National Groundwater Association Ground Water and Environmental Law Conference.* Lecture conducted from Wyndham Baltimore Inner Harbor, Baltimore Maryland.

Paul Rosenfeld, Ph.D. and James Clark Ph.D. and Rob Hesse R.G. (May 5-6, 2004). Tert-butyl Alcohol Liability and Toxicology, A National Problem and Unquantified Liability. *National Groundwater Association. Environmental Law Conference*. Lecture conducted from Congress Plaza Hotel, Chicago Illinois.

Paul Rosenfeld, Ph.D. (March 2004). Perchlorate Toxicology. *Meeting of the American Groundwater Trust*. Lecture conducted from Phoenix Arizona.

Hagemann, M.F., **Paul Rosenfeld, Ph.D.** and Rob Hesse (2004). Perchlorate Contamination of the Colorado River. *Meeting of tribal representatives*. Lecture conducted from Parker, AZ.

Paul Rosenfeld, Ph.D. (April 7, 2004). A National Damage Assessment Model For PCE and Dry Cleaners. *Drycleaner Symposium. California Ground Water Association*. Lecture conducted from Radison Hotel, Sacramento, California.

Rosenfeld, P. E., Grey, M., (June 2003) Two stage biofilter for biosolids composting odor control. *Seventh International In Situ And On Site Bioremediation Symposium Battelle Conference* Orlando, FL.

Paul Rosenfeld, Ph.D. and James Clark Ph.D. (February 20-21, 2003) Understanding Historical Use, Chemical Properties, Toxicity and Regulatory Guidance of 1,4 Dioxane. *National Groundwater Association. Southwest Focus Conference. Water Supply and Emerging Contaminants*.. Lecture conducted from Hyatt Regency Phoenix Arizona.

Paul Rosenfeld, Ph.D. (February 6-7, 2003). Underground Storage Tank Litigation and Remediation. *California CUPA Forum*. Lecture conducted from Marriott Hotel, Anaheim California.

Paul Rosenfeld, Ph.D. (October 23, 2002) Underground Storage Tank Litigation and Remediation. *EPA Underground Storage Tank Roundtable*. Lecture conducted from Sacramento California.

Rosenfeld, P.E. and Suffet, M. (October 7- 10, 2002). Understanding Odor from Compost, *Wastewater and Industrial Processes. Sixth Annual Symposium On Off Flavors in the Aquatic Environment. International Water Association*. Lecture conducted from Barcelona Spain.

Rosenfeld, P.E. and Suffet, M. (October 7- 10, 2002). Using High Carbon Wood Ash to Control Compost Odor. *Sixth Annual Symposium On Off Flavors in the Aquatic Environment. International Water Association*. Lecture conducted from Barcelona Spain.

Rosenfeld, P.E. and Grey, M. A. (September 22-24, 2002). Biocycle Composting For Coastal Sage Restoration. *Northwest Biosolids Management Association*. Lecture conducted from Vancouver Washington..

Rosenfeld, P.E. and Grey, M. A. (November 11-14, 2002). Using High-Carbon Wood Ash to Control Odor at a Green Materials Composting Facility. *Soil Science Society Annual Conferenc*e. Lecture conducted from Indianapolis, Maryland.

Rosenfeld. P.E. (September 16, 2000). Two stage biofilter for biosolids composting odor control. *Water Environment Federation.* Lecture conducted from Anaheim California.

Rosenfeld. P.E. (October 16, 2000). Wood ash and biofilter control of compost odor. *Biofest.* Lecture conducted from Ocean Shores, California.

Rosenfeld, P.E. (2000). Bioremediation Using Organic Soil Amendments. *California Resource Recovery Association*. Lecture conducted from Sacramento California.

Rosenfeld, P.E., C.L. Henry, R. Harrison. (1998). Oat and Grass Seed Germination and Nitrogen and Sulfur Emissions Following Biosolids Incorporation With High-Carbon Wood-Ash. *Water Environment Federation 12th Annual Residuals and Biosolids Management Conference Proceedings*. Lecture conducted from Bellevue Washington.

Rosenfeld, P.E., and C.L. Henry. (1999). An evaluation of ash incorporation with biosolids for odor reduction. *Soil Science Society of America*. Lecture conducted from Salt Lake City Utah.

Rosenfeld, P.E., C.L. Henry, R. Harrison. (1998). Comparison of Microbial Activity and Odor Emissions from Three Different Biosolids Applied to Forest Soil. *Brown and Caldwell.* Lecture conducted from Seattle Washington.

Rosenfeld, P.E., C.L. Henry. (1998). Characterization, Quantification, and Control of Odor Emissions from Biosolids Application To Forest Soil. *Biofest.* Lecture conducted from Lake Chelan, Washington.

Rosenfeld, P.E, C.L. Henry, R. Harrison. (1998). Oat and Grass Seed Germination and Nitrogen and Sulfur Emissions Following Biosolids Incorporation With High-Carbon Wood-Ash. Water Environment Federation 12th Annual Residuals and Biosolids Management Conference Proceedings. Lecture conducted from Bellevue Washington.

Rosenfeld, P.E., C.L. Henry, R. B. Harrison, and R. Dills. (1997). Comparison of Odor Emissions From Three Different Biosolids Applied to Forest Soil. *Soil Science Society of America*. Lecture conducted from Anaheim California.

Teaching Experience:

UCLA Department of Environmental Health (Summer 2003 through 20010) Taught Environmental Health Science 100 to students, including undergrad, medical doctors, public health professionals and nurses. Course focused on the health effects of environmental contaminants.

National Ground Water Association, Successful Remediation Technologies. Custom Course in Sante Fe, New Mexico. May 21, 2002. Focused on fate and transport of fuel contaminants associated with underground storage tanks.

National Ground Water Association; Successful Remediation Technologies Course in Chicago Illinois. April 1, 2002. Focused on fate and transport of contaminants associated with Superfund and RCRA sites.

California Integrated Waste Management Board, April and May, 2001. Alternative Landfill Caps Seminar in San Diego, Ventura, and San Francisco. Focused on both prescriptive and innovative landfill cover design.

UCLA Department of Environmental Engineering, February 5, 2002. Seminar on Successful Remediation Technologies focusing on Groundwater Remediation.

University Of Washington, Soil Science Program, Teaching Assistant for several courses including: Soil Chemistry, Organic Soil Amendments, and Soil Stability.

U.C. Berkeley, Environmental Science Program Teaching Assistant for Environmental Science 10.

Academic Grants Awarded:

California Integrated Waste Management Board. $41,000 grant awarded to UCLA Institute of the Environment. Goal: To investigate effect of high carbon wood ash on volatile organic emissions from compost. 2001.

Synagro Technologies, Corona California: $10,000 grant awarded to San Diego State University.
Goal: investigate effect of biosolids for restoration and remediation of degraded coastal sage soils. 2000.

King County, Department of Research and Technology, Washington State. $100,000 grant awarded to University of Washington: Goal: To investigate odor emissions from biosolids application and the effect of polymers and ash on VOC emissions. 1998.

Northwest Biosolids Management Association, Washington State. $20,000 grant awarded to investigate effect of polymers and ash on VOC emissions from biosolids. 1997.

James River Corporation, Oregon: $10,000 grant was awarded to investigate the success of genetically engineered Poplar trees with resistance to round-up. 1996.

United State Forest Service, Tahoe National Forest: $15,000 grant was awarded to investigating fire ecology of the Tahoe National Forest. 1995.

Kellogg Foundation, Washington D.C. $500 grant was awarded to construct a large anaerobic digester on St. Kitts in West Indies. 1993

Deposition and/or Trial Testimony:

In the United States District Court For The District of New Jersey
Duarte et al, *Plaintiffs,* vs. United States Metals Refining Company et. al. *Defendant.*
Case No.: 2:17-cv-01624-ES-SCM
Rosenfeld Deposition. 6-7-2019

In the United States District Court of Southern District of Texas Galveston Division
M/T Carla Maersk, *Plaintiffs,* vs. Conti 168., Schiffahrts-GMBH & Co. Bulker KG MS "Conti Perdido" *Defendant.*
Case No.: 3:15-CV-00106 consolidated with 3:15-CV-00237
Rosenfeld Deposition. 5-9-2019

In The Superior Court of the State of California In And For The County Of Los Angeles – Santa Monica
Carole-Taddeo-Bates et al., vs. Ifran Khan et al., Defendants
Case No.: No. BC615636
Rosenfeld Deposition, 1-26-2019

In The Superior Court of the State of California In And For The County Of Los Angeles – Santa Monica
The San Gabriel Valley Council of Governments et al. vs El Adobe Apts. Inc. et al., Defendants
Case No.: No. BC646857
Rosenfeld Deposition, 10-6-2018; Trial 3-7-19

In United States District Court For The District of Colorado
Bells et al. Plaintiff vs. The 3M Company et al., Defendants
Case: No 1:16-cv-02531-RBJ
Rosenfeld Deposition, 3-15-2018 and 4-3-2018

In The District Court Of Regan County, Texas, 112th Judicial District
Phillip Bales et al., Plaintiff vs. Dow Agrosciences, LLC, et al., Defendants
Cause No 1923
Rosenfeld Deposition, 11-17-2017

In The Superior Court of the State of California In And For The County Of Contra Costa
Simons et al., Plaintiffs vs. Chevron Corporation, et al., Defendants
Cause No C12-01481
Rosenfeld Deposition, 11-20-2017

In The Circuit Court Of The Twentieth Judicial Circuit, St Clair County, Illinois
Martha Custer et al., Plaintiff vs. Cerro Flow Products, Inc., Defendants
Case No.: No. 0i9-L-2295
Rosenfeld Deposition, 8-23-2017

In The Superior Court of the State of California, For The County of Los Angeles
Warrn Gilbert and Penny Gilber, Plaintiff vs. BMW of North America LLC
Case No.: LC102019 (c/w BC582154)
Rosenfeld Deposition, 8-16-2017, Trail 8-28-2018

In the Northern District Court of Mississippi, Greenville Division
Brenda J. Cooper, et al., *Plaintiffs,* vs. Meritor Inc., et al., *Defendants*
Case Number: 4:16-cv-52-DMB-JVM
Rosenfeld Deposition: July 2017

In The Superior Court of the State of Washington, County of Snohomish
Michael Davis and Julie Davis et al., Plaintiff vs. Cedar Grove Composting Inc., Defendants
Case No.: No. 13-2-03987-5
Rosenfeld Deposition, February 2017
Trial, March 2017

In The Superior Court of the State of California, County of Alameda
Charles Spain., Plaintiff vs. Thermo Fisher Scientific, et al., Defendants
Case No.: RG14711115
Rosenfeld Deposition, September 2015

In The Iowa District Court In And For Poweshiek County
Russell D. Winburn, et al., Plaintiffs vs. Doug Hoksbergen, et al., Defendants
Case No.: LALA002187
Rosenfeld Deposition, August 2015

In The Iowa District Court For Wapello County
Jerry Dovico, et al., Plaintiffs vs. Valley View Sine LLC, et al., Defendants
Law No,: LALA105144 - Division A
Rosenfeld Deposition, August 2015

In The Iowa District Court For Wapello County
Doug Pauls, et al.,, et al., Plaintiffs vs. Richard Warren, et al., Defendants
Law No,: LALA105144 - Division A
Rosenfeld Deposition, August 2015

In The Circuit Court of Ohio County, West Virginia
Robert Andrews, et al. v. Antero, et al.
Civil Action N0. 14-C-30000
Rosenfeld Deposition, June 2015

In The Third Judicial District County of Dona Ana, New Mexico
Betty Gonzalez, et al. Plaintiffs vs. Del Oro Dairy, Del Oro Real Estate LLC, Jerry Settles and Deward DeRuyter, Defendants
Rosenfeld Deposition: July 2015

In The Iowa District Court For Muscatine County
Laurie Freeman et. al. Plaintiffs vs. Grain Processing Corporation, Defendant
Case No 4980
Rosenfeld Deposition: May 2015

In the Circuit Court of the 17th Judicial Circuit, in and For Broward County, Florida
Walter Hinton, et. al. Plaintiff, vs. City of Fort Lauderdale, Florida, a Municipality, Defendant.
Case Number CACE07030358 (26)
Rosenfeld Deposition: December 2014

In the United States District Court Western District of Oklahoma
Tommy McCarty, et al., Plaintiffs, v. Oklahoma City Landfill, LLC d/b/a Southeast Oklahoma City Landfill, et al. Defendants.
Case No. 5:12-cv-01152-C
Rosenfeld Deposition: July 2014

In the County Court of Dallas County Texas
Lisa Parr et al, *Plaintiff*, vs. Aruba et al, *Defendant.*
Case Number cc-11-01650-E
Rosenfeld Deposition: March and September 2013
Rosenfeld Trial: April 2014

In the Court of Common Pleas of Tuscarawas County Ohio
John Michael Abicht, et al., *Plaintiffs,* vs. Republic Services, Inc., et al., *Defendants*
Case Number: 2008 CT 10 0741 (Cons. w/ 2009 CV 10 0987)
Rosenfeld Deposition: October 2012

In the United States District Court of Southern District of Texas Galveston Division
Kyle Cannon, Eugene Donovan, Genaro Ramirez, Carol Sassler, and Harvey Walton, each Individually and on behalf of those similarly situated, *Plaintiffs,* vs. BP Products North America, Inc., *Defendant.*
Case 3:10-cv-00622
Rosenfeld Deposition: February 2012
Rosenfeld Trial: April 2013

In the Circuit Court of Baltimore County Maryland
Philip E. Cvach, II et al., *Plaintiffs* vs. Two Farms, Inc. d/b/a Royal Farms, Defendants
Case Number: 03-C-12-012487 OT
Rosenfeld Deposition: September 2013

EXHIBIT C

SWAPE Technical Consultation, Data Analysis and Litigation Support for the Environment

1640 5th St.., Suite 204 Santa
Santa Monica, California 90401
Tel: (949) 887-9013
Email: mhagemann@swape.com

Matthew F. Hagemann, P.G., C.Hg., QSD, QSP

Geologic and Hydrogeologic Characterization
Industrial Stormwater Compliance
Investigation and Remediation Strategies
Litigation Support and Testifying Expert
CEQA Review

Education:

M.S. Degree, Geology, California State University Los Angeles, Los Angeles, CA, 1984.
B.A. Degree, Geology, Humboldt State University, Arcata, CA, 1982.

Professional Certifications:

California Professional Geologist
California Certified Hydrogeologist
Qualified SWPPP Developer and Practitioner

Professional Experience:

Matt has 25 years of experience in environmental policy, assessment and remediation. He spent nine years with the U.S. EPA in the RCRA and Superfund programs and served as EPA's Senior Science Policy Advisor in the Western Regional Office where he identified emerging threats to groundwater from perchlorate and MTBE. While with EPA, Matt also served as a Senior Hydrogeologist in the oversight of the assessment of seven major military facilities undergoing base closure. He led numerous enforcement actions under provisions of the Resource Conservation and Recovery Act (RCRA) while also working with permit holders to improve hydrogeologic characterization and water quality monitoring.

Matt has worked closely with U.S. EPA legal counsel and the technical staff of several states in the application and enforcement of RCRA, Safe Drinking Water Act and Clean Water Act regulations. Matt has trained the technical staff in the States of California, Hawaii, Nevada, Arizona and the Territory of Guam in the conduct of investigations, groundwater fundamentals, and sampling techniques.

Positions Matt has held include:

- Founding Partner, Soil/Water/Air Protection Enterprise (SWAPE) (2003 – present);
- Geology Instructor, Golden West College, 2010 – 2014;
- Senior Environmental Analyst, Komex H2O Science, Inc. (2000 -- 2003);

- Executive Director, Orange Coast Watch (2001 – 2004);
- Senior Science Policy Advisor and Hydrogeologist, U.S. Environmental Protection Agency (1989–1998);
- Hydrogeologist, National Park Service, Water Resources Division (1998 – 2000);
- Adjunct Faculty Member, San Francisco State University, Department of Geosciences (1993 – 1998);
- Instructor, College of Marin, Department of Science (1990 – 1995);
- Geologist, U.S. Forest Service (1986 – 1998); and
- Geologist, Dames & Moore (1984 – 1986).

Senior Regulatory and Litigation Support Analyst:

With SWAPE, Matt's responsibilities have included:

- Lead analyst and testifying expert in the review of over 100 environmental impact reports since 2003 under CEQA that identify significant issues with regard to hazardous waste, water resources, water quality, air quality, Valley Fever, greenhouse gas emissions, and geologic hazards. Make recommendations for additional mitigation measures to lead agencies at the local and county level to include additional characterization of health risks and implementation of protective measures to reduce worker exposure to hazards from toxins and Valley Fever.
- Stormwater analysis, sampling and best management practice evaluation at industrial facilities.
- Manager of a project to provide technical assistance to a community adjacent to a former Naval shipyard under a grant from the U.S. EPA.
- Technical assistance and litigation support for vapor intrusion concerns.
- Lead analyst and testifying expert in the review of environmental issues in license applications for large solar power plants before the California Energy Commission.
- Manager of a project to evaluate numerous formerly used military sites in the western U.S.
- Manager of a comprehensive evaluation of potential sources of perchlorate contamination in Southern California drinking water wells.
- Manager and designated expert for litigation support under provisions of Proposition 65 in the review of releases of gasoline to sources drinking water at major refineries and hundreds of gas stations throughout California.
- Expert witness on two cases involving MTBE litigation.
- Expert witness and litigation support on the impact of air toxins and hazards at a school.
- Expert witness in litigation at a former plywood plant.

With Komex H2O Science Inc., Matt's duties included the following:

- Senior author of a report on the extent of perchlorate contamination that was used in testimony by the former U.S. EPA Administrator and General Counsel.
- Senior researcher in the development of a comprehensive, electronically interactive chronology of MTBE use, research, and regulation.
- Senior researcher in the development of a comprehensive, electronically interactive chronology of perchlorate use, research, and regulation.
- Senior researcher in a study that estimates nationwide costs for MTBE remediation and drinking water treatment, results of which were published in newspapers nationwide and in testimony against provisions of an energy bill that would limit liability for oil companies.
- Research to support litigation to restore drinking water supplies that have been contaminated by MTBE in California and New York.

- Expert witness testimony in a case of oil production-related contamination in Mississippi.
- Lead author for a multi-volume remedial investigation report for an operating school in Los Angeles that met strict regulatory requirements and rigorous deadlines.

- Development of strategic approaches for cleanup of contaminated sites in consultation with clients and regulators.

Executive Director:

As Executive Director with Orange Coast Watch, Matt led efforts to restore water quality at Orange County beaches from multiple sources of contamination including urban runoff and the discharge of wastewater. In reporting to a Board of Directors that included representatives from leading Orange County universities and businesses, Matt prepared issue papers in the areas of treatment and disinfection of wastewater and control of the discharge of grease to sewer systems. Matt actively participated in the development of countywide water quality permits for the control of urban runoff and permits for the discharge of wastewater. Matt worked with other nonprofits to protect and restore water quality, including Surfrider, Natural Resources Defense Council and Orange County CoastKeeper as well as with business institutions including the Orange County Business Council.

Hydrogeology:

As a Senior Hydrogeologist with the U.S. Environmental Protection Agency, Matt led investigations to characterize and cleanup closing military bases, including Mare Island Naval Shipyard, Hunters Point Naval Shipyard, Treasure Island Naval Station, Alameda Naval Station, Moffett Field, Mather Army Airfield, and Sacramento Army Depot. Specific activities were as follows:

- Led efforts to model groundwater flow and contaminant transport, ensured adequacy of monitoring networks, and assessed cleanup alternatives for contaminated sediment, soil, and groundwater.
- Initiated a regional program for evaluation of groundwater sampling practices and laboratory analysis at military bases.
- Identified emerging issues, wrote technical guidance, and assisted in policy and regulation development through work on four national U.S. EPA workgroups, including the Superfund Groundwater Technical Forum and the Federal Facilities Forum.

At the request of the State of Hawaii, Matt developed a methodology to determine the vulnerability of groundwater to contamination on the islands of Maui and Oahu. He used analytical models and a GIS to show zones of vulnerability, and the results were adopted and published by the State of Hawaii and County of Maui.

As a hydrogeologist with the EPA Groundwater Protection Section, Matt worked with provisions of the Safe Drinking Water Act and NEPA to prevent drinking water contamination. Specific activities included the following:

- Received an EPA Bronze Medal for his contribution to the development of national guidance for the protection of drinking water.
- Managed the Sole Source Aquifer Program and protected the drinking water of two communities through designation under the Safe Drinking Water Act. He prepared geologic reports, conducted public hearings, and responded to public comments from residents who were very concerned about the impact of designation.

- Reviewed a number of Environmental Impact Statements for planned major developments, including large hazardous and solid waste disposal facilities, mine reclamation, and water transfer.

Matt served as a hydrogeologist with the RCRA Hazardous Waste program. Duties were as follows:

- Supervised the hydrogeologic investigation of hazardous waste sites to determine compliance with Subtitle C requirements.
- Reviewed and wrote "part B" permits for the disposal of hazardous waste.
- Conducted RCRA Corrective Action investigations of waste sites and led inspections that formed the basis for significant enforcement actions that were developed in close coordination with U.S. EPA legal counsel.
- Wrote contract specifications and supervised contractor's investigations of waste sites.

With the National Park Service, Matt directed service-wide investigations of contaminant sources to prevent degradation of water quality, including the following tasks:

- Applied pertinent laws and regulations including CERCLA, RCRA, NEPA, NRDA, and the Clean Water Act to control military, mining, and landfill contaminants.
- Conducted watershed-scale investigations of contaminants at parks, including Yellowstone and Olympic National Park.
- Identified high-levels of perchlorate in soil adjacent to a national park in New Mexico and advised park superintendent on appropriate response actions under CERCLA.
- Served as a Park Service representative on the Interagency Perchlorate Steering Committee, a national workgroup.
- Developed a program to conduct environmental compliance audits of all National Parks while serving on a national workgroup.
- Co-authored two papers on the potential for water contamination from the operation of personal watercraft and snowmobiles, these papers serving as the basis for the development of nation-wide policy on the use of these vehicles in National Parks.
- Contributed to the Federal Multi-Agency Source Water Agreement under the Clean Water Action Plan.

Policy:

Served senior management as the Senior Science Policy Advisor with the U.S. Environmental Protection Agency, Region 9. Activities included the following:

- Advised the Regional Administrator and senior management on emerging issues such as the potential for the gasoline additive MTBE and ammonium perchlorate to contaminate drinking water supplies.
- Shaped EPA's national response to these threats by serving on workgroups and by contributing to guidance, including the Office of Research and Development publication, Oxygenates in Water: Critical Information and Research Needs.
- Improved the technical training of EPA's scientific and engineering staff.
- Earned an EPA Bronze Medal for representing the region's 300 scientists and engineers in negotiations with the Administrator and senior management to better integrate scientific principles into the policy-making process.
- Established national protocol for the peer review of scientific documents.

Geology:

With the U.S. Forest Service, Matt led investigations to determine hillslope stability of areas proposed for timber harvest in the central Oregon Coast Range. Specific activities were as follows:

- Mapped geology in the field, and used aerial photographic interpretation and mathematical models to determine slope stability.
- Coordinated his research with community members who were concerned with natural resource protection.
- Characterized the geology of an aquifer that serves as the sole source of drinking water for the city of Medford, Oregon.

As a consultant with Dames and Moore, Matt led geologic investigations of two contaminated sites (later listed on the Superfund NPL) in the Portland, Oregon, area and a large hazardous waste site in eastern Oregon. Duties included the following:

- Supervised year-long effort for soil and groundwater sampling.
- Conducted aquifer tests.
- Investigated active faults beneath sites proposed for hazardous waste disposal.

Teaching:

From 1990 to 1998, Matt taught at least one course per semester at the community college and university levels:

- At San Francisco State University, held an adjunct faculty position and taught courses in environmental geology, oceanography (lab and lecture), hydrogeology, and groundwater contamination.
- Served as a committee member for graduate and undergraduate students.
- Taught courses in environmental geology and oceanography at the College of Marin.

Matt taught physical geology (lecture and lab and introductory geology at Golden West College in Huntington Beach, California from 2010 to 2014.

Invited Testimony, Reports, Papers and Presentations:

Hagemann, M.F., 2008. Disclosure of Hazardous Waste Issues under CEQA. Presentation to the Public Environmental Law Conference, Eugene, Oregon.

Hagemann, M.F., 2008. Disclosure of Hazardous Waste Issues under CEQA. Invited presentation to U.S. EPA Region 9, San Francisco, California.

Hagemann, M.F., 2005. Use of Electronic Databases in Environmental Regulation, Policy Making and Public Participation. Brownfields 2005, Denver, Coloradao.

Hagemann, M.F., 2004. Perchlorate Contamination of the Colorado River and Impacts to Drinking Water in Nevada and the Southwestern U.S. Presentation to a meeting of the American Groundwater Trust, Las Vegas, NV (served on conference organizing committee).

Hagemann, M.F., 2004. Invited testimony to a California Senate committee hearing on air toxins at schools in Southern California, Los Angeles.

Brown, A., Farrow, J., Gray, A. and **Hagemann, M.**, 2004. An Estimate of Costs to Address MTBE Releases from Underground Storage Tanks and the Resulting Impact to Drinking Water Wells. Presentation to the Ground Water and Environmental Law Conference, National Groundwater Association.

Hagemann, M.F., 2004. Perchlorate Contamination of the Colorado River and Impacts to Drinking Water in Arizona and the Southwestern U.S. Presentation to a meeting of the American Groundwater Trust, Phoenix, AZ (served on conference organizing committee).

Hagemann, M.F., 2003. Perchlorate Contamination of the Colorado River and Impacts to Drinking Water in the Southwestern U.S. Invited presentation to a special committee meeting of the National Academy of Sciences, Irvine, CA.

Hagemann, M.F., 2003. Perchlorate Contamination of the Colorado River. Invited presentation to a tribal EPA meeting, Pechanga, CA.

Hagemann, M.F., 2003. Perchlorate Contamination of the Colorado River. Invited presentation to a meeting of tribal repesentatives, Parker, AZ.

Hagemann, M.F., 2003. Impact of Perchlorate on the Colorado River and Associated Drinking Water Supplies. Invited presentation to the Inter-Tribal Meeting, Torres Martinez Tribe.

Hagemann, M.F., 2003. The Emergence of Perchlorate as a Widespread Drinking Water Contaminant. Invited presentation to the U.S. EPA Region 9.

Hagemann, M.F., 2003. A Deductive Approach to the Assessment of Perchlorate Contamination. Invited presentation to the California Assembly Natural Resources Committee.

Hagemann, M.F., 2003. Perchlorate: A Cold War Legacy in Drinking Water. Presentation to a meeting of the National Groundwater Association.

Hagemann, M.F., 2002. From Tank to Tap: A Chronology of MTBE in Groundwater. Presentation to a meeting of the National Groundwater Association.

Hagemann, M.F., 2002. A Chronology of MTBE in Groundwater and an Estimate of Costs to Address Impacts to Groundwater. Presentation to the annual meeting of the Society of Environmental Journalists.

Hagemann, M.F., 2002. An Estimate of the Cost to Address MTBE Contamination in Groundwater (and Who Will Pay). Presentation to a meeting of the National Groundwater Association.

Hagemann, M.F., 2002. An Estimate of Costs to Address MTBE Releases from Underground Storage Tanks and the Resulting Impact to Drinking Water Wells. Presentation to a meeting of the U.S. EPA and State Underground Storage Tank Program managers.

Hagemann, M.F., 2001. From Tank to Tap: A Chronology of MTBE in Groundwater. Unpublished report.

Hagemann, M.F., 2001. Estimated Cleanup Cost for MTBE in Groundwater Used as Drinking Water. Unpublished report.

Hagemann, M.F., 2001. Estimated Costs to Address MTBE Releases from Leaking Underground Storage Tanks. Unpublished report.

Hagemann, M.F., and VanMouwerik, M., 1999. Potential Water Quality Concerns Related to Snowmobile Usage. Water Resources Division, National Park Service, Technical Report.

VanMouwerik, M. and **Hagemann, M.F**. 1999, Water Quality Concerns Related to Personal Watercraft Usage. Water Resources Division, National Park Service, Technical Report.

Hagemann, M.F., 1999, Is Dilution the Solution to Pollution in National Parks? The George Wright Society Biannual Meeting, Asheville, North Carolina.

Hagemann, M.F., 1997, The Potential for MTBE to Contaminate Groundwater. U.S. EPA Superfund Groundwater Technical Forum Annual Meeting, Las Vegas, Nevada.

Hagemann, M.F., and Gill, M., 1996, Impediments to Intrinsic Remediation, Moffett Field Naval Air Station, Conference on Intrinsic Remediation of Chlorinated Hydrocarbons, Salt Lake City.

Hagemann, M.F., Fukunaga, G.L., 1996, The Vulnerability of Groundwater to Anthropogenic Contaminants on the Island of Maui, Hawaii. Hawaii Water Works Association Annual Meeting, Maui, October 1996.

Hagemann, M. F., Fukanaga, G. L., 1996, Ranking Groundwater Vulnerability in Central Oahu, Hawaii. Proceedings, Geographic Information Systems in Environmental Resources Management, Air and Waste Management Association Publication VIP-61.

Hagemann, M.F., 1994. Groundwater Characterization and Cleanup at Closing Military Bases in California. Proceedings, California Groundwater Resources Association Meeting.

Hagemann, M.F. and Sabol, M.A., 1993. Role of the U.S. EPA in the High Plains States Groundwater Recharge Demonstration Program. Proceedings, Sixth Biennial Symposium on the Artificial Recharge of Groundwater.

Hagemann, M.F., 1993. U.S. EPA Policy on the Technical Impracticability of the Cleanup of DNAPL-contaminated Groundwater. California Groundwater Resources Association Meeting.

Hagemann, M.F., 1992. Dense Nonaqueous Phase Liquid Contamination of Groundwater: An Ounce of Prevention... Proceedings, Association of Engineering Geologists Annual Meeting, v. 35.

Other Experience:

Selected as subject matter expert for the California Professional Geologist licensing examination, 2009-2011.

DocuSign Envelope ID: 25F4B5D4-F8D0-49A3-9E56-6FFFFF78D7EE

California
Department of Conservation
Geologic Energy Management Division

Gavin Newsom, Governor
David Shabazian, Director
715 P Street, MS 1803
Sacramento, CA. 95814
T: (916) 445-5986

11/29/2023

Alexis Brito
2700 M Street, Suite 100, Bakersfield, CA 93301, USA
Britoal@kerncounty.com

Construction Site Well Review (CSWR) ID: 1012921

Assessor Parcel Number(s): 49201013, 49201017

Property Owner(s): IPG Kern County 52 Holdings, LLC

Project Location Address: Airport Drive & Boughton Drive Bakersfield, California 93308

Project Title: IPG Industrial Project

Public Resources Code (PRC) § 3208.1 establishes well reabandonment responsibility when a previously plugged and abandoned well will be impacted by planned property development or construction activities. Local permitting agencies, property owners, and/or developers should be aware of, and fully understand, that significant and potentially dangerous issues may be associated with development near oil, gas, and geothermal wells.

The California Geologic Energy Management Division (CalGEM) has received and reviewed the above referenced project dated 11/28/2023. To assist local permitting agencies, property owners, and developers in making wise land use decisions regarding potential development near oil, gas, or geothermal wells, the Division provides the following well evaluation.

The project is located in Kern County, within the boundaries of the following fields:

N/A

Our records indicate there are no known oil or gas wells located within the project boundary as identified in the application.

- Number of wells Not Abandoned to Current Division Requirements as Prescribed by Law and

DocuSign Envelope ID: 25F4B5D4-F8D0-49A3-9E56-6FFFFF78D7EE

Projected to Be Built Over or Have Future Access Impeded by this project: 0

- Number of wells Not Abandoned to Current Division Requirements as Prescribed by Law and Not Projected to Be Built Over or Have Future Access Impeded by this project: 0

- Number of wells Abandoned to Current Division Requirements as Prescribed by Law and Projected to Be Built Over or Have Future Access Impeded by this project: 0

- Number of wells Abandoned to Current Division Requirements as Prescribed by Law and Not Projected to Be Built Over or Have Future Access Impeded by this project: 0

As indicated in PRC § 3106, the Division has statutory authority over the drilling, operation, maintenance, and abandonment of oil, gas, and geothermal wells, and attendant facilities, to prevent, as far as possible, damage to life, health, property, and natural resources; damage to underground oil, gas, and geothermal deposits; and damage to underground and surface waters suitable for irrigation or domestic purposes. In addition to the Division's authority to order work on wells pursuant to PRC §§ 3208.1 and 3224, it has authority to issue civil and criminal penalties under PRC §§ 3236, 3236.5, and 3359 for violations within the Division's jurisdictional authority. The Division does not regulate grading, excavations, or other land use issues.

If during development activities, any wells are encountered that were not part of this review, the property owner is expected to immediately notify the Division's construction site well review engineer in the Inland district office, and file for Division review an amended site plan with well casing diagrams. The District office will send a follow-up well evaluation letter to the property owner and local permitting agency.

Should you have any questions, please contact me at (661) 201-8607 or via email at Victor.Medrano@conservation.ca.gov.

Sincerely, David Cookey-Gam
David Cookey-Gam for
Chris Jones
District Deputy

cc: Alexis Brito - Submitter

From: Lau, Scott@DOT
To: Alexis Brito
Cc: Mendibles, Lorena@DOT
Subject: Caltrans response to NOP of the EIR for IPG Industrial Project
Date: Friday, December 1, 2023 10:46:21 AM
Attachments: image001.gif

CAUTION: This email originated from outside of the organization. Do not click links, open attachments, or provide information unless you recognize the sender and know the content is safe.

Hi,

I have reviewed the NOP of the EIR for IPG Industrial Project, and have no comments.

Respectfully,

Scott Lau

Associate Transportation Planner
California Department of Transportation
1352 West Olive Avenue
Fresno, CA 93778
Cell: (559) 981-7341

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

State of California – Natural Resources Agency
DEPARTMENT OF FISH AND WILDLIFE
Central Region
1234 East Shaw Avenue
Fresno, California 93710
(559) 243-4005
www.wildlife.ca.gov

GAVIN NEWSOM, Governor
CHARLTON H. BONHAM, Director

December 22, 2023

Alexis Brito
Kern County Planning and Natural Resources Department
2700 "M" Street Suite 100
Bakersfield, California 93301

Subject: IGP Industrial Project (Project)
Notice of Preparation (NOP)
SCH No.: 2023110442

Dear Alexis Brito:

The California Department of Fish and Wildlife (CDFW) received a Notice of Preparation (NOP) from the Kern County Planning and Natural Resources Department for the above-referenced Project pursuant to the California Environmental Quality Act (CEQA) and CEQA Guidelines.[1]

Thank you for the opportunity to provide comments and recommendations regarding those activities involved in the Project that may affect California fish and wildlife. Likewise, CDFW appreciates the opportunity to provide comments regarding those aspects of the Project that CDFW, by law, may be required to carry out or approve through the exercise of its own regulatory authority under Fish and Game Code. While the comment period may have ended, CDFW requests that Kern County still consider our comments.

CDFW ROLE

CDFW is California's **Trustee Agency** for fish and wildlife resources and holds those resources in trust by statue for all the people of the State (Fish & G. Code, §§ 711.7, subd. (a) & 1802; Pub. Resources Code, § 21070; CEQA Guidelines § 15386, subd. (a)). CDFW, in its trustee capacity, has jurisdiction over the conservation, protection, and management of fish, wildlife, native plants, and habitat necessary for biologically sustainable populations of those species (*Id*., § 1802). Similarly, for purposes of CEQA, CDFW is charged by law to provide, as available, biological expertise during public agency environmental review efforts, focusing specifically on projects and related activities that have the potential to adversely affect fish and wildlife resources.

[1] CEQA is codified in the California Public Resources Code in section 21000 et seq. The "CEQA Guidelines" are found in Title 14 of the California Code of Regulations, commencing with section 15000.

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

CDFW is also submitting comments as a **Responsible Agency** under CEQA (Pub. Resources Code, § 21069; CEQA Guidelines, § 15381). CDFW expects that it may need to exercise regulatory authority as provided by the Fish and Game Code. As proposed, for example, the Project may be subject to CDFW's lake and streambed alteration regulatory authority (Fish & G. Code, § 1600 et seq.). Likewise, to the extent implementation of the Project as proposed may result in "take" as defined by State law of any species protected under the California Endangered Species Act (CESA) (Fish & G. Code, § 2050 et seq.), related authorization as provided by the Fish and Game Code may be required.

Nesting Birds: CDFW has jurisdiction over actions with potential to result in the disturbance or destruction of active nest sites or the unauthorized take of birds. Fish and Game Code sections that protect birds, their eggs and nests include, sections 3503 (regarding unlawful take, possession or needless destruction of the nest or eggs of any bird), 3503.5 (regarding the take, possession or destruction of any birds-of-prey or their nests or eggs), and 3513 (regarding unlawful take of any migratory nongame bird).

PROJECT DESCRIPTION SUMMARY

Proponent: IGP Kern County 52 Holdings, LLC

Objective: The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Location: The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the project site, and the unincorporated community of Oildale is directly bordering the east side of the project site.

Timeline: September 2024 - November 2025

COMMENTS AND RECOMMENDATIONS

CDFW offers the following comments and recommendations to assist the Kern County Planning and Natural Resources Department in adequately identifying and/or mitigating the Project's significant, or potentially significant, direct and indirect impacts on fish and wildlife (biological) resources. Editorial comments or other suggestions may also be included to improve the CEQA document prepared for this Project.

There are special-status species that may be present at the Project site. These resources should be evaluated and addressed prior to any approvals that would allow ground-disturbing activities or land use changes. CDFW is concerned about potential

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

Project related impacts to special-status species including, but not limited to, the federally and State endangered Bakersfield cactus (*Opuntia basilaris var. treleasei*), the federally endangered and State threatened San Joaquin kit fox (*Vulpes macrotis mutica*), the State threatened Swainson's hawk (*Buteo swainsoni*), the State candidate endangered Crotch's bumble bee (*Bombus crotchii*), and the State Species of Special Concern burrowing owl (*Athene cunnicularia*), California glossy snake (*Arizona elegans occidentalis*), Bakersfield legless lizard (*Anniella grinnelli*), and American badger (*Taxidea taxus*).

To adequately assess potential Project related impacts to biological resources, CDFW recommends that a qualified biologist perform database and other research of the Project area, then conduct focused habitat assessments and/or focused biological surveys during the appropriate survey period(s) in order to determine whether any special-status species may be present within the Project site. CDFW recommends this initial work be documented and used to inform further efforts that may be needed thereafter including the need for additional protocol surveys and/or the development of avoidance, minimization, and/or mitigation measures. This information and analysis may then be used to consider the development of modified or new project alternatives to avoid and minimize potentially significant environmental impacts on the biological environment. This information is critical to make an informed decision during the CEQA process and to ensure Project compliance with CESA, Fish and Game code, and other applicable State and federal laws and regulations.

Bakersfield Cactus

Plants listed pursuant to the federal Endangered Species Act, CESA, and the Native Plant Protection Act, as well as other special status plants such as California Rare Plant Rank (CRPR) may occur within the Project area, such as the federally and State endangered Bakersfield cactus. According to the CNDDB, multiple known populations of Bakersfield cactus occur approximately 1 mile north of the Project Site. Based on aerial imagery, the Project site seems to consist of ruderal grassland habitat, which may support the species. Special-status plant species are threatened with habitat loss and habitat fragmentation resulting from development, vehicle and foot traffic, and introduction of non-native plant species (CNPS 2018), all of which may be unintended direct and indirect impacts of the Project. Therefore, Project activities will potentially have significant and cumulative impacts to populations of the species mentioned above if present in the Project area.

CDFW recommends that individual Project sites be surveyed for State listed and special-status plants by a qualified botanist following the "Protocols for surveying and evaluating impacts to special status native plant populations and sensitive natural communities" (CDFW 2018). This protocol, which is intended to maximize detectability, includes identification of reference populations to facilitate the likelihood of field investigations occurring during the appropriate floristic period.

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

If Bakersfield cactus or other special-status plants are detected, CDFW recommends special-status plant species be avoided whenever possible by delineating and observing a no-disturbance buffer of at least 50 feet from the outer edge of the plant population(s) or specific habitat type(s) required by State listed and special-status plant species.

If buffers for special-status plants cannot be maintained, then consultation with CDFW is warranted to determine appropriate minimization and mitigation measures for impacts to special-status plant species. If State-listed plant species are identified during botanical surveys, consultation with CDFW is warranted to determine if the Project can avoid take. If take cannot be avoided, take authorization would need to occur through issuance of an Incidental Take Permit (ITP) by CDFW to comply with CESA and/or Fish and Game Code section 1900 and California Code of Regulations, title 14, section 786.9, subdivision (b).

San Joaquin Kit Fox

Bakersfield is home to a significant urban population of the federally endangered and State threatened, San Joaquin kit fox (SJKF) with multiple recorded occurrences in the California Natural Diversity Database (CNDDB) (CDFW 2023a). While the Project may not contain typical native habitat for SJKF, it is within a geographic area occupied by SJKF. In addition, any Project related ground-disturbing activity could attract SJKF. The urban population of SJKF has also been recorded to utilize anthropogenically altered habitats while maintaining a robust population (Cypher 2013). As a result, the Project may result in impacts to SJKF and any take of SJKF without appropriate take authorization would be a violation of Fish and Game Code.

In addition to native habitats, SJKF can den in rights-of-way, vacant lots, under buildings, and other urban habitats and populations can fluctuate over time. It is important to note that SJKF populations are known to fluctuate and a negative finding from biological surveys at any given time does not necessarily demonstrate absence of SJKF on a site. In addition, SJKF may be attracted to both construction materials (pipes, etc.) and construction footprints due to the type and level of activity (excavation, etc.) and the loose, friable soils that are created as a result of intensive ground disturbance.

CDFW recommends assessing presence/absence of SJKF by conducting den surveys following the USFWS' "Standardized recommendations for protection of the San Joaquin kit fox prior to or during ground disturbance", and implementing no-disturbance buffers around den sites, as described in the United States Fish and Wildlife Service document (USFWS 2011). Specifically, CDFW recommends conducting these den surveys over the entirety of the Project site as part of the biological technical studies conducted in support of the CEQA document. CDFW also recommends repeating those surveys, regardless of the results, no less than 14-days and no more than 30-days prior to the beginning of ground and/or vegetation disturbing activities, unless the Project

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

pursues and obtains an ITP. Finally, CDFW recommends a qualified biologist conduct on-site worker awareness training and inspect all construction materials for SJKF before use. Any pits or trenches created should be sloped or covered to prevent inadvertent capture or entrapment (take).

SJKF detection warrants consultation with CDFW to discuss how to avoid take or, if avoidance is not feasible, to acquire ITP pursuant to Fish and Game Code section 2081, subdivision (b), prior to initiating or resuming (whichever applies) ground-disturbing activities.

Swainson's Hawk

According to the CNDDB, the State threatened Swainson's hawk (SWHA) occurs in and around the City of Bakersfield. Given the proximity to known SWHA occurrences 1.7 miles south in the City of Bakersfield, potential nesting tress on parcels directly adjacent to the Project site, and the fact that SWHA exhibit high nest-site fidelity year after year in the San Joaquin Valley (CDFW 2016), SWHA have the potential to be present near the Project site, and CDFW has jurisdiction over this species under CESA.

The Project as proposed may involve noise, groundwork, and movement of workers that could affect nests and has the potential to result in nest abandonment, significantly impacting local nesting SWHA. Without appropriate avoidance and minimization measures for SWHA, potential significant impacts that may result from Project activities include nest abandonment, and reduced nesting success (loss or reduced health or vigor of eggs or young) from loss of foraging habitat. CDFW recommends that the Environmental Impact Report prepared for this Project address potential impacts to SWHA by including both mitigation for loss of foraging habitat and appropriate avoidance and minimization measures resulting from an analysis of potential impacts to nesting habitat beginning with protocol surveys as described below.

CDFW recommends compensation for the loss of SWHA foraging habitat as described in the Staff Report Regarding Mitigation for Impacts to Swainson's Hawks (CDFW 1994). CDFW recommends that mitigation for habitat loss occur within a minimum distance of 10 miles from known nest sites. CDFW has the following recommendations based on the Staff Report:

- For projects within 1 mile of an active nest tree, a minimum of one acre of habitat management (HM) land for each acre of development is advised.
- For projects within 5 miles of an active nest but greater than 1 mile, a minimum of 0.75 acres of HM land for each acre of development is advised.
- For projects within 10 miles of an active nest tree but greater than 5 miles from an active nest tree, a minimum of 0.5 acres of HM land for each acre of development is advised.

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

SWHA are known to travel up to 18 miles to forage (Estep 1989). Any SWHA in known nesting trees within that range may utilize the Project site for foraging. Therefore, CDFW recommends protocol surveys for SWHA be conducted as part of the biological technical studies conducted in support of the CEQA document by a qualified biologist with knowledge of SWHA natural history and behaviors, following the survey methods developed by the Swainson's Hawk Technical Advisory Committee (SWHA TAC 2000).

Due to the proximity of potential nesting trees on the parcel east of the Project, if the initial protocol surveys do not detect nesting SWHA, CDFW recommends that protocol surveys be conducted again by a qualified biologist within the survey season immediately prior to Project construction. CDFW recommends a minimum no-disturbance buffer of 0.5-mile be delineated around active nests until the breeding season has ended or until a qualified biologist has determined that the birds have fledged and are no longer reliant upon the nest or parental care for survival. If an active SWHA nest is detected during surveys and a 0.5-mile buffer is not feasible, consultation with CDFW is warranted to discuss how to implement the Project and avoid take. If take cannot be avoided, take authorization through the acquisition of an ITP, pursuant to Fish and Game Code section 2081, subdivision (b) is necessary to comply with CESA.

Crotch's Bumble Bee

According to CNDDB, the State candidate endangered Crotch's bumble bee (CBB) has been recorded to occur less than 3 miles northeast of the Project site as well as within the City of Bakersfield. CBB was once common throughout most of central and southern California. However, it now appears to be absent from most of their range, especially in the central portion of its historic range within California's Central Valley (Hatfield et al. 2015). Analyses by the Xerces Society et al. (2018) suggest there have been sharp declines in relative abundance by 98% and persistence by 80% over the last ten years. Additionally, CBB are known to inhabit areas of grasslands and scrub that contain requisite habitat elements for nesting, such as small mammal burrows and bunch/thatched grasses. According to aerial photography some of these elements are present on the Project site, as a result, CBB have the potential to be present in the Project site, and CDFW has jurisdiction over this species under CESA.

CDFW recommends a qualified biologist conduct a habitat assessment as part of the biological technical studies conducted in support of the CEQA document to determine if the Project site or its immediate vicinity contain habitat suitable to support CBB. Potential nesting sites, which include all small mammal burrows, perennial bunch grasses, thatched annual grasses, brush piles, old bird nests, dead trees, and hollow logs would need to be documented as part of the assessment. If potentially suitable habitat is identified, CDFW recommends that a qualified biologist conduct focused surveys for CBB, and their requisite habitat features following the methodology outlined in the Survey Considerations for California Endangered Species Act Candidate Bumble

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

Bee Species (CDFW 2023b), as part of the biological technical studies conducted in support of the draft environmental impact report.

If CBB is detected, then CDFW recommends that all small mammal burrows and thatched/bunch grasses be avoided by a minimum of 50 feet to avoid take and potentially significant impacts. If ground-disturbing activities will occur during the overwintering period (October through February), consultation with CDFW is warranted to discuss how to implement Project activities and avoid take. Any detection of CBB prior to or during Project implementation warrants consultation with CDFW to discuss how to avoid take.

If take cannot be avoided, CDFW recommends acquiring an ITP pursuant to Fish and Game Code section 2081, subdivision (b), prior to initiating ground-disturbing activities.

State Species of Special Concern

Burrowing owl (BUOW), California glossy snake, Bakersfield legless lizard and American badger have the potential to occur within the Project site. According to CNDDB, BUOW have been reported to occur less than 2 miles northwest of the Project site and California glossy snake, Bakersfield legless lizard and American badger have been reported in the City of Bakersfield. The Project site, and its vicinity, may support requisite habitat elements for these species.

CDFW recommends that a qualified biologist conduct a habitat assessment as part of the biological technical studies conducted in support of the CEQA document, to determine if Project sites or their immediate vicinity contain potential habitat for the species mentioned above. If potential habitat is present, CDFW recommends that a qualified biologist conduct focused surveys for applicable species and their requisite habitat features to evaluate potential impacts resulting from ground and vegetation disturbance.

Avoidance whenever possible is encouraged via delineating and observing a 50-foot no-disturbance buffer around the entrances of burrows that can provide refuge for California glossy snake, Bakersfield legless lizard and American badger.

CDFW recommends assessing presence/absence of BUOW by having a qualified biologist conduct surveys as part of the biological technical studies conducted in support of the CEQA document following the California Burrowing Owl Consortium's Burrowing Owl Survey Protocol and Mitigation Guidelines (CBOC 1993) and CDFW's Staff Report on Burrowing Owl Mitigation (CDFG 2012). Specifically, if suitable habitat is present at an individual Project site, CBOC and CDFW's Staff Report suggest three or more surveillance surveys conducted during daylight with each visit occurring at least three weeks apart during the peak breeding season (April 15 to July 15), when BUOW are most detectable.

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

If BUOW are detected, CDFW recommends no-disturbance buffers, as outlined in the Staff Report on Burrowing Owl Mitigation (CDFG 2012), be implemented prior to and during any ground-disturbing activities. Specifically, CDFW's Staff Report recommends that impacts to occupied burrows be avoided in accordance with the following table unless a qualified biologist approved by CDFW verifies through non-invasive methods that either: 1) the birds have not begun egg laying and incubation; or 2) that juveniles from the occupied burrows are foraging independently and are capable of independent survival.

Location	Time of Year	Level of Disturbance		
		Low	Med	High
Nesting sites	April 1-Aug 15	200 m*	500 m	500 m
Nesting sites	Aug 16-Oct 15	200 m	200 m	500 m
Nesting sites	Oct 16-Mar 31	50 m	100 m	500 m

* meters (m)

If BUOW are found within these recommended buffers and avoidance is not possible, it is important to note that according to the Staff Report (CDFG 2012), exclusion is not a take avoidance, minimization, or mitigation method and is considered a potentially significant impact under CEQA. Avoidance of direct impacts to BUOW and BUOW eggs and chicks is necessary to avoid violations of Fish and Game Code Sections 3503 (taking or destroying nests or eggs, 3503.5 (take of birds of prey or their eggs), and/or 3513 (take of migratory non game birds). However, if necessary, CDFW recommends that burrow exclusion be conducted by qualified biologists and only during the non-breeding season, before breeding behavior is exhibited and after the burrow is confirmed empty through non-invasive methods, such as surveillance. CDFW recommends replacement of occupied burrows with artificial burrows at a ratio of 1 burrow collapsed to 1 artificial burrow constructed (1:1) as mitigation for the potentially significant impact of evicting BUOW. BUOW may attempt to colonize or re-colonize an area that will be impacted; thus, CDFW recommends ongoing surveillance, at a rate that is sufficient to detect BUOW if they return.

Federally Listed Species: CDFW recommends consulting with USFWS regarding potential impacts to federally listed species including but not limited to Bakersfield cactus and SJKF. Take under the Federal Endangered Species Act (FESA) is more broadly defined than CESA; take under FESA also includes significant habitat modification or degradation that could result in death or injury to a listed species by interfering with essential behavioral patterns such as breeding, foraging, or nesting. Consultation with the USFWS in order to comply with FESA is advised well in advance of any Project activities.

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

CDFW appreciates the opportunity to comment to assist the Kern County Planning and Natural Resources Department in identifying and mitigating Project impacts on biological resources. If you have any questions, please contact Jaime Marquez, Environmental Scientist, at the address provided on this letterhead, by telephone at (559) 580-3200, or by electronic mail at Jaime.Marquez@wildlife.ca.gov.

Sincerely,

DocuSigned by:
Julie Vance
FA83F09FE08945A...
Julie A. Vance
Regional Manager

ec: State Clearinghouse
Office of Planning and Research
state.clearinghouse@opr.ca.gov

Jaime Marquez
California Department of Fish and Wildlife

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

REFERENCES

California Burrowing Owl Consortium. 1993. Burrowing owl survey protocol and mitigation guidelines. April 1993.

California Department of Fish and Game. 2012. Staff report on burrowing owl mitigation. California Department of Fish and Game.

California Department of Fish and Wildlife. 2016. Five year status review for Swainson's hawk (*Buteo swainsoni*). California Department of Fish and Wildlife. April 11, 2016.

California Department of Fish and Wildlife. 2018. Protocols for surveying and evaluating impacts to special status native plant populations and sensitive natural communities. Sacramento, California, USA.

California Department of Fish and Wildlife. 2023a. Biogeographic information and observation system (BIOS). https://www.wildlife.ca.gov/Data/BIOS. Accessed November 15, 2023.

California Department of Fish and Wildlife. 2023b. Survey considerations for California endangered species act candidate bumble bee species. June 6, 2023.

California Native Plant Society, Rare Plant Program. 2018. Inventory of rare and endangered plants of California (online edition, v8-03 0.39). Website http://www.rareplants.cnps.org. Accessed December 18, 2023.

Cypher, B., S. Phillips, and P. Kelly. 2013. Quantity and distribution of suitable habitat for endangered San Joaquin kit foxes: conservation implications. Canid Biology and Conservation 16(7): 25-31.

Estep, J. 1989. Biology, movements, and habitat relationships of the Swainson's hawk in the Central Valley of California. California Department of Fish and Game, Wildlife Management Division. Sacramento, CA.

Hatfield, R., S. Jepsen, R. Thorp, L. Richardson, and S. Colla. 2015. *Bombus crotchii*. The IUCN Red List of Threatened Species.

Swainson's hawk technical advisory committee. 2000. Recommended timing and methodology for Swainson's hawk nesting surveys in the central valley of California. Swainson's hawk technical advisory committee. May 31, 2000.

United States Fish and Wildlife Service. 2011. Standard Recommendations for the Protection of the San Joaquin Kit Fox Prior to or During Ground Disturbance. Sacramento, California.

DocuSign Envelope ID: 65BC9C3F-74F8-432C-99EE-CA748E071A87

Xerces Society for Invertebrate Conservation, Defenders of Wildlife, and Center for Food Safety. 2018. A petition to the state of California fish and game commission to list the Crotch bumble bee (*Bombus crotchii*), Franklin's bumble bee (*Bombus franklini*), Suckley cuckoo bumble bee (*Bombus suckleyi*), and western bumble bee (*Bombus occidentalis occidentalis*) as Endangered under the California Endangered Species Act. October 2018.

December 4, 2023

To: Lorelei Oviatt, Director
Planning and Natural Resources Department
Alex Brito, Planner I

From: Jeremy M. Brock, County Surveyor
By: Andres Arias, Engineering Support Supervisor Phone: 28959

Subject: Notice of preparation of Environmental Impact Report for the IPG Industrial Project by IPG Kern Count 52 Holdings, LLC(PP23405).

I have reviewed the above noted project Notice of Preparation of EIR and recommend the following conditions be placed on the Conditional Use Permits:

1. Prior to issuance of a building or grading permit: All survey monuments shall be tied out by a Licensed Land Surveyor. A corner record for each monument or record of survey shall be submitted to the County Surveyor for review and processing, per Section 8771 of the Professional Land Surveyor's (PLS) Act.

2. Prior to Final Inspection: All survey monuments that were destroyed during construction shall be re-set or have a suitable witness corner set. A post construction corner record for each monument re-set or a record of survey shall be submitted to the County Surveyor for processing, per Section 8771 of the Professional Land Surveyor's Act.

3. Upon completion of project: All survey monuments shall be accessible by a Licensed Land Surveyor or their representatives, with prior notice, per Section 8774 of the PLS Act and Civil Code 846.5 (a).

Thank you for the opportunity to review and comment on this project. Should you have any questions please contact me.

Office Memorandum - Kern County

TO: Distribution List (Kern County) – PLEASE SIGN AND DATE BELOW AS SOON AS RECEIVED AND RETURN TO PLANNING & NATURAL RESOURCES DEPARTMENT

FROM: Alexis Brito, Planner I
Advanced Planning
Planning & Natural Resources Department

DATE: November 16, 2023

SUBJECT: **INITIAL STUDY/ NOTICE OF PREPARATION OF AN ENVIRONMENTAL IMPACT REPORT** IPG Industrial Project by IPG Kern Count 52 Holdings, LLC (PP23405).

Enclosed is a document entitled Notice of Preparation of an Environmental Impact Report for the IPG Industrial Project. The Kern County Planning & Natural Resources Department as Lead Agency (per CEQA Guidelines Section 15050) solicits the views of your agency as to the scope and content of the environmental information, which is germane to your agency's statutory responsibilities in connection with the proposed project.

Any comments should be addressed to Alexis Brito at the Planning and Natural Resources Department. The comment period ends ***December 18, 2023 at 5:00 pm.***

In order to verify that this document was received by your department, please date, and sign this memo and return by office mail to the Planning and Natural Resources Department, Attn: Alexis Brito.

Thank you in advance for your cooperation.

Distribution List (Kern County):

Administrative Office
Agriculture Department
Airports Department
PWD- Building & Development – Code Compliance
PWD- Building & Development – Floodplain
PWD- Building & Development – Survey
Environmental Health Services
Fire Department, Fire Chief
Fire Department, Fire Marshal
Library/Beale – Local History Room
Library Director- Andie Sullivan
Parks and Recreation
Sheriff
PWD- Building & Development- Development Review
PWD- Operations & Maintenance- Regulatory Monitoring & Reporting

RECEIVED: 11.17.2023 **By:** _____ **Dept.:** Public Works - County Surveyor's Office

ROB BONTA
Attorney General

State of California
DEPARTMENT OF JUSTICE

1300 I STREET, SUITE 125
P.O. BOX 944255
SACRAMENTO, CA 94244-2550

E-Mail: EJ@doj.ca.gov

November 28, 2023

Alexis Brito, Planner 1
Kern County Planning and Natural Resources Dept.
2700 M Street, Suite 100
Bakersfield, CA 93301

RE: IPG Industrial Project by IPG Kern County Holdings 52, LLC, SCH #2023110442

Dear Mr. Brito:

Thank you for the opportunity to provide comments on the Notice of Preparation for the IPG Industrial Project by IPG Kern County Holdings 52, LLC project. While the logistics industry is an important component of our modern economy, warehouses can bring various environmental impacts to the communities where they are located. For example, diesel trucks visiting warehouses emit nitrogen oxide (NO_x)—a primary precursor to smog formation and a significant factor in the development of respiratory problems like asthma, bronchitis, and lung irritation—and diesel particulate matter (a subset of fine particular matter that is smaller than 2.5 micrometers)—a contributor to cancer, heart disease, respiratory illnesses, and premature death.[1] Trucks and on-site loading activities can also be loud, bringing disruptive noise levels during 24/7 operation that can cause hearing damage after prolonged exposure.[2] The hundreds, and sometimes thousands, of daily truck and passenger car trips that warehouses generate can contribute to traffic jams, deterioration of road surfaces, traffic accidents, and unsafe conditions for pedestrians and bicyclists. Depending on the circumstances of an individual project, warehouses may also have other environmental impacts.

To help lead agencies avoid, analyze, and mitigate warehouses' environmental impacts, the Attorney General Office's Bureau of Environmental Justice has published a document containing best practices and mitigation measures for warehouse projects. We have attached a

---

[1] California Air Resources Board, Nitrogen Dioxide & Health, https://ww2.arb.ca.gov/resources/nitrogen-dioxide-and-health (NOx); California Air Resources Board, Summary: Diesel Particular Matter Health Impacts, https://ww2.arb.ca.gov/resources/summary-diesel-particulate-matter-health-impacts; Office of Environmental Health Hazard Assessment and American Lung Association of California, Health Effects of Diesel Exhaust, https://oehha.ca.gov/media/downloads/calenviroscreen/indicators/diesel4-02.pdf (DPM).

[2] Noise Sources and Their Effects, https://www.chem.purdue.edu/chemsafety/Training/PPETrain/dblevels.htm (a diesel truck moving 40 miles per hour, 50 feet away, produces 84 decibels of sound).

copy of this document to this letter, and it is also available online.[3] We encourage you to consider the information in this document as you prepare the draft environmental impact report for this project.

Priority should be placed on avoiding land use conflicts between warehouses and sensitive receptors and on mitigating the impacts of any unavoidable land use conflicts. However, even projects located far from sensitive receptors may contribute to harmful regional air pollution, so you should consider measures to reduce emissions associated with the project to help the State meet its air quality goals. A distant warehouse may also impact sensitive receptors if trucks must pass near sensitive receptors to visit the warehouse.

The Bureau will continue to monitor proposed warehouse projects for compliance with the California Environmental Quality Act and other laws. We are available to discuss as you prepare the draft environmental impact report and consider how to guide warehouse development in your jurisdiction. Please do not hesitate to contact the Environmental Justice Bureau at ej@doj.ca.gov if you have any questions.

Sincerely,

CHRISTIE VOSBURG
Supervising Deputy Attorney General

For ROB BONTA
Attorney General

[3] https://oag.ca.gov/system/files/media/warehouse-best-practices.pdf.

l

ROB BONTA
Attorney General

State of California
DEPARTMENT OF JUSTICE

Warehouse Projects: Best Practices and Mitigation Measures to Comply with the California Environmental Quality Act

Table of Contents

I. Background 1
II. Proactive Planning: General Plans, Local Ordinances, and Good Neighbor Policies 3
III. Community Engagement 4
IV. Warehouse Siting and Design Considerations 5
V. Air Quality and Greenhouse Gas Emissions Analysis and Mitigation 7
VI. Noise Impacts Analysis and Mitigation 10
VII. Traffic Impacts Analysis and Mitigation 11
VIII. Other Significant Environmental Impacts Analysis and Mitigation 12
IX. Conclusion 13

In carrying out its duty to enforce laws across California, the California Attorney General's Bureau of Environmental Justice (Bureau)[1] regularly reviews proposed warehouse projects for compliance with the California Environmental Quality Act (CEQA) and other laws. When necessary, the Bureau submits comment letters to lead agencies regarding warehouse projects, and in rare cases the Bureau has filed litigation to enforce CEQA.[2] This document builds upon the Bureau's work on warehouse projects, collecting information gained from the Bureau's review of hundreds of warehouse projects across the state.[3] It is meant to help lead agencies pursue CEQA compliance and promote environmentally-just development as they confront warehouse project proposals.[4] While CEQA analysis is necessarily project-specific, this document provides information on feasible best practices and mitigation measures, nearly all of which have been adapted from actual warehouse projects in California.

I. Background

In recent years, the proliferation of e-commerce and rising consumer expectations of rapid shipping have contributed to a boom in warehouse development.[5] California, with its ports, population centers, and transportation network, has found itself at the center of this trend. In 2020, the Ports of Los Angeles, Long Beach, and Oakland collectively accounted for over 34% of all United States international container trade.[6] The Ports of Los Angeles and Long Beach alone generate about 35,000 container truck trips every day.[7] Accordingly, the South Coast Air Basin now contains approximately 3,000 warehouses of over 100,000 square feet each, with a total warehouse capacity of approximately 700 million square feet, an increase of 20 percent over the last five years.[8] This trend has only accelerated, with e-commerce growing to

[1] https://oag.ca.gov/environment/justice.
[2] https://oag.ca.gov/environment/ceqa; *People of the State of California v. City of Fontana* (Super. Ct. San Bernardino County, No. CIVSB2121829); *South Central Neighbors United et al. v. City of Fresno et al.* (Super. Ct. Fresno County, No. 18CECG00690).
[3] This September 2022 version revises and replaces the prior March 2021 version of this document.
[4] Anyone reviewing this document to determine CEQA compliance responsibilities should consult their own attorney for legal advice.
[5] As used in this document, "warehouse" or "logistics facility" is defined as a facility consisting of one or more buildings that stores cargo, goods, or products on a short- or long-term basis for later distribution to businesses and/or retail customers.
[6] Data from the Bureau of Transportation Statistics, Container TEUs (Twenty-foot Equivalent Units) (2020), https://data.bts.gov/stories/s/Container-TEU/x3fb-aeda/ (Ports of Los Angeles, Long Beach, and Oakland combined for 14.157 million TEUs, 34% of 41.24 million TEUs total nationwide) (last accessed September 18, 2022).
[7] U.S. Dept. of Transportation, Federal Highway Administration, *FHWA Operations Support – Port Peak Pricing Program Evaluation* (2020), available at https://ops.fhwa.dot.gov/publications/fhwahop09014/sect2.htm (last accessed September 18, 2022).
[8] South Coast Air Qual. Mgmt. Dist., *Final Socioeconomic Assessment for Proposed Rule 2305 – Warehouse Indirect Source Rule – Warehouse Actions and Investments to Reduce Emissions (WAIRE) Program and Proposed Rule 316 – Fees for Rule 2305*, at 7-8, 41 (May 2021).

13% of all retail sales and 2021 being a second consecutive record year for new warehouse space leased.[9] The latest data and forecasts predict that the next wave of warehouse development will be in the Central Valley.[10]

When done properly, these activities can contribute to the economy and consumer welfare. However, imprudent warehouse development can harm local communities and the environment. Among other pollutants, diesel trucks visiting warehouses emit nitrogen oxide (NO_x)—a primary precursor to smog formation and a significant factor in the development of respiratory problems like asthma, bronchitis, and lung irritation—and diesel particulate matter (a subset of fine particular matter that is smaller than 2.5 micrometers)—a contributor to cancer, heart disease, respiratory illnesses, and premature death.[11] Trucks and on-site loading activities can also be loud, bringing disruptive noise levels during 24/7 operation that can cause hearing damage after prolonged exposure.[12] The hundreds, and sometimes thousands, of daily truck and passenger car trips that warehouses generate contribute to traffic jams, deterioration of road surfaces, and traffic accidents.

These environmental impacts also tend to be concentrated in neighborhoods already suffering from disproportionate health impacts and systemic vulnerability. For example, a comprehensive study by the South Coast Air Quality Management District found that communities located near large warehouses scored far higher on California's environmental justice screening tool, which measures overall pollution and demographic vulnerability.[13] That

---

[9] U.S. Census Bureau News, Quarterly Retail E-Commerce Sales 4th Quarter 2021 (February 22, 2022), https://www.census.gov/retail/mrts/www/data/pdf/ec_current.pdf (last accessed September 18, 2022); CBRE Research, *2022 North America Industrial Big Box Report: Review and Outlook*, at 2-3 (March 2022), *available at* https://www.cbre.com/insights/reports/2022-north-america-industrial-big-box#download-report (last accessed September 18, 2022).

[10] CBRE Research, *supra note* 9, at 4, 36; New York Times, *Warehouses Are Headed to the Central Valley, Too* (Jul. 22, 2020), *available* at https://www.nytimes.com/2020/07/22/us/coronavirus-ca-warehouse-workers.html.

[11] California Air Resources Board, Nitrogen Dioxide & Health, https://ww2.arb.ca.gov/resources/nitrogen-dioxide-and-health (last accessed September 18, 2022) (NOx); California Air Resources Board, Summary: Diesel Particular Matter Health Impacts, https://ww2.arb.ca.gov/resources/summary-diesel-particulate-matter-health-impacts (last accessed September 18, 2022); Office of Environmental Health Hazard Assessment and American Lung Association of California, Health Effects of Diesel Exhaust, https://oehha.ca.gov/media/downloads/calenviroscreen/indicators/diesel4-02.pdf (last accessed September 18, 2022) (DPM).

[12] Noise Sources and Their Effects, https://www.chem.purdue.edu/chemsafety/Training/PPETrain/dblevels.htm (last accessed September 18, 2022) (a diesel truck moving 40 miles per hour, 50 feet away, produces 84 decibels of sound).

[13] South Coast Air Quality Management District, "Final Socioeconomic Assessment for Proposed Rule 2305 – Warehouse Indirect Source Rule – Warehouse Actions and Investments to Reduce Emissions (WAIRE) Program and Proposed Rule 316 – Fees for Rule 2305" (May 2021), at 4-5.

study concluded that, compared to the South Coast Air Basin averages, communities in the South Coast Air Basin near large warehouses had a substantially higher proportion of people of color; were exposed to more diesel particulate matter; had higher rates of asthma, cardiovascular disease, and low birth weights; and had higher poverty and unemployment rates.[14] Each area has its own unique history, but many of these impacts and vulnerabilities reflect historic redlining practices in these communities, which devalued land and concentrated poverty, racial outgroups, and pollution into designated areas.[15]

II. Proactive Planning: General Plans, Local Ordinances, and Good Neighbor Policies

To systematically guide warehouse development, we encourage local governing bodies to proactively plan for logistics projects in their jurisdictions. Proactive planning allows jurisdictions to prevent land use conflicts before they materialize and direct sustainable development. Benefits also include providing a predictable business environment, protecting residents from environmental harm, and setting consistent expectations jurisdiction-wide.

Proactive planning can take many forms. Land use designation and zoning decisions should channel development into appropriate areas. For example, establishing industrial districts near major highway and rail corridors but away from sensitive receptors[16] can help attract investment while avoiding conflicts between warehouse facilities and residential communities. Transition zones with lighter industrial and commercial land uses may also help minimize conflicts between residential and industrial uses.

In addition, general plan policies, local ordinances, and good neighbor policies should set minimum standards for logistics projects. General plan policies can be incorporated into existing economic development, land use, circulation, or other related general plan elements. Many jurisdictions alternatively choose to consolidate policies in a separate environmental justice element. Adopting general plan policies to guide warehouse development may also help

---

[14] *Id*. at 5-7.

[15] Beginning in the 1930s, federal housing policy directed investment away from Black, immigrant, and working-class communities by color-coding neighborhoods according to the purported "riskiness" of loaning to their residents. In California cities where such "redlining" maps were drawn, nearly all of the communities where warehouses are now concentrated were formerly coded "red," signifying the least desirable areas where investment was to be avoided. *See* University of Richmond Digital Scholarship Lab, Mapping Inequality, https://dsl.richmond.edu/panorama/redlining/#loc=12/33.748/-118.272&city=los-angeles-ca (Los Angeles), https://dsl.richmond.edu/panorama/redlining/#loc=13/32.685/-117.132&city=san-diego-ca (San Diego), https://dsl.richmond.edu/panorama/redlining/#loc=11/37.81/-122.38&city=oakland-ca (Oakland), https://dsl.richmond.edu/panorama/redlining/#loc=13/37.956/-121.326&city=stockton-ca (Stockton), https://dsl.richmond.edu/panorama/redlining/#loc=12/36.751/-119.86&city=fresno-ca (Fresno) (all last accessed September 18, 2022).

[16] In this document, "sensitive receptors" refers to residences, schools, public recreation facilities, health care facilities, places of worship, daycare facilities, community centers, or incarceration facilities.

jurisdictions comply with their obligations under SB 1000, which requires local government general plans to identify objectives and policies to reduce health risks in disadvantaged communities, promote civil engagement in the public decision making process, and prioritize improvements and programs that address the needs of disadvantaged communities.[17]

Local ordinances and good neighbor policies that set development standards for all warehouses in the jurisdiction are a critical and increasingly common tool that serve several goals. When well-designed, these ordinances direct investment to local improvements, provide predictability for developers, conserve government resources by streamlining project review processes, and reduce the environmental impacts of industrial development. While many jurisdictions have adopted warehouse-specific development standards, an ordinance in the City of Fontana provides an example to review and build upon.[18] Good neighbor policies in Riverside County and by the Western Riverside Council of Government include additional measures worth consideration.[19]

The Bureau encourages jurisdictions to adopt their own local ordinances that combine the strongest policies from those models with measures discussed in the remainder of this document.

III. Community Engagement

Early and consistent community engagement is central to establishing good relationships between communities, lead agencies, and warehouse developers and tenants. Robust community engagement can give lead agencies access to community residents' on-the-ground knowledge and information about their concerns, build community support for projects, and develop creative solutions to ensure new logistics facilities are mutually beneficial. Examples of best practices for community engagement include:

- Holding a series of community meetings at times and locations convenient to members of the affected community and incorporating suggestions into the project design.
- Posting information in hard copy in public gathering spaces and on a website about the project. The information should include a complete, accurate project description, maps and drawings of the project design, and information about how the public can provide input and be involved in the project approval process. The

[17] For more information about SB 1000, *see* https://oag.ca.gov/environment/sb1000.
[18] https://oag.ca.gov/system/files/attachments/press-docs/Final%20Signed%20Fontana%20Ordinance.pdf (last accessed September 18, 2022).
[19] For example, the Riverside County policy requires community benefits agreements and supplemental funding contributions toward additional pollution offsets, and the Western Riverside Council of Governments policy sets a minimum buffer zone of 300 meters between warehouses and sensitive receptors. https://www.rivcocob.org/wp-content/uploads/2020/01/Good-Neighbor-Policy-F-3-Final-Adopted.pdf (last accessed September 18, 2022) (Riverside County); http://www.wrcog.cog.ca.us/DocumentCenter/View/318/Good-Neighbor-Guidelines-for-Siting-Warehouse-Distribution-Facilities-PDF?bidId= (last accessed September 18, 2022) (Western Riverside Council of Governments).

information should be in a format that is easy to navigate and understand for members of the affected community.

- Providing notice by mail to residents and schools within a certain radius of the project and along transportation corridors to be used by vehicles visiting the project, and by posting a prominent sign on the project site. The notice should include a brief project description and directions for accessing complete information about the project and for providing input on the project.
- Providing translation or interpretation in residents' native language, where appropriate.
- For public meetings broadcast online or otherwise held remotely, providing for access and public comment by telephone and supplying instructions for access and public comment with ample lead time prior to the meeting.
- Partnering with local community-based organizations to solicit feedback, leverage local networks, co-host meetings, and build support.
- Considering adoption of a community benefits agreement, negotiated with input from affected residents and businesses, by which the developer provides benefits to the affected community.
- Creating a community advisory board made up of local residents to review and provide feedback on project proposals in early planning stages.
- Identifying a person to act as a community liaison concerning on-site construction activity and operations, and providing contact information for the community liaison to the surrounding community.
- Requiring signage in public view at warehouse facilities with contact information for a local designated representative for the facility operator who can receive community complaints, and requiring any complaints to be answered by the facility operator within 48 hours of receipt.

IV. Warehouse Siting and Design Considerations

The most important consideration when planning a logistics facility is its location. Warehouses located in residential neighborhoods or near sensitive receptors expose community residents and those using or visiting sensitive receptor sites to the air pollution, noise, traffic, and other environmental impacts they generate. Therefore, placing facilities away from sensitive receptors significantly reduces their environmental and quality of life harms on local communities. The suggested best practices for siting and design of warehouse facilities does not relieve lead agencies' responsibility under CEQA to conduct a project-specific analysis of the project's impacts and evaluation of feasible mitigation measures and alternatives; lead agencies' incorporation of the best practices must be part of the impact, mitigation and alternatives analyses to meet the requirements of CEQA. Examples of best practices when siting and designing warehouse facilities include:

- Per California Air Resources Board (CARB) guidance, siting warehouse facilities so that their property lines are at least 1,000 feet from the property lines of the nearest sensitive receptors.[20]
- Providing adequate amounts of on-site parking to prevent trucks and other vehicles from parking or idling on public streets and to reduce demand for off-site truck yards.
- Establishing setbacks from the property line of the nearest sensitive receptor to warehouse dock doors, loading areas, and truck drive aisles, and locating warehouse dock doors, loading areas, and truck drive aisles on the opposite side of the building from the nearest sensitive receptors—e.g., placing dock doors on the north side of the facility if sensitive receptors are near the south side of the facility.
- Placing facility entry and exit points from the public street away from sensitive receptors—e.g., placing these points on the north side of the facility if sensitive receptors are adjacent to the south side of the facility.
- Ensuring heavy duty trucks abide by the on-site circulation plans by constructing physical barriers to block those trucks from using areas of the project site restricted to light duty vehicles or emergency vehicles only.
- Preventing truck queuing spillover onto surrounding streets by positioning entry gates after a minimum of 140 feet of space for queuing, and increasing the distance by 70 feet for every 20 loading docks beyond 50 docks.
- Locating facility entry and exit points on streets of higher commercial classification that are designed to accommodate heavy duty truck usage.
- Screening the warehouse site perimeter and onsite areas with significant truck traffic (e.g., dock doors and drive aisles) by creating physical, structural, and/or vegetative buffers that prevent or substantially reduce pollutant and noise dispersion from the facility to sensitive receptors.
- Planting exclusively 36-inch box evergreen trees to ensure faster maturity and four-season foliage.
- Requiring all property owners and successors in interest to maintain onsite trees and vegetation for the duration of ownership, including replacing any dead or unhealthy trees and vegetation.
- Posting signs clearly showing the designated entry and exit points from the public street for trucks and service vehicles.
- Including signs and drive aisle pavement markings that clearly identify onsite circulation patterns to minimize unnecessary onsite vehicle travel.
- Posting signs indicating that all parking and maintenance of trucks must be conducted within designated on-site areas and not within the surrounding community or public streets.

[20] CARB, Air Quality and Land Use Handbook: A Community Health Perspective (April 2005), at ES-1. CARB staff has released draft updates to this siting and design guidance which suggests a greater distance may be warranted in some scenarios. CARB, Concept Paper for the Freight Handbook (December 2019), *available at* https://ww2.arb.ca.gov/sites/default/files/2020-03/2019.12.12%20-%20Concept%20Paper%20for%20the%20Freight%20Handbook_1.pdf (last accessed September 18, 2022).

V. Air Quality and Greenhouse Gas Emissions Analysis and Mitigation

Emissions of air pollutants and greenhouse gases are often among the most substantial environmental impacts from new warehouse facilities. CEQA compliance demands a proper accounting of the full air quality and greenhouse gas impacts of logistics facilities and adoption of all feasible mitigation of significant impacts. Although efforts by CARB and other authorities to regulate the heavy-duty truck and off-road diesel fleets have made excellent progress in reducing the air quality impacts of logistics facilities, the opportunity remains for local jurisdictions to further mitigate these impacts at the project level. Lead agencies and developers should also consider designing projects with their long-term viability in mind. Constructing the necessary infrastructure to prepare for the zero-emission future of goods movement not only reduces a facility's emissions and local impact now, but it can also save money as demand for zero-emission infrastructure grows. In planning new logistics facilities, the Bureau strongly encourages developers to consider the local, statewide, and global impacts of their projects' emissions.

Examples of best practices when studying air quality and greenhouse gas impacts include:

- Fully analyzing all reasonably foreseeable project impacts, including cumulative impacts. In general, new warehouse developments are not ministerial under CEQA because they involve public officials' personal judgment as to the wisdom or manner of carrying out the project, even when warehouses are permitted by a site's applicable zoning and/or general plan land use designation.[21]
- When analyzing cumulative impacts, thoroughly considering the project's incremental impact in combination with past, present, and reasonably foreseeable future projects, even if the project's individual impacts alone do not exceed the applicable significance thresholds.
- Preparing a quantitative air quality study in accordance with local air district guidelines.
- Preparing a quantitative health risk assessment in accordance with California Office of Environmental Health Hazard Assessment and local air district guidelines.
- Refraining from labeling compliance with CARB or air district regulations as a mitigation measure—compliance with applicable regulations is required regardless of CEQA.
- Disclosing air pollution from the entire expected length of truck trips. CEQA requires full public disclosure of a project's anticipated truck trips, which entails calculating truck trip length based on likely truck trip destinations, rather than the distance from the facility to the edge of the air basin, local jurisdiction, or other truncated endpoint. All air pollution associated with the project must be considered, regardless of where those impacts occur.

[21] CEQA Guidelines § 15369.

- Accounting for all reasonably foreseeable greenhouse gas emissions from the project, without discounting projected emissions based on participation in California's Cap-and-Trade Program.

Examples of measures to mitigate air quality and greenhouse gas impacts from construction are below. To ensure mitigation measures are enforceable and effective, they should be imposed as permit conditions on the project where applicable.

- Requiring off-road construction equipment to be hybrid electric-diesel or zero-emission, where available, and all diesel-fueled off-road construction equipment to be equipped with CARB Tier IV-compliant engines or better, and including this requirement in applicable bid documents, purchase orders, and contracts, with successful contractors demonstrating the ability to supply the compliant construction equipment for use prior to any ground-disturbing and construction activities.
- Prohibiting off-road diesel-powered equipment from being in the "on" position for more than 10 hours per day.
- Using electric-powered hand tools, forklifts, and pressure washers, and providing electrical hook ups to the power grid rather than use of diesel-fueled generators to supply their power.
- Designating an area in the construction site where electric-powered construction vehicles and equipment can charge.
- Limiting the amount of daily grading disturbance area.
- Prohibiting grading on days with an Air Quality Index forecast of greater than 100 for particulates or ozone for the project area.
- Forbidding idling of heavy equipment for more than three minutes.
- Keeping onsite and furnishing to the lead agency or other regulators upon request, all equipment maintenance records and data sheets, including design specifications and emission control tier classifications.
- Conducting an on-site inspection to verify compliance with construction mitigation and to identify other opportunities to further reduce construction impacts.
- Using paints, architectural coatings, and industrial maintenance coatings that have volatile organic compound levels of less than 10 g/L.
- Providing information on transit and ridesharing programs and services to construction employees.
- Providing meal options onsite or shuttles between the facility and nearby meal destinations for construction employees.

Examples of measures to mitigate air quality and greenhouse gas impacts from operation include:

- Requiring all heavy-duty vehicles engaged in drayage[22] to or from the project site to be zero-emission beginning in 2030.

[22] "Drayage" refers generally to transport of cargo to or from a seaport or intermodal railyard.

- Requiring all on-site motorized operational equipment, such as forklifts and yard trucks, to be zero-emission with the necessary charging or fueling stations provided.
- Requiring tenants to use zero-emission light- and medium-duty vehicles as part of business operations.
- Forbidding trucks from idling for more than three minutes and requiring operators to turn off engines when not in use.
- Posting both interior- and exterior-facing signs, including signs directed at all dock and delivery areas, identifying idling restrictions and contact information to report violations to CARB, the local air district, and the building manager.
- Installing solar photovoltaic systems on the project site of a specified electrical generation capacity that is equal to or greater than the building's projected energy needs, including all electrical chargers.
- Designing all project building roofs to accommodate the maximum future coverage of solar panels and installing the maximum solar power generation capacity feasible.
- Constructing zero-emission truck charging/fueling stations proportional to the number of dock doors at the project.
- Running conduit to designated locations for future electric truck charging stations.
- Unless the owner of the facility records a covenant on the title of the underlying property ensuring that the property cannot be used to provide refrigerated warehouse space, constructing electric plugs for electric transport refrigeration units at every dock door and requiring truck operators with transport refrigeration units to use the electric plugs when at loading docks.
- Oversizing electrical rooms by 25 percent or providing a secondary electrical room to accommodate future expansion of electric vehicle charging capability.
- Constructing and maintaining electric light-duty vehicle charging stations proportional to the number of employee parking spaces (for example, requiring at least 10% of all employee parking spaces to be equipped with electric vehicle charging stations of at least Level 2 charging performance)
- Running conduit to an additional proportion of employee parking spaces for a future increase in the number of electric light-duty charging stations.
- Installing and maintaining, at the manufacturer's recommended maintenance intervals, air filtration systems at sensitive receptors within a certain radius of facility for the life of the project.
- Installing and maintaining, at the manufacturer's recommended maintenance intervals, an air monitoring station proximate to sensitive receptors and the facility for the life of the project, and making the resulting data publicly available in real time. While air monitoring does not mitigate the air quality or greenhouse gas impacts of a facility, it nonetheless benefits the affected community by providing information that can be used to improve air quality or avoid exposure to unhealthy air.
- Requiring all stand-by emergency generators to be powered by a non-diesel fuel.
- Requiring facility operators to train managers and employees on efficient scheduling and load management to eliminate unnecessary queuing and idling of

trucks.

- Requiring operators to establish and promote a rideshare program that discourages single-occupancy vehicle trips and provides financial incentives for alternate modes of transportation, including carpooling, public transit, and biking.
- Meeting CalGreen Tier 2 green building standards, including all provisions related to designated parking for clean air vehicles, electric vehicle charging, and bicycle parking.
- Designing to LEED green building certification standards.
- Providing meal options onsite or shuttles between the facility and nearby meal destinations.
- Posting signs at every truck exit driveway providing directional information to the truck route.
- Improving and maintaining vegetation and tree canopy for residents in and around the project area.
- Requiring that every tenant train its staff in charge of keeping vehicle records in diesel technologies and compliance with CARB regulations, by attending CARB-approved courses. Also require facility operators to maintain records on-site demonstrating compliance and make records available for inspection by the local jurisdiction, air district, and state upon request.
- Requiring tenants to enroll in the United States Environmental Protection Agency's SmartWay program, and requiring tenants who own, operate, or hire trucking carriers with more than 100 trucks to use carriers that are SmartWay carriers.
- Providing tenants with information on incentive programs, such as the Carl Moyer Program and Voucher Incentive Program, to upgrade their fleets.

VI. Noise Impacts Analysis and Mitigation

The noise associated with logistics facilities can be among their most intrusive impacts to nearby sensitive receptors. Various sources, such as unloading activity, diesel truck movement, and rooftop air conditioning units, can contribute substantial noise pollution. These impacts are exacerbated by logistics facilities' typical 24-hour, seven-days-per-week operation. Construction noise is often even greater than operational noise, so if a project site is near sensitive receptors, developers and lead agencies should adopt measures to reduce the noise generated by both construction and operation activities.

Examples of best practices when studying noise impacts include:

- Preparing a noise impact analysis that considers all reasonably foreseeable project noise impacts, including to nearby sensitive receptors. All reasonably foreseeable project noise impacts encompasses noise from both construction and operations, including stationary, on-site, and off-site noise sources.
- Adopting a lower significance threshold for incremental noise increases when baseline noise already exceeds total noise significance thresholds, to account for the cumulative impact of additional noise and the fact that, as noise moves up the decibel scale, each decibel increase is a progressively greater increase in sound

KCSOS
Kern County Superintendent of Schools
Office of John G. Mendiburu, Ed.D.— Advocates For Children

November 22, 2023

Kern County Planning Department
Attn: Alexis Brito, Planner I
2700 M Street, Suite 100
Bakersfield, CA 93301

Our File No.: CO23-0122

RE: DEVELOPER FEES FOR: Notice of Preparation, Draft EIR for the IPG Industrial Project; Map No. 102-2
(Bounded by Boughton Dr. (north), Skyway Dr. (South), Hanger Way (west) and Airport Dr. (east)

Dear Ms. Brito,

This office represents the Beardsley Elementary and Kern High School Districts with regard to the imposition of school facility fees, and appreciates the opportunity to respond on behalf of the districts regarding the proposed project. This letter is limited to addressing the possible effects which the project might have on school facilities created by students attributable to the project. It is not intended to address other possible environmental concerns which might be identified by the district(s) after reviewing it.

It is our determination that the above-mentioned project regarding the IPG Industrial Project, allowing the construction of two single story warehouses totaling approximately 923,128-square feet and a Zone Variance to construct a 56-foot tall warehouse building where 35-feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District will have no significant effects on either of these district's facilities and mitigation of this project's impacts on public school facilities will be limited to the collection of statutory fees authorized under Education Code Section 17620 and Government Code Sections 65995 et seq. (all as amended with an operative date of November 4, 1998) at the time that building permits are issued. Currently, this fee is set at $0.78 per square foot of new commercial/industrial construction, an amount subject to COLA adjustment every two years.

Thank you for the opportunity to comment on the project. Should you have any questions, or if we can be of any further assistance in this matter, please contact me at 636-4599, or through e-mail at anwatson@kern.org.

Sincerely,

awatson

Andrea Watson, Specialist
School District Facility Services

RECEIVED
NOV 30 2023
Kern County Planning & Natural Resources Dept.

Cc: Districts

pressure than the last. For example, 70 dBA is ten times more sound pressure than 60 dBA.

- Disclosing and considering the significance of short-term noise levels associated with all aspects of project operation (i.e. both on-site noise generation and off-site truck noise). Considering only average noise levels may mask noise impacts sensitive receptors would consider significant—for example, the repeated but short-lived passing of individual trucks or loading activities at night.

Examples of measures to mitigate noise impacts include:

- Constructing physical, structural, or vegetative noise barriers on and/or off the project site.
- Planning and enforcing truck routes that avoid passing sensitive receptors.
- Locating or parking all stationary construction equipment as far from sensitive receptors as possible, and directing emitted noise away from sensitive receptors.
- Verifying that construction equipment has properly operating and maintained mufflers.
- Requiring all combustion-powered construction equipment to be surrounded by a noise protection barrier
- Limiting operation hours to daytime hours on weekdays.
- Paving roads where truck traffic is anticipated with low noise asphalt.
- Orienting any public address systems onsite away from sensitive receptors and setting system volume at a level not readily audible past the property line.

VII. Traffic Impacts Analysis and Mitigation

Warehouse facilities inevitably bring truck and passenger car traffic. Truck traffic can present substantial safety issues. Collisions with heavy-duty trucks are especially dangerous for passenger cars, motorcycles, bicycles, and pedestrians. These concerns can be even greater if truck traffic passes through residential areas, school zones, or other places where pedestrians are common and extra caution is warranted.

Examples of measures to mitigate traffic impacts include:

- Designing, clearly marking, and enforcing truck routes that keep trucks out of residential neighborhoods and away from other sensitive receptors.
- Installing signs in residential areas noting that truck and employee parking is prohibited.
- Requiring preparation and approval of a truck routing plan describing the facility's hours of operation, types of items to be stored, and truck routing to and from the facility to designated truck routes that avoids passing sensitive receptors. The plan should include measures for preventing truck queuing, circling, stopping, and parking on public streets, such as signage, pavement markings, and queuing analysis and enforcement. The plan should hold facility operators responsible for violations of the truck routing plan, and a revised plan should be required from any new tenant that occupies the property before a business license

STATE OF CALIFORNIA Gavin Newsom, Governor

NATIVE AMERICAN HERITAGE COMMISSION

CHAIRPERSON
Reginald Pagaling
Chumash

VICE-CHAIRPERSON
Buffy McQuillen
Yokayo Pomo, Yuki, Nomlaki

SECRETARY
Sara Dutschke
Miwok

PARLIAMENTARIAN
Wayne Nelson
Luiseño

COMMISSIONER
Isaac Bojorquez
Ohlone-Costanoan

COMMISSIONER
Stanley Rodriguez
Kumeyaay

COMMISSIONER
Laurena Bolden
Serrano

COMMISSIONER
Reid Milanovich
Cahuilla

COMMISSIONER
Vacant

EXECUTIVE SECRETARY
Raymond C. Hitchcock
Miwok, Nisenan

NAHC HEADQUARTERS
1550 Harbor Boulevard
Suite 100
West Sacramento,
California 95691
(916) 373-3710
nahc@nahc.ca.gov
NAHC.ca.gov

November 21, 2023

Alexis Brito
Kern County Planning and Natural Resource Department
2700 M Street, Suite 100
Bakersfield, CA 93301

Re: 2023110442, IPG Industrial Project by IPG Kern County 52 Holdings, LLC, Kern County

Dear Ms. Brito:

The Native American Heritage Commission (NAHC) has received the Notice of Preparation (NOP), Draft Environmental Impact Report (DEIR) or Early Consultation for the project referenced above. The California Environmental Quality Act (CEQA) (Pub. Resources Code §21000 et seq.), specifically Public Resources Code §21084.1, states that a project that may cause a substantial adverse change in the significance of a historical resource, is a project that may have a significant effect on the environment. (Pub. Resources Code § 21084.1; Cal. Code Regs., tit.14, §15064.5 (b) (CEQA Guidelines §15064.5 (b)). If there is substantial evidence, in light of the whole record before a lead agency, that a project may have a significant effect on the environment, an Environmental Impact Report (EIR) shall be prepared. (Pub. Resources Code §21080 (d); Cal. Code Regs., tit. 14, § 5064 subd.(a)(1) (CEQA Guidelines §15064 (a)(1)). In order to determine whether a project will cause a substantial adverse change in the significance of a historical resource, a lead agency will need to determine whether there are historical resources within the area of potential effect (APE).

CEQA was amended significantly in 2014. Assembly Bill 52 (Gatto, Chapter 532, Statutes of 2014) (AB 52) amended CEQA to create a separate category of cultural resources, "tribal cultural resources" (Pub. Resources Code §21074) and provides that a project with an effect that may cause a substantial adverse change in the significance of a tribal cultural resource is a project that may have a significant effect on the environment. (Pub. Resources Code §21084.2). Public agencies shall, when feasible, avoid damaging effects to any tribal cultural resource. (Pub. Resources Code §21084.3 (a)). **AB 52 applies to any project for which a notice of preparation, a notice of negative declaration, or a mitigated negative declaration is filed on or after July 1, 2015.** If your project involves the adoption of or amendment to a general plan or a specific plan, or the designation or proposed designation of open space, on or after March 1, 2005, it may also be subject to Senate Bill 18 (Burton, Chapter 905, Statutes of 2004) (SB 18). **Both SB 18 and AB 52 have tribal consultation requirements.** If your project is also subject to the federal National Environmental Policy Act (42 U.S.C. § 4321 et seq.) (NEPA), the tribal consultation requirements of Section 106 of the National Historic Preservation Act of 1966 (154 U.S.C. 300101, 36 C.F.R. §800 et seq.) may also apply.

The NAHC recommends consultation with California Native American tribes that are traditionally and culturally affiliated with the geographic area of your proposed project as early as possible in order to avoid inadvertent discoveries of Native American human remains and best protect tribal cultural resources. Below is a brief summary of portions of AB 52 and SB 18 as well as the NAHC's recommendations for conducting cultural resources assessments.

Consult your legal counsel about compliance with AB 52 and SB 18 as well as compliance with any other applicable laws.

AB 52

AB 52 has added to CEQA the additional requirements listed below, along with many other requirements:

1. Fourteen Day Period to Provide Notice of Completion of an Application/Decision to Undertake a Project: Within fourteen (14) days of determining that an application for a project is complete or of a decision by a public agency to undertake a project, a lead agency shall provide formal notification to a designated contact of, or tribal representative of, traditionally and culturally affiliated California Native American tribes that have requested notice, to be accomplished by at least one written notice that includes:

a. A brief description of the project.

b. The lead agency contact information.

c. Notification that the California Native American tribe has 30 days to request consultation. (Pub. Resources Code §21080.3.1 (d)).

d. A "California Native American tribe" is defined as a Native American tribe located in California that is on the contact list maintained by the NAHC for the purposes of Chapter 905 of Statutes of 2004 (SB 18). (Pub. Resources Code §21073).

2. Begin Consultation Within 30 Days of Receiving a Tribe's Request for Consultation and Before Releasing a Negative Declaration, Mitigated Negative Declaration, or Environmental Impact Report: A lead agency shall begin the consultation process within 30 days of receiving a request for consultation from a California Native American tribe that is traditionally and culturally affiliated with the geographic area of the proposed project. (Pub. Resources Code §21080.3.1, subds. (d) and (e)) and prior to the release of a negative declaration, mitigated negative declaration or Environmental Impact Report. (Pub. Resources Code §21080.3.1(b)).

a. For purposes of AB 52, "consultation shall have the same meaning as provided in Gov. Code §65352.4 (SB 18). (Pub. Resources Code §21080.3.1 (b)).

3. Mandatory Topics of Consultation If Requested by a Tribe: The following topics of consultation, if a tribe requests to discuss them, are mandatory topics of consultation:

a. Alternatives to the project.

b. Recommended mitigation measures.

c. Significant effects. (Pub. Resources Code §21080.3.2 (a)).

4. Discretionary Topics of Consultation: The following topics are discretionary topics of consultation:

a. Type of environmental review necessary.

b. Significance of the tribal cultural resources.

c. Significance of the project's impacts on tribal cultural resources.

d. If necessary, project alternatives or appropriate measures for preservation or mitigation that the tribe may recommend to the lead agency. (Pub. Resources Code §21080.3.2 (a)).

5. Confidentiality of Information Submitted by a Tribe During the Environmental Review Process: With some exceptions, any information, including but not limited to, the location, description, and use of tribal cultural resources submitted by a California Native American tribe during the environmental review process shall not be included in the environmental document or otherwise disclosed by the lead agency or any other public agency to the public, consistent with Government Code §6254 (r) and §6254.10. Any information submitted by a California Native American tribe during the consultation or environmental review process shall be published in a confidential appendix to the environmental document unless the tribe that provided the information consents, in writing, to the disclosure of some or all of the information to the public. (Pub. Resources Code §21082.3 (c)(1)).

6. Discussion of Impacts to Tribal Cultural Resources in the Environmental Document: If a project may have a significant impact on a tribal cultural resource, the lead agency's environmental document shall discuss both of the following:

a. Whether the proposed project has a significant impact on an identified tribal cultural resource.

b. Whether feasible alternatives or mitigation measures, including those measures that may be agreed to pursuant to Public Resources Code §21082.3, subdivision (a), avoid or substantially lessen the impact on the identified tribal cultural resource. (Pub. Resources Code §21082.3 (b)).

7. Conclusion of Consultation: Consultation with a tribe shall be considered concluded when either of the following occurs:

a. The parties agree to measures to mitigate or avoid a significant effect, if a significant effect exists, on a tribal cultural resource; or

b. A party, acting in good faith and after reasonable effort, concludes that mutual agreement cannot be reached. (Pub. Resources Code §21080.3.2 (b)).

8. Recommending Mitigation Measures Agreed Upon in Consultation in the Environmental Document: Any mitigation measures agreed upon in the consultation conducted pursuant to Public Resources Code §21080.3.2 shall be recommended for inclusion in the environmental document and in an adopted mitigation monitoring and reporting program, if determined to avoid or lessen the impact pursuant to Public Resources Code §21082.3, subdivision (b), paragraph 2, and shall be fully enforceable. (Pub. Resources Code §21082.3 (a)).

9. Required Consideration of Feasible Mitigation: If mitigation measures recommended by the staff of the lead agency as a result of the consultation process are not included in the environmental document or if there are no agreed upon mitigation measures at the conclusion of consultation, or if consultation does not occur, and if substantial evidence demonstrates that a project will cause a significant effect to a tribal cultural resource, the lead agency shall consider feasible mitigation pursuant to Public Resources Code §21084.3 (b). (Pub. Resources Code §21082.3 (e)).

10. Examples of Mitigation Measures That, If Feasible, May Be Considered to Avoid or Minimize Significant Adverse Impacts to Tribal Cultural Resources:

a. Avoidance and preservation of the resources in place, including, but not limited to:

i. Planning and construction to avoid the resources and protect the cultural and natural context.

ii. Planning greenspace, parks, or other open space, to incorporate the resources with culturally appropriate protection and management criteria.

b. Treating the resource with culturally appropriate dignity, taking into account the tribal cultural values and meaning of the resource, including, but not limited to, the following:

i. Protecting the cultural character and integrity of the resource.

ii. Protecting the traditional use of the resource.

iii. Protecting the confidentiality of the resource.

c. Permanent conservation easements or other interests in real property, with culturally appropriate management criteria for the purposes of preserving or utilizing the resources or places.

d. Protecting the resource. (Pub. Resource Code §21084.3 (b)).

e. Please note that a federally recognized California Native American tribe or a non-federally recognized California Native American tribe that is on the contact list maintained by the NAHC to protect a California prehistoric, archaeological, cultural, spiritual, or ceremonial place may acquire and hold conservation easements if the conservation easement is voluntarily conveyed. (Civ. Code §815.3 (c)).

f. Please note that it is the policy of the state that Native American remains and associated grave artifacts shall be repatriated. (Pub. Resources Code §5097.991).

11. Prerequisites for Certifying an Environmental Impact Report or Adopting a Mitigated Negative Declaration or Negative Declaration with a Significant Impact on an Identified Tribal Cultural Resource: An Environmental Impact Report may not be certified, nor may a mitigated negative declaration or a negative declaration be adopted unless one of the following occurs:

a. The consultation process between the tribes and the lead agency has occurred as provided in Public Resources Code §21080.3.1 and §21080.3.2 and concluded pursuant to Public Resources Code §21080.3.2.

b. The tribe that requested consultation failed to provide comments to the lead agency or otherwise failed to engage in the consultation process.

c. The lead agency provided notice of the project to the tribe in compliance with Public Resources Code §21080.3.1 (d) and the tribe failed to request consultation within 30 days. (Pub. Resources Code §21082.3 (d)).

The NAHC's PowerPoint presentation titled, "Tribal Consultation Under AB 52: Requirements and Best Practices" may be found online at: http://nahc.ca.gov/wp-content/uploads/2015/10/AB52TribalConsultation_CalEPAPDF.pdf

SB 18

SB 18 applies to local governments and requires local governments to contact, provide notice to, refer plans to, and consult with tribes prior to the adoption or amendment of a general plan or a specific plan, or the designation of open space. (Gov. Code §65352.3). Local governments should consult the Governor's Office of Planning and Research's "Tribal Consultation Guidelines," which can be found online at: https://www.opr.ca.gov/docs/09_14_05_Updated_Guidelines_922.pdf.

Some of SB 18's provisions include:

1. Tribal Consultation: If a local government considers a proposal to adopt or amend a general plan or a specific plan, or to designate open space it is required to contact the appropriate tribes identified by the NAHC by requesting a "Tribal Consultation List." If a tribe, once contacted, requests consultation the local government must consult with the tribe on the plan proposal. **A tribe has 90 days from the date of receipt of notification to request consultation unless a shorter timeframe has been agreed to by the tribe.** (Gov. Code §65352.3 (a)(2)).
2. No Statutory Time Limit on SB 18 Tribal Consultation. There is no statutory time limit on SB 18 tribal consultation.
3. Confidentiality: Consistent with the guidelines developed and adopted by the Office of Planning and Research pursuant to Gov. Code §65040.2, the city or county shall protect the confidentiality of the information concerning the specific identity, location, character, and use of places, features and objects described in Public Resources Code §5097.9 and §5097.993 that are within the city's or county's jurisdiction. (Gov. Code §65352.3 (b)).
4. Conclusion of SB 18 Tribal Consultation: Consultation should be concluded at the point in which:
    a. The parties to the consultation come to a mutual agreement concerning the appropriate measures for preservation or mitigation; or
    b. Either the local government or the tribe, acting in good faith and after reasonable effort, concludes that mutual agreement cannot be reached concerning the appropriate measures of preservation or mitigation. (Tribal Consultation Guidelines, Governor's Office of Planning and Research (2005) at p. 18).

Agencies should be aware that neither AB 52 nor SB 18 precludes agencies from initiating tribal consultation with tribes that are traditionally and culturally affiliated with their jurisdictions before the timeframes provided in AB 52 and SB 18. For that reason, we urge you to continue to request Native American Tribal Contact Lists and "Sacred Lands File" searches from the NAHC. The request forms can be found online at: http://nahc.ca.gov/resources/forms/.

NAHC Recommendations for Cultural Resources Assessments

To adequately assess the existence and significance of tribal cultural resources and plan for avoidance, preservation in place, or barring both, mitigation of project-related impacts to tribal cultural resources, the NAHC recommends the following actions:

1. Contact the appropriate regional California Historical Research Information System (CHRIS) Center (https://ohp.parks.ca.gov/?page_id=30331) for an archaeological records search. The records search will determine:
    a. If part or all of the APE has been previously surveyed for cultural resources.
    b. If any known cultural resources have already been recorded on or adjacent to the APE.
    c. If the probability is low, moderate, or high that cultural resources are located in the APE.
    d. If a survey is required to determine whether previously unrecorded cultural resources are present.

2. If an archaeological inventory survey is required, the final stage is the preparation of a professional report detailing the findings and recommendations of the records search and field survey.
    a. The final report containing site forms, site significance, and mitigation measures should be submitted immediately to the planning department. All information regarding site locations, Native American human remains, and associated funerary objects should be in a separate confidential addendum and not be made available for public disclosure.
    b. The final written report should be submitted within 3 months after work has been completed to the appropriate regional CHRIS center.

3. Contact the NAHC for:
   a. A Sacred Lands File search. Remember that tribes do not always record their sacred sites in the Sacred Lands File, nor are they required to do so. A Sacred Lands File search is not a substitute for consultation with tribes that are traditionally and culturally affiliated with the geographic area of the project's APE.
   b. A Native American Tribal Consultation List of appropriate tribes for consultation concerning the project site and to assist in planning for avoidance, preservation in place, or, failing both, mitigation measures.

4. Remember that the lack of surface evidence of archaeological resources (including tribal cultural resources) does not preclude their subsurface existence.
   a. Lead agencies should include in their mitigation and monitoring reporting program plan provisions for the identification and evaluation of inadvertently discovered archaeological resources per Cal. Code Regs., tit. 14, §15064.5(f) (CEQA Guidelines §15064.5(f)). In areas of identified archaeological sensitivity, a certified archaeologist and a culturally affiliated Native American with knowledge of cultural resources should monitor all ground-disturbing activities.
   b. Lead agencies should include in their mitigation and monitoring reporting program plans provisions for the disposition of recovered cultural items that are not burial associated in consultation with culturally affiliated Native Americans.
   c. Lead agencies should include in their mitigation and monitoring reporting program plans provisions for the treatment and disposition of inadvertently discovered Native American human remains. Health and Safety Code §7050.5, Public Resources Code §5097.98, and Cal. Code Regs., tit. 14, §15064.5, subdivisions (d) and (e) (CEQA Guidelines §15064.5, subds. (d) and (e)) address the processes to be followed in the event of an inadvertent discovery of any Native American human remains and associated grave goods in a location other than a dedicated cemetery.

If you have any questions or need additional information, please contact me at my email address: Cameron.Vela@nahc.ca.gov.

Sincerely,

Cameron Vela

Cameron Vela
Cultural Resources Analyst

cc: State Clearinghouse

RECEIVED
NOV 28 2023
Kern County Planning &
Natural Resources Dept.

is issued. The approving agency should retain discretion to determine if changes to the plan are necessary, including any additional measures to alleviate truck routing and parking issues that may arise during the life of the facility.
- Constructing new or improved transit stops, sidewalks, bicycle lanes, and crosswalks, with special attention to ensuring safe routes to schools.
- Consulting with the local public transit agency and securing increased public transit service to the project area.
- Designating areas for employee pickup and drop-off.
- Implementing traffic control and safety measures, such as speed bumps, speed limits, or new traffic signs or signals.
- Placing facility entry and exit points on major streets that do not have adjacent sensitive receptors.
- Restricting the turns trucks can make entering and exiting the facility to route trucks away from sensitive receptors.
- Constructing roadway improvements to improve traffic flow.
- Preparing a construction traffic control plan prior to grading, detailing the locations of equipment staging areas, material stockpiles, proposed road closures, and hours of construction operations, and designing the plan to minimize impacts to roads frequented by passenger cars, pedestrians, bicyclists, and other non-truck traffic.

VIII. Other Significant Environmental Impacts Analysis and Mitigation

Warehouse projects may result in significant environmental impacts to other resources, such as to aesthetics, cultural resources, energy, geology, or hazardous materials. All significant adverse environmental impacts must be evaluated, disclosed and mitigated to the extent feasible under CEQA. Examples of best practices and mitigation measures to reduce environmental impacts that do not fall under any of the above categories include:

- Appointing a compliance officer who is responsible for implementing all mitigation measures, and providing contact information for the compliance officer to the lead agency, to be updated annually.
- Creating a fund to mitigate impacts on affected residents, schools, places of worship, and other community institutions by retrofitting their property. For example, retaining a contractor to retrofit/install HVAC and/or air filtration systems, doors, dual-paned windows, and sound- and vibration-deadening insulation and curtains.
- Sweeping surrounding streets on a daily basis during construction to remove any construction-related debris and dirt.
- Directing all lighting at the facility into the interior of the site.
- Using full cut-off light shields and/or anti-glare lighting.
- Requiring submission of a property maintenance program for agency review and approval providing for the regular maintenance of all building structures, landscaping, and paved surfaces.
- Using cool pavement to reduce heat island effects.

- Planting trees in parking areas to provide at least 35% shade cover of parking areas within fifteen years to reduce heat island impacts.
- Using light colored roofing materials with a solar reflective index of 78 or greater.
- Including on-site amenities, such as a truck operator lounge with restrooms, vending machines, and air conditioning, to reduce the need for truck operators to idle or travel offsite.
- Designing skylights to provide natural light to interior worker areas.
- Installing climate control and air filtration in the warehouse facility to promote worker well-being.

IX. Conclusion

California's world-class economy, ports, and transportation network position it at the center of the e-commerce and logistics industry boom. At the same time, California is a global leader in environmental protection and environmentally just development. The guidance in this document furthers these dual strengths, ensuring that all can access the benefits of economic development. The Bureau will continue to monitor proposed projects for compliance with CEQA and other laws. Lead agencies, developers, community advocates, and other interested parties should feel free to reach out to us as they consider how to guide warehouse development in their area.

Please do not hesitate to contact the Environmental Justice Bureau at ej@doj.ca.gov if you have any questions.

NORTH of the RIVER
NOR
recreation & park district
JOIN THE FUN!

November 29, 2023

Ms. Alexis Brito, Planner I
Planning & Natural Resources Department
2700 "M" Street, Suite 100
Bakersfield, California 93301-2323

SUBJECT: Notice of Preparation of Draft EIR for the IPG Industrial Project
PD Plan 72, Map 102; ZV 57, Map 102

Dear Ms. Brito:

The above referenced Precise Development Plan to facilitate construction and operation of two single-story warehouses at the corner of Boughton Drive and Airport Drive and the Zoning Variance Case to construct a 56-foot-tall warehouse building will have no impact to the services or facilities of North of the River Recreation and Park District.

Thank you for the opportunity to review this project.

Sincerely,

Steph Thisius-Sanders, PLA, ASLA
Planning and Construction Director

STS:bc

Lorelei H. Oviatt, AICP, Director
2700 "M" Street, Suite 100
Bakersfield, CA 93301-2323
Phone: (661) 862-8600
Fax: (661) 862-8601 TTY Relay 1-800-735-2929
Email: planning@kerncounty.com
Web Address: http://kernplanning.com/

PLANNING AND NATURAL RESOURCES DEPARTMENT

Planning
Community Development
Administrative Operations

DATE: November 16, 2023

TO: See Attached Mailing List

FROM: Kern County Planning and Natural Resources Department
Attn: Alexis Brito
2700 "M" Street, Suite 100
Bakersfield, CA 93301
(661) 862-5029; BritoAL@kerncounty.com

SUBJECT: NOTICE OF PREPARATION (NOP) OF A DRAFT ENVIRONMENTAL IMPACT REPORT (EIR) FOR THE IPG INDUSTRIAL PROJECT BY IPG KERN COUNTY 52 HOLDINGS, LLC.

The Kern County Planning and Natural Resources Department as Lead Agency (per CEQA Guidelines Section 15062) has determined that preparation of an Environmental Impact Report (per CEQA Guidelines 15161) is necessary for the proposed project identified below. The Planning and Natural Resources Department solicits the views of your agency as to the scope and content of the environmental information which is germane to your agency's statutory responsibilities in connection with the proposed project. Your agency may need to use the EIR prepared by our agency when considering your permit or other approval of the project.

You are invited to view the NOP and submit written comments regarding the scope and content of the environmental information in connection with the proposed project should you wish to do so. Due to the limits mandated by State law, your response must be received by **December 18, 2023 at 5:00 p.m**. Comments can be submitted to the Kern County Planning and Natural Resources Department at the address shown above or to britoal@kerncounty.com. A Scoping Meeting will be held on **December 6, 2023 at 1:30 p.m.**, at the address listed above.

PROJECT TITLE: IPG Industrial Project by IPG Kern County 52 Holdings, LLC (PP23405); PD Plan 72, Map 102; ZV 57, Map 102

PROJECT LOCATION: The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the project site, and the unincorporated community of Oildale is directly bordering the east side of the project site. The project site is situated approximately 1.4 miles northeast of State Route (SR) 99. The project site is located on the *Oildale, California* United States Geological Survey (USGS) 7.5-minute Topographic Quadrangle Map, Township 29 South, Range 27 East, Section 2.

PROJECT DESCRIPTION:

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Documents can be viewed online at: https://kernplanning.com/planning/notices-of-preparation/

Signature: _____

Name: Alexis Brito, Planner I

I:\Planning\WORKGRPS\WP\LABELS\IP
G Kern County Holdings LLC .docx
IPG Kern County Holdings LLC PD 72,
ZV 57, Map 102
cc: 11/07/2023

City of Arvin
P.O. Box 548
Arvin, CA 93203

Bakersfield City Planning Dept
1715 Chester Avenue
Bakersfield, CA 93301

Bakersfield City Public Works Dept
1501 Truxtun Avenue
Bakersfield, CA 93301

California City Planning Dept
21000 Hacienda Blvd.
California City, CA 93515

Delano City Planning Dept
P.O. Box 3010
Delano, CA 93216

City of Maricopa
P.O. Box 548
Maricopa, CA 93252

City of McFarland
401 West Kern Avenue
McFarland, CA 93250

City of Ridgecrest
100 West California Avenue
Ridgecrest, CA 93555

City of Shafter
336 Pacific Avenue
Shafter, CA 93263

City of Taft
Planning & Building
209 East Kern Street
Taft, CA 93268

City of Tehachapi
Attn: John Schlosser
115 South Robinson Street
Tehachapi, CA 93561-1722

City of Wasco
764 E Street
Wasco, CA 93280

Inyo County Planning Dept
P.O. Drawer "L"
Independence, CA 93526

Kings County Planning Agency
1400 West Lacey Blvd, Bldg 6
Hanford, CA 93230

Los Angeles Co Reg Planning Dept
320 West Temple Street
Los Angeles, CA 90012

San Bernardino Co Planning Dept
385 North Arrowhead Avenue, 1st Floor
San Bernardino, CA 92415-0182

San Luis Obispo Co Planning Dept
Planning and Building
976 Osos Street
San Luis Obispo, CA 93408

Santa Barbara Co Resource Mgt Dept
123 East Anapamu Street
Santa Barbara, CA 93101

Tulare County Planning & Dev Dept
5961 South Mooney Boulevard
Visalia, CA 93291

Ventura County RMA Planning Div
800 South Victoria Avenue, L1740
Ventura, CA 93009-1740

U.S. Bureau of Land Management
Caliente/Bakersfield
35126 McMurtrey Avenue
Bakersfield, CA 93308

Federal Aviation Administration
Western Reg Office/
777 South Aviation Boulevard
Suite 150
El Segundo, CA 90245

Federal Communications Comm
18000 Studebaker Road, #660
Cerritos, CA 90701

U. S. Fish & Wildlife Service
Division of Ecological Services
2800 Cottage Way #W-2605
Sacramento, CA 95825-1846

U.S. Dept of Agriculture/NRCS
5080 California Avenue, Ste 150
Bakersfield, CA 93309-0711

U.S. Army Corps of Engineers
Regulatory Division
1325 "J" Street, #1350
Sacramento, CA 95814-2920

State Air Resources Board
Stationary Resource Division
P.O. Box 2815
Sacramento, CA 95812

So. San Joaquin Valley Arch Info Ctr
California State University of Bkfd
9001 Stockdale Highway
Bakersfield, CA 93311

Caltrans/Dist 6
Planning/Land Bank Bldg.
P.O. Box 12616
Fresno, CA 93778

Caltrans/
Division of Aeronautics, MS #40
P.O. Box 942873
Sacramento, CA 94273-0001

State Dept of Conservation
Director's Office
801 "K" Street, MS 24-01
Sacramento, CA 95814-3528

State Dept of Conservation
Geologic Energy Management Division
11000 River Run Boulevard
Bakersfield, CA 93311

California Energy Commission
James W. Reed, Jr.
1516 Ninth Street Mail Stop 17
Sacramento, CA 95814

California Fish & Wildlife
1234 East Shaw Avenue
Fresno, CA 93710

California Highway Patrol
Planning & Analysis Division
P.O. Box 942898
Sacramento, CA 94298-0001

State Dept of Toxic Substance Control
Environmental Protection Agency
1515 Tollhouse Road
Clovis, CA 93612

Cal Environmental Protection Agency/
Dept of Toxic Substances Control, Reg 1
Attn: Dave Kereazis, Permit Div - CEQA
8800 Cal Center Drive, 2nd Floor
Sacramento, CA 95826

Kern County
Agriculture Department

Kern County Public Works Department/
Building& Development/Development
Review

Kern County Airports Department

Kern County Administrative Officer

Kern County Public Works Department/
Building & Development/Floodplain

Kern County Public Works Department/
Building & Development/Survey

Kern County
Env Health Services Department

Kern County Fire Dept
Cary Wright, Fire Marshall

Kern County Library/Beale
Local History Room

Kern County Library/Beale
Andie Sullivan

Kern County Library
Rathbun Branch
200 West China Grade Loop
Bakersfield, CA 93308

Kern County Parks & Recreation

Kern County Sheriff's Dept
Administration

Kern County Public Works
Department/Operations&
Maintenance/Regulatory Monitoring &
Reporting

Kern County Public Works Department/
Building & Development/Code
Compliance

Beardsley School Dist
1001 Roberts Lane
Bakersfield, CA 93308

Standard School Dist
1200 North Chester Avenue
Oildale, CA 93308

Kern High School Dist
5801 Sundale Avenue
Bakersfield, CA 93309

Kern County Superintendent of Schools
Attention School District Facility Services
1300 - 17th Street
Bakersfield, CA 93301

KernCOG
1401 19th Street - Suite 300
Bakersfield, CA 93301

Oildale Mutual Water Co
P.O. Box 5638
Bakersfield, CA 93388

North of the River Muni Water Dist
P.O. Box 5638
Bakersfield, CA 93388-5638

Kern County Water Agency
3200 Rio Mirada Drive
Bakersfield, CA 93308

North Edwards Water Dist
13001 Claymine Road
North Edwards, CA 93523

San Joaquin Valley
Air Pollution Control District
1990 East Gettysburg Avenue
Fresno, CA 93726

Golden Empire Transit
1830 Golden State Avenue
Bakersfield, CA 93301

Kern Mosquito Abatement Dist
4705 Allen Road
Bakersfield, CA 93314

North of the River Rec & Parks Dist
3825 Riverlakes Dr.
Bakersfield, CA 93312

California State University
Bakersfield - Library
9001 Stockdale Highway
Bakersfield, CA 93309

Bakersfield Municipal Airport
4101 Truxtun Avenue
Bakersfield, CA 93309

Adams, Broadwell, Joseph & Cardozo
Attention: Janet M. Laurain
601 Gateway Boulevard, Suite 1000
South San Francisco, CA 94080

Center on Race, Poverty
& the Environment
5901 Christie Avenue, Suit 208
Emeryville, CA 94608

AT&T California
OSP Engineering/Right-of-Way
4901 Ashe Road
Bakersfield, CA 93313

Kern Audubon Society
Attn: Frank Bedard, Chairman
4124 Chardonnay Drive
Bakersfield, CA 93306

Los Angeles Audubon
926 Citrus Avenue
Los Angeles, CA 90036-4929

Verizon California, Inc.
Attention Engineering Department
520 South China Lake Boulevard
Ridgecrest, CA 93555

Center on Race, Poverty
& the Environmental/
CA Rural Legal Assistance Foundation
1012 Jefferson Street
Delano, CA 93215

Defenders of Wildlife/
Kim Delfino, California Dir
980 - 9th Street, Suite 1730
Sacramento, CA 95814

Nature Conservancy West Reg Office
201 Mission Street, 4th Floor
San Francisco, CA 94105

Pacific Gas & Electric Co
Matt Coleman, Land Mgt
1918 "H" Street
Bakersfield, CA 93301-4319

Sierra Club/Kern Kaweah Chapter
P.O. Box 3357
Bakersfield, CA 93385

Southern California Gas Co
35118 McMurtrey Avenue
Bakersfield, CA 93308-9477

Southern California Gas Co
Transportation Dept
9400 Oakdale Avenue
Chatsworth, CA 91313-6511

David Laughing Horse Robinson
P.O. Box 20849
Bakersfield, CA 93390

Kern Valley Indian Council
Attn: Robert Robinson, Chairperson
P.O. Box 401
Weldon, CA 93283

Kern Valley Indian Council
Historic Preservation Office
P.O. Box 401
Weldon, CA 93283

Carol Bender
13340 Smoke Creek Avenue
Bakersfield, CA 93314-9025

Indian Wells Valley Groundwater
Authority
500 West Ridgecrest Boulevard
Ridgecrest, CA 93555

LIUNA
Attn: Danny Zaragoza
2201 "H" Street
Bakersfield, CA 93301

Native American Heritage Council
of Kern County
Attn: Gene Albitre
18169 Highway 155
Woody, CA 93287

Lozeau Drury LLP
1939 Harrison Street, Suite 150
Oakland, CA 94612

A E Corporation
Planning Department
901 Via Piemonte, 5th Floor
Ontario, CA 91764

Kevin Johnston
2476 Buena Vista Avenue
Livermore, CA 94550

Leadership Counsel for Justice &
Accountability
85350 Bagdad Ave.
Coachella, CA 92236

Indian Wells Valley Groundwater Authority
500 West Ridgecrest Boulevard
Ridgecrest, CA 93555

Kern River Groundwater
Sustainability Agency
1600 Truxton Avenue
Bakersfield, CA 93301

Lorelei H. Oviatt, AICP, Director
2700 "M" Street, Suite 100
Bakersfield, CA 93301-2323
Phone: (661) 862-8600
Fax: (661) 862-8601 TTY Relay 1-800-735-2929
Email: planning@kerncounty.com
Web Address: http://kernplanning.com/

PLANNING AND NATURAL RESOURCES DEPARTMENT

Planning
Community Development
Administrative Operations

DATE: November 16, 2023

TO: Surrounding Property Owners within 1,000 Feet of Project Boundary; and Interested Parties

FROM: Kern County Planning and Natural Resources Department
2700 "M" Street, Suite 100
Bakersfield, CA 93311

SUBJECT: Notice of Preparation of an Environmental Impact Report – IPG Industrial Project by IPG Kern County 52 Holdings, LLC. (PP23405).

Dear Sir or Madam:

The Kern County Planning and Natural Resources Department has determined that preparation of an Environmental Impact Report (EIR) is necessary for the proposed project identified below. The purpose of this letter is to notify interested parties and surrounding property owners within 1,000 feet of the project boundaries of this determination. A copy of the Initial Study/Notice of Preparation (IS/NOP) prepared for this proposed project is available for viewing at the following Kern County website:

https.//kernplanning.com/planning/notices-of-preparation/

The purpose of the IS/NOP is to describe the proposed project, specify the project location, and to identify the potential environmental impacts of the project so that Responsible Agencies and interested persons can provide a meaningful response related to potential environmental concerns that should be analyzed in the Environmental Impact Report.

You are invited to view the NOP and submit written comments regarding the scope and content of the environmental information in connection with the proposed project should you wish to do so. Due to the limits mandated by State law, your response must be received by **December 18, 2023 at 5:00 p.m**. Comments can be submitted to the Kern County Planning and Natural Resources Department at the address shown above or to britoal@kerncounty.com. A Scoping Meeting will be held on **Wednesday, December 6, 2023 at 1:30 p.m.**, at the address listed above.

Please be advised that any comments received after the dates listed above will still be included in the public record for this project and made available to decision makers when this project is scheduled for consideration at a public hearing. Please also be advised that you will receive an additional notice in the mail once a public hearing date is scheduled for this project. You will also be provided additional opportunities to submit comments at that time.

PROJECT TITLE: IPG Industrial Project by IPG Kern County 52 Holdings, LLC (PP23405); PD Plan 72, Map 102; ZV 57, Map 102

PROJECT LOCATION: The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the

project site, and the unincorporated community of Oildale is directly bordering the east side of the project site. The project site is situated approximately 1.4 miles northeast of State Route (SR) 99. The project site is located on the *Oildale, California* United States Geological Survey (USGS) 7.5-minute Topographic Quadrangle Map, Township 29 South, Range 27 East, Section 2.

PROJECT DESCRIPTION: The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Should you have any questions regarding this project, or the Initial Study/Notice of Preparation, please feel free to me directly by phone at (661) 862-5029 or email BritoAL@kerncounty.com.

Sincerely,

Alexis Brito, Planner I
Planning and Natural Resources Department

Attachments: Figure 1 – Regional Vicinity

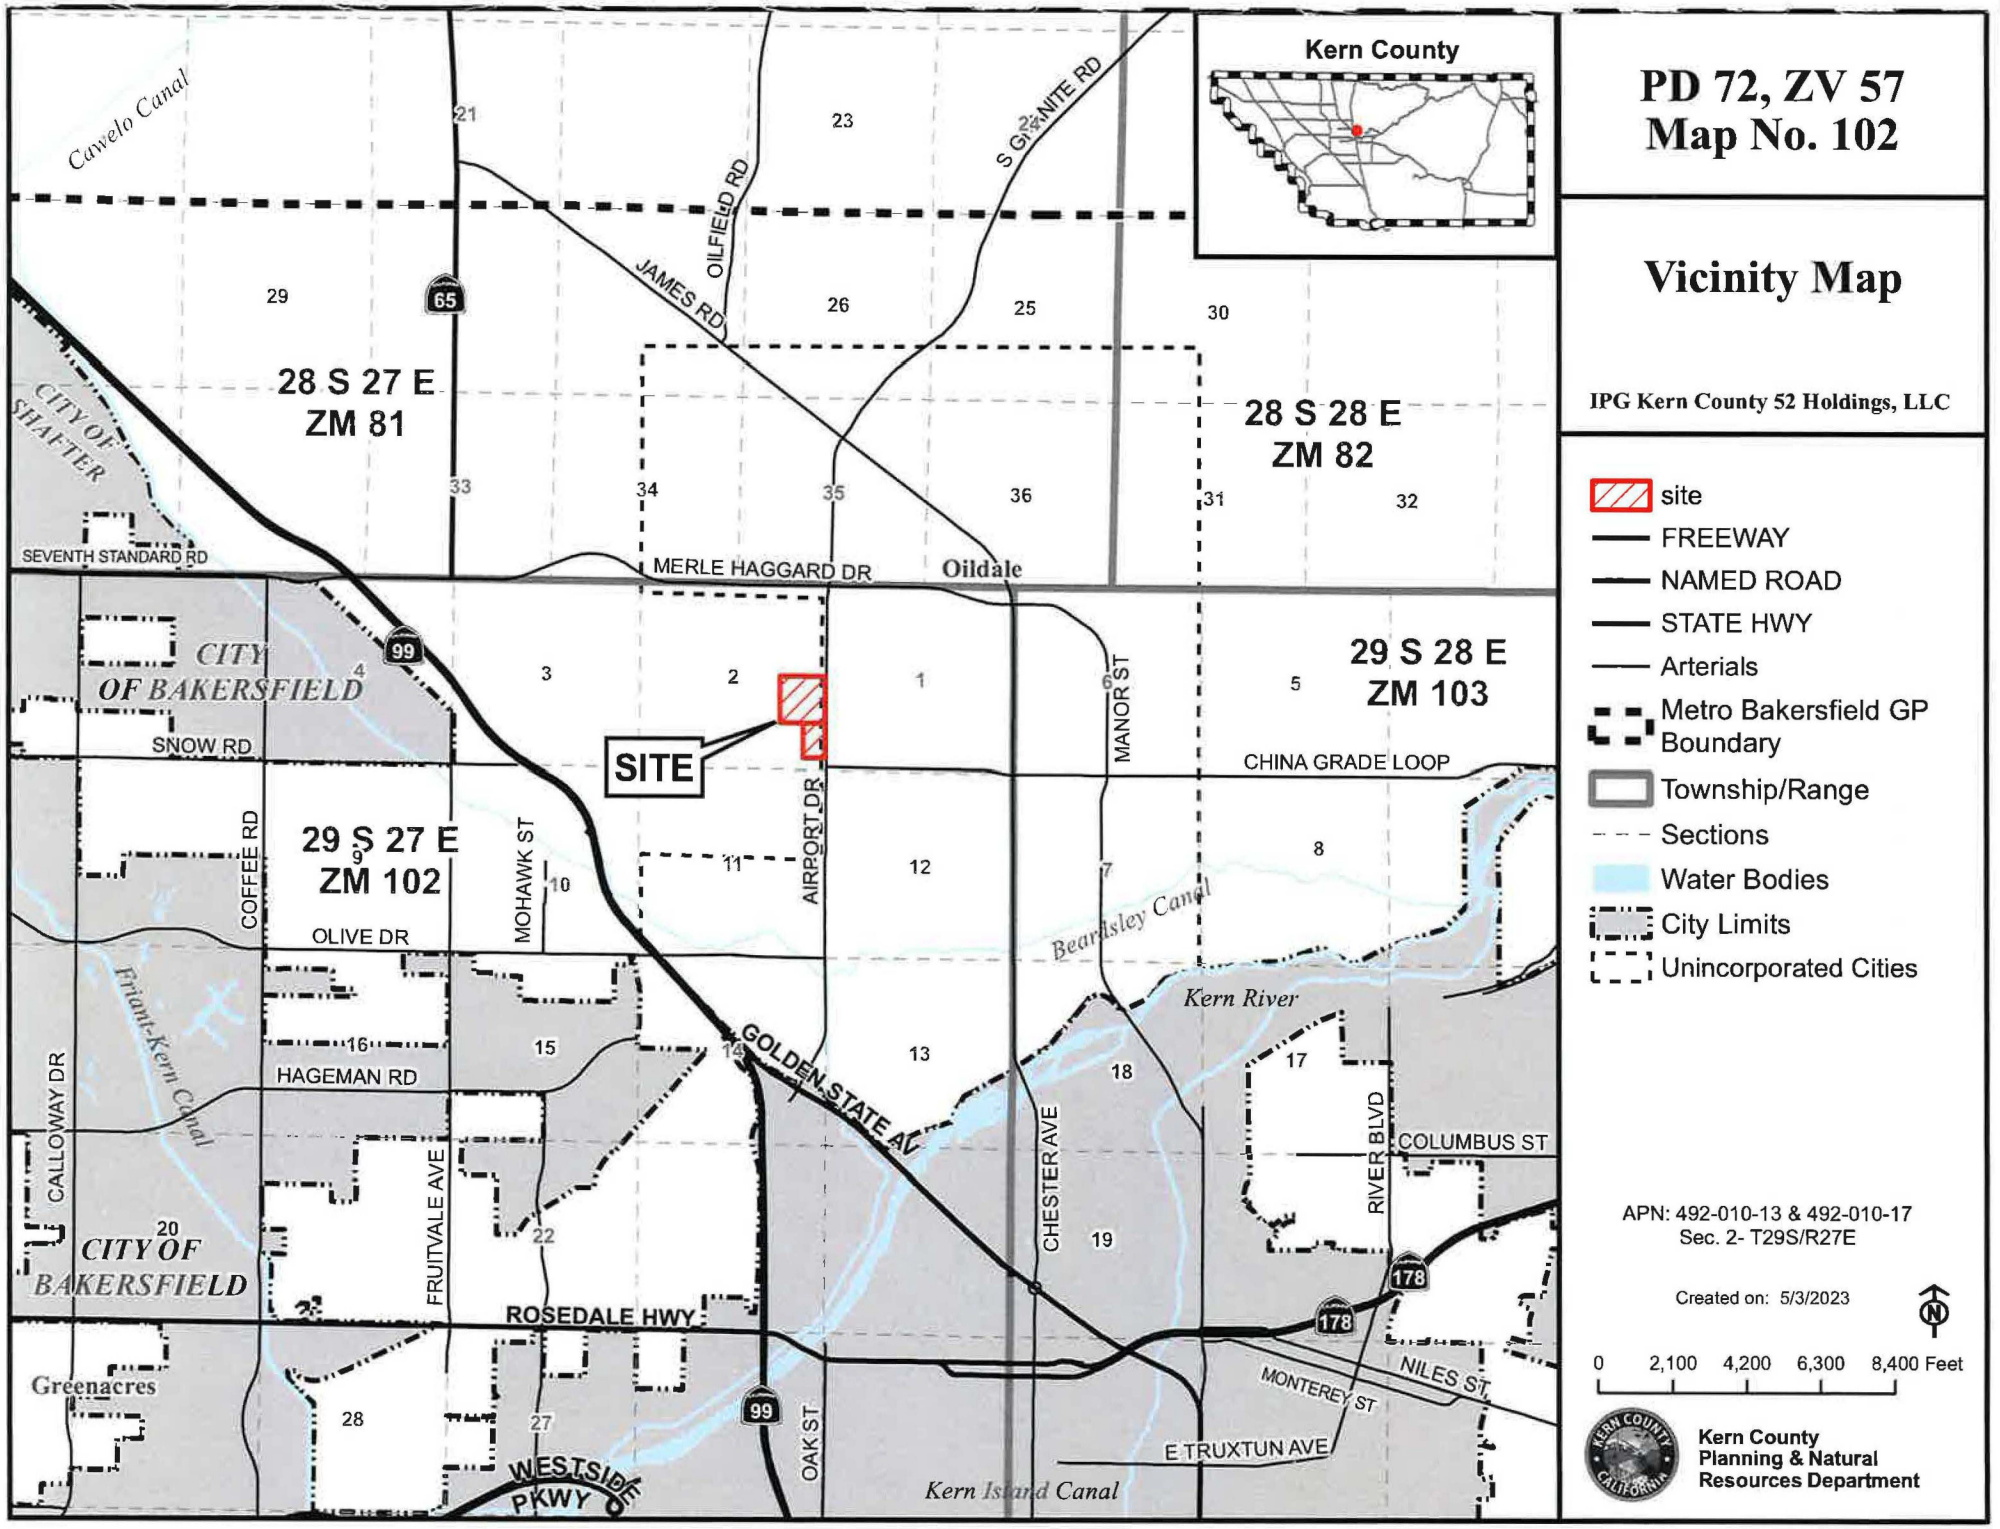
Kern County
PD 72, ZV 57
Map No. 102
Vicinity Map
IPG Kern County 52 Holdings, LLC
site
FREEWAY
NAMED ROAD
STATE HWY
Arterials
Metro Bakersfield GP Boundary
Township/Range
Sections
Water Bodies
City Limits
Unincorporated Cities
APN: 492-010-13 & 492-010-17
Sec. 2- T29S/R27E
Created on: 5/3/2023
0 2,100 4,200 6,300 8,400 Feet
Kern County Planning & Natural Resources Department
SITE
28 S 27 E ZM 81
28 S 28 E ZM 82
29 S 28 E ZM 103
29 S 27 E ZM 102
CITY OF BAKERSFIELD
CITY OF SHAFTER
Greenacres
Oildale
Cawelo Canal
Beardsley Canal
Kern River
Friant-Kern Canal
Kern Island Canal
SEVENTH STANDARD RD
SNOW RD
OLIVE DR
HAGEMAN RD
ROSEDALE HWY
WESTSIDE PKWY
MERLE HAGGARD DR
CHINA GRADE LOOP
JAMES RD
OILFIELD RD
S GRANITE RD
MANOR ST
AIRPORT DR
MOHAWK ST
COFFEE RD
CALLOWAY DR
FRUITVALE AVE
GOLDEN STATE AV
CHESTER AVE
RIVER BLVD
COLUMBUS ST
OAK ST
E TRUXTUN AVE
MONTEREY ST
NILES ST
65
99
178

This page intentionally left blank

I:\Planning\WORKGRPS\WP\LABELS\IPG Kern County Holdings LLC .docx
IPG Kern County Holdings LLC PD 72, ZV 57, Map 102
cc: 11/07/2023

491 461 11 00 3
ALDAPE RAUL & LORENA
849 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 461 10 00 0
AMADOR RICHARD A
843 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 420 22 00 6
ANGELES LOUIE M & GLENDA T
818 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

112 020 09 00 9
ANTONINO JOHN C
PO BOX 489
BAKERSFIELD CA 93302

112 040 16 00 5
ASHBY MARY JANETTE
2144 WINGLAND DR
BAKERSFIELD CA 93308-1612

491 461 07 00 2
BAILEY JERROD
829 SUNSET MEADOW LN
BAKERSFIELD CA 93308

112 020 08 00 6
BAKER JOYCE ANN
2131 WINGLAND DR
BAKERSFIELD CA 93308-1611

491 420 12 00 7
BAKER MEDLOCK DELBERT & LARRY JASON
2501 GARDEN ST
WASCO CA 93280-9833

491 084 04 00 4
BEL COURT APARTMENTS LLC
8020 DEERING AV
CANOGA PARK CA 91304-5010

491 420 11 00 4
BOWER LAWRENCE L
847 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 412 52 00 4
BR PATEL PROP LLC
8714 SKYE ISLE WY
BAKERSFIELD CA 93312

112 040 11 00 0
BRASHEAR FAMILY TRUST
2124 WINGLAND DR
BAKERSFIELD CA 93308-1612

491 491 08 00 4
BRIER INVESTMENTS LLC
12107 HURST PARK DR
BAKERSFIELD CA 93311

112 020 01 00 5
BROWN RUSSEL C & PHYLLIS ANN
1600 AIRPORT DR
BAKERSFIELD CA 93308-2250

491 011 04 00 2
CALIFORNIA RESOURCES PETROLEUM CORPORATION
27200 TOURNEY RD STE 200
SANTA CLARITA CA 91355-4910

491 492 01 00 0
CAMINI INVESTMENTS LLC
12107 HURTS PARK DR
BAKERSFIELD CA 93311

491 011 15 00 4
CHEVRON LAND & DEVELOPMENT CO
P O BOX 1392
BAKERSFIELD CA 93302

491 420 16 00 9
CLARK CHARLES S & KAREN E
12708 OVERTON ST
BAKERSFIELD CA 93312

492 010 14 00 1
COUNTY OF KERN
1115 TRUXTUN AV
BAKERSFIELD CA 93301

112 020 05 00 7
DANIEL AMY
2115 WINGLAND DR
BAKERSFIELD CA 93308

112 020 07 00 3
DELGADO ALONDRA
2125 WINGLAND DR
BAKERSFIELD CA 93308-1611

112 020 02 00 8
ENGLE CARLA ERICA
2105 WINGLAND DR
BAKERSFIELD CA 93308

491 420 13 00 0
EVANS MEREDITH
855 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 461 08 00 5
FEERO ADRIEN BEAUMONT
835 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 420 15 00 6
FORDYCE TRACY RICHARD DARREL & AZARAE MISHEL
850 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 461 09 00 8
GUERRA DAYANARA
839 SUNSET MEADOW LN
BAKERSFIELD CA 93308

491 420 07 00 3
HANDA FAMILY TRUST
1465 AVENIDA DE LOS PADRE
MORGAN HILL CA 95037

112 040 13 00 6
HAWKINS STEVE E
2132 WINGLAND DR
BAKERSFIELD CA 93308

491 420 14 00 3
HUEBNER ANDREW A
854 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

492 010 13 00 8
IPG KERN CO 52 HOLDINGS LLC
14832 HIGHLAND VALLEY RD
ESCONDIDO CA 92025

111 010 02 00 8
KERN CO DEPT OF AIRPORTS
3701 WINGS WY STE 300
BAKERSFIELD CA 93308-7026

491 420 17 00 2
LIVING BRIGHT INVS LLC
19801 WARDLOW LN
HUNTINGTON BEAC CA 92646-3457

491 412 47 00 0
MC DONALD PROP MANAGEMENT LLC
6006 INVERWOOD DR
BAKERSFIELD CA 93314-8046

112 020 03 00 1
MILLER FAMILY TRUST
6305 KELVIN GROVE
BAKERSFIELD CA 93312-6268

112 020 11 00 4
NADER DEV INC
828 23RD ST
SANTA MONICA CA 90403

491 011 06 00 8
PARK MEADOWS LP
140 NEWPORT CENTER DR STE 270
NEWPORT BEACH CA 92660

491 420 21 00 3
PRANDI ELLEN CHARLOTTE TRUST
20878 JACK RD
SARATOGA CA 95070

491 461 13 00 9
REEVES WILLIAM SHAD
857 SUNSET MEADOW LN
BAKERSFIELD CA 93308-9237

491 420 03 00 1
RUNIA JANICE V TRUST
809 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 420 23 00 9
JASSO DEAN E & PERRY HANNAH
814 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 491 01 00 3
KLASSEN FAMILY LIMITED PARTNERSHIP
2019 COVERDALE ST
BAKERSFIELD CA 93311

491 412 48 00 3
LU WANG KIEN & TERESA THAI FAM TR
1022 S DANCOVE DR
WEST COVINA CA 91791-3719

112 040 17 00 8
METZNER FLOYD J & JANICE O
2121 DIANE DR
BAKERSFIELD CA 93308-1601

491 011 19 00 6
MONTEREY BAKERSFIELD L P
25871 PASEO REAL
MONTEREY CA 93940-2706

112 040 15 00 2
OILDALE MUTUAL WATER CO
P O BOX 5638
BAKERSFIELD CA 93308

491 420 09 00 9
PATEL DIVYANG & RUPAL
4681 SETTING SUN DR
EL SOBRANTE CA 94803

491 420 05 00 7
RAMOS MARIA M
PO BOX 81374
BAKERSFIELD CA 93380

491 461 12 00 6
RIVAS SHANTE
853 SUNSET MEADOW LN
BAKERSFIELD CA 93308

112 020 06 00 0
SALAS ANASTACIO ORTEGA
2119 WINGLAND DR
BAKERSFIELD CA 93308

491 420 08 00 6
KAUR GURMEET
9345 VAL DI CHIANA DR
BAKERSFIELD CA 93314

491 491 03 00 9 **DUP**
KLASSEN FAMILY LTD PARTNERSHIP
2019 COVERDALE ST
BAKERSFIELD CA 93311

491 011 43 00 5
MARCIAL JOSE & MARIA TR
15930 STREBOR DR
BAKERSFIELD CA 93314-9326

491 420 01 00 5
MILLER CHRISTINA L & SHOFNER CAREY H JR
761 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9815

491 420 04 00 4
MORTON JESSE W FAM TR
3569 MILITARY AV
LOS ANGELES CA 90034-6103

491 412 34 00 2
OUR TAPASYA LLC
3207 HILLTOP DR
VENTURA CA 93003

112 040 14 00 9
PEDROZA ESTELA OSCAR
407 17TH ST
BAKERSFIELD CA 93301-4917

491 420 06 00 0
RAYA AGUSTIN RAFAEL
825 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 420 10 00 1
RUEDA MAURICIO
841 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

112 020 10 00 1
SANCHEZ JOSE A & COFFMAN M RENEE
2143 WINGLAND DR
BAKERSFIELD CA 93308-1611

491 412 49 00 6
SMITH ADOBE RANCH FAMILY L P
1547 34TH AV
SAN FRANCISCO CA 94122

491 420 18 00 5
SORENSEN JOSEPH L
836 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 420 19 00 8
SPARKS PROP LLC
9206 BRUNELLO CT
BAKERSFIELD CA 93314

112 020 04 00 4
STUTZ BROOKE
2113 WINGLAND DR
BAKERSFIELD CA 93308-1611

491 011 42 00 2
TAKSBAK L P
3239 W ASHLAN AV
FRESNO CA 93722

491 420 24 00 2
TAMAYO NORMA CARILLO
808 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308-9833

491 420 02 00 8
TEJADA JULIO & GUADALUPE
803 GREENWOOD MEADOW LN
BAKERSFIELD CA 93308

491 011 05 00 5
TSIBOUKAS CHRIS FAM TR
3301 W ROSECRANS AV
HAWTHORNE CA 90250-8226

492 010 12 00 5
VANDER WEERD INVESTMENTS
837 COMMERCIAL AV
TULARE CA 93274

491 420 20 00 0
VEREBELY SHANGELA D
13089 PEYTON DR APT C176
CHINO HILLS CA 91709-6018

491 540 01 00 0
WEST DAY LLC
6501 FRUITVALE AV
BAKERSFIELD CA 93308-2712

112 040 12 00 3
ZANINOVICH DOMINIC
200 EL CERRITO DR
BAKERSFIELD CA 93305-1304

491 492 08 00 1
13418 LIVINGSTON TR
PO BOX 261
PORT HUENEME CA 93044-0261

This page intentionally left blank

Office Memorandum

To: Lorelei Oviatt, Director
Planning and Natural Resources Department
Attn: Alexis Brito, Planner I

December 5, 2023

From: PC for Cesar Ayon, Engineering Manager
Public Works Department/Development

Subject: 7-8.3.b Draft Supplemental Environmental Impact Report for IPG Industrial Project by IPG Kern County 52 Holdings, LLC (Located at the southwest corner of Airport Drive and Boughton Drive)

Development Review Section

This Section has reviewed the subject project and has no comment.

Thank you for the opportunity to comment on this project. If you have any questions or comments, please contact Rodd Parke of this Division at (661) 862-8848.

Floodplain Management Section

This Section has reviewed the subject project and has the recommend the following:

The runoff of storm water from the site will be increased due to the increase in impervious surface generated by the proposed development.

Therefore, this section recommends the following be included as Conditions of Approval for this project:

The applicant shall provide a plan for the disposal of drainage waters originating on site and from adjacent road right-of-ways (if required), subject to approval of the Public Works Department, per the Kern County Development Standards.

Thank you for the opportunity to comment on this project. If you have any questions or comments, please contact Brian Blaise of this Division at (661) 862-5098.

Sewer and Water Section

This Section has reviewed the subject project and has no comment.

Thank you for the opportunity to comment on this project. If you have any questions or comments, please contact Kyle Perez of this Division at (661) 862-8852.

CSA Section

This Section has reviewed the subject project and has no comment.

Thank you for the opportunity to comment on this project. If you have any questions or comments, please contact Stephen Chavira of this Section at (661) 862-5115.

San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

HEALTHY AIR LIVING™

December 19, 2023

Alexis Brito
County of Kern
Planning and Natural Resources Department
2700 “M” Street, Suite 100
Bakersfield, CA 93301-2323

Project: Notice of Preparation of a Draft Environmental Impact Report for the IPG Industrial Project

District CEQA Reference No: 20231151

Dear Ms. Brito:

The San Joaquin Valley Air Pollution Control District (District) has reviewed the Notice of Preparation (NOP) for a Draft Environmental Impact Report (DEIR) from Kern County (County) for the IPG Industrial project. Per the NOP, the project consists of the development of two single story logistics facilities totaling approximately 923,128 square feet and associated improvements on approximately 49.05 acres (Project). The Project is located approximately 1.7 miles north of the City of Bakersfield, northwest of the intersection of China Grade Loop and Airport Drive.

The District offers the following comments at this time regarding the Project:

1) Project Related Emissions

At the federal level under the National Ambient Air Quality Standards (NAAQS), the District is designated as extreme nonattainment for the 8-hour ozone standards and serious nonattainment for the particulate matter less than 2.5 microns in size (PM2.5) standards. At the state level under California Ambient Air Quality Standards (CAAQS), the District is designated as nonattainment for the 8-hour ozone, PM10, and PM2.5 standards.

Based on information provided to the District, Project specific annual criteria pollutant emissions from construction and operation are not expected to exceed any of the significance thresholds as identified in the District’s Guidance for Assessing and Mitigating Air Quality Impacts (GAMAQI): https://ww2.valleyair.org/media/g4nl3p0g/gamaqi.pdf.

Samir Sheikh
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: (661) 392-5500 FAX: (661) 392-5585

www.valleyair.org www.healthyairliving.com

Printed on recycled paper.

1a) Construction Emissions

The District recommends, to reduce impacts from construction-related diesel exhaust emissions, the Project should utilize the cleanest available off-road construction equipment.

1b) Operational Emissions

Operational (ongoing) air emissions from mobile sources and stationary sources should be analyzed separately. For reference, the District's significance thresholds are identified in the District's Guidance for Assessing and Mitigating Air Quality Impacts: https://ww2.valleyair.org/media/g4nl3p0g/gamaqi.pdf.

Recommended Mitigation Measure: At a minimum, project related impacts on air quality should be reduced to levels below the District's significance thresholds through incorporation of design elements such as the use of cleaner Heavy Heavy-Duty (HHD) trucks and vehicles, measures that reduce Vehicle Miles Traveled (VMTs), and measures that increase energy efficiency. More information on transportation mitigation measures can be found at: https://ww2.valleyair.org/media/ob0pweru/clean-air-measures.pdf

1c) Project Trip Length for HHD Truck Travel

The County's environmental review should adequately characterize and justify an appropriate trip length distance for off-site HHD truck travel to and from the Project site. Based on the following factors: 1) the Project consists of a logistics facility that is expected to generate a high volume of HHD truck trips, and 2) HHD trucks generally travel further distances for distribution. The District recommends the environmental review include a discussion characterizing an appropriate trip length distance for HHD truck travel, and reflect such appropriate distance supported by project-specific factors.

1d) Recommended Model for Quantifying Air Emissions

Project-related criteria pollutant emissions from construction and operational sources should be identified and quantified. Emissions analysis should be performed using the California Emission Estimator Model (CalEEMod), which uses the most recent CARB-approved version of relevant emissions models and emission factors. CalEEMod is available to the public and can be downloaded from the CalEEMod website at: www.caleemod.com.

2) Health Risk Screening/Assessment

The County should evaluate the risk associated with the Project for sensitive receptors (residences, businesses, hospitals, day-care facilities, health care facilities, etc.) in the area and mitigate any potentially significant risk to help limit exposure of sensitive receptors to emissions.

To determine potential health impacts on surrounding receptors (residences, businesses, hospitals, day-care facilities, health care facilities, etc.) a Prioritization and/or a Health Risk Assessment (HRA) should be performed for the Project. These health risk determinations should quantify and characterize potential Toxic Air Contaminants (TACs) identified by the Office of Environmental Health Hazard Assessment/California Air Resources Board (OEHHA/CARB) that pose a present or potential hazard to human health.

Health risk analyses should include all potential air emissions from the project, which include emissions from construction of the project, including multi-year construction, as well as ongoing operational activities of the project. Note, two common sources of TACs can be attributed to diesel exhaust emitted from heavy-duty off-road earth moving equipment during construction, and from ongoing operation of heavy-duty on-road trucks.

Prioritization (Screening Health Risk Assessment):
A "Prioritization" is the recommended method for a conservative screening-level health risk assessment. The Prioritization should be performed using the California Air Pollution Control Officers Association's (CAPCOA) methodology. Please contact the District for assistance with performing a Prioritization analysis.

The District recommends that a more refined analysis, in the form of an HRA, be performed for any project resulting in a Prioritization score of 10 or greater. This is because the prioritization results are a conservative health risk representation, while the detailed HRA provides a more accurate health risk evaluation.

Health Risk Assessment:
Prior to performing an HRA, it is strongly recommended that land use agencies/ project proponents develop and submit for District review a health risk modeling protocol that outlines the sources and methodologies that will be used to perform the HRA.

A development project would be considered to have a potentially significant health risk if the HRA demonstrates that the health impacts would exceed the District's established risk thresholds, which can be found here: https://ww2.valleyair.org/permitting/ceqa/.

A project with a significant health risk would trigger all feasible mitigation measures.

The District strongly recommends that development projects that result in a significant health risk not be approved by the land use agency.

The District is available to review HRA protocols and analyses. For HRA submittals please provide the following information electronically to the District for review:

- HRA (AERMOD) modeling files
- HARP2 files
- Summary of emissions source locations, emissions rates, and emission factor calculations and methodologies.

For assistance, please contact the District's Technical Services Department by:

- E-Mailing inquiries to: hramodeler@valleyair.org
- Calling (559) 230-5900

Recommended Measure: Development projects resulting in TAC emissions should be located an adequate distance from residential areas and other sensitive receptors to prevent the creation of a significant health risk in accordance to CARB's Air Quality and Land Use Handbook: A Community Health Perspective located at https://ww2.arb.ca.gov/our-work/programs/resource-center/strategy-development/land-use-resources.

3) Ambient Air Quality Analysis

An Ambient Air Quality Analysis (AAQA) uses air dispersion modeling to determine if emissions increases from a project will cause or contribute to a violation of State or National Ambient Air Quality Standards. The District recommends an AAQA be performed for the Project if emissions exceed 100 pounds per day of any pollutant.

An AAQA uses air dispersion modeling to determine if emission increase from a project will cause or contribute to a violation of State or National Ambien Air Quality Standards. An acceptable analysis would include emissions from both project-specific permitted and non-permitted equipment and activities. The District recommends consultation with District staff to determine the appropriate model and input data to use in the analysis.

Specific information for assessing significance, including screening tools and modeling guidance, is available online at the District's website: https://ww2.valleyair.org/permitting/ceqa/.

4) Voluntary Emission Reduction Agreement

Future development projects from the Project could have a significant impact on air quality. The District recommends the DEIR include a feasibility discussion on implementing a Voluntary Emission Reduction Agreement (VERA) as a mitigation measure for future development projects that may be approved under implementation of the Project that are determined to exceed the District's CEQA significance thresholds.

Criteria pollutant emissions may result in emissions exceeding the District's significance thresholds, potentially resulting in a significant impact on air quality. When a project is expected to have a significant impact, the District recommends the DEIR also include a discussion on the feasibility of implementing a Voluntary Emission Reduction Agreement (VERA) for this Project.

A VERA is a mitigation measure by which the project proponent provides pound-for-pound mitigation of emissions increases through a process that develops, funds, and implements emission reduction projects, with the District serving a role of administrator of the emissions reduction projects and verifier of the successful mitigation effort. To implement a VERA, the project proponent and the District enter into a contractual agreement in which the project proponent agrees to mitigate project specific emissions by providing funds for the District's incentives programs. The funds are disbursed by the District in the form of grants for projects that achieve emission reductions. Thus, project-related impacts on air quality can be mitigated. Types of emission reduction projects that have been funded in the past include electrification of stationary internal combustion engines (such as agricultural irrigation pumps), replacing old heavy-duty trucks with new, cleaner, more efficient heavy-duty trucks, and replacement of agricultural equipment with the latest generation technologies.

In implementing a VERA, the District verifies the actual emission reductions that have been achieved as a result of completed grant contracts, monitors the emission reduction projects, and ensures the enforceability of achieved reductions. After the project is mitigated, the District certifies to the Lead Agency that the mitigation is completed, providing the Lead Agency with an enforceable mitigation measure demonstrating that project-related emissions have been mitigated. To assist the Lead Agency and project proponent in ensuring that the environmental document is compliant with CEQA, the District recommends the environmental document includes an assessment of the feasibility of implementing a VERA.

5) Industrial/Warehouse Emission Reduction Strategies

The District recommends the County incorporate emission reduction strategies that can reduce potential harmful health impacts, such as those listed below:

- Require cleanest available heavy-duty trucks and off-road equipment (see comment 7)
- Require HHD truck routing patterns that limit exposure of residential communities and sensitive receptors to emissions (see comment 6)
- Require minimization of heavy-duty truck idling (see comment 8)
- Require solid screen buffering trees, solid decorative walls, and/or other natural ground landscaping techniques are implemented along the property line of adjacent sensitive receptors
- Orient loading docks away from sensitive receptors unless physically impossible
- Require loading docks a minimum of 300 feet away from the property line of sensitive receptor unless dock is exclusively used for electric trucks
- Incorporate signage and “pavement markings” to clearly identify on-site circulation patterns to minimize unnecessary on-site vehicle travel
- Require truck entries be located on streets of a higher commercial classification
- Require projects be designed to provide the necessary infrastructure to support use of zero-emissions on-road vehicles and off-road equipment (see comment 9)
- Require all building roofs are solar-ready
- Require all portions of roof tops that are not covered with solar panels are constructed to have light colored roofing material with a solar reflective index of greater than 78
- Ensure rooftop solar panels are installed and operated to supply 100% of the power needed to operate all non-refrigerated portions of the development project
- Require power sources at loading docks for all refrigerated trucks have “plugin” capacity, which will eliminate prolonged idling while loading and unloading goods
- Incorporate bicycle racks and electric bike plug-ins
- Require the use of low volatile organic compounds (VOC) architectural and industrial maintenance coatings
- Designate an area during construction to charge electric powered construction vehicles and equipment, if temporary power is available
- Prohibit the use of non-emergency diesel-powered generators during construction
- Inform the project proponent of the incentive programs (e.g., Carl Moyer Program and Voucher Incentive Program) offered to reduce air emissions from the Project
- Ensure all landscaping be drought tolerant

6) Truck Routing

Truck routing involves the assessment of which roads Heavy Heavy-Duty (HHD) trucks take to and from their destination, and the emissions impact that the HHD trucks may have on residential communities and sensitive receptors. Since the Project consists of industrial logistics facilities, there is potential for an increase in truck trips in the area.

The District recommends the County evaluate HHD truck routing patterns for the Project, with the aim of limiting exposure of residential communities and sensitive receptors to emissions. This evaluation would consider the current truck routes, the quantity and type of each truck (e.g., Medium Heavy-Duty, HHD, etc.), the destination and origin of each trip, traffic volume correlation with the time of day or the day of the week, overall Vehicle Miles Traveled (VMT), and associated exhaust emissions. The truck routing evaluation would also identify alternative truck routes and their impacts on VMT and air quality.

7) Cleanest Available Heavy-Duty Trucks

The San Joaquin Valley will not be able to attain stringent health-based federal air quality standards without significant reductions in emissions from HHD trucks, the single largest source of NOx emissions in the San Joaquin Valley. Accordingly, to meet federal air quality attainment standards, the District's ozone and particulate matter attainment plans rely on a significant and rapid transition of HHD fleets to zero or near-zero emissions technologies.

For development projects which typically generate a high volume of HHD truck traffic (e.g., "high-cube" warehouses or distribution centers), there are HHD trucks traveling to-and-from the project location at longer distribution trip length distances. Since the Project may exceed the District significance thresholds, the District recommends that the following measures be considered by the County to reduce Project-related operational emissions:

- *Recommended Measure*: Fleets associated with operational activities utilize the cleanest available HHD trucks, including zero and near-zero technologies.

- *Recommended Measure*: All on-site service equipment (cargo handling, yard hostlers, forklifts, pallet jacks, etc.) utilize zero-emissions technologies.

8) Reduce Idling of Heavy-Duty Trucks

The goal of this strategy is to limit the potential for localized PM2.5 and toxic air contaminant impacts associated with the idling of Heavy-Duty trucks. The diesel

exhaust from idling has the potential to impose significant adverse health and environmental impacts.

Since the Project is expected to result in HHD truck trips, the District recommends the DEIR include measures to ensure compliance of the state anti-idling regulation (13 CCR § 2485 and 13 CCR § 2480) and discuss the importance of limiting the amount of idling, especially near sensitive receptors. In addition, the District recommends the County consider the feasibility of implementing a more stringent 3-minute idling restriction and requiring appropriate signage and enforcement of idling restrictions.

9) Electric On-Site Off-Road and On-Road Equipment

Since the Project consists of logistical uses, it may have the potential to result in increased use of off-road equipment (e.g., forklifts) and on-road equipment (e.g., mobile yard trucks with the ability to move materials). The District recommends that the DEIR include requirements for project proponents to utilize electric or zero emission off-road and on-road equipment.

10) Vegetative Barriers and Urban Greening

There are residential units located east of the Project. The District suggests the County consider the feasibility of incorporating vegetative barriers and urban greening as a measure to further reduce air pollution exposure on sensitive receptors (e.g., residential units).

While various emission control techniques and programs exist to reduce air quality emissions from mobile and stationary sources, vegetative barriers have been shown to be an additional measure to potentially reduce a population's exposure to air pollution through the interception of airborne particles and the update of gaseous pollutants. Examples of vegetative barriers include, but are not limited to the following: trees, bushes, shrubs, or a mix of these. Generally, a higher and thicker vegetative barrier with full coverage will result in greater reductions in downwind pollutant concentrations. In the same manner, urban greening is also a way to help improve air quality and public health in addition to enhancing the overall beautification of a community with drought tolerant, low-maintenance greenery.

11) Clean Lawn and Garden Equipment in the Community

Since the Project consists of industrial development, gas-powered lawn and garden equipment have the potential to result in an increase of NOx and PM2.5 emissions. Utilizing electric lawn care equipment can provide residents with immediate economic, environmental, and health benefits. The District recommends the Project proponent consider the District's Clean Green Yard Machines (CGYM) program which provides incentive funding for replacement of existing gas powered lawn and

garden equipment. More information on the District CGYM program and funding can be found at: https://ww2.valleyair.org/grants/clean-green-yard-machines-residential/ and https://ww2.valleyair.org/grants/zero-emission-landscaping-equipment-voucher-program/.

12) On-Site Solar Deployment

It is the policy of the State of California that renewable energy resources and zero-carbon resources supply 100% of retail sales of electricity to California end-use customers by December 31, 2045. While various emission control techniques and programs exist to reduce air quality emissions from mobile and stationary sources, the production of solar energy is contributing to improving air quality and public health. The District suggests that the County consider incorporating solar power systems as an emission reduction strategy for the Project.

13) Electric Infrastructure

The District recommends that the County require all nonresidential buildings be designed to provide electric infrastructure to support the use of on-road zero emissions vehicles, such as HHD trucks associated with a warehouse or commercial project.

To support and accelerate the installation of electric vehicle charging equipment and development of required infrastructure, the District offers incentives to public agencies, businesses, and property owners of multi-unit dwellings to install electric charging infrastructure (Level 2 and 3 chargers). The purpose of the District's Charge Up! Incentive program is to promote clean air alternative-fuel technologies and the use of low or zero-emission vehicles. The District recommends that the County and project proponents install electric vehicle chargers at project sites, and at strategic locations.

Please visit www.valleyair.org/grants/chargeup.htm for more information.

14) District Rules and Regulations

The District issues permits for many types of air pollution sources, and regulates some activities that do not require permits. A project subject to District rules and regulations would reduce its impacts on air quality through compliance with the District's regulatory framework. In general, a regulation is a collection of individual rules, each of which deals with a specific topic. As an example, Regulation II (Permits) includes District Rule 2010 (Permits Required), Rule 2201 (New and Modified Stationary Source Review), Rule 2520 (Federally Mandated Operating Permits), and several other rules pertaining to District permitting requirements and processes.

The list of rules below is neither exhaustive nor exclusive. Current District rules can be found online at: www.valleyair.org/rules/1ruleslist.htm.

To identify other District rules or regulations that apply to future projects, or to obtain information about District permit requirements, the project proponents are strongly encouraged to contact the District's Small Business Assistance (SBA) Office at (661) 392-5665.

14a) District Rules 2010 and 2201 - Air Quality Permitting for Stationary Sources

Stationary Source emissions include any building, structure, facility, or installation which emits or may emit any affected pollutant directly or as a fugitive emission. District Rule 2010 (Permits Required) requires operators of emission sources to obtain an Authority to Construct (ATC) and Permit to Operate (PTO) from the District. District Rule 2201 (New and Modified Stationary Source Review) requires that new and modified stationary sources of emissions mitigate their emissions using Best Available Control Technology (BACT).

This Project may be subject to District Rule 2010 (Permits Required) and Rule 2201 (New and Modified Stationary Source Review) and may require District permits. Prior to construction, the Project proponent should submit to the District an application for an ATC. For further information or assistance, the project proponent may contact the District's SBA Office at (661) 392-5665.

14b) District Rule 9510 - Indirect Source Review (ISR)

The Project is subject to District Rule 9510 because it will receive a project-level discretionary approval from a public agency and will equal or exceed 25,000 square feet of light industrial.

The purpose of District Rule 9510 is to reduce the growth in both NOx and PM emissions associated with development and transportation projects from mobile and area sources; specifically, the emissions associated with the construction and subsequent operation of development projects. The ISR Rule requires developers to mitigate their NOx and PM emissions by incorporating clean air design elements into their projects. Should the proposed development project clean air design elements be insufficient to meet the required emission reductions, developers must pay a fee that ultimately funds incentive projects to achieve off-site emissions reductions.

Per Section 5.0 of the ISR Rule, an Air Impact Assessment (AIA) application is required to be submitted no later than applying for project-level approval from a

public agency. As of the date of this letter, the District has not received an AIA application for this Project. Please inform the project proponent to immediately submit an AIA application to the District to comply with District Rule 9510 so that proper mitigation and clean air design under ISR can be incorporated into the Project's design. One AIA application should be submitted for the entire Project.

Information about how to comply with District Rule 9510 can be found online at: https://ww2.valleyair.org/permitting/indirect-source-review-rule-overview

The AIA application form can be found online at: https://ww2.valleyair.org/permitting/indirect-source-review-rule-overview/forms-and-applications/

District staff is available to provide assistance and can be reached by phone at (559) 230-5900 or by email at ISR@valleyair.org.

14c) District Rule 9410 (Employer Based Trip Reduction)

The Project may be subject to District Rule 9410 (Employer Based Trip Reduction) if the project would result in employment of 100 or more "eligible" employees. District Rule 9410 requires employers with 100 or more "eligible" employees at a worksite to establish an Employer Trip Reduction Implementation Plan (eTRIP) that encourages employees to reduce single-occupancy vehicle trips, thus reducing pollutant emissions associated with work commutes. Under an eTRIP plan, employers have the flexibility to select the options that work best for their worksites and their employees.

Information about District Rule 9410 can be found online at: https://ww2.valleyair.org/compliance/rule-9410-employer-based-trip-reduction/.

For additional information, you can contact the District by phone at 559-230-6000 or by e-mail at etrip@valleyair.org

14d) District Rule 4601 (Architectural Coatings)

The Project may be subject to District Rule 4601 since it may utilize architectural coatings. Architectural coatings are paints, varnishes, sealers, or stains that are applied to structures, portable buildings, pavements or curbs. The purpose of this rule is to limit VOC emissions from architectural coatings. In addition, this rule specifies architectural coatings storage, cleanup and labeling requirements. Additional information on how to comply with District Rule 4601 requirements can be found online at: https://ww2.valleyair.org/media/tkgjeusd/rule-4601.pdf

14e) District Regulation VIII (Fugitive PM10 Prohibitions)

The project proponent may be required to submit a Construction Notification Form or submit and receive approval of a Dust Control Plan prior to commencing any earthmoving activities as described in Regulation VIII, specifically Rule 8021 – *Construction, Demolition, Excavation, Extraction, and Other Earthmoving Activities.*

Should the project result in at least 1-acre in size, the project proponent shall provide written notification to the District at least 48 hours prior to the project proponents intent to commence any earthmoving activities pursuant to District Rule 8021 (Construction, Demolition, Excavation, Extraction, and Other Earthmoving Activities). Also, should the project result in the disturbance of 5-acres or more, or will include moving, depositing, or relocating more than 2,500 cubic yards per day of bulk materials, the project proponent shall submit to the District a Dust Control Plan pursuant to District Rule 8021 (Construction, Demolition, Excavation, Extraction, and Other Earthmoving Activities). For additional information regarding the written notification or Dust Control Plan requirements, please contact District Compliance staff at (559) 230-5950.

The application for both the Construction Notification and Dust Control Plan can be found online at: https://ww2.valleyair.org/media/fm3jrbsq/dcp-form.docx

Information about District Regulation VIII can be found online at: https://ww2.valleyair.org/dustcontrol

14f) Other District Rules and Regulations

The Project may also be subject to the following District rules: Rule 4102 (Nuisance) and Rule 4641 (Cutback, Slow Cure, and Emulsified Asphalt, Paving and Maintenance Operations).

Transmission Technical
Services Department

9400 Oakdale Ave
Chatsworth, CA 91311
SC9314

December 20, 2023

Alexis Brito
Kern County
Britoal@kerncounty.com

Subject: **PD 72, ZV 57**
Map No. 102

DCF: **2767-23NC**

The Transmission Department of SoCalGas does not operate any facilities within your proposed improvement. However, the Distribution Department of SoCalGas may maintain and operate facilities within your project scope.

To assure no conflict with the Distribution's pipeline system, please e-mail them at:

NorthwestDistributionUtilityRequest@semprautilities.com

Best Regards,
Nerses Papazyan
SoCalGas Transmission Technical Services
SoCalGasTransmissionUtilityRequest@semprautilities.com

15) District Comment Letter

The District recommends that a copy of the District's comments be provided to the Project proponent.

If you have any questions or require further information, please contact Matt Crow by e-mail at Matt.Crow@valleyair.org or by phone at (559) 230-5931.

Sincerely,

Brian Clements
Director of Permit Services

For: Mark Montelongo
Program Manager

Notice of Completion & Environmental Document Transmittal

Mail to: State Clearinghouse, P.O. Box 3044, Sacramento, CA 95812-3044 (916) 445-0613
For Hand Delivery/Street Address: 1400 Tenth Street, Sacramento, CA 95814

SCH #

Project Title: IPG Industrial Project by IPG Kern County 52 Holdings, LLC

Lead Agency: Kern County Planning and Natural Resources Department — Contact Person: Alexis Brito

Mailing Address: 2700 M Street, Suite 100 — Phone: 661-862-5029

City: Bakersfield — Zip: 93301 — County: Kern County

Project Location: County: Kern — City/Nearest Community: Bakersfield

Cross Streets: Airport Drive & Boughton Drive — Zip Code:

Longitude/Latitude (degrees, minutes and seconds): 35 ° 25 ′ 59.3394 ″ N / 119 ° 2 ′ 29.5074 ″ W Total Acres: 49

Assessor's Parcel No.: 492-010-13 and 492-010-17 — Section: 2 — Twp.: 29S — Range: 27E — Base: MDBM

Within 2 Miles: State Hwy #: SR-99 — Waterways:

Airports: Meadows Field — Railways: BNSF — Schools: Wingland Elementary, North High School

Document Type:

CEQA: ☒ NOP ☐ Draft EIR — NEPA: ☐ NOI — Other: ☐ Joint Document
☐ Early Cons ☐ Supplement/Subsequent EIR ☐ EA ☐ Final Document
☐ Neg Dec (Prior SCH No.) ☐ Draft EIS ☐ Other:
☐ Mit Neg Dec Other: ☐ FONSI

Local Action Type:

☐ General Plan Update ☐ Specific Plan ☐ Rezone ☐ Annexation
☐ General Plan Amendment ☐ Master Plan ☐ Prezone ☐ Redevelopment
☐ General Plan Element ☐ Planned Unit Development ☐ Use Permit ☐ Coastal Permit
☐ Community Plan ☒ Site Plan ☐ Land Division (Subdivision, etc.) ☒ Other: Zone Variance

Development Type:

☐ Residential: Units _____ Acres _____
☐ Office: Sq.ft. _____ Acres _____ Employees _____ ☐ Transportation: Type _____
☐ Commercial: Sq.ft. _____ Acres _____ Employees _____ ☐ Mining: Mineral _____
☒ Industrial: Sq.ft. 923,128 Acres 49.05 Employees 525 ☐ Power: Type _____ MW _____
☐ Educational: _____ ☐ Waste Treatment: Type _____ MGD _____
☐ Recreational: _____ ☐ Hazardous Waste: Type _____
☐ Water Facilities: Type _____ MGD _____ ☐ Other: _____

Project Issues Discussed in Document:

☒ Aesthetic/Visual ☒ Fiscal ☒ Recreation/Parks ☒ Vegetation
☒ Agricultural Land ☒ Flood Plain/Flooding ☒ Schools/Universities ☒ Water Quality
☒ Air Quality ☒ Forest Land/Fire Hazard ☒ Septic Systems ☒ Water Supply/Groundwater
☒ Archeological/Historical ☒ Geologic/Seismic ☒ Sewer Capacity ☒ Wetland/Riparian
☒ Biological Resources ☒ Minerals ☒ Soil Erosion/Compaction/Grading ☒ Growth Inducement
☐ Coastal Zone ☒ Noise ☒ Solid Waste ☒ Land Use
☒ Drainage/Absorption ☒ Population/Housing Balance ☒ Toxic/Hazardous ☒ Cumulative Effects
☒ Economic/Jobs ☒ Public Services/Facilities ☒ Traffic/Circulation ☐ Other: Tribal Cultural, Green House Gas

Present Land Use/Zoning/General Plan Designation:

Vacant/Light Industrial Precise Development Airport Approach Height Combining District (M-1 PD H)/ LI (Light Industrial)

Project Description: *(please use a separate page if necessary)*

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County. Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.
- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

Note: The State Clearinghouse will assign identification numbers for all new projects. If a SCH number already exists for a project (e.g. Notice of Preparation or previous draft document) please fill in.

Reviewing Agencies Checklist

Lead Agencies may recommend State Clearinghouse distribution by marking agencies below with and "**X**".
If you have already sent your document to the agency please denote that with an "**S**".

S	Air Resources Board		Office of Historic Preservation
	Boating & Waterways, Department of		Office of Public School Construction
	California Emergency Management Agency		Parks & Recreation, Department of
	California Highway Patrol		Pesticide Regulation, Department of
S	Caltrans District # 6		Public Utilities Commission
	Caltrans Division of Aeronautics	X	Regional WQCB # Central
S	Caltrans Planning	X	Resources Agency
	Central Valley Flood Protection Board		Resources Recycling and Recovery, Department of
	Coachella Valley Mtns. Conservancy		S.F. Bay Conservation & Development Comm.
	Coastal Commission		San Gabriel & Lower L.A. Rivers & Mtns. Conservancy
	Colorado River Board		San Joaquin River Conservancy
X	Conservation, Department of		Santa Monica Mtns. Conservancy
	Corrections, Department of		State Lands Commission
	Delta Protection Commission		SWRCB: Clean Water Grants
	Education, Department of	X	SWRCB: Water Quality
	Energy Commission		SWRCB: Water Rights
S	Fish & Game Region # Fresno		Tahoe Regional Planning Agency
	Food & Agriculture, Department of	S	Toxic Substances Control, Department of
	Forestry and Fire Protection, Department of	S	Water Resources, Department of
	General Services, Department of		
	Health Services, Department of		Other:
	Housing & Community Development		Other:
X	Native American Heritage Commission		

Local Public Review Period (to be filled in by lead agency)

Starting Date November 16, 2023 Ending Date December 18, 2023

Lead Agency (Complete if applicable):

Consulting Firm: _____
Address: _____
City/State/Zip: _____
Contact: _____
Phone: _____

Applicant: _____
Address: _____
City/State/Zip: _____
Phone: _____

Signature of Lead Agency Representative: /s/ **Date:** 11/16/2023

Authority cited: Section 21083, Public Resources Code. Reference: Section 21161, Public Resources Code.

NOTICE OF PREPARATION/INITIAL STUDY CHECKLIST

IPG Industrial Project
by IPG Kern County 52 Holdings, LLC

Precise Development Plan No. 72, Map No. 102
Zone Variance No. 57, Map No. 102

PLN22-01027
(PP23405)

LEAD AGENCY:

Kern County Planning and Natural Resources Department
2700 M Street, Suite 100
Bakersfield, CA 93301-2370

Contact: Alexis Brito, Planner I
(661) 862-5029
Britoal@kerncounty.com

November 2023

This page intentionally left blank

TABLE OF CONTENTS

INTRODUCTION 2
1. Project Description 2
1.1. Project Location 2
1.2. Environmental Setting 2
1.3. Project Description 4
1.4 Project Facilities, Construction Activities, and Operations 5
Project Facilities 5
Construction Activities 7
Operations 8
1.5. Project Objectives 9
1.6. Proposed Discretionary Actions/Required Approvals 10
2. Kern County Environmental Checklist Form 22
2.1. Environmental Factors Potentially Affected 22
2.2. Determination 22

List of Figures

Figure 1 – Vicinity Map 12
Figure 2 – Aerial Landscape 13
Figure 3 – Airport Land Use Compatibility Plan Map 14
Figure 4 – Existing General Plan Map 15
Figure 5 – Existing Zone Classifications 16
Figure 6a – Proposed Precise Development Plan – Overall Site Plan 17
Figure 6b – Proposed Precise Development Plan – Building One 18
Figure 6c – Proposed Precise Development Plan – Building One Landscaping 19
Figure 6d – Proposed Precise Development Plan – Building Two 20
Figure 6e – Proposed Precise Development Plan – Building Two Landscaping 21

List of Tables

Table 1: Project Site and Surrounding Land Uses 4

Table 2: Project Assessor's Parcel Number, Existing Land Uses, and Acreage 5

Table 3: Project Summary 5

Table 4: Truck Door Summary 6

Table 5: Parking Summary 6

INTRODUCTION

Pursuant to the California Environmental Quality Act (CEQA), the Kern County Planning and Natural Resources Department (County) will initiate the preparation of an Environmental Impact Report (EIR) for the IPG Industrial Project in the unincorporated area of central Kern County, California.

1. Project Description

1.1. Project Location

The IPG Industrial Project (proposed project) is a proposal by IPG Kern County 52 Holdings, LLC (project proponent) for the construction and operation of a logistics facility. The proposed project would include the construction of two single-story warehouses totaling approximately 923,128-square-foot (including 15,000 square-feet for dedicated office space) and related site improvements. The proposed project is located on two (2) parcels totaling approximately 49.05 acres (Assessor's Parcel Number (APN) 492-010-13 & 492-010-17) of privately owned land at the southern end of the San Joaquin Valley in unincorporated Kern County, California as shown in **Figure 1**, *Vicinity Map.* The project site is bounded by Boughton Drive (north), Airport Drive (east), Skyway Drive (south), and Hanger Way(west) as shown in **Figure 2**, *Aerial Landscape.*

The project site is approximately 1.7 miles north of the City of Bakersfield, in unincorporated Kern County. The project site is located within the Kern County, Metropolitan Bakersfield General Plan (unincorporated Planning Area). The City of Shafter lies approximately 3.1 miles west of the project site, and the unincorporated community of Oildale is directly bordering the east side of the project site. The project site is situated approximately 1.4 miles northeast of State Route (SR) 99. Regional access to the project site is available from SR-99 via the Airport Drive exit. Local access to the project site is available from Airport Drive and Boughton Drive.

The project vicinity is characterized by industrial and commercial uses (distribution, storage, and shipping centers), transportation, vacant land, as well as residential uses. The Wingland Elementary School is located approximately 0.25 miles southeast of the project site at Douglas Street and Diane Drive, the California Aeronautical University is located approximately 0.25 miles west of the project site at Boughton Drive and an unnamed paved street, and the North High School is located approximately 0.65 miles east of the project site at West China Grade Loop and McCray Street.

The project site is located on the *Oildale, California* United States Geological Survey (USGS) 7.5-minute Topographic Quadrangle Map, Township 29 South, Range 27 East, Section 2. **Figures 6a - 6f**, *Proposed PD Plan* depicts the proposed project and the project boundaries.

1.2. Environmental Setting

The project site is situated in the southern end of the San Joaquin Valley, in unincorporated Kern County. Kern County and City of Bakersfield have jointly adopted a general plan for the metropolitan area (Metropolitan Bakersfield General Plan 2002). Kern County is California's third largest county in land area and encompasses approximately 8,202 square miles. The County's geography includes, among others, mountainous areas, agricultural lands, and deserts. According to the California Department of Finance's 2023 Population estimates, Kern County's current estimated population is 907,476 residents and Bakersfield is the largest city in the County with a current estimated population of 408,373 residents.

The project site is relatively flat. Elevation on the project site is approximately 500 feet at the above mean sea level (AMSL) with a gradually increasing topographic gradient to the north ranging from 495 feet AMSL in the southwest to 540 feet AMSL to the northeast of the project site; there are numerous stockpiles of soil with varying elevations on the southeast portion of the project site. While this area may be generally characterized as "open flats," outside of leveled fields and orchards, it is better described as an uneven plain consisting of extensive alluvial fans, debris flows, and over-bank deposits. Vegetation on the valley floor is predominated by modern cultigens and other non-native species, such as Russian thistle (tumbleweed) and grasses, but also includes cheatgrass and doveweed.

Land uses within the region and the immediate area of the site primarily consist of industrial, commercial, transportation, and residential uses. Land uses surrounding the site include the following:

North–Boughton Drive and vacant undeveloped land is located north of the project site on the opposite side of Boughton Drive.

South–Skyway Drive, FedEx Ship Center, Epic Jet Center, and Airman Flight Training are located south of the project site on the opposite side of Skyway Drive. The properties include a shipping logistics facility and airplane hangars.

West–Hanger Way, Meadows Field Airport, and transportation related services are located immediately west of the project site on the opposite side of Hanger Way. The facilities include several single-story structures and an airport runway.

East–Airport Drive, Derrel's Mini Storage, Park Meadows Apartments, and Fabulous Burgers are located east of the project site on the opposite side of Airport Drive. The properties include several columns of storage units, an apartment complex, and a fast-food restaurant.

Table 1, *Project Site and Surrounding Land Uses,* **Figure 4,** *Existing General Plan Map,* and **Figure 5,** *Existing Zoning Classifications,* presents the existing land uses, Metropolitan Bakersfield General Plan designations, and Zoning classification for the project site and surrounding area. The immediate project area has nearby single- and multi-family residences, mostly east of the project site. The nearest residence is approximately 100 feet directly east. The nearest existing schools include Wingland Elementary School 0.25 miles southeast from the proposed project site, California Aeronautical University located approximately 0.25 miles west of the project site, North High School is located approximately 0.65 miles east of the project site, North Beardsley Elementary School is located approximately 0.85 miles south of the project site, Golden State Baptist School is located approximately 1 mile southwest of the project site, Standard Elementary School is located approximately 1.2 miles southwest of the project site, Highland Elementary School is located approximately 1.3 miles west of the project site, Beardsley Junior High School is located approximately 1.33 miles south of the project site, Lifehouse Christian Academy is located approximately 1.35 miles northwest of the project site, Legacy Christian Academy is located approximately 1.6 miles southwest of the project site, and San Lauren Elementary School is located approximately 1.72 miles southwest of the project site.

Table 1. Project Site and Surrounding Land Uses

	Existing Land Use	Existing Map Code Designation	Existing Zone Classification
Project Site	Vacant	Light Industrial (LI)	Light Industrial Precise Development Airport Approach Height Combining District (M-1 PD H)
North	Vacant	Light Industrial (LI)	Light Industrial Precise Development Airport Approach Height Combining District (M-1 PD H)
East	Residential, Storage, Restaurant	Major Commercial (MC), General Commercial (GC)	General Commercial Precise Development Combining District (C2 PD)
South	Shipping Centers, Transportation services	Public Transportation (PT)	Medium Industrial Airport Approach Height Combining District (M-2 H)
West	Airport, Transportation Services	Public Transportation (PT)	Medium Industrial Airport Approach Height Combining District (M-2 H)

Through review of the Kern County Airport Land Use Compatibility plan (ALUCP), the proposed project is located within the Sphere of Influence (SOI) for the Meadows Field Airport. The Meadows Field Airport is located approximately 0.6 miles west of the project. The project site is located within the Airport Approach Height Combining overlay and, as shown on **Figure 3,** *Airport Land Use Compatibility Plan Map*, is designated in the "B1" and "C" Zone. The closest public use runway has a length of approximately 2 miles, with distance of approximately 0.3 miles from the nearest point of the runway to the project site.

The project site is not located within an area that is designated by the California Department of Conservation (CDC) as Prime Farmland, Farmland of Statewide Importance, or Unique Farmland. No lands within the project boundary are subject to a Williamson Act Land Use contract. The proposed project site is not part of an Agricultural Preserve. In addition, the project site is not located within the boundaries of an adopted Habitat Conservation Plan.

1.3. Project Description

The proposed project would include the development of two single-story logistics facilities totaling approximately 923,128 square-feet (including 15,000 square-feet for dedicated office space) and associated improvements on approximately 49.05 acres of privately owned land in the central portion of unincorporated Kern County.

Implementation of the project as proposed include the following requests:

- Precise Development Plan No. 72, Map 102 to facilitate construction and operation of two (2) single-story warehouses totaling approximately 923,128-square-feet located at the corner of Boughton Drive and Airport Drive.

- Zoning Variance Case No. 57, Map 102 to construct a 56-foot tall warehouse building where 35 feet is authorized on two parcels zoned M-1 PD H (Light Industrial Precise Development Airport Approach Height Combining) District.

The proposed project site lies within the boundaries of the Metro Bakersfield General Plan (MBGP). The existing MBGP designations are listed in **Table 2**, below, and depicted in **Figure 2**, *General Designations*. The entire project site is also subject to the provisions of the Kern County Zoning Ordinance and is zoned as specified in **Table 2**, below, and depicted in **Figure 3**, *Existing Zoning Classifications*.

Table 2: Project Assessor's Parcel Number, Existing Land Uses, and Acreages

Parcel	APN	Zone Map	General Plan	Existing Map Code Designation	Existing Zoning	Acres
1.	492-010-13	102	Metro Bakersfield	LI	M-1 PD H	35.17
2.	492-010-17	102	Metro Bakersfield	LI	M-1 PD H	13.88
Metropolitan Bakersfield General Plan (MBGP) Map Code Designation: *LI (Light Industrial)* *Kern County Zoning District:* *M-1 PD H (Light Industrial, Precise Development Combining Airport Approach Height Combining)*						

1.4. Project Facilities, Construction Activities, and Operations

Project Facilities

The overall proposed development consists of two single-story warehouses totaling approximately 923,128-square-foot (including 15,000 square-feet for dedicated office space) and related site improvements. Its primary function will be high cube warehouse storage, to facilitate material handling equipment and storage uses, with a secondary application of cold storage occupying up to 20% of the facility, as shown in **Figures 6a - 6f**, *Proposed PD Plan*. **Table 3**, *Project Summary,* provides a project summary of the proposed project.

Table 3: Project Summary

Acreage	Proposed End Use	Maximum Building Footprint	Maximum Building Height	Truck Dock Trailer Parking Spaces	Automobile Parking Spaces	Truck Trailer Spaces
49.05 acres	Approximately 923,128 square foot high-cube and cold storage warehouse	923,128	+/- 56 feet	124	547 stalls	307 stalls

Source: IPG Kern County 52 Holdings, LLC, October 2023.

The warehouse buildings will be primarily constructed from architecturally enhanced concrete panels with a maximum height of 56' above the finish floor elevation. Architectural glazing will be integrated at key locations to enhance the internal office lighting and exterior appearance.

The warehouses would be exclusively truck-served, meaning it would be utilized by delivery trucks. **Table 4**, *Truck Door Summary*, is a summary of the assignment of truck doors by type.

Table 4: Truck Door Summary

Type	Doors (approximately)
Dock-High Doors	114
Grade-Level Doors	10
Total	124
Source: IPG Kern County 52 Holdings, LLC, October 2023.	

Parking

Table 5, *Parking Summary*, is a summary of the assignment of parking spaces by type.

Table 5. Parking Summary

Type	Stalls (approximately)
Automobile	547
Truck Trailer	307
Accessible	14
Electric Vehicle Charging Stations (EVCS)	108
Motorcycle	None
Bicycle	None
Source: IPG Kern County 52 Holdings, LLC, October 2023.	

Vehicular Access and Circulation

The proposed project would include off-site improvements along Boughton Road, Airport Road and Hanger Way. Such improvements would be necessary to meet applicable Kern County Public Works Department development standards.

The existing roadswould be improved with new pavement, curb and gutter, and sidewalk. Additionally, signing and markings would be constructed for the new pavement delineations.

Landscaping

The proposed project would include approximately 359,286 square feet (8.25 acres) of landscaping and irrigation, which would consist primarily of drought tolerant and low maintenance plants. Islands with canopy trees would be provided to reduce heat island effect. Landscaping would also be utilized to provide visual screening where needed. Landscaping would exceed the 5 percent landscaping requirement of

Section 19.86.060 of the Kern County Zoning Ordinance. There are no existing trees on-site, and therefore no trees would be required to be removed.

Lighting

The proposed project would operate 24 hours a day, 7 days a week as a warehouse facility. Therefore, lighting would be designed to maximize employee safety and security while complying with County standards to confine light spread within the project site. Proposed lighting would adhere to the requirements of Chapter 19.81 Outdoor Lighting "Dark Skies Ordinance" of the Kern County Municipal Code, which promotes the reduction of unnecessary light and flare, the reduction of light spillover onto adjacent properties, and energy conservation through the reduction of excessive or unwanted outdoor lighting. Lighting would be located throughout the proposed parking areas.

Construction Activities

Schedule and Workforce

For the purposes of this environmental analysis, the following construction schedule was assumed to last approximately 16 months. The project applicant anticipates that grading of the proposed project would start in July 2024 and would last approximately 60 days. Construction would be completed in a single phase, beginning in September 2024, and concluding in November 2025. It is anticipated that the proposed project would be operational in 2025. Should commencement of construction be delayed, the utilization of July 2024 represents a conservative estimate for the purpose of this document.

Construction would primarily occur during daylight hours, Monday through Friday, between 7:00 a.m. and 8:00 p.m., as required to meet the construction schedule. Additional hours/days may be necessary to facilitate the schedule. Any construction work performed outside of the normal work schedule would be coordinated with the appropriate agencies and would conform to the MBGP and the Kern County Noise Ordinance (Chapter 8.36).

The on-site construction workforce would consist of up to 100 individuals; however, the average daily workforce would vary depending upon the stage in construction. The average daily workforce would include construction, supervisory, support, and construction management personnel on-site during construction. It is anticipated that the construction workforce would commute to the project site each day from local communities and report to the designated construction staging yards prior to the beginning of each workday. Parking for construction personnel would be provided on-site. Portable toilets would be used and would be maintained by a private off-site company during the construction period.

Construction Activities and Equipment

Construction activities would consist of site preparation, grading, building construction, paving, and architectural coating. Typical equipment associated with these construction activities will be used.

Construction Water Use and Wastewater

During construction of the proposed project, water would be required for common construction-related purposes, including but not limited to dust suppression, soil compaction, and grading. Dust-control water may be used for ingress and egress of on-site construction vehicle equipment traffic and for the construction of the warehouse infrastructure. A sanitary water supply would not be required during construction, because restroom facilities would be provided by portable units to be serviced by licensed providers.

Solid and Non-hazardous Waste Disposal

During construction, the building contractor would arrange to have trash, construction recycling, and regular recycling bins delivered to the site in accordance with Kern County Building Code requirements and guidelines. During construction, every effort would be made to minimize packaging and construction waste.

Construction recycling, regular recycling, and nonrecyclable trash would be regularly picked up during the construction period.

Hazards and Hazardous Materials Compliance

The hazardous materials used for construction would be typical of most construction projects of this type. Materials would include small quantities of gasoline, diesel fuel, oils, lubricants, solvents, detergents, degreasers, paints, ethylene glycol, dust palliative, herbicides, and welding materials/supplies. A hazardous materials business plan would be provided to the Kern County Environmental Health Services Division/Hazardous Materials Section. The hazardous materials business plan would include a complete list of all materials used on-site and information regarding how the materials would be transported and in what form they would be used. This information would be recorded to maintain safety and prevent possible environmental contamination or worker exposure. During project construction, safety data sheets for all applicable materials present at the site would be made readily available to on-site personnel.

To ensure minimum exposure of construction workers to hazardous materials (e.g., construction-related fuels and paints) and other hazardous materials, construction activities would comply with applicable worker protection laws and regulations, including the Occupational Safety and Health Act (OSHA), Title 9 of the Code of Federal Regulations, and Title 8 of the California Code of Regulations. The construction contractor selected for the project would be responsible for ensuring that construction workers are trained in accordance with local, state, and federal requirements for handling hazardous materials.

Operations

The proposed facility would operate 24 hours a day, 365 days a year and typically consist of three shifts rotating throughout the day and night. The facility would employ approximately 525 employees over the course of three shifts . Once operational, the proposed project would utilize standard equipment such as electric forklifts and pallet jacks.

Vehicular Access and Circulation

The proposed project would generate approximately 371 daily truck trips. Ingress to the proposed project would be taken from five entrances off of Airport Drive and three off of Hanger Way.

Utilities and Infrastructure

The proposed project would be served with potable water provided by the Oildale Mutual Water Company. Service laterals would be extended from an existing water line located within Airport Road.

The proposed project would be served by the North of River Sanitary District. Electricity service would be provided by PG&E. Natural Gas service is to be provided by So Cal Gas. Service laterals would be extended to the project site from existing utility facilities along Boughton Drive and Airport Drive.

The proposed project would install an on-site storm drainage system consisting of inlets, underground piping, and surface and underground basins. Runoff would drain to retention basins located on the south side of each building within the boundaries of the project site. The basins would be designed to accommodate a 100-year storm event and would detain runoff and release it at a rate no greater than the pre-development condition of the project site. The proposed project would be required to retain the stormwater per Kern County's drainage requirements and all other applicable standards.

Solid and Non-hazardous Waste Disposal

The proposed project would produce a small amount of waste associated with maintenance activities, which could include typical refuse generated by office and warehouse uses. Most of these materials would be collected and delivered back to the manufacturer or to recyclers. Nonrecyclable waste would be placed in covered dumpsters and removed on a regular basis by a certified waste-handling contractor for disposal at a Class III landfill. The closest Class III municipal landfill is the BENA Sanitary Landfill.

Hazards and Hazardous Materials Compliance

The proposed project would produce a small amount of hazardous waste associated with maintenance activities, which could include paint, solvents, cleaners, and waste oil. Workers would be trained to properly identify and handle all hazardous wastes. Fuels and lubricants used in operations would be subject to the Spill Prevention, Containment, and Countermeasure Plan to be prepared for the proposed project.

Hazardous waste would be either recycled or disposed of at a permitted and licensed treatment and/or disposal facility. All hazardous waste shipped off-site for recycling or disposal would be transported by a licensed and permitted hazardous waste hauler and disposed of at an approved location.

1.5. Applicant Provided Project Objectives

State CEQA Guidelines Section 15124(b) requires that a project description include a clearly written statement of objectives. The statement of objectives should include the underlying purpose of the project and may discuss the project benefits. The following are the applicant objectives for the proposed project:

- Develop state of the art warehouse and distribution facilities near major transportation corridor.
- Meet regional demand for Class A industrial facilities which address local traffic patterns and needs. Develop a visually appealing industrial project that is consistent with the provisions of the Kern County Zoning Ordinance, Land Division Ordinance, and Development Standards.
- Promote land use compatibility with adjacent airport related uses by developing a warehouse and distribution facility. .
- Positively contribute to the local economy through new capital investment, the creation of new employment opportunities, expansion of the tax base, economic growth and development, and payment of development fees.
- Site an industrial project in a location consistent with current and future market demands which minimizes conflicts with surrounding uses.

1.6. Proposed Discretionary Actions/Required Approvals

The Kern County Planning and Natural Resources Department as the CEQA Lead Agency (per CEQA Guidelines Section 15052) has discretionary responsibility for the IPG Industrial Project owned by IPG Kern County 52 Holdings, LLC. To implement this project, the project proponent may need to obtain the following discretionary and ministerial permits/approvals, but not be limited to:

- **State**
    - Central Valley Regional Water Quality Control Board (RWQCB)
        - National Pollution Discharge Elimination System (NPDES) Construction General Permit
        - General Construction Stormwater Permit (Preparation of a SWPPP)
    - California Department of Transportation (Caltrans)
        - Right-of-Way Encroachment Permit (if required)
        - Permit for Transport of Oversized Loads (if required)
- **Local**
    - Kern County
        - Certification of Final Environmental Impact Report
        - Adoption of 15091 Findings of Fact and 15093 Statement of Overriding Considerations
        - Adoption of Mitigation Monitoring and Reporting Program
        - Approval of Precise Development Plan
        - Approval of Zone Variance
        - Approval of Kern County Grading and Building Permits
        - Approval of Kern County Encroachment Permits
        - Approval of Fire Safety Plan
    - San Joaquin Valley Air Pollution Control District
        - Authority to Construct (ATC)
        - Construction Fugitive Dust Control Plan
        - Permit to Operate (PTO)
        - Indirect Source Rule and Voluntary Emission Reduction Agreement
        - Other permits as required

The preceding discretionary actions/approvals are potentially required and do not necessarily represent a comprehensive list of all possible discretionary permits/approvals required. Other additional permits or approvals from responsible agencies may be required for the proposed project.

Figure 1 – Vicinity Map

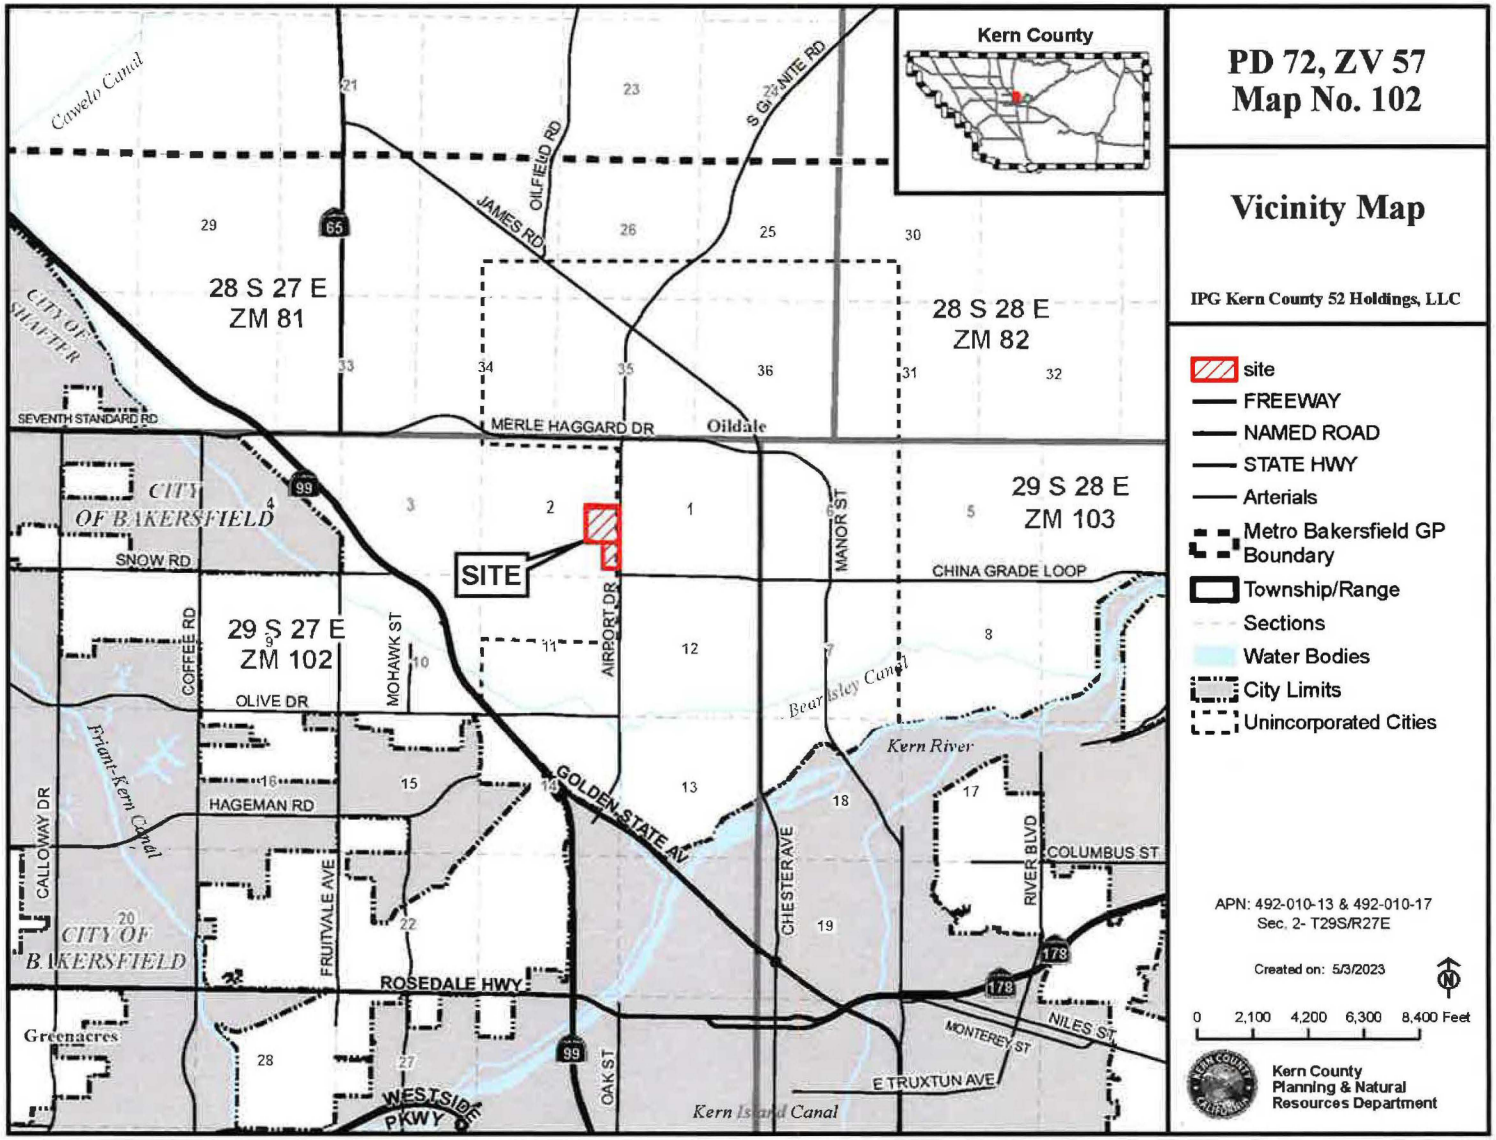

Figure 2 – Aerial Landscape

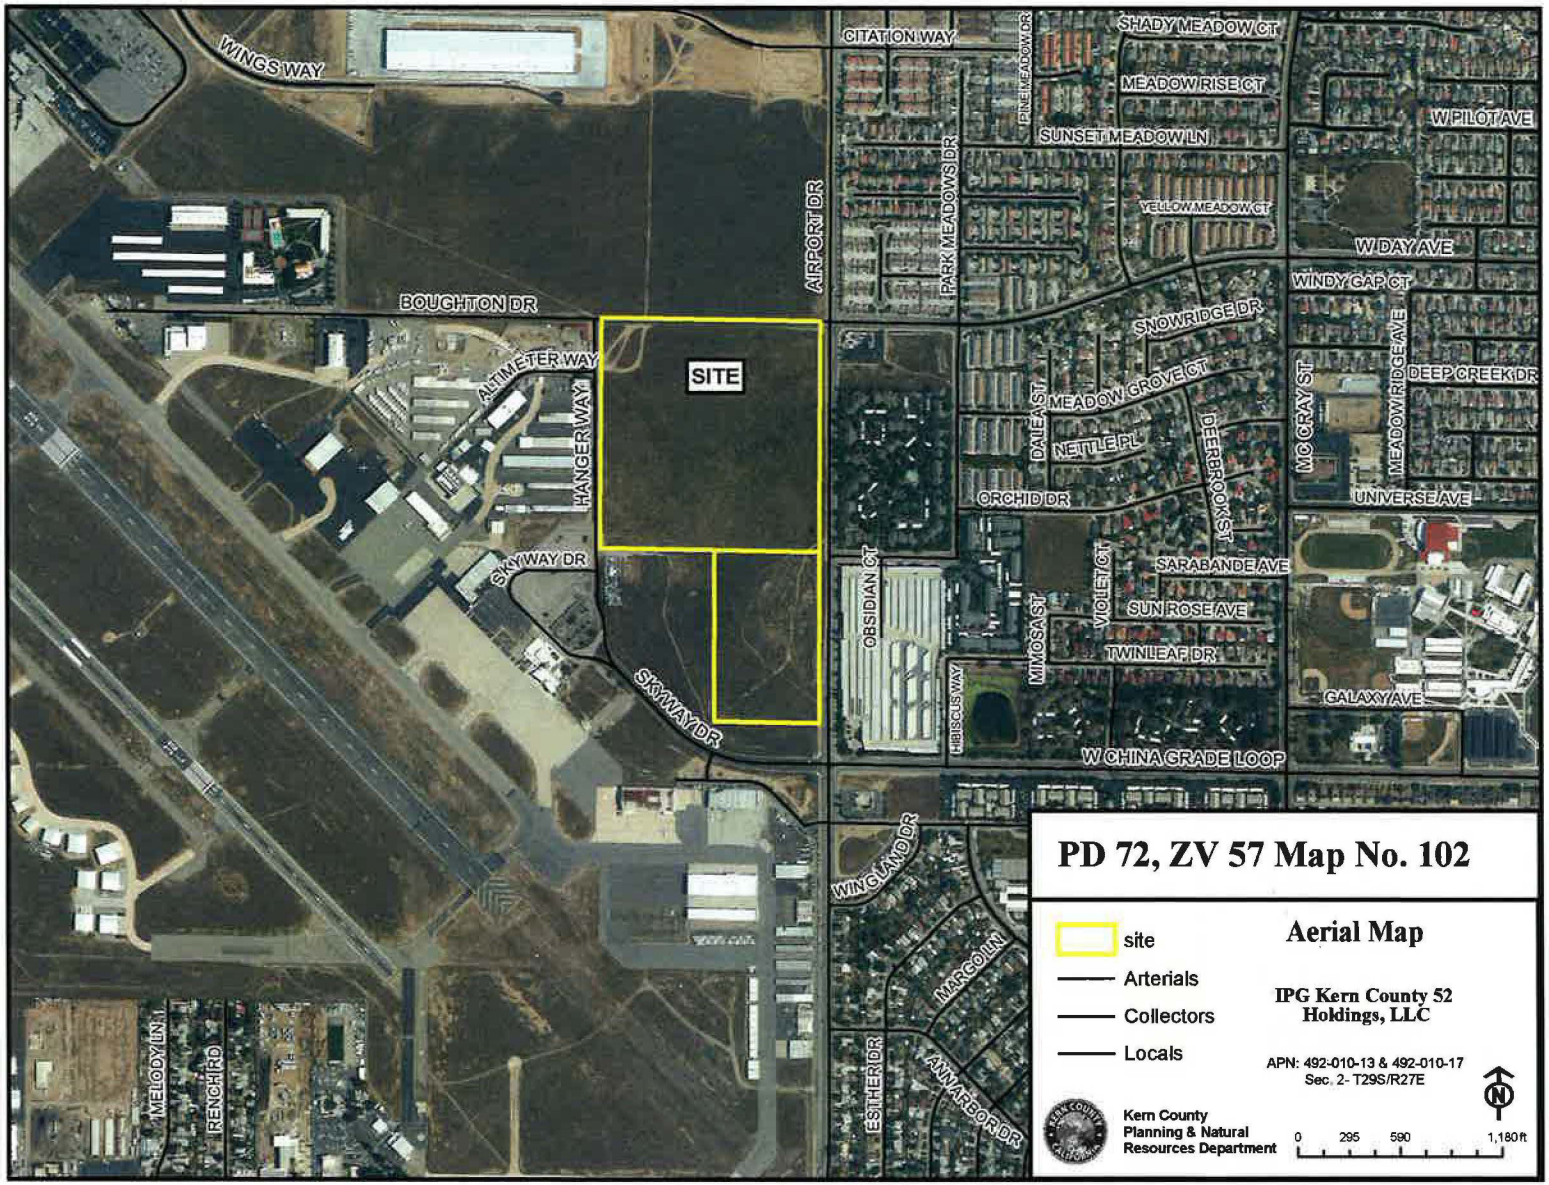

Figure 3 – Airport Land Use Compatibility Plan Map

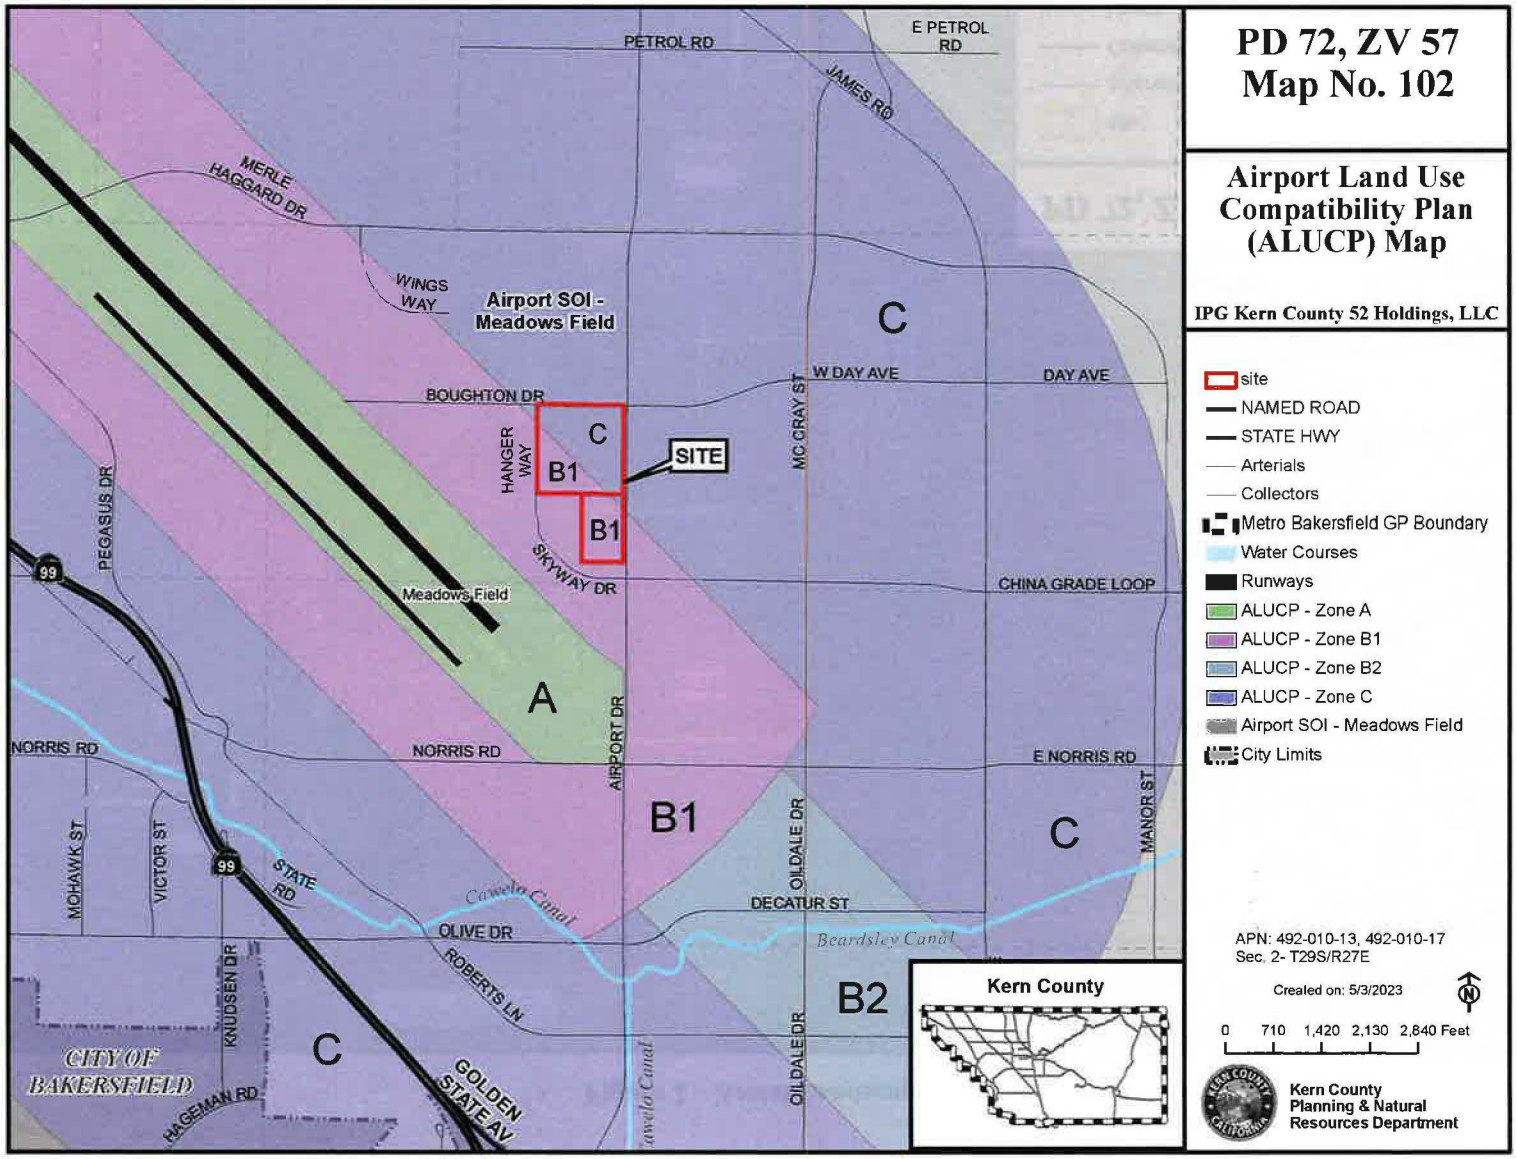

Figure 4 – Existing General Plan Map

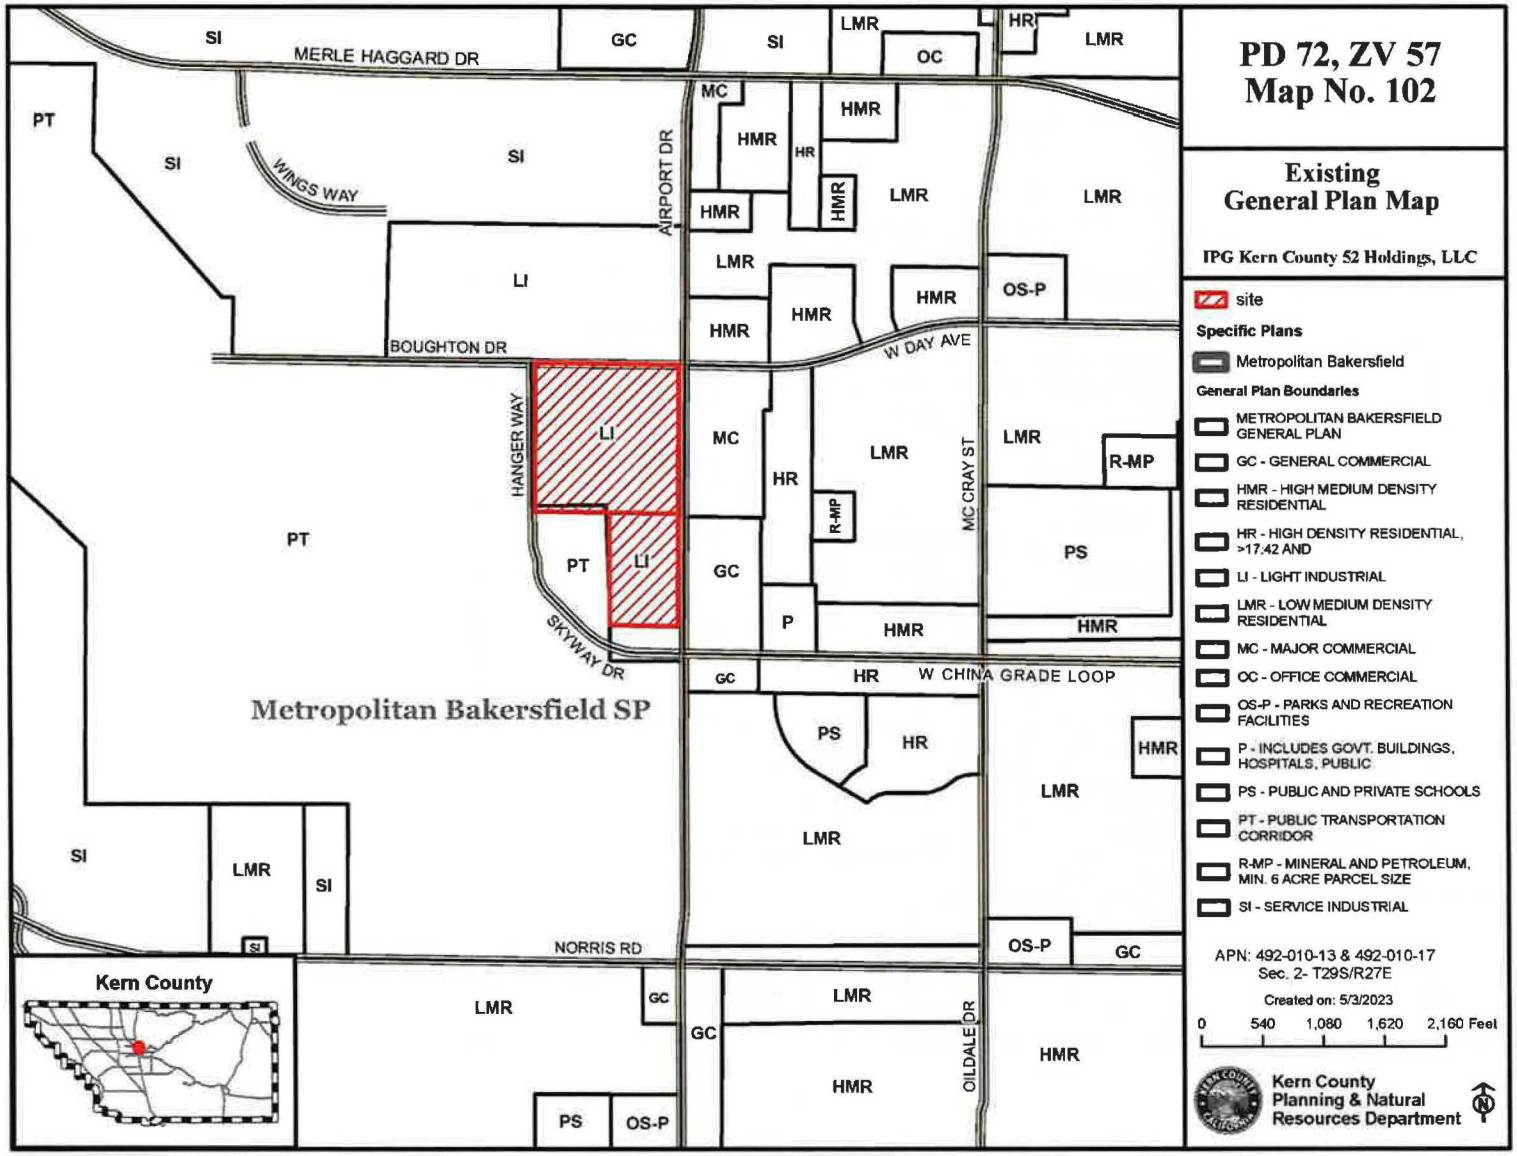

Figure 5 – Existing Zoning Classifications

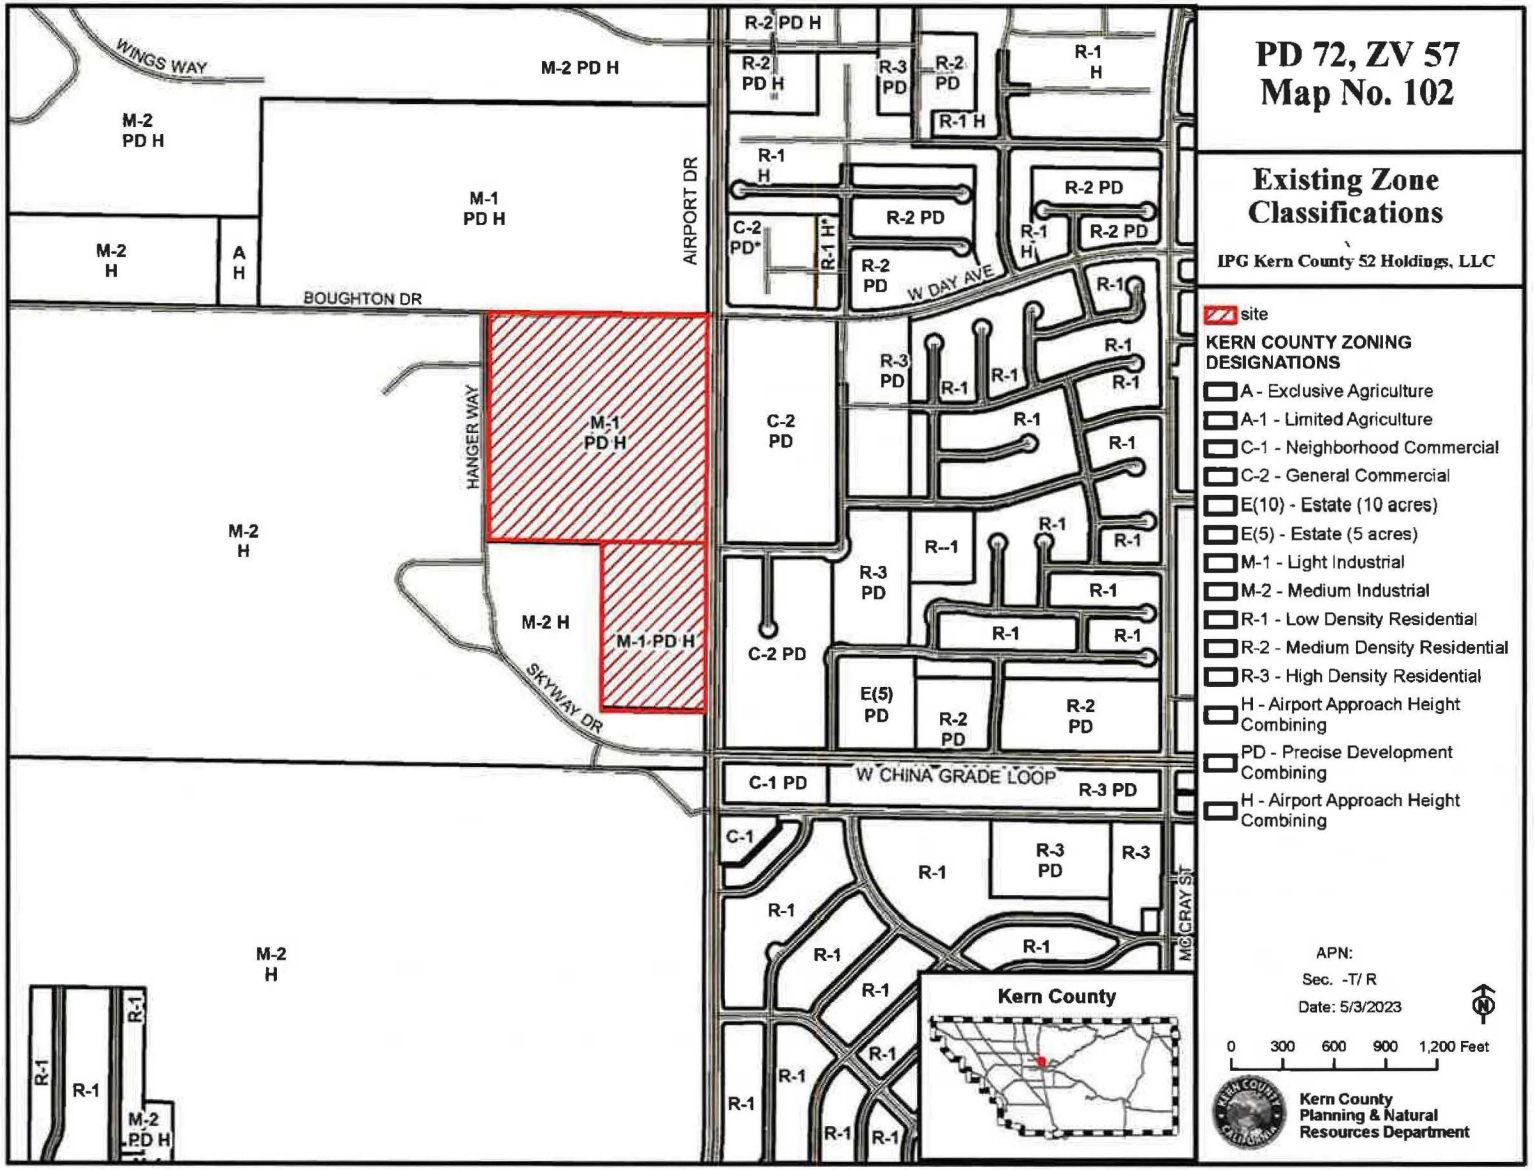

Figure 6a – Proposed PD Plan – Overall Site Plan

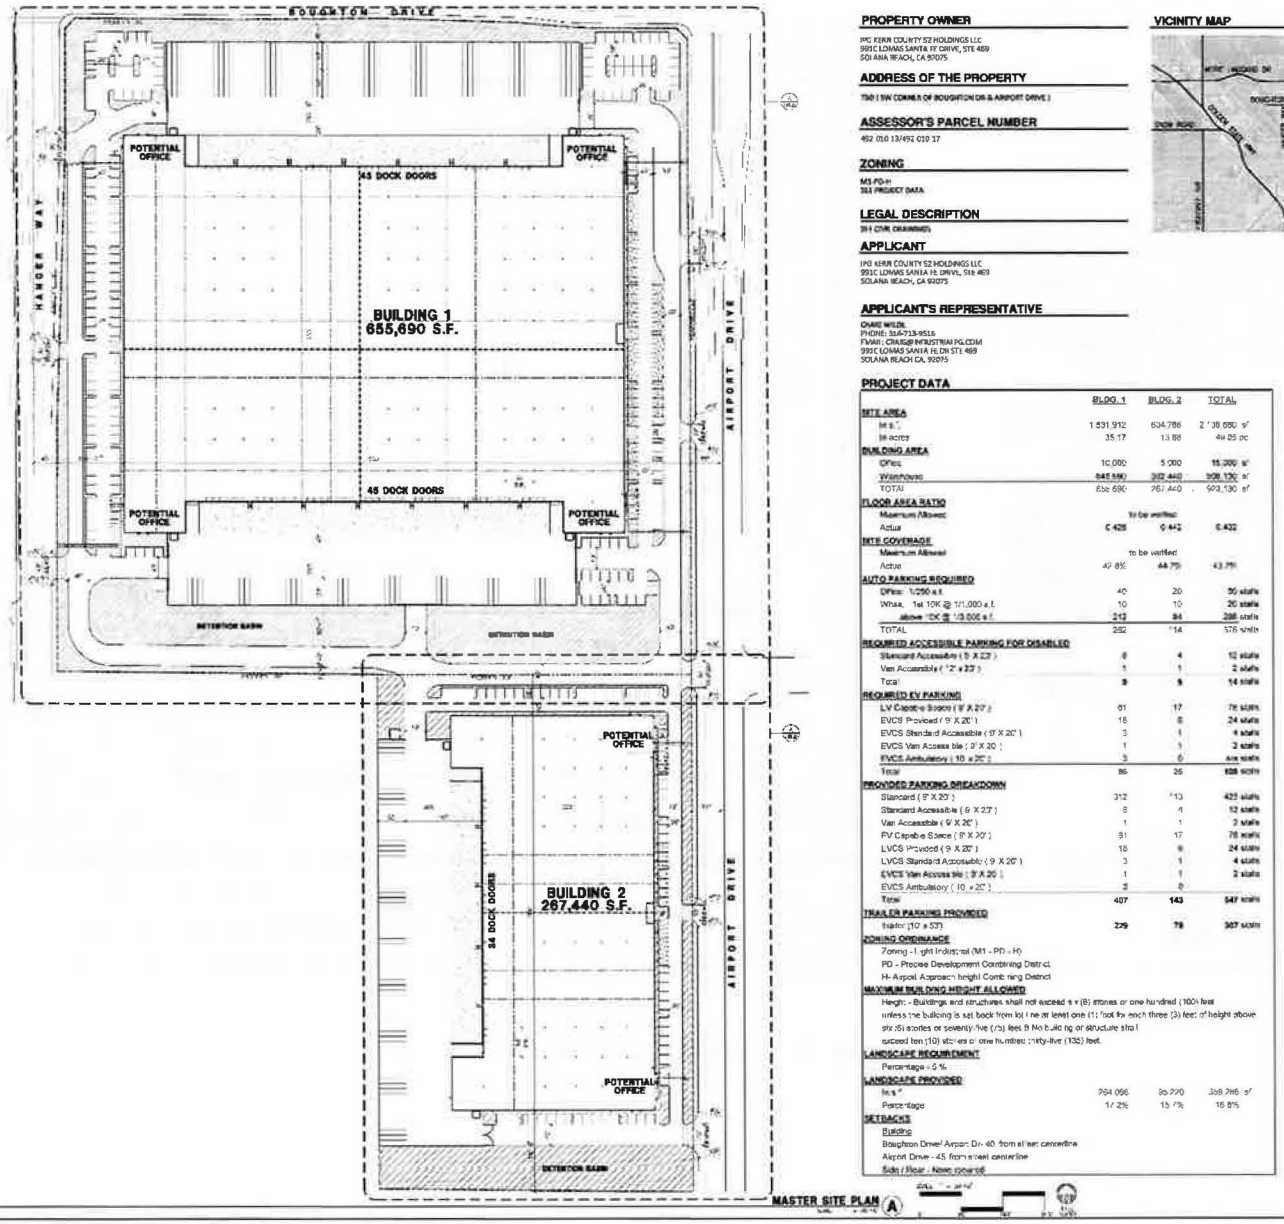

Figure 6b – Proposed PD Plan – Building One

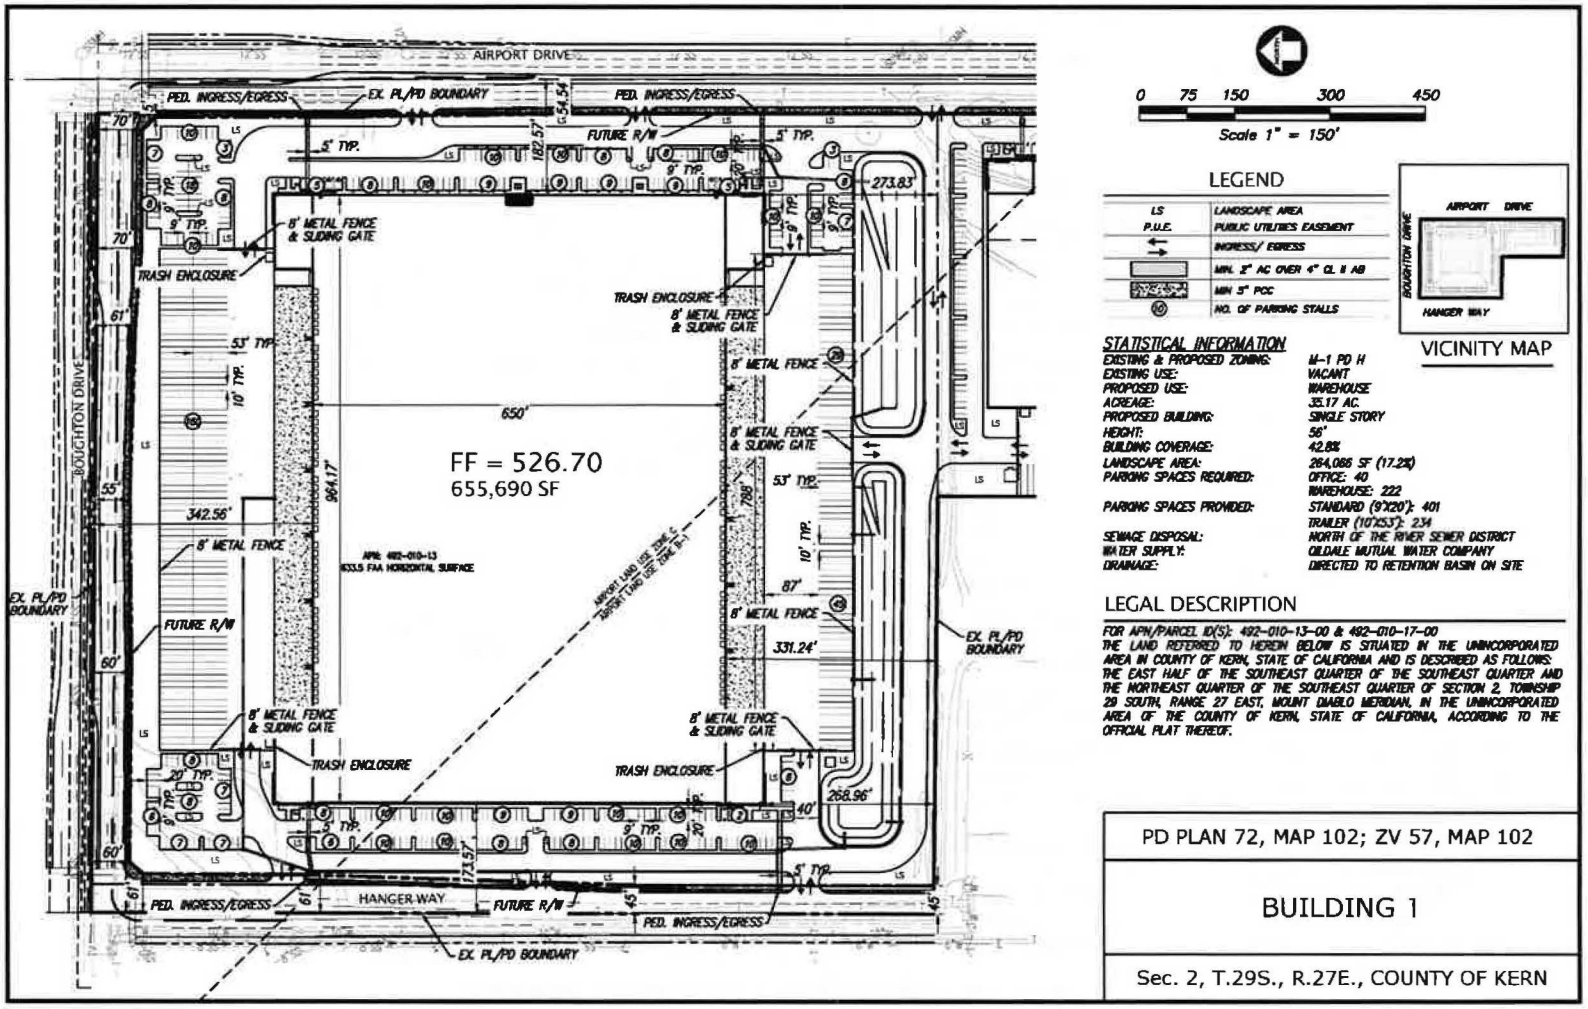

Figure 6c – Proposed PD Plan – Building One Landscaping

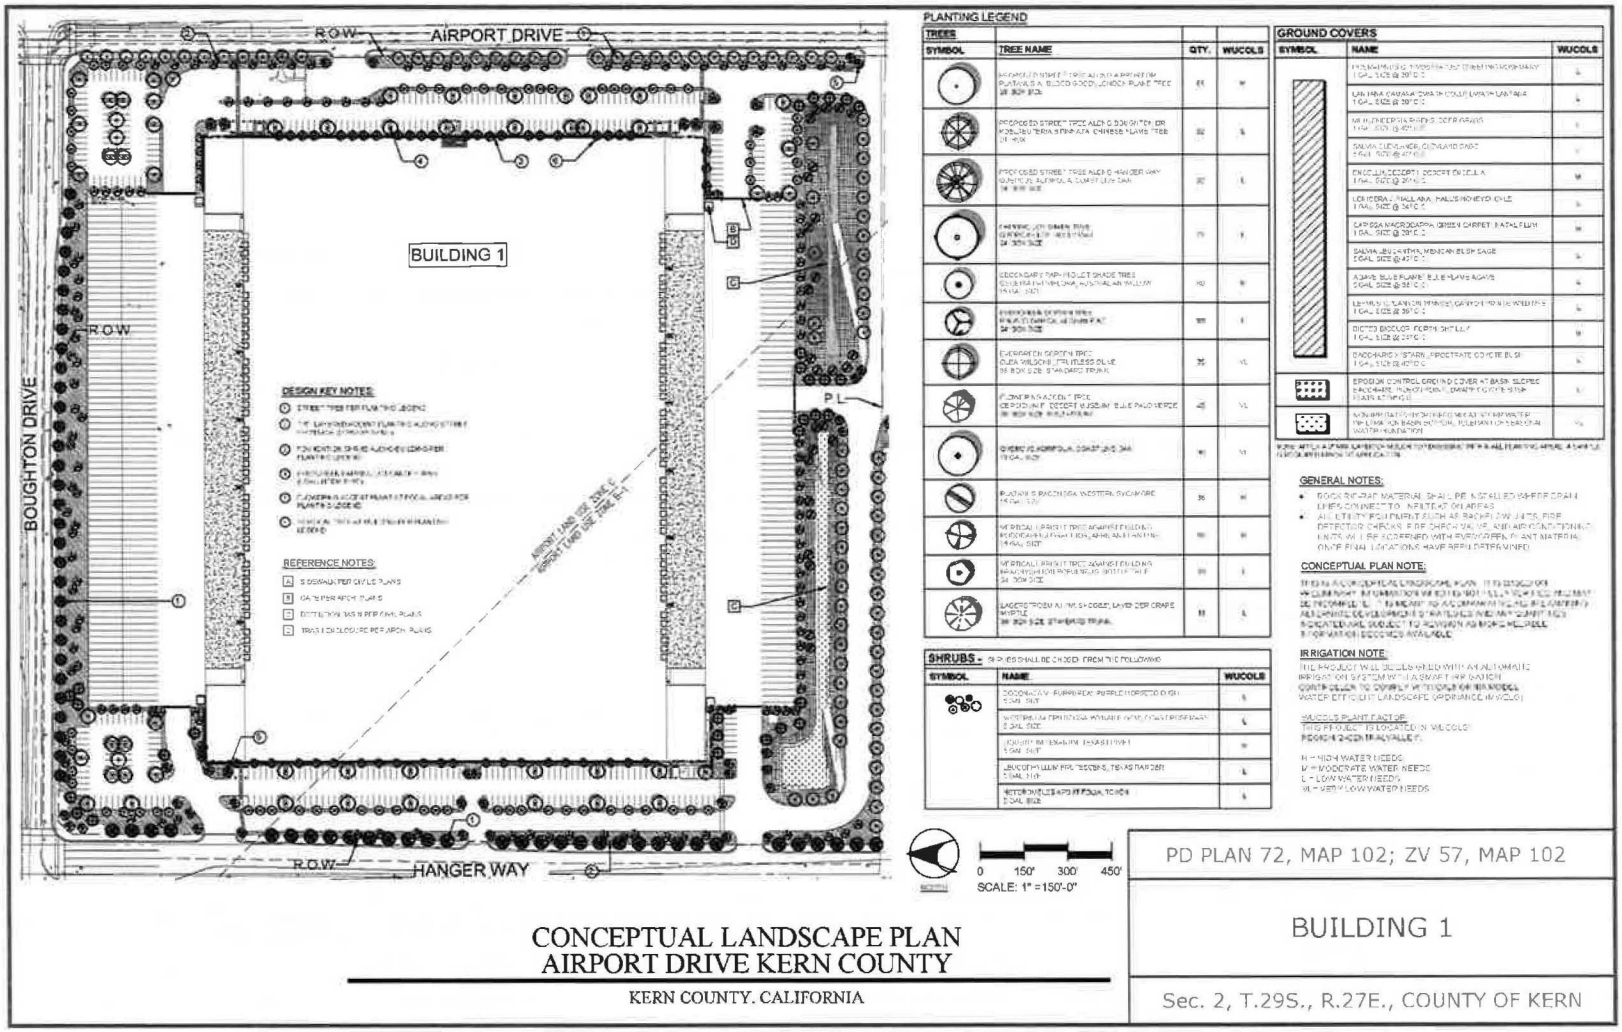

Figure 6d – Proposed PD Plan – Building Two

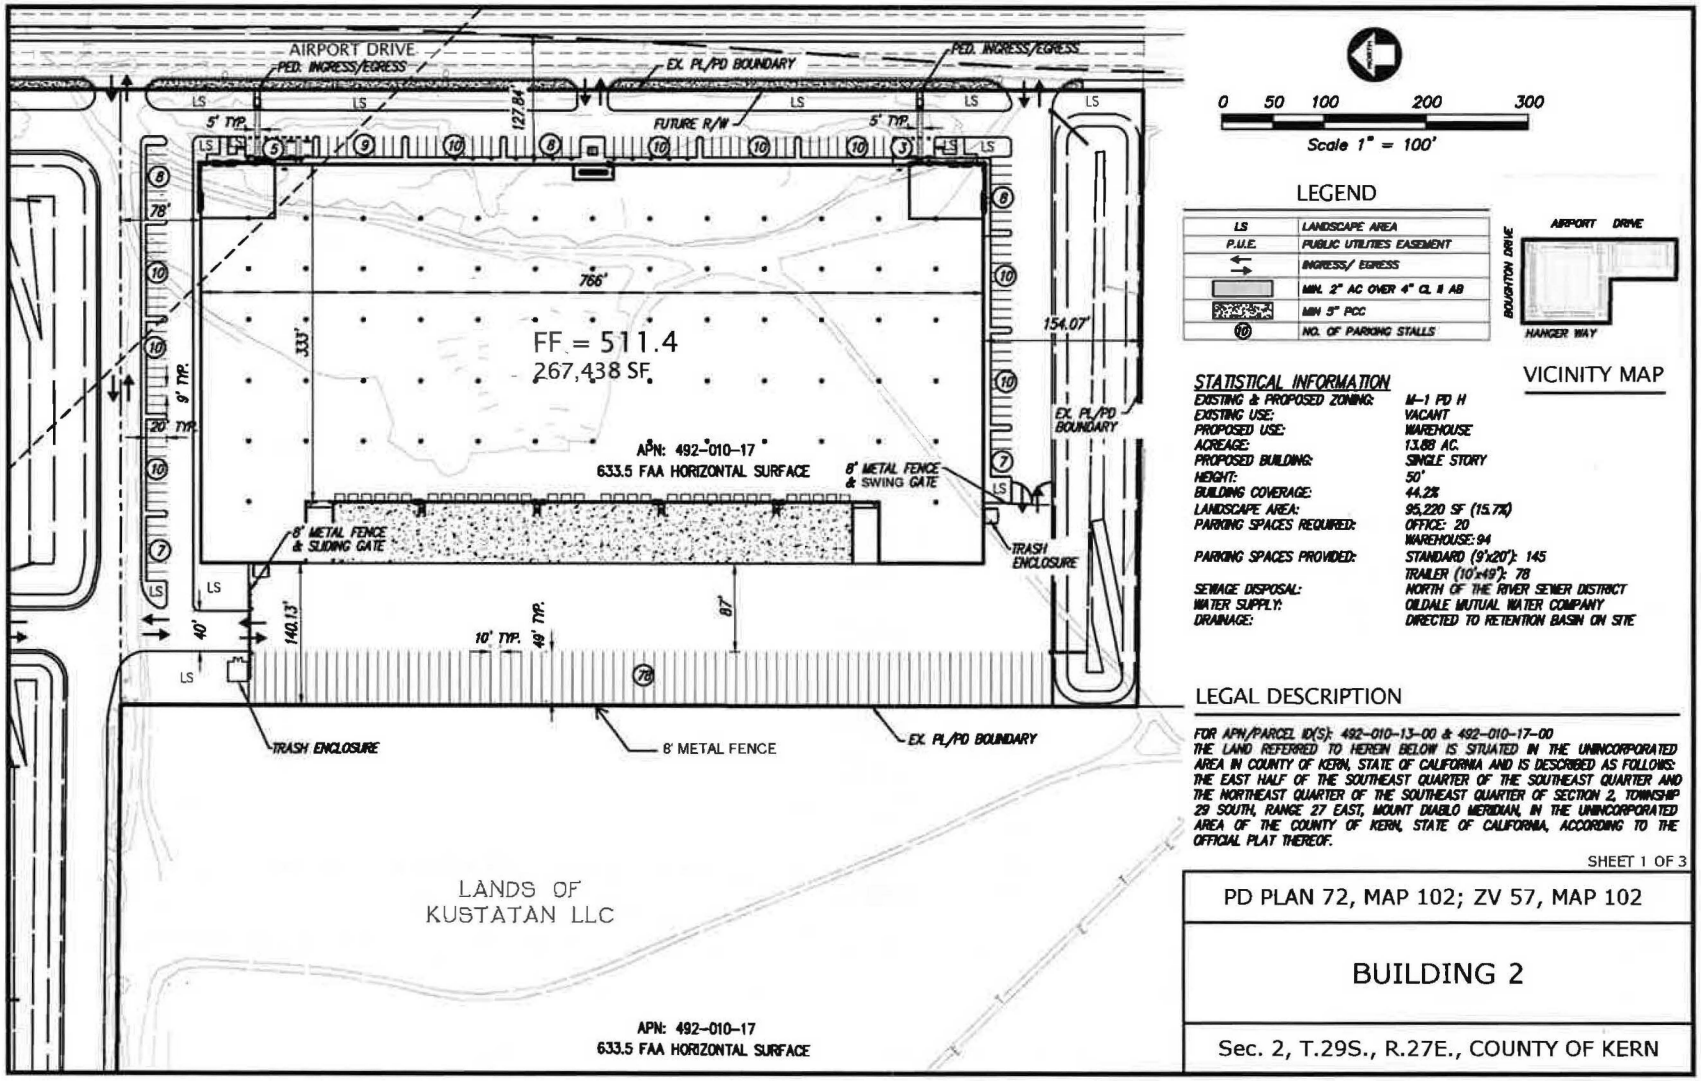

Figure 6e – Proposed PD Plan – Building Two Landscaping

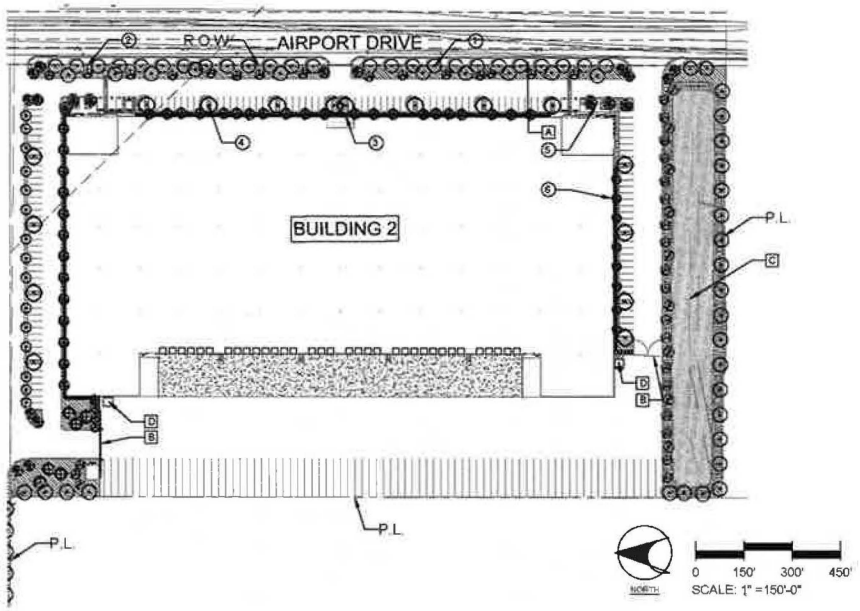

PLANTING LEGEND:

TREES			
SYMBOL	TREE NAME	QTY.	WUCOLS
	PROPOSED STREET TREE ALONG AIRPORT DR: PLATANUS A. 'BLOOD GOOD', LONDON PLANE TREE 24" BOX SIZE	61	M
	PROPOSED STREET TREE ALONG BOUGHTON DR.: KOELREUTERIA BIPINNATA, CHINESE FLAME TREE 24" BOX	33	L
	PROPOSED STREET TREE ALONG HANGER WAY QUERCUS AGRIFOLIA, COAST LIVE OAK 24" BOX SIZE	22	L
	PARKING LOT SHADE TREE QUERCUS ILEX, HOLLY OAK 24" BOX SIZE	72	L
	SECONDARY PARKING LOT SHADE TREE GEIJERA PARVIFLORA, AUSTRALIAN WILLOW 15 GAL SIZE	93	M
	EVERGREEN SCREEN TREE PINUS ELDARICA, AFGHAN PINE 24" BOX SIZE	185	L
	EVERGREEN SCREEN TREE OLEA 'WILSONII', FRUITLESS OLIVE 36 BOX SIZE STANDARD TRUNK	35	VL
	FLOWERING ACCENT TREE CERCIDIUM F. 'DESERT MUSEUM', BLUE PALO VERDE 36" BOX SIZE MULTI-TRUNK	45	VL
	QUERCUS AGRIFOLIA, COAST LIVE OAK 15 GAL SIZE	39	VL
	PLATANUS RACEMOSA, WESTERN SYCAMORE 15 GAL SIZE	36	M
	VERTICAL UPRIGHT TREE AGAINST BUILDING PODOCARPUS GRACILIOR, AFRICAN FERN PINE 15 GAL SIZE	68	M
	VERTICAL UPRIGHT TREE AGAINST BUILDING BRACHYCHITON POPULNEUS, BOTTLE TREE 24" BOX SIZE	33	L
	LAGERSTROEMIA I 'MUSKOGEE', LAVENDER CRAPE MYRTLE 36" BOX SIZE STANDARD TRUNK	18	L

SHRUBS - SHRUBS SHALL BE CHOSEN FROM THE FOLLOWING		
SYMBOL	NAME	WUCOLS
	DODONAEA V. 'PURPUREA', PURPLE HOPSEED BUSH 5 GAL. SIZE	L
	WESTRINGIA FRUTICOSA 'WYNABIE GEM', COAST ROSEMARY 5 GAL. SIZE	L
	LIGUSTRUM TEXANUM, TEXAS PRIVET 5 GAL. SIZE	M
	LEUCOPHYLLUM FRUTESCENS, TEXAS RANGER 5 GAL SIZE	L
	HETEROMELES ARBUTIFOLIA, TOYON 5 GAL. SIZE	L

GROUND COVERS

SYMBOL	NAME	WUCOLS
	ROSMARINUS O. 'PROSTRATUS', CREEPING ROSEMARY 1 GAL. SIZE @ 30" O.C.	L
	LANTANA CAMARA 'DWARF GOLD', DWARF LANTANA 1 GAL. SIZE @ 30" O.C.	L
	MUHLENBERGIA RIGENS, DEER GRASS 1 GAL. SIZE @ 42" O.C.	L
	SALVIA CLEVLANDII, CLEVLAND SAGE 5 GAL. SIZE @ 48" O.C.	L
	ENCELIA DESERTII, DESERT ENCELIA, 1 GAL. SIZE @ 36" O.C.	M
	LONICERA J. 'HALLIANA', HALL'S HONEYSUCKLE 1 GAL. SIZE @ 24"O.C.	L
	CARISSA MACROCARPA 'GREEN CARPET', NATAL PLUM 1 GAL. SIZE @ 36" O.C.	M
	SALVIA LEUCANTHA, MEXICAN BUSH SAGE 5 GAL. SIZE @ 42" O.C.	L
	AGAVE 'BLUE FLAME', BLUE FLAME AGAVE 5 GAL. SIZE @ 36" O.C.	L
	LEYMUS C. 'CANYON PRINCE', CANYON PRINCE WILD RYE 1 GAL. SIZE @ 36" O.C.	L
	DIETES BICOLOR, FORTNIGHT LILY 1 GAL. SIZE @ 24"O.C.	M
	BACCHARIS P. 'STARN', PROSTRATE COYOTE BUSH 1 GAL. SIZE @ 42" O.C.	L
	EROSION CONTROL GROUND COVER AT BASIN SLOPES BACCHARIS 'PIGEON POINT', DWARF COYOTE BUSH FLATS AT 18"O.C.	L
	NON-IRRIGATED HYDROSEED MIX AT STORM WATER INFILTRATION BASIN BOTTOM, TOLERANT OF SEASONAL WATER INUNDATION	VL

NOTE: APPLY A 3" MIN. LAYER OF MULCH TOP DRESSING WITHIN ALL PLANTING AREAS. A SAMPLE IS REQUIRED PRIOR TO APPLICATION

GENERAL NOTES:

- ROCK RIP-RAP MATERIAL SHALL BE INSTALLED WHERE DRAIN LINES CONNECT TO INFILTRATION AREAS
- ALL UTILITY EQUIPMENT SUCH AS BACKFLOW UNITS, FIRE DETECTOR CHECKS, FIRE CHECK VALVE, AND AIR CONDITIONING UNITS WILL BE SCREENED WITH EVERGREEN PLANT MATERIAL ONCE FINAL LOCATIONS HAVE BEEN DETERMINED

CONCEPTUAL PLAN NOTE:

THIS IS A CONCEPTUAL LANDSCAPE PLAN. IT IS BASED ON PRELIMINARY INFORMATION WHICH IS NOT FULLY VERIFIED AND MAY BE INCOMPLETE. IT IS MEANT AS A COMPARATIVE AID IN EXAMINING ALTERNATE DEVELOPMENT STRATEGIES AND ANY QUANTITIES INDICATED ARE SUBJECT TO REVISION AS MORE RELIABLE INFORMATION BECOMES AVAILABLE

IRRIGATION NOTE:

THE PROJECT WILL BE DESIGNED WITH AN AUTOMATIC IRRIGATION SYSTEM WITH A SMART IRRIGATION CONTROLLER TO COMPLY WITH CALIFORNIA MODEL WATER EFFICIENT LANDSCAPE ORDINANCE (MWELO)

WUCOLS PLANT FACTOR
THIS PROJECT IS LOCATED IN 'WUCOLS' REGION '2-CENTRALVALLEY'

H = HIGH WATER NEEDS
M = MODERATE WATER NEEDS
L = LOW WATER NEEDS
VL= VERY LOW WATER NEEDS

DESIGN KEY NOTES:

1. STREET TREE PER PLANTING LEGEND
2. TYP. LAYERED ACCENT PLANTING ALONG STREET FRONTAGE (LOW-GROWING)
3. FOUNDATION SHRUB ALONG BUILDING PER PLANTING LEGEND
4. EVERGREEN PARKING LOT CANOPY TREE (LOW-LITTER TYPE)
5. FLOWERING ACCENT PLANT AT FOCAL AREAS PER PLANTING LEGEND
6. VERTICAL TREE AT BUILDING PER PLANTING LEGEND

REFERENCE NOTES:

- A. SIDEWALK PER CIVIL'S PLANS
- B. GATE PER ARCH. PLANS
- D. DETENTION BASIN PER CIVIL PLANS
- E. TRASH ENCLOSURE PER ARCH. PLANS

CONCEPTUAL LANDSCAPE PLAN
AIRPORT DRIVE KERN COUNTY
KERN COUNTY, CALIFORNIA

PD PLAN 72, MAP 102; ZV 57, MAP 102

BUILDING 2

Sec. 2, T.29S., R.27E., COUNTY OF KERN

2. Kern County Environmental Checklist Form

2.1. Environmental Factors Potentially Affected

In accordance with CEQA Guidelines, the County intends to prepare an Environmental Impact Report (EIR) to evaluate potential environmental effects of the project and to propose mitigation measures to reduce any significant effects identified.

The environmental factors checked below would be potentially affected by this project, involving at least one impact that is a "potentially significant impact" as indicated by the Kern County Environmental Checklist. As such, the analysis contained within the EIR will focus on these issue areas.

☒	Aesthetics	☒	Agricultural and Forestry Resources	☒	Air Quality
☒	Biological Resources	☒	Cultural Resources	☒	Energy
☒	Geology and Soils	☒	Greenhouse Gas Emissions	☒	Hazards and Hazardous Materials
☒	Hydrology and Water Quality	☒	Land Use and Planning	☒	Mineral Resources
☒	Noise	☒	Population and Housing	☒	Public Services
☒	Recreation	☒	Transportation and Traffic	☒	Tribal Cultural Resources
☒	Utilities/Service Systems	☒	Wildfire	☒	Mandatory Findings of Significance

2.2. Determination

(To be completed by the Lead Agency)

Based on this initial evaluation:

☐ I find that the proposed project COULD NOT have a significant effect on the environment, and a NEGATIVE DECLARATION will be prepared.

☐ I find that although the proposed project could have a significant effect on the environment, there will not be a significant effect in this case because revisions in the project have been made by or agreed to by the project proponent. A MITIGATED NEGATIVE DECLARATION will be prepared.

☒ I find that the proposed project MAY have a significant effect on the environment, and an ENVIRONMENTAL IMPACT REPORT is required.

☐ I find that the proposed project MAY have a "potentially significant impact" or "potentially significant unless mitigated" impact on the environment, but at least one effect (a) has been adequately analyzed in an earlier document pursuant to applicable legal standards, and (b) has been addressed by mitigation measures based on the earlier analysis as described on attached sheets. An ENVIRONMENT IMPACT REPORT is required, but it must analyze only the effects that remain to be addressed.

☐ I find that although the proposed project could have a significant effect on the environment, because all potentially significant effects (a) have been analyzed adequately in an earlier EIR or NEGATIVE DECLARATION pursuant to applicable standards, and (b) have been avoided or mitigated pursuant to that earlier EIR or NEGATIVE DECLARATION, including revisions or mitigation measures that are imposed upon the proposed project, nothing further is required.

Signature:

Date:
November 16, 2023

Printed Name:
Alexis Brito

Title:
Planner I

AGENDA

KERN COUNTY PLANNING & NATURAL RESOURCES DEPARTMENT

Scoping Meeting

Kern County Public Services Building
2700 "M" Street, Conference Room 1A – Public Meeting Room
Bakersfield, California

DECEMBER 6, 2023 – 1:30 p.m.

Pursuant to revised Section 21083.9 of the Public Resources Code, California Environmental Quality Act, effective January 1, 2002, this scoping meeting is being held to receive agency comments on the preparation of Environmental Impact Reports (EIR) on certain projects. The process of determining the scope, focus, and content of the EIR is known as "scoping." Scoping helps to identify the range of actions, alternatives, environmental effects, methods of assessment, and mitigation measures to be analyzed in depth, and eliminate from detailed study those issues that are not important to the decision at hand. This is not a public hearing; however, the public may be present and offer comments. If you attend as a member of the public to address an item on the agenda, please let the chairperson know when discussion begins on that item. Each project will be presented by staff followed by an opportunity for comments for the record.

A. INTRODUCTION: Staff and format of meeting

B. NEW CASES:

EIR – Notice of Preparation:
IPG Industrial Project by IPG Kern County 52 Holdings, LLC (PP23405)
PD Plan 72, Map 102; ZV 57, Map 102.

C. ADJOURNMENT: Staff closing remarks

AMERICANS WITH DISABILITIES ACT
(Government Code Section 54953.2)

Disabled individuals who need special assistance to attend or participate in the scoping meeting may request assistance at the Kern County Planning Department or by calling Alyssa Torres at (661) 862-8615. Every effort will be made to reasonably accommodate individuals with disabilities by making meeting materials available in alternative formats. Requests for assistance should be made five (5) working days in advance whenever possible.

Posted: December 4, 2023
AB

SUBMIT WRITTEN COMMENTS ON THE NOP BY DECEMBER 18, 2023 AT 5:00 PM

Mail to:
Kern County Planning and Natural Resources Department
Attn: Alexis Brito
2700 'M' Street, Suite 100
Bakersfield, CA 93301
Email: BritoAL@kerncounty.com
Phone: 661-862-5029

IPG Industrial Project by IPG Kern County 52 Holdings, LLC (Industrial Property Group)
December 6, 2023 - Scoping Meeting Sign-In Sheet

Name	Agency/Organization	Contact Number	Address (Only if interested to be on mailing list)
Craig Wilde	IPG	314-713-9516	
Janice Ruiz	home owner	661-889-0864	809 Greenwood Meadow Lane 93308
RYAN NANCE		661-426-1716	

NOTE: Your name, address, and phone number become public information once you sign-in. However, signing in is voluntary. Under the Brown Act, "all persons may attend a meeting regardless of whether a person signs."

SUMMARY OF PROCEEDINGS

KERN COUNTY AGENCY SCOPING MEETING

Kern County Planning and Natural Resources Department
2700 M Street, Suite 100
Bakersfield, California

Conference Room 1A

Date December 6, 2023

STAFF ATTENDANCE:
Terrance Smalls, Supervising Planner
Alexis Brito, Staff Planner

The meeting convened at 1:32 p.m. with Staff and Craig Wilde as a representative of the IPG Industrial Project in attendance. Items were then discussed in order as identified on the agenda.

NOTICE OF PREPARATION PROJECT:

EIR – Notice of Preparation:
IPG Industrial Project by IPG Kern County 52 Holdings, LLC (PP23405)
PD Plan 72, Map 102; ZV 57, Map 102

Three (3) members of the public were present, one (1) of whom provided comments.

Jorge Torres, a representative from the Western States Regional Council of Carpenters and resident of the surrounding area, discussed the project's need to hire local union labor and how such hiring efforts are associated with a reduction of air quality impacts.

Public testimony closed at approximately 01:37 p.m.

Notes prepared by
Alexis Brito, Staff Planner