# Appendix F-3
Preliminary Hydrology Report

FUSCOE ENGINEERING

# Gateway Village

## PRELIMINARY HYDROLOGY REPORT

City of Irvine, CA

Prepared for:

BROOKFIELD RESIDENTIAL, LLC
3200 Park Center Dr # 1000,
Costa Mesa, CA 92626

Prepared by:

FUSCOE ENGINEERING, INC.
15535 Sand Canyon, Suite 100
Irvine, California 92618
949.474.1960
www.fuscoe.com


**Project Manager:**
**John Olivier, PE**

**Supervising Engineer:**
**Craig Kwasniewski, PE**

**December, 2024**

**Job Number: 308-092-01**

*full circle thinking®*

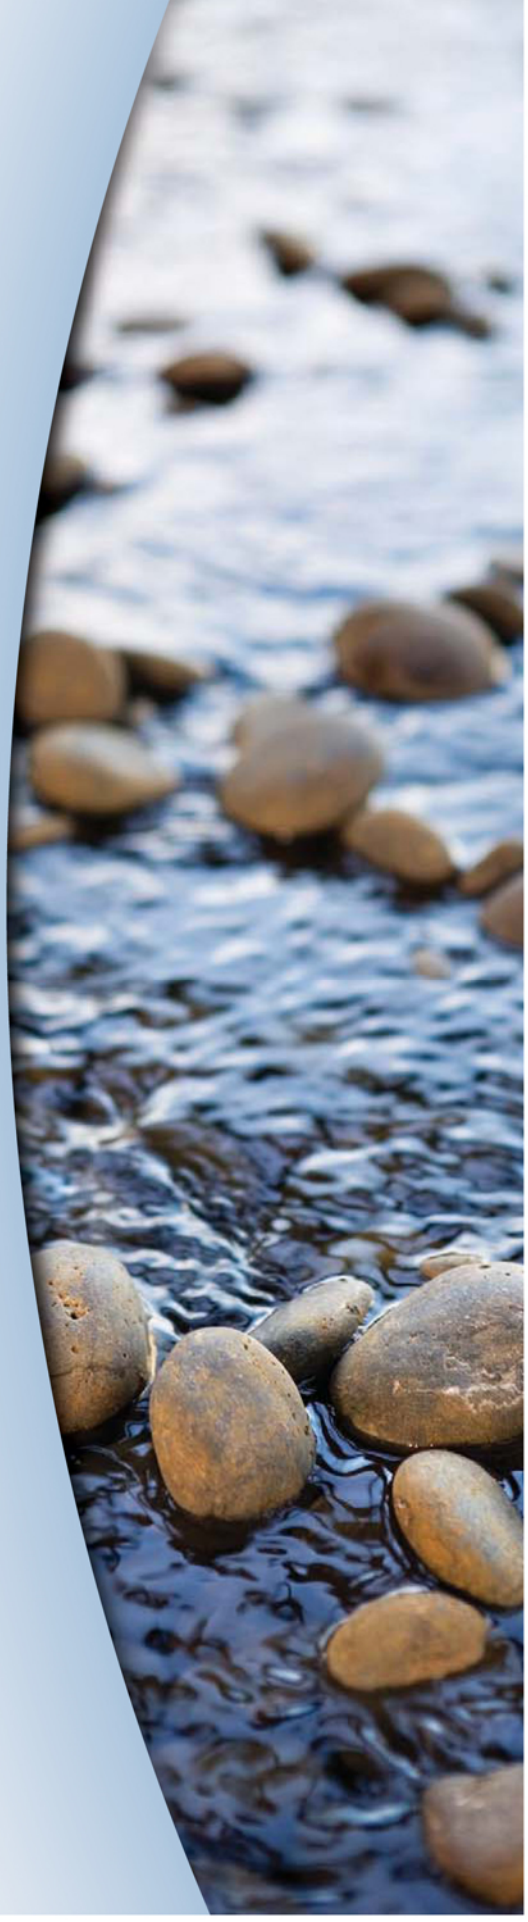

# Gateway Village

# PRELIMINARY HYDROLOGY REPORT

Prepared by:

Fuscoe Engineering, Inc.
15535 Sand Canyon, Suite 100
Irvine, California 92618
949.474.1960

Project Manager:
John Olivier, P.E.

Supervising Engineer:
Craig Kwasniewski, P.E.

Project No.: 308-092-01

December 2024

F:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology\2024-12-06 Hydro Report 1st Sub

# TABLE OF CONTENTS

1.0 INTRODUCTION.....
1.1 PROJECT DESCRIPTION.....
1.2 PURPOSE.....
2.0 EXISTING SITE CONDITIONS.....Error! Bookmark not defined.
2.1 TOPOGRAPHY, DRAINAGE PATTERNS, AND LAND USES .....
2.2 EXISTING STORM DRAIN FACILITIES .....
3.0 HYDROLOGY .....
3.1 STORM FREQUENCY & METHODOLOGY.....
3.2 PROPOSED STORM DRAIN FACILITIES .....
3.3 HYDROMODIFICATION .....
4.0 HYDROLOGY RESULTS .....
4.1 RESULTS .....
5.0 CALIFORNIA ENVIRONMENTAL QUALITY ACT (CEQA) .....
5.1 CEQA COMPLIANCE.....
6.0 REFERENCES .....
6.1 REFERENCES.....

## LIST OF FIGURES

Figure 1 Vicinity Map
Figure 2 Existing Site & Storm Drain Facilities
Figure 3 Storm Drain Points of Connection (POC) & Watershed Boundaries
Figure 4 Proposed Site & Storm Drain Facilities
Figure 5 Hydromodification Susceptibility Map

## LIST OF TABLES

Table 1: 2-Year Storm Hydromodification Compliance Summary
Table 2: 25-Year Storm Peak Flow Mitigation Summary

## LIST OF APPENDICES

Appendix 1 Figures 1-5
Appendix 2 Existing 2-Year Storm AES Calculations
Appendix 3 Existing 25-Year Storm AES Calculations
Appendix 4 Proposed 2-Year Storm AES Calculations
Appendix 5 Proposed 25-Year Storm AES Calculations
Appendix 6 Detention Basin Sizing & Routing Calculations
Appendix 7 Existing Condition 25-Year Storm Hydrology Map
Appendix 8 Proposed Condition 25-Year Storm Hydrology Map
Appendix 9 Existing Condition 2-Year Hydromod Map for Watersheds 'C' & 'D'
Appendix 10 Proposed Condition 2-Year Hydromod Map for Watersheds 'C' & 'D'
Appendix 11 Hunsaker Hydrology Map for T.T. 16927 – PA-9B, PA-9C2

# 1.0 INTRODUCTION

## 1.1 Project Description:

Brookfield Homes, partnering with the City of Irvine, has proposed a new 116.9-acre residential village with 1,360 residential units, called Gateway Village (the proposed project), in the City of Irvine (City), California. The project would also include development of parks, a community garden, paseos, associated roadway infrastructure, and an extension of the Jeffrey Open Space Trail (JOST) east from Portola Parkway for approximately (2,750 feet) at the entrance to the forthcoming Gateway Preserve. Brookfield Homes would develop the residential village on 65.5 acres, and the City would develop the JOST and a community park on 14.4 acres. Density ranges for different residential development areas will range from 10-22 dwelling units per acre at the lowest density to 30-40 dwelling units per acre at the highest density.

The project site is located in North Irvine, at the northeast corner of Portola Parkway and Jeffrey Road. The site is bounded by Portola Parkway to the south, Jeffrey Road/Hicks Haul Road to the west, and Bee Canyon Access Road to the east. Hicks Canyon Wash is to the north. See Figure 1, Vicinity Map.

## 1.2 Purpose:

The purpose of this hydrology report is to identify and evaluate any potential stormwater impacts associated with the proposed development of the Gateway Village project, and to recommend strategies to mitigate said impacts. Stormwater impacts are generally defined as increased peak design flow rates caused by proposed development above existing peak flow rates (or above expected flow rates) at a common node where runoff leaves the site, and/or, increased hydromodification flow rates caused by the proposed development above existing hydromodification flow rates at a common node where runoff leaves the site. The results and recommendations evaluated in this report will be presented in the project Environmental Impact Report (EIR). The main purpose of an EIR is to inform public agency decision makers and the public about potential environmental impacts (if any) caused by the project. The EIR will be used by the City, as the lead agency under the California Environmental Quality Act (CEQA), in making decisions with regard to the proposed project described herein and the related drainage approvals required for the project.

# 2.0 EXISTING SITE CONDITIONS

## 2.1 Topography, Drainage Patterns, and Land Uses:

The project site consists primarily of active agricultural fields with equipment storage and laydown areas in the northern portion of the site. The current City General Plan designation for the project site is Recreation, which would change with this application. The topography on the upper third of the site generally drains by surface ditch (2 ditches) in a southwest direction toward Jeffrey Road at a gradient of 3.5 percent. This upper third site tributary is part of the larger East Hicks Canyon watershed which originates offsite and upstream of the

project site. The City is planning for the development of a separate project called the Gateway Preserve, which would create a 700 acre open space preserve in the hills above North Irvine and include the Ease Hicks Canyon watershed area. This action would assure that offsite flows originating upstream and passing through the Gateway Village project site will remain natural. The two upper tributary ditches terminate at Jeffrey Road where they are collected by an existing storm drain in Jeffrey Road.

The topography on the lower two thirds of the site generally drains in a southerly direction toward Portola Parkway, with a moderate gradient of 2.5 to 3 percent. At Portola Parkway, the lower two thirds flow is collected by two existing storm drain pipes, one on Portola Parkway midway between Jeffrey Road and Bee Canyon Road and one at the intersection of Portola Parkway and Bee Canyon Road.

2.2 Existing Storm Drain Facilities:

Six existing drainage facilities exist around the perimeter of the project site (see Exhibit x), and include,

a) Hicks Canyon Facility F27 in Jeffrey Road, a 102" mainline drain and associated laterals L10 (Drain D) and L12 (Drain C),
b) AD 07-22 36"and 48" drains in Portola Parkway (Drain F),
c) AD 07-22 36" drain at Portola Parkway/Bee Canyon Road intersection (Drain E),
d) 36" drain crossover in Bee Canyon Road (Drain D1),
e) 30" drain in Bee Canyon Road (Drain Y) (N.A.P.),
f) 51"drain crossover in Bee Canyon Road (Drain Z) (N.A.P.).

Under existing conditions, drains C, D, D1, E, and F, receive runoff from project site areas and will continue to do so under proposed conditions. Drain Y collects runoff from areas due east of Bee Canyon Road but does not collect or convey site flows. Drain D1 crosses Bee Canyon Road approximately 3,400 feet north of the intersection of Portola Parkway and Bee Canyon Road and conveys runoff from natural areas east of Bee Canyon Road into the project site. For purposes of discussion in this report, Drain C will connect to the F27 lateral L12 at POC1, Drain D will connect to the F27 lateral L10 at POC2, Drain E will connect to the AD 07-22 36" drain at POC 3 near the intersection of Portola Parkway and Bee Canyon Road, and Drain F will connect to the AD 07-22 36" drain at POC4 on Portola Parkway midblock between Jeffrey Road and Bee Canyon Road. Existing hydrology maps were obtained for Drains C, D, E, and F to determine if design flow Q25 allowable threshold flow rates were previously established for any of the four drains. The hydrology map for Drains E and F, *Exhibit 2, Offsite Hydrology Map for Rough Grading, TT16927-PA-9B, PA-9C, Phase 1, City of Irvine, Hunsaker and Associates, 6/28/06*, was the only map with Q25 information and was used to establish Q25 threshold flow rates for those drains, 93.3cfs at Drain F, and 62.8cfs at drain E, respectively. The Hunsaker Map can be found in Appendix 10.

3.0 HYDROLOGY

3.1 Storm Frequency and Methodology:

Hydrologic calculations were prepared for existing and proposed conditions throughout the site to establish baseline storm flow rates at project watershed exit points C, D, E, and F described in the paragraph above, and to compare existing condition design peak flow rates versus proposed condition design peak flow rates to determine peak flow rate mitigation needs. Hydrologic sub-watersheds C, D, E, and F were established to delineate areas draining to each POC. Hydrologic calculations were not prepared for sub-watershed areas A17a and A17b as those areas were previously programmed to drain into Facility F27 and Gateway Village improvements will not change that. Per Orange County Hydrology Manual (Ref. xx) and per the City of Irvine Standards (Ref. xx), a 25-year frequency storm event was selected for design peak flow rate evaluation because sump conditions are present onsite. The existing and proposed conditions were analyzed utilizing the Advanced Engineering Software (AES) package for Orange County (RATSCX) (Ref. xx). Rational Method analysis was used because the total watershed area is less than 1 square mile (640-acres) in size. Nodal point location determination focused on key mainline storm drain confluence locations and point of connection locations. Storm drain lateral and catch basin locations were given low priority. AES hydrologic calculations for existing and proposed conditions can be found in Section xx.

3.2 Proposed Storm Drain Facilities:

a) Sub-Watershed C: A storm drain (pass through drain) will be provided in 'C' Street to intercept off-site flows and convey them to POC-1. The pipe will be sized to convey 25-year peak flows and does not require peak flow mitigation. The remainder of sub-watershed C flows (onsite flows) will be collected and conveyed to the park site for water quality treatment. Hydrology results (see Table 1) indicate proposed 2-year hydromod flow rates are less than existing 2-year hydromod flow rates, thereby 2-year flow rate attenuation is not necessary. Hydrology results (see Table 2) also indicate that proposed 25-year peak flow rates are marginally higher than existing 25-year peak flow rates by 0.1 percent so detention mitigation will not be considered on the C drain. After water quality treatment, the drain will be connected to the pass through drain.

b) Sub-Watershed D: Drainage D originates offsite and east of Bee Canyon Road, crosses Bee Canyon Road in an existing 36" RCP pipe, outlets to the surface approximately 100 feet west of Bee Canyon Road and travels on the surface to POC 2. In the proposed condition, a drain will be connected to the existing 36" pipe outlet, undergrounded, and conveyed to POC 2. The pipe will be sized to convey Q25 peak flow rate. Onsite Area D sub-watershed tributary areas will be collected and conveyed to a detention basin (underground tank) where Q25 peak flow mitigation (difference between existing and proposed Q25 flow rates) will be performed. Approximately 87.9 cfs Q25 peak flow rate will be conveyed to the proposed detention basin which will release 80.0 cfs during a 25-year storm event. The structure will require 17,500 cubic feet of storage (see Table 2). The reduced flow will be connected back to the pass through drain.

c) Sub-Watershed E: A proposed storm drain will originate at the intersection of 'B' and 'D' Streets and traverse south in 'D' Street to the southeast corner of the project site and collect Sub-Watershed E runoff along the way. The pipe will be sized to convey Q25 flows. A

proposed detention basin (underground tank) will be provided at the southeast corner location where 25-year peak flow mitigation will be required. Approximately 167.9 cfs Q25 will be conveyed to the proposed detention basin which will release 64.5 cfs during a 25-year storm event. The structure will require 190,575 cubic feet of storage (see Table 2). The reduced flow will be connected to an existing 36" RCP pipe at the corner of Portola Parkway and Bee Canyon Road (POC 4).

d) Sub-Watershed F: Drainage F consists of a short piece of storm drain in 'E' Street which collects runoff from the street and from Sub-Watershed F (a single lot). The storm drain connects to a 36" RCP in Portola Parkway mid-block between Jeffrey Road and Bee Canyon Road. The connection point is labeled POC 3. As-built plans for the existing 36" drain reveal a threshold Q25 value of 93.3 cfs at this location. Existing condition hydrology indicates a Q25 flow rate of 44.0 cfs at this location. Proposed condition hydrology indicates a Q25 flow rate of 18.9 cfs at this location (see Table 2). Because the proposed flow rate is less than the threshold rate and the existing flow rate, Q25 peak flow mitigation is not required for this drain.

3.3 Hydromodification:

The proposed Gateway Village project site ultimately drains 5 miles downstream to the Upper Newport Bay via the San Diego Creek Channel and those receiving waters are susceptible to hydrologic conditions of concern (HCOC's). As such, per City of Irvine requirements, and per the adopted Watershed Infiltration and Hydromodification Management Plan (WIHMP) guidelines, the project is required to mitigate either the excess runoff volume (by retention) or the excess runoff flow rate (by detention) from a 2-year rain event if excess' are present. Soil testing on the site indicates the soils have very low percolation capabilities and cannot infiltrate stored water within a 48 hour period, thus flow rate detention of the post-development 2-year peak flow rate to within 110% of the pre-development flow rate is the appropriate method of mitigation if excess' are present. Accordingly, each of the four project site watersheds (C, D, E, and F) have been evaluated for 2-year peak flow mitigation with results shown in Table 2.1.

Table 2.1 shows that proposed condition 2-year flow rates exceed 110% of existing condition 2-year flow rates in sub-watersheds C, D, and E. Mitigation has been added to sub-watersheds D and E in the form of underground concrete vaults with outlet control to reduce outbound 2-year flow rates to acceptable levels. Flow attenuation was not provided for sub-watershed C because existing and proposed 2-year flow rates are only marginally different. The underground vaults will simultaneously serve to reduce proposed condition 25-year design peak flow rates to existing/threshold levels. Basin routing calculations for 2-year and 25-year can be found in Appendix 6.

## 4.0 HYDROLOGY RESULTS

### 4.1 Design Flow Rate Q25 Results:

As described throughout this report, the subject property will encompass four separate sub-watersheds C, D, E, and F and storm runoff from each sub-watershed will leave the project site and immediately connect to four individual receiving drains at point of connection (POC) locations 1 ,2 ,3 , and 4 (see Figure 3). Hydrology calculations have been prepared at a 25-year frequency for each sub-watershed with results being used to evaluate mitigation needs. Mitigation needs for Q25 design peak flow rate are defined as proposed 25-year flow rates exceeding existing 25-year flow rates or allowable 25-year flow rate thresholds (if applicable) at each POC location. Results of the 25-year hydrology modeling shows proposed 25-year flow rates exceed existing 25-year flow rates and/or threshold flow rates at POC locations in sub-watershed areas C, D, and E and mitigation is required to reduce 25-year flow rates to existing levels in those sub-watersheds. Proposed 25-year flow rates do not exceed existing 25-year flow rates at POC 4 in sub-watershed F and sub-watershed F flow rates do not require mitigation. Mitigation for non-compliant sub-watersheds D and E will be the inclusion of an underground detention basin (underground tank) which will provide peak flow reduction via storage and outflow control in the tank. Mitigation will not be provided for sub-watershed C based on the small percentage increase of proposed flow rate over existing flow rate (less than 1%). Table 2.2 summarizes hydrology results for the 25-year flow rate analysis for existing, proposed pre-mitigation, and post-mitigation conditions. See Appendices 7 and 8 for hydrology map supporting documents and Appendices 9 and 10 for hydrology calculation supporting documents.

## 5.0 CALIFORNIA ENVIRONMENTAL QUALITY ACT (CEQA)

### 5.1 CEQA Compliance:

In accordance with CEQA Appendix G environmental checklist guidelines, the following questions from Paragraph X.c) are addressed herewith in support of Environmental Impact Report (EIR) compliance.

*X.c.) Would the project substantially alter the existing drainage pattern o□the site or area, including through the alteration o□the course o□a stream bed or river or through the addition o□impervious sur□aces, in a manner, which would:*

*i) result in substantial erosion on- or offsite*.

Answer: Proposed drainage patterns will substantially mimic existing condition drainage patterns in size and in coarse as evidenced by size and position of POC connections at the project perimeter (see hydrology maps). Two existing streams traversing through sub-watersheds C and D will be replaced by underground pipe conduit further reducing the potential for erosion on the site. Finally, as with most developments, land use conditions will be altered and will generally become less pervious while at the same time reducing the potential for erosion.

*ii) substantially increase the rate or the amount o surface runoff in a manner that would result in flooding on- or offsite.*

Answer: Proposed site runoff will increase over existing conditions but will be captured and conveyed onsite in underground conduit (sized for Q25 conveyance per City requirements) to it's mitigation location or it's POC location or both. If necessary, Q25 and/or Q2 runoff rates will be reduced to existing condition flow rates or to receiving pipe threshold rates by detention basin routing implementation so that runoff leaving the site matches existing Q25 rates or is within 110% of existing Q2 rates. Flooding will not occur onsite with Q25 underground conduit conveyance in place and with allowance of street flow for Q100 differences. Flooding will not occur offsite due to this project based on flow rate match at perimeter POC locations.

*iii) create or contribute runoff water which would exceed the capacity o existing or planned stormwater drainage systems or provide substantial sources o polluted runoff.*

Answer: See answer about drainage system capacity in Item ii) above.

Table 1: 2-Year Storm Hydromodification Compliance Summary

| Watershed/POC | Ex. Hydrology Node | Ex. $Q_2$ Rate (cfs) | 110% Ex. $Q_2$ (cfs) | Prop. Hydrology Node | Prop. $Q_2$ Pre-Mitigation Rate (cfs) | Detention Basin Storage (cf) | Prop. $Q_2$ Post-Mitigation (cfs) | Post-Mitigation Exceedance (%) | Meets Compliance |
|---|---|---|---|---|---|---|---|---|---|
| C / 1 (c,d) | 213 | 3.1 | 3.4 | 215 | 2.5 | None | None | 81% | Yes |
| D / 2 (c,d) | 313 | 6.3 | 6.9 | 317 | 12.1 | 17,500 | 6.7 | 106% | Yes |
| E / 3 (a,b) | 25 | 25.1 | 27.6 | 27 | 71.5 | 190,575 | 27.4 | 109% | Yes |
| F / 4 (a,b) | 15 | 15.6 | 17.2 | 5 | 8.3 | None | None | 53% | Yes |

a) See Appendix 7, Ex. Condition 25-Year Storm Hydrology Map
b) See Appendix 8, Prop. Condition 25-Year Storm Hydrology Map
c) See Appendix 9, Ex. Condition 2-Year Hydromod Map for Watersheds 'C' & 'D'
d) See Appendix 10, Prop. Condition 2-Year Hydromod Map for Watersheds 'C' & 'D'

Table 2: 25-Year Storm Peak Flow Rate Summary

| Watershed/POC | Ex. Hydrology Node | Ex. $Q_{25}$ Rate (cfs) | Prop. Hydrology Node | Prop. $Q_{25}$ Pre-Mitigation Rate (cfs) | Storage (cf) | Prop. $Q_{25}$ Post-Mitigation (cfs) | Post-Mitigation vs. Ex. $Q_{25}$ (%) | Meets Compliance |
|---|---|---|---|---|---|---|---|---|
| C / 1 (a,b) | 210 | 316.5 | 214 | 319.3 | None | None | 101% | Yes |
| D / 2 (a,b) | 310 | 83.0 | 315 | 87.9 | 17,500 | 80.0 | 96% | Yes |
| E / 3 (a,b) | 25 | 69.9 | 27 | 167.9 | 190,575 | 64.5 | 92% | Yes |
| F / 4 (a,b) | 15 | 44.0 | 5 | 18.9 | None | None | 43% | Yes |

a) See Appendix 7, Ex. Condition 25-Year Storm Hydrology Map
b) See Appendix 8, Prop. Condition 25-Year Storm Hydrology Map


# 6.0 REFERENCES

## 6.1 References


- City of Irvine Standards & Design Manual
- Orange County Hydrology Manual
- Jefferey Road Extension Hydrology / Hydraulics Report for Project # 00810743-MCE, prepared by Wilson Mikami, September 2019
- Offsite Hydrology Map for TT 16927 – PA-9B, PA-9C2 prepared by Hunsaker and Associates, June 2006.
- Advanced Engineering Software (AES) RATSCX, 2016
- California Environmental Quality Act (CEQA) Manual, City of Irvine, Vol. II, April 2020

# APPENDIX 1

## Figures 1-5

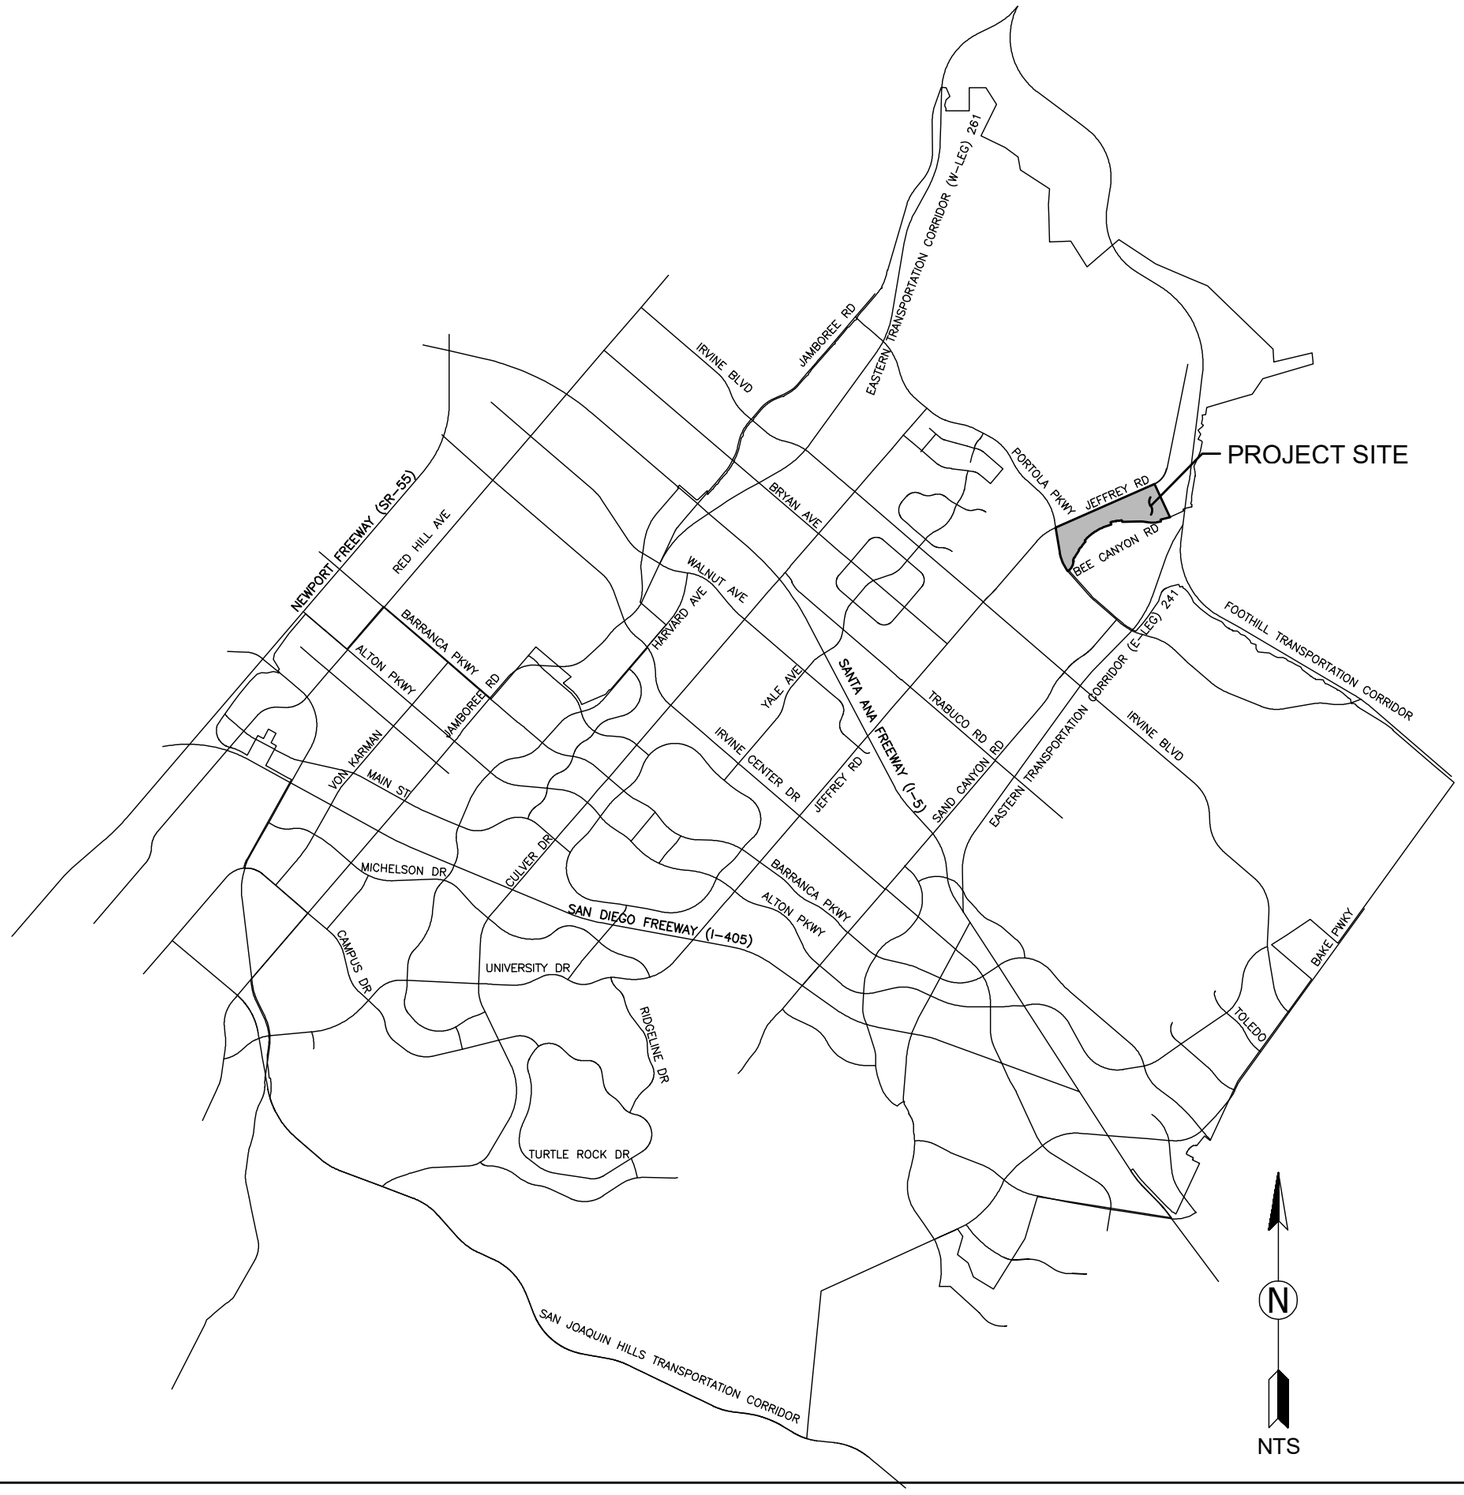



**Brookfield Residential**

GATEWAY VILLAGE | December 2024

# FIGURE 1
VICINITY MAP

I:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology\Exhibits\308-092-XH-Fig 1 Vicinity Map.dwg (12/5/2024) Plotted by: Michelle Penaloza

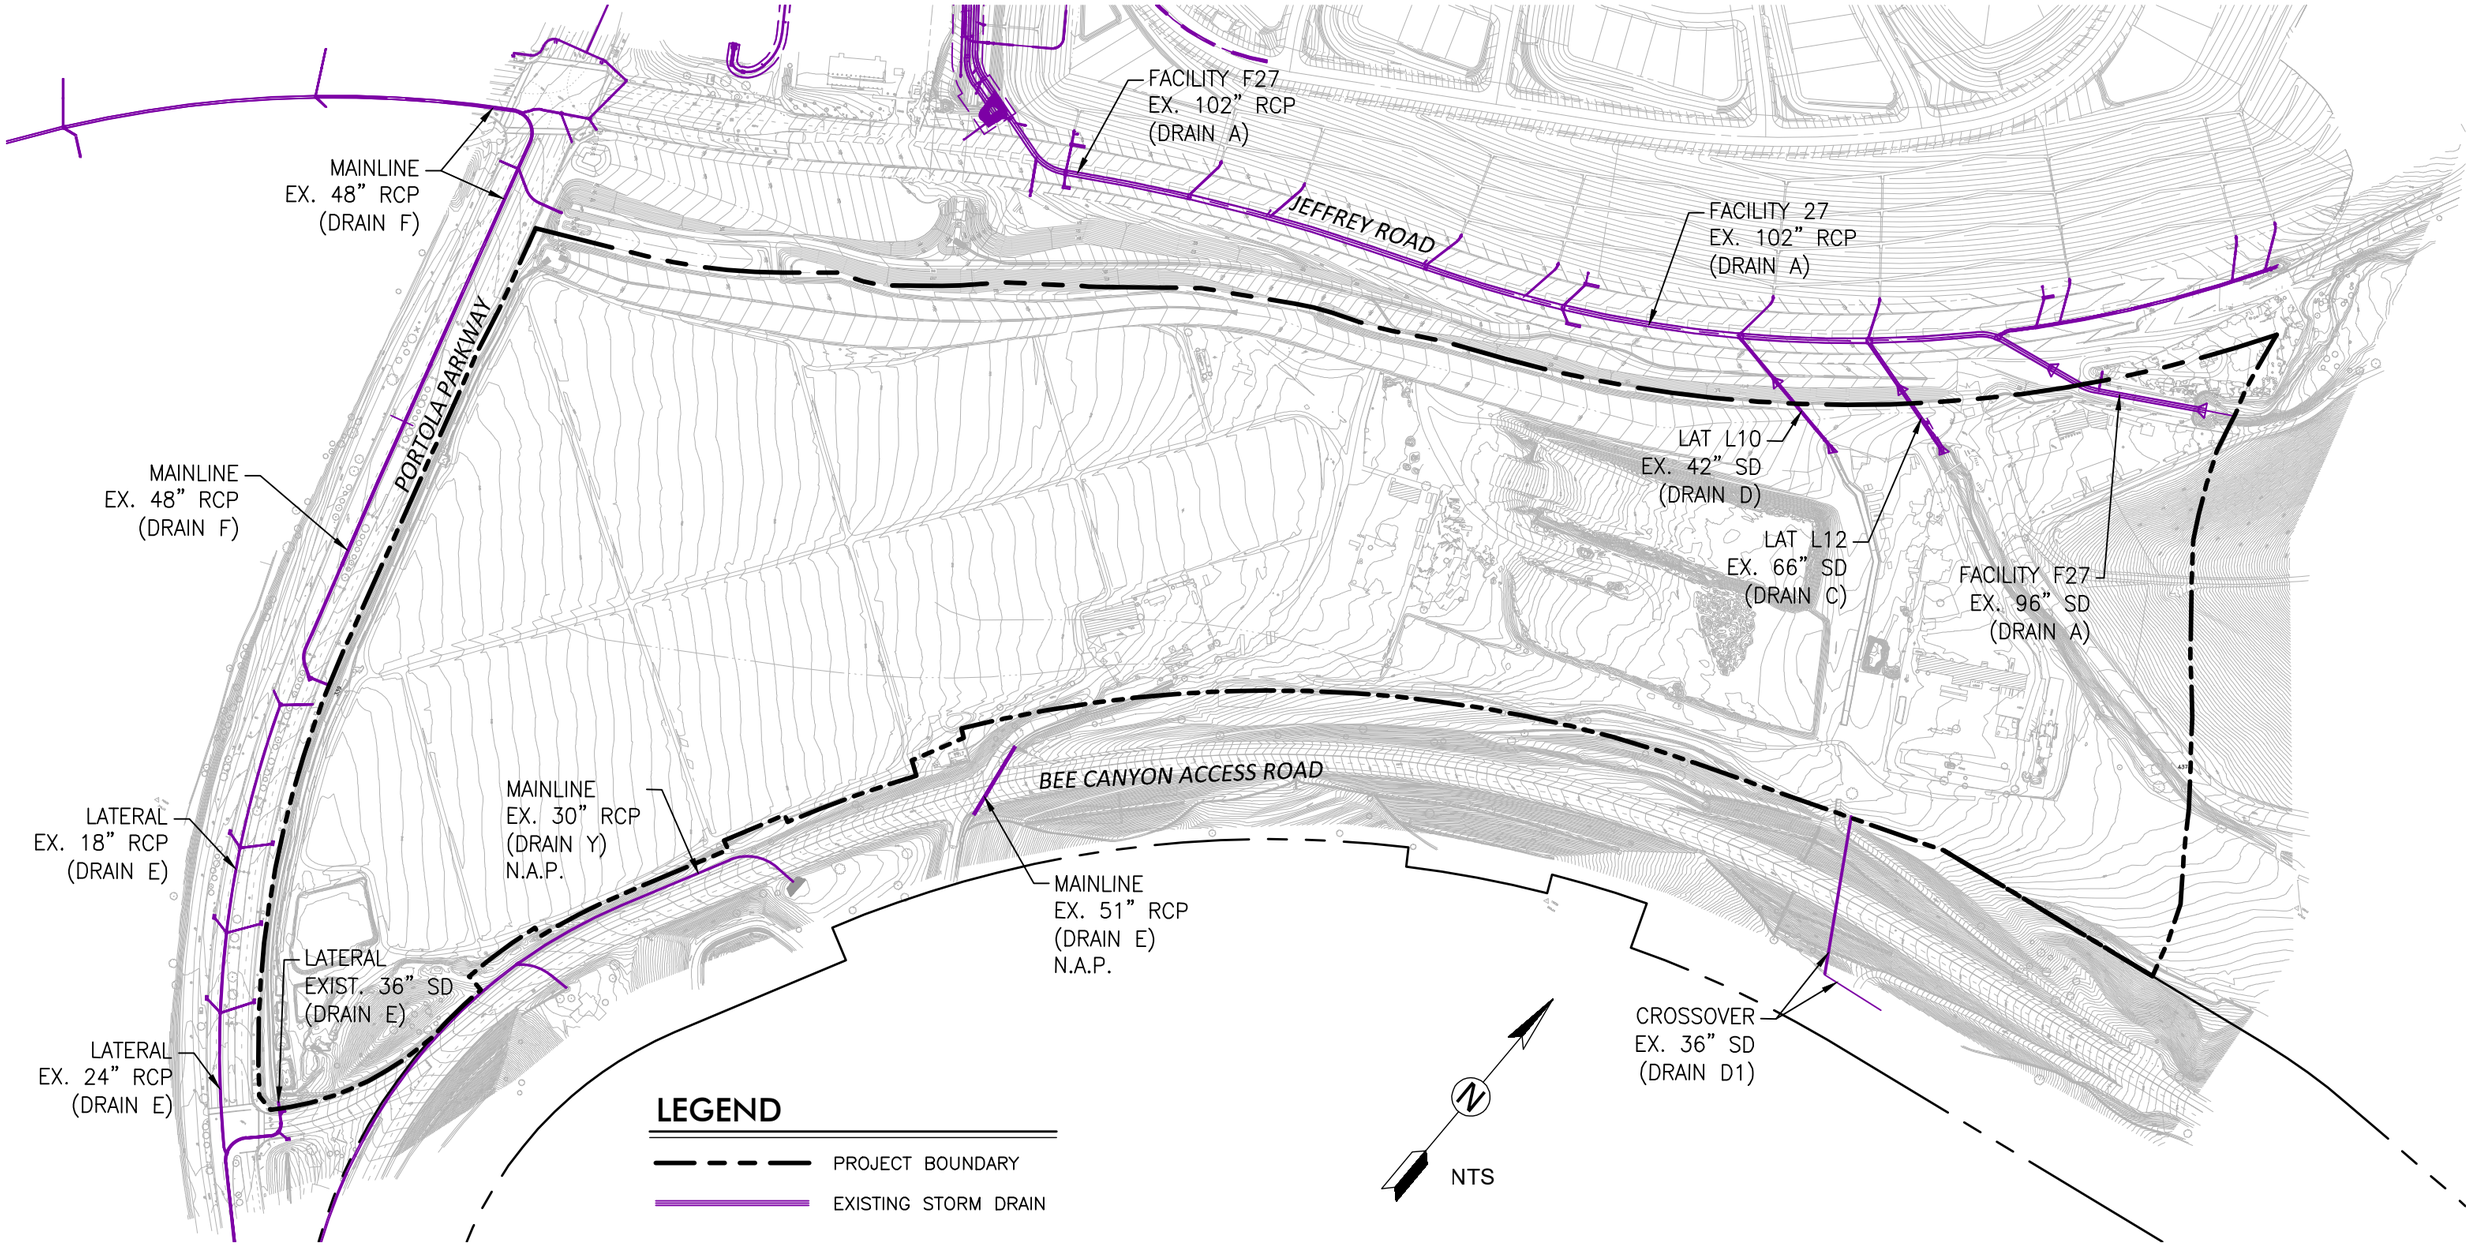


Brookfield Residential

GATEWAY VILLAGE | December 2024

# FIGURE 2

EXISTING STORM DRAIN FACILITIES

F:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology\Exhibits\308-092-XH-Fig 2 Existing Site & SD.dwg (12/3/2024) Plotted by: Michelle Pendoza

JEFFREY ROAD

PORTOLA PARKWAY

BEE CANYON ACCESS ROAD

POINT OF CONNECTION 1

POINT OF CONNECTION 2

POINT OF CONNECTION 3

POINT OF CONNECTION 4

SD

## LEGEND

- PROJECT BOUNDARY
- SD — PROPOSED STORM DRAIN
- EXISTING STORM DRAIN TO REMAIN
- SUB–WATERSHED C
- SUB–WATERSHED D
- SUB–WATERSHED E
- SUB–WATERSHED F

**Brookfield Residential**

GATEWAY VILLAGE | December 2024

CITY OF IRVINE 1971

FUSCOE ENGINEERING

# FIGURE 3

SD POC & WATERSHED BOUNDARIES

F:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology\Exhibits\308-092-PH-Fig 3 Prop SD POC & Watershed Bndry.dwg (12/3/2024) Plotted by: Michelle Penaloza

JOST – N.A.P.

JEFFREY ROAD

JOST – N.A.P.

PORTOLA PARKWAY

BEE CANYON ACCESS ROAD

SD

## LEGEND

- PROJECT BOUNDARY
- SD — PROPOSED STORM DRAIN
- PROPOSED DETENTION BASIN
- PROPOSED DITCH
- PROPOSED WATER QUALITY BIOSCAPE
- EXISTING STORM DRAIN TO REMAIN
- LOT LINE
- 1 — LOT NUMBER

N

NTS

Brookfield Residential


GATEWAY VILLAGE | December 2024

# FIGURE 4
PROPOSED STORM DRAIN FACILITIES

F:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology\Exhibits\308-092-HH-Fig 4 Prop Site & SD Exhibit.dwg (12/3/2024) Plotted by: Michelle Penaloza

# Watershed Infiltration & Hydromodification Management Plan (WIHMP)

**WIHMP_Dataset - Susceptibility**

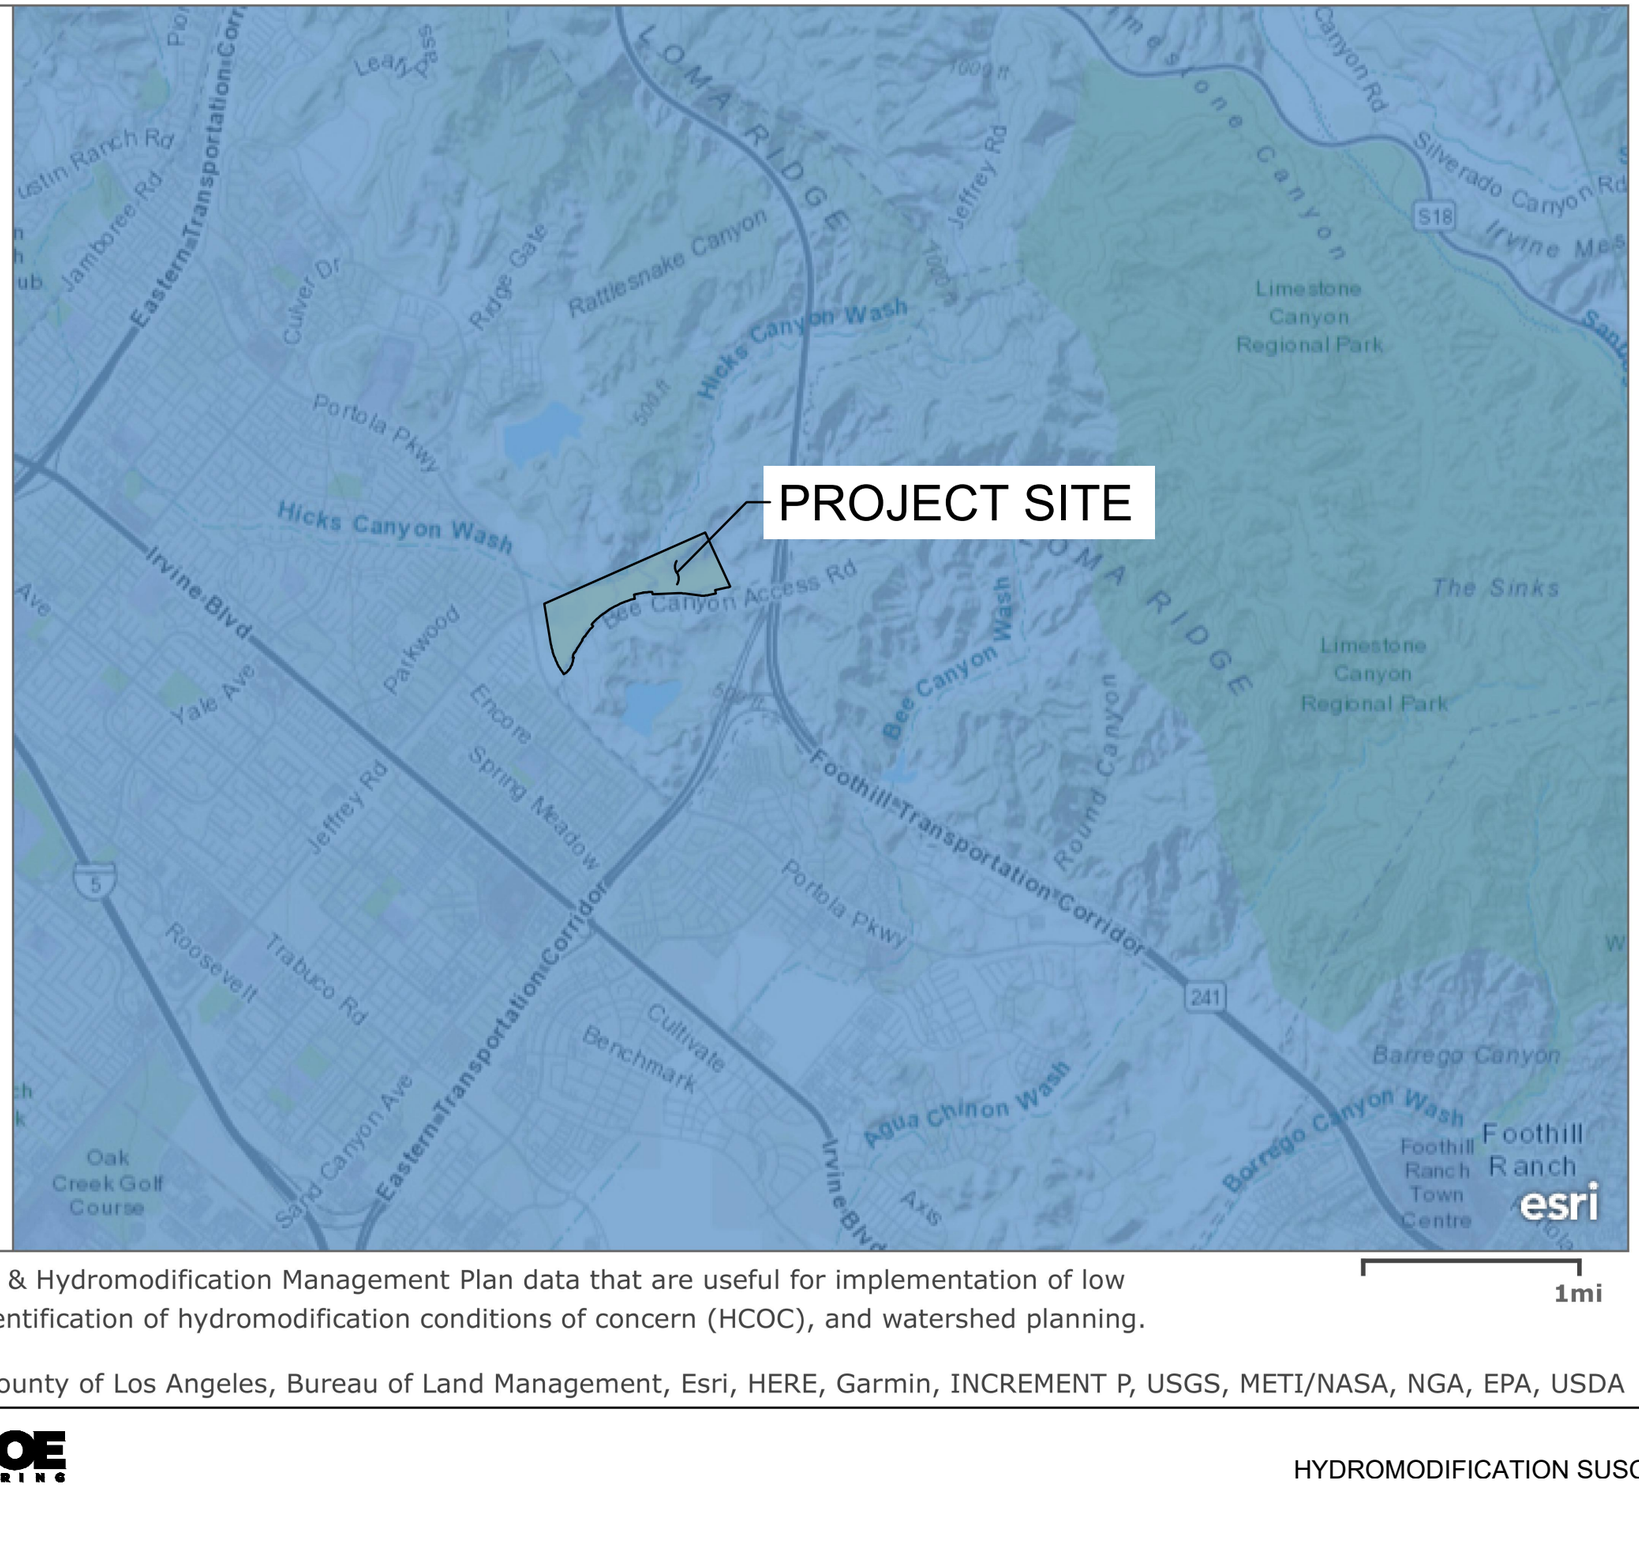


(WIHMP) Watershed Infiltration & Hydromodification Management Plan data that are useful for implementation of low impact development (LID), indentification of hydromodification conditions of concern (HCOC), and watershed planning.

City of Irvine, County of Los Angeles, Bureau of Land Management, Esri, HERE, Garmin, INCREMENT P, USGS, METI/NASA, NGA, EPA, USDA

Brookfield Residential | GATEWAY VILLAGE | December 2024

FUSCOE ENGINEERING

**FIGURE 5**
HYDROMODIFICATION SUSCEPTIBILITY MAP

F:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology\Exhibits\308-092-XH-Fig 5 Hydromodification Susceptibility.dwg (12/3/2024) Plotted by: Michelle Penaloza

# APPENDIX 2

## Existing 2-Year Storm AES Calculations

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                           Analysis prepared by:




 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE EXISTING CONDITION                                      *
* WATERSHED 'C' 2 YEAR HYDROMOD                                           *
* 12/5/24 JZ                                                              *
 **************************************************************************

  FILE NAME: GVCEX2.DAT
  TIME/DATE OF STUDY: 08:59 12/05/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)   (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE    211.00 TO NODE    212.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    429.50  DOWNSTREAM(FEET) =    421.50

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   15.111
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.200
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"               A        0.50      0.40      1.000    28   15.11
  NATURAL FAIR COVER
  "OPEN BRUSH"               B        0.70      0.30      1.000    46   15.11
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.34
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      0.93
  TOTAL AREA(ACRES) =      1.20   PEAK FLOW RATE(CFS) =      0.93

****************************************************************************
  FLOW PROCESS FROM NODE    212.00 TO NODE    213.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    421.50  DOWNSTREAM(FEET) =    410.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   556.00   CHANNEL SLOPE =  0.0207
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.069
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               A        0.70      0.40      1.000    28
  NATURAL FAIR COVER
  "OPEN BRUSH"               B        2.80      0.30      1.000    46
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.32
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       2.11
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.74
  AVERAGE FLOW DEPTH(FEET) =   0.51   TRAVEL TIME(MIN.) =   3.38
  Tc(MIN.) =   18.49
  SUBAREA AREA(ACRES) =     3.50       SUBAREA RUNOFF(CFS) =    2.36
  EFFECTIVE AREA(ACRES) =      4.70     AREA-AVERAGED Fm(INCH/HR) =   0.33
  AREA-AVERAGED Fp(INCH/HR) =   0.33  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =        4.7         PEAK FLOW RATE(CFS) =       3.14

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.58   FLOW VELOCITY(FEET/SEC.) =   3.07
  LONGEST FLOWPATH FROM NODE    211.00 TO NODE    213.00 =     886.00 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =        4.7  TC(MIN.) =     18.49
  EFFECTIVE AREA(ACRES) =      4.70  AREA-AVERAGED Fm(INCH/HR)=  0.33
  AREA-AVERAGED Fp(INCH/HR) =  0.33  AREA-AVERAGED Ap = 1.000
  PEAK FLOW RATE(CFS)   =       3.14
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                           Analysis prepared by:




 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE EXISTING CONDITION                                      *
* WATERSHED 'D' 2 YEAR HYDROMOD                                           *
* 12/5/24 JZ                                                              *
 **************************************************************************

  FILE NAME: GVDEX2.DAT
  TIME/DATE OF STUDY: 08:48 12/05/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)   (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE    311.00 TO NODE    312.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    425.00  DOWNSTREAM(FEET) =    413.90

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   14.153
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.246
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"                A        2.10      0.40      1.000    28   14.15
  NATURAL FAIR COVER
  "OPEN BRUSH"                C        3.50      0.25      1.000    59   14.15
  NATURAL FAIR COVER
  "OPEN BRUSH"                D        0.20      0.20      1.000    67   14.15
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      4.92
  TOTAL AREA(ACRES) =      5.80   PEAK FLOW RATE(CFS) =      4.92

****************************************************************************
  FLOW PROCESS FROM NODE    312.00 TO NODE    313.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    413.90  DOWNSTREAM(FEET) =    410.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   437.00   CHANNEL SLOPE =  0.0089
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.123
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                A        2.10      0.40      1.000    28
  NATURAL FAIR COVER
  "OPEN BRUSH"                B        0.50      0.30      1.000    46
  NATURAL FAIR COVER
  "OPEN BRUSH"                C        0.30      0.25      1.000    59
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.37
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       5.91
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.59
  AVERAGE FLOW DEPTH(FEET) =   0.87   TRAVEL TIME(MIN.) =   2.81
  Tc(MIN.) =   16.97
  SUBAREA AREA(ACRES) =     2.90       SUBAREA RUNOFF(CFS) =    1.97
  EFFECTIVE AREA(ACRES) =      8.70     AREA-AVERAGED Fm(INCH/HR) =   0.32
  AREA-AVERAGED Fp(INCH/HR) =   0.32  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =        8.7         PEAK FLOW RATE(CFS) =       6.25

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.89   FLOW VELOCITY(FEET/SEC.) =   2.63
  LONGEST FLOWPATH FROM NODE    311.00 TO NODE    313.00 =     767.00 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =        8.7  TC(MIN.) =     16.97
  EFFECTIVE AREA(ACRES) =      8.70  AREA-AVERAGED Fm(INCH/HR)=  0.32
  AREA-AVERAGED Fp(INCH/HR) =  0.32  AREA-AVERAGED Ap = 1.000
  PEAK FLOW RATE(CFS)   =       6.25
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
            RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
           (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
         (c) Copyright 1983-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:
```

# EXISTING 2-YEAR FOR WATERSHEDS 'B', 'E', & 'F'

```
 ************************* DESCRIPTION OF STUDY *************************
* GATEWAY VILLAGE                                                      *
* 2-YEAR STORM EVENT - EX. CONDTION                                    *
* 2024-12-05                                                           *
 ************************************************************************

  FILE NAME: GV2EX.DAT
  TIME/DATE OF STUDY: 16:36 12/05/2024
========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
========================================================================
                    --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =   6.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.90
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  ========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE      1.00 TO NODE      2.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   305.00
  ELEVATION DATA: UPSTREAM(FEET) =    361.20  DOWNSTREAM(FEET) =    353.50

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   10.800
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.455
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   B        0.20      0.30     1.000    64   10.80
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      0.21
  TOTAL AREA(ACRES) =      0.20   PEAK FLOW RATE(CFS) =      0.21

****************************************************************************
  FLOW PROCESS FROM NODE      2.00 TO NODE      3.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    353.50  DOWNSTREAM(FEET) =    346.50
  CHANNEL LENGTH THRU SUBAREA(FEET) =   228.00   CHANNEL SLOPE =  0.0307
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.327
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   B        0.30      0.30     1.000    64
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       0.35
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.02
  AVERAGE FLOW DEPTH(FEET) =   0.24   TRAVEL TIME(MIN.) =   1.88
  Tc(MIN.) =   12.68
  SUBAREA AREA(ACRES) =     0.30       SUBAREA RUNOFF(CFS) =    0.28
  EFFECTIVE AREA(ACRES) =      0.50     AREA-AVERAGED Fm(INCH/HR) =   0.30
  AREA-AVERAGED Fp(INCH/HR) =   0.30  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =        0.5         PEAK FLOW RATE(CFS) =       0.46

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.26   FLOW VELOCITY(FEET/SEC.) =   2.21
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      3.00 =     533.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE      3.00 TO NODE      4.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   346.50  DOWNSTREAM(FEET) =   344.00
  FLOW LENGTH(FEET) =    29.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN   6.0 INCH PIPE IS   2.2 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   6.98
  ESTIMATED PIPE DIAMETER(INCH) =   6.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       0.46
  PIPE TRAVEL TIME(MIN.) =   0.07    Tc(MIN.) =   12.75
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      4.00 =     562.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     10.00 TO NODE     11.00 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
```

```
 INITIAL SUBAREA FLOW-LENGTH(FEET) =   295.00
 ELEVATION DATA: UPSTREAM(FEET) =    425.70  DOWNSTREAM(FEET) =    420.20

 Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   11.323
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.416
 SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        1.10      0.25     1.000    75   11.32
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.20      0.40     1.000    53   11.32
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 SUBAREA RUNOFF(CFS) =      1.34
 TOTAL AREA(ACRES) =      1.30   PEAK FLOW RATE(CFS) =      1.34

****************************************************************************
 FLOW PROCESS FROM NODE     11.00 TO NODE     12.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    420.20  DOWNSTREAM(FEET) =    396.20
 CHANNEL LENGTH THRU SUBAREA(FEET) =   529.00   CHANNEL SLOPE =  0.0454
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.270
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        1.40      0.25     1.000    75
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.80      0.40     1.000    53
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       2.30
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.73
 AVERAGE FLOW DEPTH(FEET) =   0.45   TRAVEL TIME(MIN.) =   2.36
 Tc(MIN.) =   13.69
 SUBAREA AREA(ACRES) =     2.20       SUBAREA RUNOFF(CFS) =    1.91
 EFFECTIVE AREA(ACRES) =      3.50     AREA-AVERAGED Fm(INCH/HR) =   0.29
 AREA-AVERAGED Fp(INCH/HR) =   0.29  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =        3.5         PEAK FLOW RATE(CFS) =       3.08

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  0.50   FLOW VELOCITY(FEET/SEC.) =   4.09
 LONGEST FLOWPATH FROM NODE     10.00 TO NODE     12.00 =     824.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     12.00 TO NODE     13.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    396.20  DOWNSTREAM(FEET) =    387.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =   454.00   CHANNEL SLOPE =  0.0203
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
```

```
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.165
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   C        5.10      0.25     1.000    75
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       5.18
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.40
  AVERAGE FLOW DEPTH(FEET) =   0.71   TRAVEL TIME(MIN.) =   2.22
  Tc(MIN.) =   15.91
  SUBAREA AREA(ACRES) =     5.10       SUBAREA RUNOFF(CFS) =    4.20
  EFFECTIVE AREA(ACRES) =      8.60     AREA-AVERAGED Fm(INCH/HR) =   0.27
  AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =        8.6         PEAK FLOW RATE(CFS) =       6.95

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.80   FLOW VELOCITY(FEET/SEC.) =   3.65
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     13.00 =    1278.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     13.00 TO NODE     14.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    387.00  DOWNSTREAM(FEET) =    361.20
  CHANNEL LENGTH THRU SUBAREA(FEET) =  1087.00   CHANNEL SLOPE =  0.0237
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.014
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   A        0.50      0.40     1.000    53
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   B        2.50      0.30     1.000    64
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   C        3.50      0.25     1.000    75
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.28
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       9.10
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   4.18
  AVERAGE FLOW DEPTH(FEET) =   0.85   TRAVEL TIME(MIN.) =   4.33
  Tc(MIN.) =   20.24
  SUBAREA AREA(ACRES) =     6.50       SUBAREA RUNOFF(CFS) =    4.29
  EFFECTIVE AREA(ACRES) =     15.10     AREA-AVERAGED Fm(INCH/HR) =   0.27
  AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       15.1         PEAK FLOW RATE(CFS) =      10.07

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.89   FLOW VELOCITY(FEET/SEC.) =   4.26
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     14.00 =    2365.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     15.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
```

```
==========================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    361.20  DOWNSTREAM(FEET) =    337.10
  CHANNEL LENGTH THRU SUBAREA(FEET) =  1249.00   CHANNEL SLOPE =  0.0193
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   2.000
  MANNING'S FACTOR = 0.015   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  0.944
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   B        3.40      0.30     1.000    64
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   C        7.00      0.25     1.000    75
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   A        0.20      0.40     1.000    53
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      13.29
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.72
  AVERAGE FLOW DEPTH(FEET) =   0.93   TRAVEL TIME(MIN.) =   2.70
  Tc(MIN.) =   22.94
  SUBAREA AREA(ACRES) =    10.60       SUBAREA RUNOFF(CFS) =    6.44
  EFFECTIVE AREA(ACRES) =     25.70     AREA-AVERAGED Fm(INCH/HR) =   0.27
  AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       25.7         PEAK FLOW RATE(CFS) =      15.56

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.99   FLOW VELOCITY(FEET/SEC.) =   7.99
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     15.00 =    3614.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     20.00 TO NODE     21.00 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   298.00
  ELEVATION DATA: UPSTREAM(FEET) =    427.30  DOWNSTREAM(FEET) =    413.80

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    9.520
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.564
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   C        1.30      0.25     1.000    75    9.52
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      1.54
  TOTAL AREA(ACRES) =      1.30   PEAK FLOW RATE(CFS) =      1.54

****************************************************************************
  FLOW PROCESS FROM NODE     21.00 TO NODE     22.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    413.80  DOWNSTREAM(FEET) =    391.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   800.00   CHANNEL SLOPE =  0.0285
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
```

```
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.301
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        5.60      0.25     1.000    75
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.20      0.40     1.000    53
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       4.28
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.70
 AVERAGE FLOW DEPTH(FEET) =   0.62   TRAVEL TIME(MIN.) =   3.60
 Tc(MIN.) =   13.12
 SUBAREA AREA(ACRES) =     5.80       SUBAREA RUNOFF(CFS) =    5.46
 EFFECTIVE AREA(ACRES) =      7.10     AREA-AVERAGED Fm(INCH/HR) =   0.25
 AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =        7.1         PEAK FLOW RATE(CFS) =       6.69

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  0.74   FLOW VELOCITY(FEET/SEC.) =   4.12
 LONGEST FLOWPATH FROM NODE     20.00 TO NODE     22.00 =    1098.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     22.00 TO NODE     23.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    391.00  DOWNSTREAM(FEET) =    377.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =   707.00   CHANNEL SLOPE =  0.0198
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.156
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        6.70      0.25     1.000    75
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.10      0.40     1.000    53
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       9.46
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.93
 AVERAGE FLOW DEPTH(FEET) =   0.90   TRAVEL TIME(MIN.) =   3.00
 Tc(MIN.) =   16.12
 SUBAREA AREA(ACRES) =     6.80       SUBAREA RUNOFF(CFS) =    5.53
 EFFECTIVE AREA(ACRES) =     13.90     AREA-AVERAGED Fm(INCH/HR) =   0.25
 AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =       13.9         PEAK FLOW RATE(CFS) =      11.30

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  0.96   FLOW VELOCITY(FEET/SEC.) =   4.12
 LONGEST FLOWPATH FROM NODE     20.00 TO NODE     23.00 =    1805.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     23.00 TO NODE     24.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
```

```
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    377.00  DOWNSTREAM(FEET) =    365.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   469.00   CHANNEL SLOPE =  0.0256
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.094
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   C        6.40      0.25     1.000    75
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      13.73
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   4.75
  AVERAGE FLOW DEPTH(FEET) =   0.98   TRAVEL TIME(MIN.) =   1.65
  Tc(MIN.) =   17.76
  SUBAREA AREA(ACRES) =     6.40       SUBAREA RUNOFF(CFS) =    4.86
  EFFECTIVE AREA(ACRES) =     20.30     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       20.3         PEAK FLOW RATE(CFS) =      15.37

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.03   FLOW VELOCITY(FEET/SEC.) =   4.87
  LONGEST FLOWPATH FROM NODE     20.00 TO NODE     24.00 =    2274.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     24.00 TO NODE     25.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    365.00  DOWNSTREAM(FEET) =    335.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  1896.00   CHANNEL SLOPE =  0.0158
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   2.000
  MANNING'S FACTOR = 0.015   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  0.974
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   C       16.80      0.25     1.000    75
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   A        1.80      0.40     1.000    53
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      21.32
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.99
  AVERAGE FLOW DEPTH(FEET) =   1.15   TRAVEL TIME(MIN.) =   3.95
  Tc(MIN.) =   21.71
  SUBAREA AREA(ACRES) =    18.60       SUBAREA RUNOFF(CFS) =   11.88
  EFFECTIVE AREA(ACRES) =     38.90     AREA-AVERAGED Fm(INCH/HR) =   0.26
  AREA-AVERAGED Fp(INCH/HR) =   0.26  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       38.9         PEAK FLOW RATE(CFS) =      25.08

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.23   FLOW VELOCITY(FEET/SEC.) =   8.35
  LONGEST FLOWPATH FROM NODE     20.00 TO NODE     25.00 =    4170.00 FEET.
================================================================================
  END OF STUDY SUMMARY:
```

```
  TOTAL AREA(ACRES)      =       38.9  TC(MIN.) =     21.71
  EFFECTIVE AREA(ACRES) =     38.90  AREA-AVERAGED Fm(INCH/HR)=  0.26
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap = 1.000
  PEAK FLOW RATE(CFS)    =      25.08
================================================================================
================================================================================
  END OF RATIONAL METHOD ANALYSIS
```

# APPENDIX 3

## Existing 25-Year Storm AES Calculations

# WILSON MIKAMI AES RUN FOR WATERSHED 'C'

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                           Analysis prepared by:

                          Fuscoe Engineering, Inc.
                           15535 Sand Canyon Ave
                                 Suite 100
                              Irvine, CA 92618

 ************************* DESCRIPTION OF STUDY ************************
* EXISTING WATERSHED TRIBUTARY TO 102" SD FACILITY "F27"                 *
* 25-YEAR HYDRAULIC RUN                                                 *
* BY KAM 011819                                                         *
 **************************************************************************

  FILE NAME: EX25YR.DAT
  TIME/DATE OF STUDY: 16:13 11/05/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE    200.00 TO NODE    202.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   300.00
  ELEVATION DATA: UPSTREAM(FEET) =    745.00  DOWNSTREAM(FEET) =    680.00

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    9.386
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.377
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"                C        0.80      0.25     1.000    77    9.39
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
```

```
  SUBAREA RUNOFF(CFS) =      2.25
  TOTAL AREA(ACRES) =      0.80   PEAK FLOW RATE(CFS) =      2.25

****************************************************************************
  FLOW PROCESS FROM NODE    202.00 TO NODE    204.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    680.00  DOWNSTREAM(FEET) =    608.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   984.00   CHANNEL SLOPE =  0.0732
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.991
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 C        2.70      0.25     0.100    69
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        5.00      0.25     1.000    77
  COMMERCIAL                 D        0.90      0.20     0.100    75
  NATURAL FAIR COVER
  "OPEN BRUSH"               D        0.60      0.20     1.000    83
  NATURAL FAIR COVER
  "OPEN BRUSH"               B        1.50      0.30     1.000    66
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.697
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      15.83
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.31
  AVERAGE FLOW DEPTH(FEET) =   0.85   TRAVEL TIME(MIN.) =   2.24
  Tc(MIN.) =   11.63
  SUBAREA AREA(ACRES) =    10.70       SUBAREA RUNOFF(CFS) =   27.09
  EFFECTIVE AREA(ACRES) =     11.50     AREA-AVERAGED Fm(INCH/HR) =   0.18
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   0.72
  TOTAL AREA(ACRES) =       11.5         PEAK FLOW RATE(CFS) =      29.07

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.07   FLOW VELOCITY(FEET/SEC.) =   8.54
  LONGEST FLOWPATH FROM NODE    200.00 TO NODE    204.00 =    1284.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    204.00 TO NODE    206.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    608.00  DOWNSTREAM(FEET) =    510.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  1446.80   CHANNEL SLOPE =  0.0677
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.662
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               A        1.60      0.40     1.000    46
  NATURAL FAIR COVER
  "OPEN BRUSH"               B        4.20      0.30     1.000    66
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        5.70      0.25     1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.29
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      41.36
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   9.07
  AVERAGE FLOW DEPTH(FEET) =   1.23   TRAVEL TIME(MIN.) =   2.66
  Tc(MIN.) =   14.29
  SUBAREA AREA(ACRES) =    11.50       SUBAREA RUNOFF(CFS) =   24.56
```

```
  EFFECTIVE AREA(ACRES) =     23.00     AREA-AVERAGED Fm(INCH/HR) =   0.24
  AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   0.86
  TOTAL AREA(ACRES) =       23.0         PEAK FLOW RATE(CFS) =      50.22

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.33   FLOW VELOCITY(FEET/SEC.) =   9.46
  LONGEST FLOWPATH FROM NODE    200.00 TO NODE    206.00 =    2730.80 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    206.00 TO NODE    206.00 IS CODE =  16
----------------------------------------------------------------------------
  >>>>>USER SPECIFIED CONSTANT SOURCE FLOW AT NODE<<<<<
============================================================================
  USER-SPECIFIED CONSTANT SOURCE FLOW =    77.00(CFS)
  USER-SPECIFIED AREA ASSOCIATED TO SOURCE FLOW =    23.01(ACRES)
  * CUMULATIVE SOURCE FLOW DATA: FLOW(CFS) =    77.00  AREA(AC.) =    23.01
  * SUMMED DATA: FLOW(CFS) =   127.22    TOTAL AREA(ACRES) =    46.01

****************************************************************************
  FLOW PROCESS FROM NODE    206.00 TO NODE    208.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    510.00  DOWNSTREAM(FEET) =    445.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  1835.40   CHANNEL SLOPE =  0.0354
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   4.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.401
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               A        8.20      0.40     1.000    46
  COMMERCIAL                 B        4.80      0.30     0.100    56
  NATURAL FAIR COVER
  "OPEN BRUSH"               B       17.80      0.30     1.000    66
  COMMERCIAL                 C        1.20      0.25     0.100    69
  NATURAL FAIR COVER
  "OPEN BRUSH"               C       38.00      0.25     1.000    77
  NATURAL FAIR COVER
  "OPEN BRUSH"               D       20.30      0.20     1.000    83
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.940
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =     214.84
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =  10.68
  AVERAGE FLOW DEPTH(FEET) =   2.59   TRAVEL TIME(MIN.) =   2.86
  Tc(MIN.) =   17.15
  SUBAREA AREA(ACRES) =    90.30       SUBAREA RUNOFF(CFS) =  174.99
  EFFECTIVE AREA(ACRES) =    113.30     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   0.92
  TOTAL AREA(ACRES) =      113.3         PEAK FLOW RATE(CFS) =     219.80

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  2.92   FLOW VELOCITY(FEET/SEC.) =  11.61
  * TOTAL SOURCE FLOW(CFS) =      77.00
  LONGEST FLOWPATH FROM NODE    200.00 TO NODE    208.00 =    4566.20 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    208.00 TO NODE    210.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    445.00  DOWNSTREAM(FEET) =    410.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  1533.20   CHANNEL SLOPE =  0.0228
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
```

```
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   4.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.219
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 NATURAL FAIR COVER
 "OPEN BRUSH"               A        7.40      0.40     1.000    46
 NATURAL FAIR COVER
 "OPEN BRUSH"               B        7.10      0.30     1.000    66
 NATURAL FAIR COVER
 "OPEN BRUSH"               C        4.10      0.25     1.000    77
 NATURAL FAIR COVER
 "OPEN BRUSH"               D        3.60      0.20     1.000    83
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.31
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =     315.90
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   9.99
 AVERAGE FLOW DEPTH(FEET) =   3.25   TRAVEL TIME(MIN.) =   2.56
 Tc(MIN.) =   19.71
 SUBAREA AREA(ACRES) =    22.20       SUBAREA RUNOFF(CFS) =   38.19
 EFFECTIVE AREA(ACRES) =    135.50     AREA-AVERAGED Fm(INCH/HR) =   0.26
 AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   0.94
 TOTAL AREA(ACRES) =      135.5         PEAK FLOW RATE(CFS) =     239.46

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  3.25   FLOW VELOCITY(FEET/SEC.) =  10.00
 * TOTAL SOURCE FLOW(CFS) =      77.00
 LONGEST FLOWPATH FROM NODE    200.00 TO NODE    210.00 =    6099.40 FEET.
================================================================================
 END OF STUDY SUMMARY:
 TOTAL AREA(ACRES)     =      135.5  TC(MIN.) =     19.71
 EFFECTIVE AREA(ACRES) =    135.50  AREA-AVERAGED Fm(INCH/HR)=  0.26
 AREA-AVERAGED Fp(INCH/HR) =  0.27  AREA-AVERAGED Ap = 0.936
 PEAK FLOW RATE(CFS)   =     239.46
 * CUMULATIVE SOURCE FLOW DATA: FLOW(CFS) =      77.00  AREA(AC.) =       23.0
 * SUMMED DATA: FLOW(CFS) =     316.46    TOTAL AREA(ACRES) =      158.5
================================================================================
================================================================================
 END OF RATIONAL METHOD ANALYSIS
```

# WILSON MIKAMI AES RUN FOR WATERSHED 'D'

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                              Analysis prepared by:

                             Fuscoe Engineering, Inc.
                              15535 Sand Canyon Ave
                                    Suite 100
                                 Irvine, CA 92618

 ************************** DESCRIPTION OF STUDY ************************
* EXISTING WATERSHED TRIBUTARY TO 102" SD FACILITY "F27"                  *
* 25-YEAR HYDRAULIC RUN NODE D                                            *
* BY KAM 011819                                                           *
 **************************************************************************

  FILE NAME: WMEX25.DAT
  TIME/DATE OF STUDY: 17:01 11/05/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                      --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)   (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE    300.00 TO NODE    302.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   300.00
  ELEVATION DATA: UPSTREAM(FEET) =    640.00  DOWNSTREAM(FEET) =    620.00

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   11.882
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.955
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        0.20      0.25      1.000    77   11.88
  NATURAL FAIR COVER
  "OPEN BRUSH"               D        0.20      0.20      1.000    83   11.88
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.23
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      0.98
  TOTAL AREA(ACRES) =      0.40   PEAK FLOW RATE(CFS) =      0.98

****************************************************************************
  FLOW PROCESS FROM NODE    302.00 TO NODE    304.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    620.00  DOWNSTREAM(FEET) =    430.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  2812.10   CHANNEL SLOPE =  0.0676
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.311
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               C       17.20      0.25      1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      17.14
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.25
  AVERAGE FLOW DEPTH(FEET) =   0.89   TRAVEL TIME(MIN.) =   6.47
  Tc(MIN.) =   18.35
  SUBAREA AREA(ACRES) =    17.20       SUBAREA RUNOFF(CFS) =   31.91
  EFFECTIVE AREA(ACRES) =     17.60     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       17.6         PEAK FLOW RATE(CFS) =      32.66

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.13   FLOW VELOCITY(FEET/SEC.) =   8.49
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    304.00 =    3112.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    304.00 TO NODE    306.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   430.00  DOWNSTREAM(FEET) =   425.00
  FLOW LENGTH(FEET) =   115.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  14.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  15.88
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      32.66
  PIPE TRAVEL TIME(MIN.) =   0.12    Tc(MIN.) =   18.47
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    306.00 =    3227.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    306.00 TO NODE    306.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
```

```
==========================================================================
  MAINLINE Tc(MIN.) =   18.47
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.303
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                C       17.20      0.25     1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA AREA(ACRES) =   17.20      SUBAREA RUNOFF(CFS) =   31.77
  EFFECTIVE AREA(ACRES) =     34.80   AREA-AVERAGED Fm(INCH/HR) =  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  1.00
  TOTAL AREA(ACRES) =       34.8       PEAK FLOW RATE(CFS) =      64.29

**************************************************************************
  FLOW PROCESS FROM NODE    306.00 TO NODE    308.00 IS CODE =  31
--------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
==========================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   425.00  DOWNSTREAM(FEET) =   422.00
  FLOW LENGTH(FEET) =   313.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  26.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  10.59
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      64.29
  PIPE TRAVEL TIME(MIN.) =   0.49    Tc(MIN.) =   18.96
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    308.00 =    3540.10 FEET.

**************************************************************************
  FLOW PROCESS FROM NODE    308.00 TO NODE    310.00 IS CODE =  51
--------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
==========================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    422.00  DOWNSTREAM(FEET) =    410.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   766.00   CHANNEL SLOPE =  0.0157
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   3.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.137
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                D       13.70      0.20     1.000    83
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.20
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      76.24
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   6.06
  AVERAGE FLOW DEPTH(FEET) =   2.05   TRAVEL TIME(MIN.) =   2.11
  Tc(MIN.) =   21.07
  SUBAREA AREA(ACRES) =    13.70       SUBAREA RUNOFF(CFS) =   23.89
  EFFECTIVE AREA(ACRES) =     48.50     AREA-AVERAGED Fm(INCH/HR) =   0.24
  AREA-AVERAGED Fp(INCH/HR) =   0.24  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       48.5         PEAK FLOW RATE(CFS) =      83.00

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  2.11   FLOW VELOCITY(FEET/SEC.) =   6.21
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    310.00 =    4306.10 FEET.
==========================================================================
```

```
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)      =       48.5  TC(MIN.) =     21.07
  EFFECTIVE AREA(ACRES) =     48.50  AREA-AVERAGED Fm(INCH/HR)=  0.24
  AREA-AVERAGED Fp(INCH/HR) =  0.24  AREA-AVERAGED Ap = 1.000
  PEAK FLOW RATE(CFS)    =      83.00
================================================================================
================================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
******************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:
```

## EXISTING 25-YEAR FOR WATERSHEDS 'B', 'E', & 'F'

```
 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE                                                        *
* 25-YEAR STORM EVENT - EX. CONDITION                                    *
* 2024-12-5 JZ                                                           *
 ************************************************************************

  FILE NAME: GV25EX.DAT
  TIME/DATE OF STUDY: 15:44 12/05/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                    --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =   6.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.90
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)   (FT)  (FT)    (n)
===  =====  ========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

******************************************************************************
  FLOW PROCESS FROM NODE      1.00 TO NODE      2.00 IS CODE =  21
------------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   305.00
  ELEVATION DATA: UPSTREAM(FEET) =    361.20  DOWNSTREAM(FEET) =    353.50

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   10.800
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.119
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   B        0.20      0.30     1.000    81   10.80
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      0.51
  TOTAL AREA(ACRES) =      0.20   PEAK FLOW RATE(CFS) =      0.51

****************************************************************************
  FLOW PROCESS FROM NODE      2.00 TO NODE      3.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    353.50  DOWNSTREAM(FEET) =    346.50
  CHANNEL LENGTH THRU SUBAREA(FEET) =   228.00   CHANNEL SLOPE =  0.0307
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.902
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  AGRICULTURAL POOR COVER
  "ROW CROPS,STRAIGHT ROW"   B        0.30      0.30     1.000    81
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       0.86
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.58
  AVERAGE FLOW DEPTH(FEET) =   0.33   TRAVEL TIME(MIN.) =   1.47
  Tc(MIN.) =   12.27
  SUBAREA AREA(ACRES) =     0.30       SUBAREA RUNOFF(CFS) =    0.70
  EFFECTIVE AREA(ACRES) =      0.50     AREA-AVERAGED Fm(INCH/HR) =   0.30
  AREA-AVERAGED Fp(INCH/HR) =   0.30  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =        0.5         PEAK FLOW RATE(CFS) =       1.17

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.38   FLOW VELOCITY(FEET/SEC.) =   2.75
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      3.00 =     533.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE      3.00 TO NODE      4.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   346.50  DOWNSTREAM(FEET) =   344.00
  FLOW LENGTH(FEET) =    29.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN   6.0 INCH PIPE IS   3.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   8.73
  ESTIMATED PIPE DIAMETER(INCH) =   6.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       1.17
  PIPE TRAVEL TIME(MIN.) =   0.06    Tc(MIN.) =   12.33
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      4.00 =     562.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     10.00 TO NODE     11.00 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
```

```
 INITIAL SUBAREA FLOW-LENGTH(FEET) =   295.00
 ELEVATION DATA: UPSTREAM(FEET) =    425.70  DOWNSTREAM(FEET) =    420.20

 Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   11.323
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.037
 SUBAREA Tc AND LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        1.10      0.25     1.000    88   11.32
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.20      0.40     1.000    72   11.32
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 SUBAREA RUNOFF(CFS) =      3.23
 TOTAL AREA(ACRES) =      1.30   PEAK FLOW RATE(CFS) =      3.23

****************************************************************************
 FLOW PROCESS FROM NODE     11.00 TO NODE     12.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    420.20  DOWNSTREAM(FEET) =    396.20
 CHANNEL LENGTH THRU SUBAREA(FEET) =   529.00   CHANNEL SLOPE =  0.0454
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.784
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        1.40      0.25     1.000    88
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.80      0.40     1.000    72
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       5.69
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   4.69
 AVERAGE FLOW DEPTH(FEET) =   0.64   TRAVEL TIME(MIN.) =   1.88
 Tc(MIN.) =   13.20
 SUBAREA AREA(ACRES) =     2.20       SUBAREA RUNOFF(CFS) =    4.91
 EFFECTIVE AREA(ACRES) =      3.50     AREA-AVERAGED Fm(INCH/HR) =   0.29
 AREA-AVERAGED Fp(INCH/HR) =   0.29  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =        3.5         PEAK FLOW RATE(CFS) =       7.85

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  0.71   FLOW VELOCITY(FEET/SEC.) =   5.13
 LONGEST FLOWPATH FROM NODE     10.00 TO NODE     12.00 =     824.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     12.00 TO NODE     13.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    396.20  DOWNSTREAM(FEET) =    387.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =   454.00   CHANNEL SLOPE =  0.0203
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
```

```
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.595
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        5.10      0.25     1.000    88
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      13.23
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   4.32
 AVERAGE FLOW DEPTH(FEET) =   1.01   TRAVEL TIME(MIN.) =   1.75
 Tc(MIN.) =   14.95
 SUBAREA AREA(ACRES) =     5.10       SUBAREA RUNOFF(CFS) =   10.76
 EFFECTIVE AREA(ACRES) =      8.60     AREA-AVERAGED Fm(INCH/HR) =   0.27
 AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =        8.6         PEAK FLOW RATE(CFS) =      18.01

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.13   FLOW VELOCITY(FEET/SEC.) =   4.67
 LONGEST FLOWPATH FROM NODE     10.00 TO NODE     13.00 =    1278.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     13.00 TO NODE     14.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    387.00  DOWNSTREAM(FEET) =    361.20
 CHANNEL LENGTH THRU SUBAREA(FEET) =  1087.00   CHANNEL SLOPE =  0.0237
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.310
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.50      0.40     1.000    72
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   B        2.50      0.30     1.000    81
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        3.50      0.25     1.000    88
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.28
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      23.96
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   5.32
 AVERAGE FLOW DEPTH(FEET) =   1.23   TRAVEL TIME(MIN.) =   3.41
 Tc(MIN.) =   18.36
 SUBAREA AREA(ACRES) =     6.50       SUBAREA RUNOFF(CFS) =   11.87
 EFFECTIVE AREA(ACRES) =     15.10     AREA-AVERAGED Fm(INCH/HR) =   0.27
 AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =       15.1         PEAK FLOW RATE(CFS) =      27.68

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.29   FLOW VELOCITY(FEET/SEC.) =   5.51
 LONGEST FLOWPATH FROM NODE     10.00 TO NODE     14.00 =    2365.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     14.00 TO NODE     15.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
```

```
==========================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    361.20  DOWNSTREAM(FEET) =    337.10
 CHANNEL LENGTH THRU SUBAREA(FEET) =  1249.00   CHANNEL SLOPE =  0.0193
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   2.000
 MANNING'S FACTOR = 0.015   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.173
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   B        3.40      0.30     1.000    81
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        7.00      0.25     1.000    88
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.20      0.40     1.000    72
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      36.77
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   9.90
 AVERAGE FLOW DEPTH(FEET) =   1.36   TRAVEL TIME(MIN.) =   2.10
 Tc(MIN.) =   20.46
 SUBAREA AREA(ACRES) =    10.60       SUBAREA RUNOFF(CFS) =   18.16
 EFFECTIVE AREA(ACRES) =     25.70     AREA-AVERAGED Fm(INCH/HR) =   0.27
 AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =       25.7         PEAK FLOW RATE(CFS) =      43.98

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.46   FLOW VELOCITY(FEET/SEC.) =  10.31
 LONGEST FLOWPATH FROM NODE     10.00 TO NODE     15.00 =    3614.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     20.00 TO NODE     21.00 IS CODE =  21
----------------------------------------------------------------------------
 >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
 INITIAL SUBAREA FLOW-LENGTH(FEET) =   298.00
 ELEVATION DATA: UPSTREAM(FEET) =    427.30  DOWNSTREAM(FEET) =    413.80

 Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    9.520
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.350
 SUBAREA Tc AND LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS   Tc
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        1.30      0.25     1.000    88    9.52
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 SUBAREA RUNOFF(CFS) =      3.63
 TOTAL AREA(ACRES) =      1.30   PEAK FLOW RATE(CFS) =      3.63

****************************************************************************
 FLOW PROCESS FROM NODE     21.00 TO NODE     22.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    413.80  DOWNSTREAM(FEET) =    391.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =   800.00   CHANNEL SLOPE =  0.0285
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
```

```
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.883
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        5.60      0.25     1.000    88
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.20      0.40     1.000    72
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      10.52
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   4.61
 AVERAGE FLOW DEPTH(FEET) =   0.87   TRAVEL TIME(MIN.) =   2.90
 Tc(MIN.) =   12.41
 SUBAREA AREA(ACRES) =     5.80       SUBAREA RUNOFF(CFS) =   13.72
 EFFECTIVE AREA(ACRES) =      7.10     AREA-AVERAGED Fm(INCH/HR) =   0.25
 AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =        7.1         PEAK FLOW RATE(CFS) =      16.80

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.03   FLOW VELOCITY(FEET/SEC.) =   5.23
 LONGEST FLOWPATH FROM NODE     20.00 TO NODE     22.00 =    1098.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     22.00 TO NODE     23.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    391.00  DOWNSTREAM(FEET) =    377.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =   707.00   CHANNEL SLOPE =  0.0198
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.611
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        6.70      0.25     1.000    88
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        0.10      0.40     1.000    72
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      24.02
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   4.97
 AVERAGE FLOW DEPTH(FEET) =   1.27   TRAVEL TIME(MIN.) =   2.37
 Tc(MIN.) =   14.79
 SUBAREA AREA(ACRES) =     6.80       SUBAREA RUNOFF(CFS) =   14.44
 EFFECTIVE AREA(ACRES) =     13.90     AREA-AVERAGED Fm(INCH/HR) =   0.25
 AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =       13.9         PEAK FLOW RATE(CFS) =      29.50

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.37   FLOW VELOCITY(FEET/SEC.) =   5.24
 LONGEST FLOWPATH FROM NODE     20.00 TO NODE     23.00 =    1805.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     23.00 TO NODE     24.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
```

```
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
================================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    377.00  DOWNSTREAM(FEET) =    365.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =   469.00   CHANNEL SLOPE =  0.0256
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.491
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C        6.40      0.25     1.000    88
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      35.95
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   6.06
 AVERAGE FLOW DEPTH(FEET) =   1.41   TRAVEL TIME(MIN.) =   1.29
 Tc(MIN.) =   16.08
 SUBAREA AREA(ACRES) =     6.40       SUBAREA RUNOFF(CFS) =   12.91
 EFFECTIVE AREA(ACRES) =     20.30     AREA-AVERAGED Fm(INCH/HR) =   0.25
 AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =       20.3         PEAK FLOW RATE(CFS) =      40.89

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.48   FLOW VELOCITY(FEET/SEC.) =   6.25
 LONGEST FLOWPATH FROM NODE     20.00 TO NODE     24.00 =    2274.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     24.00 TO NODE     25.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
================================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    365.00  DOWNSTREAM(FEET) =    335.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =  1896.00   CHANNEL SLOPE =  0.0158
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   2.000
 MANNING'S FACTOR = 0.015   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.256
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   C       16.80      0.25     1.000    88
 AGRICULTURAL POOR COVER
 "ROW CROPS,STRAIGHT ROW"   A        1.80      0.40     1.000    72
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      57.57
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =  10.28
 AVERAGE FLOW DEPTH(FEET) =   1.67   TRAVEL TIME(MIN.) =   3.07
 Tc(MIN.) =   19.15
 SUBAREA AREA(ACRES) =    18.60       SUBAREA RUNOFF(CFS) =   33.33
 EFFECTIVE AREA(ACRES) =     38.90     AREA-AVERAGED Fm(INCH/HR) =   0.26
 AREA-AVERAGED Fp(INCH/HR) =   0.26  AREA-AVERAGED Ap =   1.00
 TOTAL AREA(ACRES) =       38.9         PEAK FLOW RATE(CFS) =      69.93

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.80   FLOW VELOCITY(FEET/SEC.) =  10.75
 LONGEST FLOWPATH FROM NODE     20.00 TO NODE     25.00 =    4170.00 FEET.
================================================================================
 END OF STUDY SUMMARY:
```

```
  TOTAL AREA(ACRES)     =       38.9  TC(MIN.) =     19.15
  EFFECTIVE AREA(ACRES) =     38.90  AREA-AVERAGED Fm(INCH/HR)=  0.26
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap = 1.000
  PEAK FLOW RATE(CFS)   =      69.93
================================================================================
================================================================================
  END OF RATIONAL METHOD ANALYSIS
```

# APPENDIX 4

## Proposed 2-Year Storm AES Calculations

```
******************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                           Analysis prepared by:




 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                      *
* WATERSHED 'C' 2 YEAR STORM                                              *
* 12/5/24 JZ                                                              *
 ***************************************************************************

  FILE NAME: GVCPR2.DAT
  TIME/DATE OF STUDY: 15:03 12/05/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)   (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

******************************************************************************
  FLOW PROCESS FROM NODE    211.00 TO NODE    212.00 IS CODE =  21
------------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    437.30  DOWNSTREAM(FEET) =    427.80

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    6.287
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.985
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  COMMERCIAL                  A        0.30      0.40      0.100    17    6.29
  COMMERCIAL                  B        0.20      0.30      0.100    36    6.29
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.36
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA RUNOFF(CFS) =      0.88
  TOTAL AREA(ACRES) =      0.50   PEAK FLOW RATE(CFS) =      0.88

****************************************************************************
  FLOW PROCESS FROM NODE    212.00 TO NODE    213.00 IS CODE =  62
----------------------------------------------------------------------------
  >>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>(STREET TABLE SECTION #  1 USED)<<<<<
============================================================================
  UPSTREAM ELEVATION(FEET) =  427.80  DOWNSTREAM ELEVATION(FEET) =  421.90
  STREET LENGTH(FEET) =   513.00   CURB HEIGHT(INCHES) =  8.0
  STREET HALFWIDTH(FEET) = 30.00

  DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) =  20.00
  INSIDE STREET CROSSFALL(DECIMAL) =  0.018
  OUTSIDE STREET CROSSFALL(DECIMAL)  =  0.018

  SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF =  2
  STREET PARKWAY CROSSFALL(DECIMAL)  =  0.020
  Manning's FRICTION FACTOR for Streetflow Section(curb-to-curb) =   0.0150
  Manning's FRICTION FACTOR for Back-of-Walk Flow Section =   0.0200

    **TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       1.39
    STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:
    STREET FLOW DEPTH(FEET) =  0.24
    HALFSTREET FLOOD WIDTH(FEET) =    4.28
    AVERAGE FLOW VELOCITY(FEET/SEC.) =    1.94
    PRODUCT OF DEPTH&VELOCITY(FT*FT/SEC.) =    0.46
  STREET FLOW TRAVEL TIME(MIN.) =   4.40   Tc(MIN.) =   10.69
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.464
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                  A        0.30      0.40      0.100    17
  COMMERCIAL                  B        0.50      0.30      0.100    36
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.34
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    0.80      SUBAREA RUNOFF(CFS) =    1.03
  EFFECTIVE AREA(ACRES) =      1.30    AREA-AVERAGED Fm(INCH/HR) =  0.03
  AREA-AVERAGED Fp(INCH/HR) =  0.35  AREA-AVERAGED Ap =  0.10
  TOTAL AREA(ACRES) =        1.3        PEAK FLOW RATE(CFS) =       1.67

  END OF SUBAREA STREET FLOW HYDRAULICS:
  DEPTH(FEET) = 0.25   HALFSTREET FLOOD WIDTH(FEET) =   5.09
  FLOW VELOCITY(FEET/SEC.) =  1.96   DEPTH*VELOCITY(FT*FT/SEC.) =   0.50
  LONGEST FLOWPATH FROM NODE    211.00 TO NODE    213.00 =     843.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    213.00 TO NODE    214.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   413.90  DOWNSTREAM(FEET) =   407.80
  FLOW LENGTH(FEET) =   132.00   MANNING'S N =  0.013
```

```
 ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
 DEPTH OF FLOW IN  18.0 INCH PIPE IS   3.4 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =   7.34
 ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =       1.67
 PIPE TRAVEL TIME(MIN.) =   0.30    Tc(MIN.) =   10.99
 LONGEST FLOWPATH FROM NODE    211.00 TO NODE    214.00 =     975.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    214.00 TO NODE    214.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =   10.99
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.441
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 PUBLIC PARK                B        0.80      0.30     0.850    36
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.850
 SUBAREA AREA(ACRES) =    0.80      SUBAREA RUNOFF(CFS) =    0.85
 EFFECTIVE AREA(ACRES) =      2.10   AREA-AVERAGED Fm(INCH/HR) =  0.12
 AREA-AVERAGED Fp(INCH/HR) =  0.31  AREA-AVERAGED Ap =  0.39
 TOTAL AREA(ACRES) =        2.1       PEAK FLOW RATE(CFS) =       2.50

****************************************************************************
 FLOW PROCESS FROM NODE    214.00 TO NODE    215.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   407.80  DOWNSTREAM(FEET) =   398.20
 FLOW LENGTH(FEET) =   134.00   MANNING'S N =  0.013
 ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
 DEPTH OF FLOW IN  18.0 INCH PIPE IS   3.7 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =   9.64
 ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =       2.50
 PIPE TRAVEL TIME(MIN.) =   0.23    Tc(MIN.) =   11.22
 LONGEST FLOWPATH FROM NODE    211.00 TO NODE    215.00 =    1109.00 FEET.
============================================================================
 END OF STUDY SUMMARY:
 TOTAL AREA(ACRES)     =        2.1  TC(MIN.) =     11.22
 EFFECTIVE AREA(ACRES) =      2.10  AREA-AVERAGED Fm(INCH/HR)=  0.12
 AREA-AVERAGED Fp(INCH/HR) =  0.31  AREA-AVERAGED Ap = 0.386
 PEAK FLOW RATE(CFS)   =       2.50
============================================================================
============================================================================
 END OF RATIONAL METHOD ANALYSIS
```

```
******************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                           Analysis prepared by:




 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                      *
* WATERSHED 'D' 2 YEAR STORM                                              *
* 12/5/24 JZ                                                              *
 ***************************************************************************

  FILE NAME: GVDPR2.DAT
  TIME/DATE OF STUDY: 14:37 12/05/2024
==============================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==============================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)   (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

******************************************************************************
  FLOW PROCESS FROM NODE    311.00 TO NODE    312.00 IS CODE =  21
------------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   328.00
  ELEVATION DATA: UPSTREAM(FEET) =    449.70  DOWNSTREAM(FEET) =    435.00

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    6.798
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.898
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS                A        0.40      0.40      0.350    17    6.80
  CONDOMINIUMS                C        0.70      0.25      0.350    50    6.80
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =      1.77
  TOTAL AREA(ACRES) =      1.10   PEAK FLOW RATE(CFS) =      1.77

****************************************************************************
  FLOW PROCESS FROM NODE    312.00 TO NODE    313.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    435.00  DOWNSTREAM(FEET) =    415.50
  CHANNEL LENGTH THRU SUBAREA(FEET) =   840.00   CHANNEL SLOPE =  0.0232
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.478
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                A        3.40      0.40      0.350    17
  CONDOMINIUMS                C        3.60      0.25      0.350    50
  CONDOMINIUMS                D        0.20      0.20      0.350    57
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.32
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       6.25
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.77
  AVERAGE FLOW DEPTH(FEET) =   0.74   TRAVEL TIME(MIN.) =   3.71
  Tc(MIN.) =   10.51
  SUBAREA AREA(ACRES) =     7.20       SUBAREA RUNOFF(CFS) =    8.85
  EFFECTIVE AREA(ACRES) =      8.30     AREA-AVERAGED Fm(INCH/HR) =   0.11
  AREA-AVERAGED Fp(INCH/HR) =   0.32  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        8.3         PEAK FLOW RATE(CFS) =      10.21

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.90   FLOW VELOCITY(FEET/SEC.) =   4.24
  LONGEST FLOWPATH FROM NODE    311.00 TO NODE    313.00 =    1168.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    313.00 TO NODE    314.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   409.00  DOWNSTREAM(FEET) =   406.60
  FLOW LENGTH(FEET) =   172.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  12.7 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   7.67
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      10.21
  PIPE TRAVEL TIME(MIN.) =   0.37    Tc(MIN.) =   10.88
  LONGEST FLOWPATH FROM NODE    311.00 TO NODE    314.00 =    1340.00 FEET.
```

314 TO NODE 315 MITIGATED Q = 4.81 CFS

```
****************************************************************************
  FLOW PROCESS FROM NODE    315.00 TO NODE    316.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
```

```
==========================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   404.00  DOWNSTREAM(FEET) =   400.50
  FLOW LENGTH(FEET) =   350.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  14.7 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   6.61
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      ~~10.21~~ 4.81
  PIPE TRAVEL TIME(MIN.) =   0.88    Tc(MIN.) =   11.77
  LONGEST FLOWPATH FROM NODE    311.00 TO NODE    316.00 =    1690.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    316.00 TO NODE    316.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
==========================================================================
  MAINLINE Tc(MIN.) =   11.77
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.385
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               A        1.10      0.40      0.350    17
  CONDOMINIUMS               B        1.20      0.30      0.350    36
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.35
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    2.30      SUBAREA RUNOFF(CFS) =    2.62
  EFFECTIVE AREA(ACRES) =     10.60   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.32  AREA-AVERAGED Ap =  0.35
  TOTAL AREA(ACRES) =       10.6       PEAK FLOW RATE(CFS) =      ~~12.13~~ 6.73

****************************************************************************
  FLOW PROCESS FROM NODE    316.00 TO NODE    317.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
==========================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   400.50  DOWNSTREAM(FEET) =   395.20
  FLOW LENGTH(FEET) =   126.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   9.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  12.31
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      12.13
  PIPE TRAVEL TIME(MIN.) =   0.17    Tc(MIN.) =   11.94
  LONGEST FLOWPATH FROM NODE    311.00 TO NODE    317.00 =    1816.00 FEET.
==========================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)      =       10.6  TC(MIN.) =     11.94
  EFFECTIVE AREA(ACRES) =     10.60  AREA-AVERAGED Fm(INCH/HR)=  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.32  AREA-AVERAGED Ap = 0.350
  PEAK FLOW RATE(CFS)    =      ~~12.13~~ 6.73
==========================================================================
==========================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
            RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
           (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
         (c) Copyright 1983-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:

                         Fuscoe Engineering, Inc.
                          15535 Sand Canyon Ave
                                Suite 100
                             Irvine, CA 92618

 ************************* DESCRIPTION OF STUDY *************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                    *
* SUBAREA 'E' 2 YEAR STORM                                              *
* 11/25/2024 JZ                                                         *
 ************************************************************************

  FILE NAME: GVEPR2.DAT
  TIME/DATE OF STUDY: 10:36 11/25/2024
========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
========================================================================
                    --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.020/0.020/0.020   0.50    2.00 0.0313 0.125 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE     10.00 TO NODE     11.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   229.00
  ELEVATION DATA: UPSTREAM(FEET) =    413.00  DOWNSTREAM(FEET) =    404.60

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    6.128
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  2.014
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS                A        1.40      0.40      0.350    17    6.13
  CONDOMINIUMS                B        0.60      0.30      0.350    36    6.13
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.37
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =      3.39
  TOTAL AREA(ACRES) =      2.00   PEAK FLOW RATE(CFS) =      3.39

****************************************************************************
  FLOW PROCESS FROM NODE     11.00 TO NODE     12.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    404.60  DOWNSTREAM(FEET) =    401.30
  CHANNEL LENGTH THRU SUBAREA(FEET) =   241.00   CHANNEL SLOPE =  0.0137
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.788
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                A        1.20      0.40      0.350    17
  CONDOMINIUMS                B        0.30      0.30      0.350    36
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.38
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       4.51
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.84
  AVERAGE FLOW DEPTH(FEET) =   0.73   TRAVEL TIME(MIN.) =   1.41
  Tc(MIN.) =    7.54
  SUBAREA AREA(ACRES) =     1.50       SUBAREA RUNOFF(CFS) =    2.23
  EFFECTIVE AREA(ACRES) =      3.50     AREA-AVERAGED Fm(INCH/HR) =   0.13
  AREA-AVERAGED Fp(INCH/HR) =   0.37  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        3.5         PEAK FLOW RATE(CFS) =       5.22

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.77   FLOW VELOCITY(FEET/SEC.) =   2.95
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     12.00 =     470.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     12.00 TO NODE     13.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   394.30  DOWNSTREAM(FEET) =   390.90
  FLOW LENGTH(FEET) =    55.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   5.5 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.33
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       5.22
  PIPE TRAVEL TIME(MIN.) =   0.08    Tc(MIN.) =    7.62
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     13.00 =     525.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     13.00 TO NODE     13.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
```

```
 MAINLINE Tc(MIN.) =    7.62
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.777
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 CONDOMINIUMS               C        3.90      0.25     0.350    50
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
 SUBAREA AREA(ACRES) =    3.90      SUBAREA RUNOFF(CFS) =    5.93
 EFFECTIVE AREA(ACRES) =      7.40   AREA-AVERAGED Fm(INCH/HR) =  0.11
 AREA-AVERAGED Fp(INCH/HR) =  0.31  AREA-AVERAGED Ap =  0.35
 TOTAL AREA(ACRES) =        7.4       PEAK FLOW RATE(CFS) =      11.11

****************************************************************************
 FLOW PROCESS FROM NODE     13.00 TO NODE     14.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   390.90  DOWNSTREAM(FEET) =   389.30
 FLOW LENGTH(FEET) =    58.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  18.0 INCH PIPE IS  10.6 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =  10.26
 ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =      11.11
 PIPE TRAVEL TIME(MIN.) =   0.09    Tc(MIN.) =    7.72
 LONGEST FLOWPATH FROM NODE     10.00 TO NODE     14.00 =     583.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     14.00 TO NODE     14.00 IS CODE =   1
----------------------------------------------------------------------------
 >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
============================================================================
 TOTAL NUMBER OF STREAMS =  2
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
 TIME OF CONCENTRATION(MIN.) =    7.72
 RAINFALL INTENSITY(INCH/HR) =   1.76
 AREA-AVERAGED Fm(INCH/HR) =  0.11
 AREA-AVERAGED Fp(INCH/HR) =  0.31
 AREA-AVERAGED Ap =  0.35
 EFFECTIVE STREAM AREA(ACRES) =       7.40
 TOTAL STREAM AREA(ACRES) =       7.40
 PEAK FLOW RATE(CFS) AT CONFLUENCE =      11.11

****************************************************************************
 FLOW PROCESS FROM NODE     14.10 TO NODE     14.20 IS CODE =  21
----------------------------------------------------------------------------
 >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
 INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
 ELEVATION DATA: UPSTREAM(FEET) =    459.00  DOWNSTREAM(FEET) =    403.50

 Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   10.258
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.499
 SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS   Tc
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
 NATURAL FAIR COVER
 "OPEN BRUSH"               C        1.20      0.25     1.000    59   10.26
```

```
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      1.35
  TOTAL AREA(ACRES) =      1.20   PEAK FLOW RATE(CFS) =      1.35

****************************************************************************
  FLOW PROCESS FROM NODE     14.20 TO NODE     14.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   396.50  DOWNSTREAM(FEET) =   389.30
  FLOW LENGTH(FEET) =   334.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   3.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   5.27
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       1.35
  PIPE TRAVEL TIME(MIN.) =   1.06    Tc(MIN.) =   11.31
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     14.00 =     664.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     14.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   11.31
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.417
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 A        1.40      0.40      0.100    17
  COMMERCIAL                 B        0.10      0.30      0.100    36
  COMMERCIAL                 C        0.30      0.25      0.100    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.37
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.80      SUBAREA RUNOFF(CFS) =    2.24
  EFFECTIVE AREA(ACRES) =      3.00   AREA-AVERAGED Fm(INCH/HR) =  0.12
  AREA-AVERAGED Fp(INCH/HR) =  0.27  AREA-AVERAGED Ap =  0.46
  TOTAL AREA(ACRES) =        3.0       PEAK FLOW RATE(CFS) =       3.50

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     14.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
  >>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
  TIME OF CONCENTRATION(MIN.) =   11.31
  RAINFALL INTENSITY(INCH/HR) =   1.42
  AREA-AVERAGED Fm(INCH/HR) =  0.12
  AREA-AVERAGED Fp(INCH/HR) =  0.27
  AREA-AVERAGED Ap =  0.46
  EFFECTIVE STREAM AREA(ACRES) =       3.00
  TOTAL STREAM AREA(ACRES) =       3.00
  PEAK FLOW RATE(CFS) AT CONFLUENCE =       3.50

  ** CONFLUENCE DATA **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)  (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
```

```
    1       11.11    7.72    1.764  0.31( 0.11) 0.35       7.4       10.00
    2        3.50   11.31    1.417  0.27( 0.12) 0.46       3.0       14.10

  RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
  CONFLUENCE FORMULA USED FOR  2 STREAMS.

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)         (ACRES)    NODE
      1       14.14    7.72    1.764  0.30( 0.11) 0.37       9.4       10.00
      2       12.28   11.31    1.417  0.29( 0.11) 0.38      10.4       14.10

  COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:
  PEAK FLOW RATE(CFS) =      14.14    Tc(MIN.) =     7.72
  EFFECTIVE AREA(ACRES) =       9.45   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.30  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       10.4
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     14.00 =     664.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     15.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   389.30  DOWNSTREAM(FEET) =   377.10
  FLOW LENGTH(FEET) =   494.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  13.1 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  10.27
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      14.14
  PIPE TRAVEL TIME(MIN.) =   0.80    Tc(MIN.) =    8.52
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     15.00 =    1158.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     15.00 TO NODE     15.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    8.52
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.667
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               A        2.50      0.40     0.350    17
  CONDOMINIUMS               B        0.80      0.30     0.350    36
  CONDOMINIUMS               C        0.40      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.36
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    3.70      SUBAREA RUNOFF(CFS) =    5.13
  EFFECTIVE AREA(ACRES) =     13.15   AREA-AVERAGED Fm(INCH/HR) =  0.12
  AREA-AVERAGED Fp(INCH/HR) =  0.31  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       14.1       PEAK FLOW RATE(CFS) =      18.36

****************************************************************************
  FLOW PROCESS FROM NODE     15.00 TO NODE     15.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    8.52
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.667
```

```
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        3.60      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    3.60      SUBAREA RUNOFF(CFS) =    5.12
  EFFECTIVE AREA(ACRES) =     16.75   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.30  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       17.7       PEAK FLOW RATE(CFS) =      23.48

****************************************************************************
  FLOW PROCESS FROM NODE     15.00 TO NODE     16.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   377.10  DOWNSTREAM(FEET) =   367.20
  FLOW LENGTH(FEET) =   356.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  21.0 INCH PIPE IS  15.7 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  12.13
  ESTIMATED PIPE DIAMETER(INCH) =  21.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      23.48
  PIPE TRAVEL TIME(MIN.) =   0.49    Tc(MIN.) =    9.01
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     16.00 =    1514.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     16.00 TO NODE     16.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    9.01
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.615
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        2.70      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    2.70      SUBAREA RUNOFF(CFS) =    3.71
  EFFECTIVE AREA(ACRES) =     19.45   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.29  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       20.4       PEAK FLOW RATE(CFS) =      26.40

****************************************************************************
  FLOW PROCESS FROM NODE     16.00 TO NODE     17.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   367.20  DOWNSTREAM(FEET) =   365.20
  FLOW LENGTH(FEET) =    58.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  21.0 INCH PIPE IS  15.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  13.53
  ESTIMATED PIPE DIAMETER(INCH) =  21.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      26.40
  PIPE TRAVEL TIME(MIN.) =   0.07    Tc(MIN.) =    9.08
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     17.00 =    1572.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     17.00 TO NODE     17.00 IS CODE =  81
```

```
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    9.08
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.607
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 A        0.30      0.40      0.100    17
  COMMERCIAL                 B        0.10      0.30      0.100    36
  COMMERCIAL                 C        1.40      0.25      0.100    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.28
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.80      SUBAREA RUNOFF(CFS) =    2.56
  EFFECTIVE AREA(ACRES) =     21.25   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29  AREA-AVERAGED Ap =  0.34
  TOTAL AREA(ACRES) =       22.2       PEAK FLOW RATE(CFS) =      28.83

****************************************************************************
  FLOW PROCESS FROM NODE     17.00 TO NODE     18.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   365.20  DOWNSTREAM(FEET) =   363.40
  FLOW LENGTH(FEET) =    91.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  18.3 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.21
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      28.83
  PIPE TRAVEL TIME(MIN.) =   0.14    Tc(MIN.) =    9.22
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     18.00 =    1663.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.00 TO NODE     18.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
  TIME OF CONCENTRATION(MIN.) =    9.22
  RAINFALL INTENSITY(INCH/HR) =   1.59
  AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29
  AREA-AVERAGED Ap =  0.34
  EFFECTIVE STREAM AREA(ACRES) =      21.25
  TOTAL STREAM AREA(ACRES) =      22.20
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      28.83

****************************************************************************
  FLOW PROCESS FROM NODE     18.10 TO NODE     18.20 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    391.00  DOWNSTREAM(FEET) =    378.60

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    7.059
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.857
```

```
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS               A        0.40      0.40      0.350    17    7.06
  CONDOMINIUMS               B        1.00      0.30      0.350    36    7.06
  CONDOMINIUMS               C        1.00      0.25      0.350    50    7.06
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =      3.79
  TOTAL AREA(ACRES) =      2.40   PEAK FLOW RATE(CFS) =      3.79

****************************************************************************
  FLOW PROCESS FROM NODE     18.20 TO NODE     18.30 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    378.60  DOWNSTREAM(FEET) =    374.90
  CHANNEL LENGTH THRU SUBAREA(FEET) =   369.00   CHANNEL SLOPE =  0.0100
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.574
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               B        0.80      0.30      0.350    36
  CONDOMINIUMS               C        1.10      0.25      0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       5.05
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.61
  AVERAGE FLOW DEPTH(FEET) =   0.80   TRAVEL TIME(MIN.) =   2.36
  Tc(MIN.) =    9.42
  SUBAREA AREA(ACRES) =     1.90       SUBAREA RUNOFF(CFS) =    2.53
  EFFECTIVE AREA(ACRES) =      4.30     AREA-AVERAGED Fm(INCH/HR) =   0.10
  AREA-AVERAGED Fp(INCH/HR) =   0.28  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        4.3         PEAK FLOW RATE(CFS) =       5.70

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.84   FLOW VELOCITY(FEET/SEC.) =   2.68
  LONGEST FLOWPATH FROM NODE     18.10 TO NODE     18.30 =     699.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.30 TO NODE     18.40 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   367.90  DOWNSTREAM(FEET) =   365.70
  FLOW LENGTH(FEET) =    59.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   6.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   9.67
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       5.70
  PIPE TRAVEL TIME(MIN.) =   0.10    Tc(MIN.) =    9.52
  LONGEST FLOWPATH FROM NODE     18.10 TO NODE     18.40 =     758.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.40 TO NODE     18.40 IS CODE =  81
----------------------------------------------------------------------------
```

```
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
================================================================================
  MAINLINE Tc(MIN.) =    9.52
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.564
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                B        0.80      0.30     0.100    36
  COMMERCIAL                C        0.40      0.25     0.100    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.28
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.20      SUBAREA RUNOFF(CFS) =    1.66
  EFFECTIVE AREA(ACRES) =      5.50   AREA-AVERAGED Fm(INCH/HR) =  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.30
  TOTAL AREA(ACRES) =        5.5       PEAK FLOW RATE(CFS) =       7.33

********************************************************************************
  FLOW PROCESS FROM NODE     18.40 TO NODE     18.00 IS CODE =  31
--------------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   365.70  DOWNSTREAM(FEET) =   363.40
  FLOW LENGTH(FEET) =    43.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   6.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.81
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       7.33
  PIPE TRAVEL TIME(MIN.) =   0.06    Tc(MIN.) =    9.58
  LONGEST FLOWPATH FROM NODE     18.10 TO NODE     18.00 =     801.00 FEET.

********************************************************************************
  FLOW PROCESS FROM NODE     18.00 TO NODE     18.00 IS CODE =   1
--------------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
  >>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
================================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
  TIME OF CONCENTRATION(MIN.) =    9.58
  RAINFALL INTENSITY(INCH/HR) =   1.56
  AREA-AVERAGED Fm(INCH/HR) =  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.28
  AREA-AVERAGED Ap =  0.30
  EFFECTIVE STREAM AREA(ACRES) =       5.50
  TOTAL STREAM AREA(ACRES) =       5.50
  PEAK FLOW RATE(CFS) AT CONFLUENCE =       7.33

  ** CONFLUENCE DATA **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       28.83    9.22    1.594  0.29( 0.10) 0.34      21.2      10.00
      1       24.46   12.85    1.317  0.29( 0.10) 0.34      22.2      14.10
      2        7.33    9.58    1.559  0.28( 0.08) 0.30       5.5      18.10

  RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
  CONFLUENCE FORMULA USED FOR  2 STREAMS.

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
```

```
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       36.04    9.22    1.594  0.29( 0.10) 0.33      26.5      10.00
      2       35.71    9.58    1.559  0.29( 0.10) 0.33      26.8      18.10
      3       30.59   12.85    1.317  0.29( 0.10) 0.33      27.7      14.10

  COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:
  PEAK FLOW RATE(CFS) =      36.04    Tc(MIN.) =     9.22
  EFFECTIVE AREA(ACRES) =      26.54   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29  AREA-AVERAGED Ap =  0.33
  TOTAL AREA(ACRES) =       27.7
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     18.00 =    1663.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.00 TO NODE     19.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   363.40  DOWNSTREAM(FEET) =   360.90
  FLOW LENGTH(FEET) =   127.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  27.0 INCH PIPE IS  19.1 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.96
  ESTIMATED PIPE DIAMETER(INCH) =  27.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      36.04
  PIPE TRAVEL TIME(MIN.) =   0.18    Tc(MIN.) =    9.39
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     19.00 =    1790.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.00 TO NODE     19.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
  TIME OF CONCENTRATION(MIN.) =    9.39
  RAINFALL INTENSITY(INCH/HR) =   1.58
  AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29
  AREA-AVERAGED Ap =  0.33
  EFFECTIVE STREAM AREA(ACRES) =      26.54
  TOTAL STREAM AREA(ACRES) =      27.70
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      36.04

****************************************************************************
  FLOW PROCESS FROM NODE     19.10 TO NODE     19.20 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    467.50  DOWNSTREAM(FEET) =    458.50

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    6.355
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.973
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  COMMERCIAL                 C        0.30      0.25      0.100    50    6.36
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
```

```
  SUBAREA RUNOFF(CFS) =      0.53
  TOTAL AREA(ACRES) =      0.30   PEAK FLOW RATE(CFS) =      0.53

****************************************************************************
  FLOW PROCESS FROM NODE     19.20 TO NODE     19.30 IS CODE =  62
----------------------------------------------------------------------------
  >>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>(STREET TABLE SECTION #  1 USED)<<<<<
============================================================================
  UPSTREAM ELEVATION(FEET) =  458.50  DOWNSTREAM ELEVATION(FEET) =  397.30
  STREET LENGTH(FEET) =  1205.00   CURB HEIGHT(INCHES) =  6.0
  STREET HALFWIDTH(FEET) = 30.00

  DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) =  20.00
  INSIDE STREET CROSSFALL(DECIMAL) =  0.020
  OUTSIDE STREET CROSSFALL(DECIMAL)  =  0.020

  SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF =  1
  STREET PARKWAY CROSSFALL(DECIMAL)  =  0.020
  Manning's FRICTION FACTOR for Streetflow Section(curb-to-curb) =   0.0150
  Manning's FRICTION FACTOR for Back-of-Walk Flow Section =   0.0200

    **TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       1.08
    STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:
    STREET FLOW DEPTH(FEET) =  0.19
    HALFSTREET FLOOD WIDTH(FEET) =    3.66
    AVERAGE FLOW VELOCITY(FEET/SEC.) =    3.86
    PRODUCT OF DEPTH&VELOCITY(FT*FT/SEC.) =    0.73
  STREET FLOW TRAVEL TIME(MIN.) =   5.21   Tc(MIN.) =   11.56
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.399
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 C        0.90      0.25     0.100    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    0.90      SUBAREA RUNOFF(CFS) =    1.11
  EFFECTIVE AREA(ACRES) =      1.20    AREA-AVERAGED Fm(INCH/HR) =  0.02
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.10
  TOTAL AREA(ACRES) =        1.2        PEAK FLOW RATE(CFS) =       1.48

  END OF SUBAREA STREET FLOW HYDRAULICS:
  DEPTH(FEET) = 0.21   HALFSTREET FLOOD WIDTH(FEET) =   4.78
  FLOW VELOCITY(FEET/SEC.) =  3.95   DEPTH*VELOCITY(FT*FT/SEC.) =   0.84
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.30 =    1535.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.30 TO NODE     19.40 IS CODE =  91
----------------------------------------------------------------------------
  >>>>>COMPUTE "V" GUTTER FLOW TRAVEL TIME THRU SUBAREA<<<<<
============================================================================
  UPSTREAM NODE ELEVATION(FEET) =    397.30
  DOWNSTREAM NODE ELEVATION(FEET) =    373.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   152.00
  "V" GUTTER WIDTH(FEET) =   2.00   GUTTER HIKE(FEET) =  0.500
  PAVEMENT LIP(FEET) =  0.010   MANNING'S N = .0150
  PAVEMENT CROSSFALL(DECIMAL NOTATION) = 0.02000
  MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.387
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
```

```
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        2.40      0.25      1.000    59
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      2.71
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =  14.59
  AVERAGE FLOW DEPTH(FEET) =   0.50   FLOOD WIDTH(FEET) =    2.00
  "V" GUTTER FLOW TRAVEL TIME(MIN.) =   0.17   Tc(MIN.) =   11.74
  SUBAREA AREA(ACRES) =    2.40       SUBAREA RUNOFF(CFS) =    2.46
  EFFECTIVE AREA(ACRES) =    3.60     AREA-AVERAGED Fm(INCH/HR) =   0.17
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   0.70
  TOTAL AREA(ACRES) =        3.6         PEAK FLOW RATE(CFS) =       3.93

         NOTE:TRAVEL TIME ESTIMATES BASED ON NORMAL DEPTH
         IN A FLOWING-FULL GUTTER(NORMAL DEPTH = GUTTER HIKE)


  END OF SUBAREA "V" GUTTER HYDRAULICS:
  DEPTH(FEET) =  0.50   FLOOD WIDTH(FEET) =    2.00
  FLOW VELOCITY(FEET/SEC.) =  14.59   DEPTH*VELOCITY(FT*FT/SEC) =   7.30
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.40 =    1687.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.40 TO NODE     19.50 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   366.00  DOWNSTREAM(FEET) =   364.20
  FLOW LENGTH(FEET) =   185.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   7.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   5.36
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       3.93
  PIPE TRAVEL TIME(MIN.) =   0.58    Tc(MIN.) =   12.31
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.50 =    1872.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.50 TO NODE     19.50 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   12.31
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.349
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        1.00      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    1.00       SUBAREA RUNOFF(CFS) =    1.14
  EFFECTIVE AREA(ACRES) =      4.60   AREA-AVERAGED Fm(INCH/HR) =  0.16
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.62
  TOTAL AREA(ACRES) =        4.6       PEAK FLOW RATE(CFS) =       4.94

****************************************************************************
  FLOW PROCESS FROM NODE     19.50 TO NODE     19.60 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
```

```
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   364.20  DOWNSTREAM(FEET) =   362.00
  FLOW LENGTH(FEET) =   225.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   8.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   5.69
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       4.94
  PIPE TRAVEL TIME(MIN.) =   0.66    Tc(MIN.) =   12.97
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.60 =    2097.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.60 TO NODE     19.60 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   12.97
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.310
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  PUBLIC PARK                C        1.40      0.25     0.850    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.850
  SUBAREA AREA(ACRES) =    1.40      SUBAREA RUNOFF(CFS) =    1.38
  EFFECTIVE AREA(ACRES) =      6.00   AREA-AVERAGED Fm(INCH/HR) =  0.17
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.68
  TOTAL AREA(ACRES) =        6.0       PEAK FLOW RATE(CFS) =       6.16

****************************************************************************
  FLOW PROCESS FROM NODE     19.60 TO NODE     19.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   362.00  DOWNSTREAM(FEET) =   360.90
  FLOW LENGTH(FEET) =    50.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   8.0 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   8.14
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       6.16
  PIPE TRAVEL TIME(MIN.) =   0.10    Tc(MIN.) =   13.07
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.00 =    2147.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.00 TO NODE     19.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
  >>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
  TIME OF CONCENTRATION(MIN.) =   13.07
  RAINFALL INTENSITY(INCH/HR) =   1.30
  AREA-AVERAGED Fm(INCH/HR) =  0.17
  AREA-AVERAGED Fp(INCH/HR) =  0.25
  AREA-AVERAGED Ap =  0.68
  EFFECTIVE STREAM AREA(ACRES) =       6.00
  TOTAL STREAM AREA(ACRES) =       6.00
```

```
 PEAK FLOW RATE(CFS) AT CONFLUENCE =       6.16

 ** CONFLUENCE DATA **
  STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
  NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
     1       36.04    9.39    1.576  0.29( 0.10) 0.33      26.5      10.00
     1       35.71    9.76    1.542  0.29( 0.10) 0.33      26.8      18.10
     1       30.59   13.04    1.306  0.29( 0.10) 0.33      27.7      14.10
     2        6.16   13.07    1.304  0.25( 0.17) 0.68       6.0      19.10

 RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
 CONFLUENCE FORMULA USED FOR  2 STREAMS.

 ** PEAK FLOW RATE TABLE **
  STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
  NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
     1       41.53    9.39    1.576  0.28( 0.11) 0.38      30.8      10.00
     2       41.28    9.76    1.542  0.28( 0.11) 0.38      31.3      18.10
     3       36.74   13.04    1.306  0.28( 0.11) 0.40      33.7      14.10
     4       36.69   13.07    1.304  0.28( 0.11) 0.40      33.7      19.10

 COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:
 PEAK FLOW RATE(CFS) =      41.53    Tc(MIN.) =     9.39
 EFFECTIVE AREA(ACRES) =      30.85   AREA-AVERAGED Fm(INCH/HR) =  0.11
 AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.38
 TOTAL AREA(ACRES) =       33.7
 LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.00 =    2147.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     19.00 TO NODE     20.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   360.90  DOWNSTREAM(FEET) =   350.40
 FLOW LENGTH(FEET) =   364.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  27.0 INCH PIPE IS  18.4 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =  14.36
 ESTIMATED PIPE DIAMETER(INCH) =  27.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =      41.53
 PIPE TRAVEL TIME(MIN.) =   0.42    Tc(MIN.) =    9.81
 LONGEST FLOWPATH FROM NODE     19.10 TO NODE     20.00 =    2511.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     20.00 TO NODE     20.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =    9.81
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.537
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 CONDOMINIUMS               B        3.00      0.30     0.350    36
 CONDOMINIUMS               C        1.20      0.25     0.350    50
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.29
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
 SUBAREA AREA(ACRES) =    4.20      SUBAREA RUNOFF(CFS) =    5.43
 EFFECTIVE AREA(ACRES) =     35.05   AREA-AVERAGED Fm(INCH/HR) =  0.11
 AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.38
 TOTAL AREA(ACRES) =       37.9       PEAK FLOW RATE(CFS) =      45.14
```

```
****************************************************************************
  FLOW PROCESS FROM NODE     20.00 TO NODE     20.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    9.81
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.537
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        4.60      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    4.60      SUBAREA RUNOFF(CFS) =    6.00
  EFFECTIVE AREA(ACRES) =     39.65   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       42.5       PEAK FLOW RATE(CFS) =      51.14

****************************************************************************
  FLOW PROCESS FROM NODE     20.00 TO NODE     21.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   350.40  DOWNSTREAM(FEET) =   346.90
  FLOW LENGTH(FEET) =   152.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  30.0 INCH PIPE IS  21.1 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  13.85
  ESTIMATED PIPE DIAMETER(INCH) =  30.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      51.14
  PIPE TRAVEL TIME(MIN.) =   0.18    Tc(MIN.) =   10.00
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     21.00 =    2663.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     21.00 TO NODE     21.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   10.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.521
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 C        1.10      0.25     0.100    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.10      SUBAREA RUNOFF(CFS) =    1.48
  EFFECTIVE AREA(ACRES) =     40.75   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       43.6       PEAK FLOW RATE(CFS) =      52.04

****************************************************************************
  FLOW PROCESS FROM NODE     21.00 TO NODE     22.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   346.90  DOWNSTREAM(FEET) =   342.10
  FLOW LENGTH(FEET) =    67.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  17.5 INCHES
```

```
 PIPE-FLOW VELOCITY(FEET/SEC.) =  21.20
 ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =      52.04
 PIPE TRAVEL TIME(MIN.) =   0.05    Tc(MIN.) =   10.05
 LONGEST FLOWPATH FROM NODE     19.10 TO NODE     22.00 =    2730.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     22.00 TO NODE     22.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =   10.05
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.516
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 CONDOMINIUMS               B        4.60      0.30     0.350    36
 CONDOMINIUMS               C        0.80      0.25     0.350    50
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.29
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
 SUBAREA AREA(ACRES) =    5.40      SUBAREA RUNOFF(CFS) =    6.87
 EFFECTIVE AREA(ACRES) =     46.15   AREA-AVERAGED Fm(INCH/HR) =  0.10
 AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
 TOTAL AREA(ACRES) =       49.0       PEAK FLOW RATE(CFS) =      58.75

****************************************************************************
 FLOW PROCESS FROM NODE     22.00 TO NODE     23.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   342.10  DOWNSTREAM(FEET) =   339.90
 FLOW LENGTH(FEET) =   434.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  42.0 INCH PIPE IS  29.5 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =   8.13
 ESTIMATED PIPE DIAMETER(INCH) =  42.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =      58.75
 PIPE TRAVEL TIME(MIN.) =   0.89    Tc(MIN.) =   10.94
 LONGEST FLOWPATH FROM NODE     19.10 TO NODE     23.00 =    3164.00 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE     23.00 TO NODE     23.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =   10.94
 *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.444
 SUBAREA LOSS RATE DATA(AMC  I ):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 COMMERCIAL                 C        0.90      0.25     0.100    50
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
 SUBAREA AREA(ACRES) =    0.90      SUBAREA RUNOFF(CFS) =    1.15
 EFFECTIVE AREA(ACRES) =     47.05   AREA-AVERAGED Fm(INCH/HR) =  0.10
 AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
 TOTAL AREA(ACRES) =       49.9       PEAK FLOW RATE(CFS) =      58.75
 NOTE: PEAK FLOW RATE DEFAULTED TO UPSTREAM VALUE

****************************************************************************
 FLOW PROCESS FROM NODE     23.00 TO NODE     24.00 IS CODE =  31
```

```
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   339.90  DOWNSTREAM(FEET) =   339.50
  FLOW LENGTH(FEET) =    56.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  28.0 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   9.23
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      58.75
  PIPE TRAVEL TIME(MIN.) =   0.10    Tc(MIN.) =   11.04
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     24.00 =    3220.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     24.00 TO NODE     24.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   11.04
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.437
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        4.50      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    4.50      SUBAREA RUNOFF(CFS) =    5.46
  EFFECTIVE AREA(ACRES) =     51.55   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       54.4       PEAK FLOW RATE(CFS) =      62.05

****************************************************************************
  FLOW PROCESS FROM NODE     24.00 TO NODE     25.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   339.50  DOWNSTREAM(FEET) =   333.30
  FLOW LENGTH(FEET) =   505.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  36.0 INCH PIPE IS  25.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.46
  ESTIMATED PIPE DIAMETER(INCH) =  36.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      62.05
  PIPE TRAVEL TIME(MIN.) =   0.73    Tc(MIN.) =   11.78
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     25.00 =    3725.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     25.00 TO NODE     25.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   11.78
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.385
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               A        1.40      0.40     0.350    17
  CONDOMINIUMS               C        8.80      0.25     0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =   10.20      SUBAREA RUNOFF(CFS) =   11.84
```

```
  EFFECTIVE AREA(ACRES) =     61.75   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       64.6       PEAK FLOW RATE(CFS) =      71.47

****************************************************************************
  FLOW PROCESS FROM NODE     25.00 TO NODE     26.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   333.30  DOWNSTREAM(FEET) =   331.50
  FLOW LENGTH(FEET) =   177.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  28.4 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.04
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      71.47
  PIPE TRAVEL TIME(MIN.) =   0.27    Tc(MIN.) =   12.04
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     26.00 =    3902.00 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =       64.6  TC(MIN.) =     12.04
  EFFECTIVE AREA(ACRES) =     61.75  AREA-AVERAGED Fm(INCH/HR)=  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap = 0.356
  PEAK FLOW RATE(CFS)   =      71.47

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       71.47   12.04    1.367  0.28( 0.10) 0.36      61.7      10.00
      2       70.64   12.41    1.343  0.28( 0.10) 0.36      62.2      18.10
      3       62.80   15.81    1.169  0.27( 0.10) 0.37      64.6      14.10
      4       62.73   15.85    1.168  0.27( 0.10) 0.37      64.6      19.10
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                              Analysis prepared by:

                             Fuscoe Engineering, Inc.
                              15535 Sand Canyon Ave
                                    Suite 100
                                 Irvine, CA 92618

 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                      *
* SUBAREA 'F' 2 YEAR STORM                                                *
* 11/25/2024 JZ                                                          *
 **************************************************************************

  FILE NAME: GVFPR2.DAT
  TIME/DATE OF STUDY: 09:51 11/25/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =    2.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) I ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.020/0.020/0.020   0.50    2.00 0.0313 0.125 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE      1.00 TO NODE      2.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    354.60  DOWNSTREAM(FEET) =    347.60

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    7.914
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.739
  SUBAREA Tc AND LOSS RATE DATA(AMC  I ):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS                B        0.40      0.30      0.350    36    7.91
  CONDOMINIUMS                C        3.00      0.25      0.350    50    7.91
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =      5.05
  TOTAL AREA(ACRES) =      3.40   PEAK FLOW RATE(CFS) =      5.05

****************************************************************************
  FLOW PROCESS FROM NODE      2.00 TO NODE      3.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    347.60  DOWNSTREAM(FEET) =    343.70
  CHANNEL LENGTH THRU SUBAREA(FEET) =   391.00   CHANNEL SLOPE =  0.0100
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.500
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                B        0.10      0.30      0.350    36
  CONDOMINIUMS                C        2.40      0.25      0.350    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       6.64
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   2.79
  AVERAGE FLOW DEPTH(FEET) =   0.89   TRAVEL TIME(MIN.) =   2.33
  Tc(MIN.) =   10.25
  SUBAREA AREA(ACRES) =     2.50       SUBAREA RUNOFF(CFS) =    3.18
  EFFECTIVE AREA(ACRES) =      5.90     AREA-AVERAGED Fm(INCH/HR) =   0.09
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        5.9         PEAK FLOW RATE(CFS) =       7.49

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  0.93   FLOW VELOCITY(FEET/SEC.) =   2.86
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      3.00 =     721.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE      3.00 TO NODE      4.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   337.70  DOWNSTREAM(FEET) =   337.20
  FLOW LENGTH(FEET) =   131.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  21.0 INCH PIPE IS  14.0 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   4.39
  ESTIMATED PIPE DIAMETER(INCH) =  21.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       7.49
  PIPE TRAVEL TIME(MIN.) =   0.50    Tc(MIN.) =   10.74
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      4.00 =     852.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE      4.00 TO NODE      4.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   10.74
```

```
  *   2 YEAR RAINFALL INTENSITY(INCH/HR) =  1.459
  SUBAREA LOSS RATE DATA(AMC  I ):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                A        0.50      0.40     0.100    17
  COMMERCIAL                C        0.30      0.25     0.100    50
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.34
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    0.80      SUBAREA RUNOFF(CFS) =    1.03
  EFFECTIVE AREA(ACRES) =      6.70   AREA-AVERAGED Fm(INCH/HR) =  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap =  0.32
  TOTAL AREA(ACRES) =        6.7       PEAK FLOW RATE(CFS) =       8.30

****************************************************************************
  FLOW PROCESS FROM NODE      4.00 TO NODE      5.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   337.20  DOWNSTREAM(FEET) =   336.25
  FLOW LENGTH(FEET) =   118.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  13.4 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   5.89
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       8.30
  PIPE TRAVEL TIME(MIN.) =   0.33    Tc(MIN.) =   11.08
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      5.00 =     970.00 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =        6.7  TC(MIN.) =     11.08
  EFFECTIVE AREA(ACRES) =      6.70  AREA-AVERAGED Fm(INCH/HR)=  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap = 0.320
  PEAK FLOW RATE(CFS)   =       8.30
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

# APPENDIX 5

## Proposed 25-Year Storm AES Calculations

```
******************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                              Analysis prepared by:

                            Fuscoe Engineering, Inc.
                               600 Wilshire Blvd
                                   Suite 1470
                             Los Angeles, CA 90017

 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                      *
* SUBAREA 'C' 25 YEAR STORM                                               *
* 12/4/2024 CK                                                            *
 *************************************************************************

  FILE NAME: GVCPR25.DAT
  TIME/DATE OF STUDY: 15:46 12/04/2024
==============================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==============================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

******************************************************************************
  FLOW PROCESS FROM NODE    200.00 TO NODE    202.00 IS CODE =  21
------------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   300.00
  ELEVATION DATA: UPSTREAM(FEET) =    745.00  DOWNSTREAM(FEET) =    680.00
```

```
  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    9.386
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.377
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        0.80      0.25     1.000    77    9.39
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      2.25
  TOTAL AREA(ACRES) =      0.80   PEAK FLOW RATE(CFS) =      2.25

****************************************************************************
  FLOW PROCESS FROM NODE    202.00 TO NODE    204.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    680.00  DOWNSTREAM(FEET) =    608.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   984.00   CHANNEL SLOPE =  0.0732
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.991
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 C        2.70      0.25     0.100    69
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        5.00      0.25     1.000    77
  COMMERCIAL                 D        0.90      0.20     0.100    75
  NATURAL FAIR COVER
  "OPEN BRUSH"               D        0.60      0.20     1.000    83
  NATURAL FAIR COVER
  "OPEN BRUSH"               B        1.50      0.30     1.000    66
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.697
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      15.83
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.31
  AVERAGE FLOW DEPTH(FEET) =   0.85   TRAVEL TIME(MIN.) =   2.24
  Tc(MIN.) =   11.63
  SUBAREA AREA(ACRES) =    10.70       SUBAREA RUNOFF(CFS) =   27.09
  EFFECTIVE AREA(ACRES) =     11.50     AREA-AVERAGED Fm(INCH/HR) =   0.18
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   0.72
  TOTAL AREA(ACRES) =       11.5         PEAK FLOW RATE(CFS) =      29.07

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.07   FLOW VELOCITY(FEET/SEC.) =   8.54
  LONGEST FLOWPATH FROM NODE    200.00 TO NODE    204.00 =    1284.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    204.00 TO NODE    206.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    608.00  DOWNSTREAM(FEET) =    510.00
```

```
 CHANNEL LENGTH THRU SUBAREA(FEET) =  1446.80   CHANNEL SLOPE =  0.0677
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.662
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 NATURAL FAIR COVER
 "OPEN BRUSH"              A        1.60      0.40     1.000    46
 NATURAL FAIR COVER
 "OPEN BRUSH"              B        4.20      0.30     1.000    66
 NATURAL FAIR COVER
 "OPEN BRUSH"              C        5.70      0.25     1.000    77
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.29
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
 TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      41.36
 TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   9.07
 AVERAGE FLOW DEPTH(FEET) =   1.23   TRAVEL TIME(MIN.) =   2.66
 Tc(MIN.) =   14.29
 SUBAREA AREA(ACRES) =    11.50       SUBAREA RUNOFF(CFS) =   24.56
 EFFECTIVE AREA(ACRES) =     23.00     AREA-AVERAGED Fm(INCH/HR) =   0.24
 AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   0.86
 TOTAL AREA(ACRES) =       23.0         PEAK FLOW RATE(CFS) =      50.22

 END OF SUBAREA CHANNEL FLOW HYDRAULICS:
 DEPTH(FEET) =  1.33   FLOW VELOCITY(FEET/SEC.) =   9.46
 LONGEST FLOWPATH FROM NODE    200.00 TO NODE    206.00 =    2730.80 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    206.00 TO NODE    206.00 IS CODE =  16
----------------------------------------------------------------------------
 >>>>>USER SPECIFIED CONSTANT SOURCE FLOW AT NODE<<<<<
============================================================================
 USER-SPECIFIED CONSTANT SOURCE FLOW =    77.00(CFS)
 USER-SPECIFIED AREA ASSOCIATED TO SOURCE FLOW =    23.01(ACRES)
 * CUMULATIVE SOURCE FLOW DATA: FLOW(CFS) =    77.00  AREA(AC.) =    23.01
 * SUMMED DATA: FLOW(CFS) =   127.22    TOTAL AREA(ACRES) =    46.01

****************************************************************************
 FLOW PROCESS FROM NODE    206.00 TO NODE    208.00 IS CODE =  51
----------------------------------------------------------------------------
 >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
 >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =    510.00  DOWNSTREAM(FEET) =    445.00
 CHANNEL LENGTH THRU SUBAREA(FEET) =  1835.40   CHANNEL SLOPE =  0.0354
 CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
 MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   4.00
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.401
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 NATURAL FAIR COVER
 "OPEN BRUSH"              A        8.20      0.40     1.000    46
 COMMERCIAL                B        4.80      0.30     0.100    56
 NATURAL FAIR COVER
 "OPEN BRUSH"              B       17.80      0.30     1.000    66
```

```
  COMMERCIAL                  C        1.20      0.25     0.100    69
  NATURAL FAIR COVER
  "OPEN BRUSH"                C       38.00      0.25     1.000    77
  NATURAL FAIR COVER
  "OPEN BRUSH"                D       20.30      0.20     1.000    83
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.940
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =     214.84
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =  10.68
  AVERAGE FLOW DEPTH(FEET) =   2.59   TRAVEL TIME(MIN.) =   2.86
  Tc(MIN.) =   17.15
  SUBAREA AREA(ACRES) =    90.30       SUBAREA RUNOFF(CFS) =  174.99
  EFFECTIVE AREA(ACRES) =    113.30     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.27  AREA-AVERAGED Ap =   0.92
  TOTAL AREA(ACRES) =      113.3         PEAK FLOW RATE(CFS) =     219.80

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  2.92   FLOW VELOCITY(FEET/SEC.) =  11.61
  * TOTAL SOURCE FLOW(CFS) =      77.00
  LONGEST FLOWPATH FROM NODE    200.00 TO NODE    208.00 =    4566.20 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    208.00 TO NODE    211.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    445.00  DOWNSTREAM(FEET) =    429.50
  CHANNEL LENGTH THRU SUBAREA(FEET) =   709.00   CHANNEL SLOPE =  0.0219
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   4.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.310
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                A        0.50      0.40     1.000    46
  NATURAL FAIR COVER
  "OPEN BRUSH"                B        5.80      0.30     1.000    66
  NATURAL FAIR COVER
  "OPEN BRUSH"                C        6.80      0.25     1.000    77
  NATURAL FAIR COVER
  "OPEN BRUSH"                D        4.10      0.20     1.000    83
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =     312.67
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   9.79
  AVERAGE FLOW DEPTH(FEET) =   3.26   TRAVEL TIME(MIN.) =   1.21
  Tc(MIN.) =   18.36
  SUBAREA AREA(ACRES) =    17.20       SUBAREA RUNOFF(CFS) =   31.75
  EFFECTIVE AREA(ACRES) =    130.50     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.26  AREA-AVERAGED Ap =   0.93
  TOTAL AREA(ACRES) =      130.5         PEAK FLOW RATE(CFS) =     242.30

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  3.29   FLOW VELOCITY(FEET/SEC.) =   9.86
  * TOTAL SOURCE FLOW(CFS) =      77.00
```

```
 LONGEST FLOWPATH FROM NODE    200.00 TO NODE    211.00 =    5275.20 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    211.00 TO NODE    212.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   429.50  DOWNSTREAM(FEET) =   413.70
 FLOW LENGTH(FEET) =   617.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  57.0 INCH PIPE IS  42.3 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =  22.63
 ESTIMATED PIPE DIAMETER(INCH) =  57.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =     319.30
 PIPE TRAVEL TIME(MIN.) =   0.45    Tc(MIN.) =   18.82
 * TOTAL SOURCE FLOW(CFS) =      77.00
 LONGEST FLOWPATH FROM NODE    200.00 TO NODE    212.00 =    5892.20 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    212.00 TO NODE    213.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   413.70  DOWNSTREAM(FEET) =   410.70
 FLOW LENGTH(FEET) =   148.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  60.0 INCH PIPE IS  43.8 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =  20.78
 ESTIMATED PIPE DIAMETER(INCH) =  60.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =     319.30
 PIPE TRAVEL TIME(MIN.) =   0.12    Tc(MIN.) =   18.93
 * TOTAL SOURCE FLOW(CFS) =      77.00
 LONGEST FLOWPATH FROM NODE    200.00 TO NODE    213.00 =    6040.20 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    213.00 TO NODE    213.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =   18.93
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.270
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 PUBLIC PARK                B        0.90      0.30     0.850    56
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.850
 SUBAREA AREA(ACRES) =    0.90      SUBAREA RUNOFF(CFS) =    1.63
 EFFECTIVE AREA(ACRES) =    131.40   AREA-AVERAGED Fm(INCH/HR) =  0.25
 AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap =  0.93
 TOTAL AREA(ACRES) =      131.4       PEAK FLOW RATE(CFS) =     242.30
 NOTE: PEAK FLOW RATE DEFAULTED TO UPSTREAM VALUE

 * SOURCE FLOW DATA: FLOW(CFS) =      77.00     AREA(ACRES) =       23.0
 * SUMMED DATA: FLOW(CFS) =     319.30    TOTAL AREA(ACRES) =      154.4

****************************************************************************
```

```
  FLOW PROCESS FROM NODE    213.00 TO NODE    213.00 IS CODE =  81
 ----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
 ============================================================================
  MAINLINE Tc(MIN.) =   18.93
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.270
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  APARTMENTS                 A        0.60      0.40     0.200    32
  APARTMENTS                 B        0.80      0.30     0.200    56
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.34
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.200
  SUBAREA AREA(ACRES) =    1.40      SUBAREA RUNOFF(CFS) =    2.77
  EFFECTIVE AREA(ACRES) =    132.80   AREA-AVERAGED Fm(INCH/HR) =  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.27  AREA-AVERAGED Ap =  0.93
  TOTAL AREA(ACRES) =      132.8       PEAK FLOW RATE(CFS) =     242.30
  NOTE: PEAK FLOW RATE DEFAULTED TO UPSTREAM VALUE

  * SOURCE FLOW DATA: FLOW(CFS) =      77.00     AREA(ACRES) =       23.0
  * SUMMED DATA: FLOW(CFS) =     319.30    TOTAL AREA(ACRES) =      155.8

 ****************************************************************************
  FLOW PROCESS FROM NODE    213.00 TO NODE    214.00 IS CODE =  31
 ----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
 ============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   410.70  DOWNSTREAM(FEET) =   398.20
  FLOW LENGTH(FEET) =    79.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  31.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  43.99
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =     319.30
  PIPE TRAVEL TIME(MIN.) =   0.03    Tc(MIN.) =   18.96
  * TOTAL SOURCE FLOW(CFS) =      77.00
  LONGEST FLOWPATH FROM NODE    200.00 TO NODE    214.00 =    6119.20 FEET.
 ============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =      132.8  TC(MIN.) =     18.96
  EFFECTIVE AREA(ACRES) =    132.80  AREA-AVERAGED Fm(INCH/HR)=  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.27  AREA-AVERAGED Ap = 0.925
  PEAK FLOW RATE(CFS)   =     242.30
  * CUMULATIVE SOURCE FLOW DATA: FLOW(CFS) =      77.00  AREA(AC.) =
23.0
  * SUMMED DATA: FLOW(CFS) =     319.30    TOTAL AREA(ACRES) =      155.8
 ============================================================================
 ============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
            RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
           (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
         (c) Copyright 1983-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:

                         Fuscoe Engineering, Inc.
                            600 Wilshire Blvd
                                Suite 1470
                          Los Angeles, CA 90017

 ************************* DESCRIPTION OF STUDY *************************
* GATEWAY VILLAGE PROPOSED CONDITION                                    *
* SUBAREA 'D' 25 YEAR STORM                                             *
* 11/27/2024 CK                                                         *
 ************************************************************************

  FILE NAME: GVDPR25.DAT
  TIME/DATE OF STUDY: 14:07 11/27/2024
========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
========================================================================
                    --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE    300.00 TO NODE    302.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   300.00
  ELEVATION DATA: UPSTREAM(FEET) =    640.00  DOWNSTREAM(FEET) =    620.00

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   11.882
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.955
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
```

```
  NATURAL FAIR COVER
  "OPEN BRUSH"                C        0.20      0.25     1.000    77   11.88
  NATURAL FAIR COVER
  "OPEN BRUSH"                D        0.20      0.20     1.000    83   11.88
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.23
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      0.98
  TOTAL AREA(ACRES) =      0.40   PEAK FLOW RATE(CFS) =      0.98

****************************************************************************
  FLOW PROCESS FROM NODE    302.00 TO NODE    304.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    620.00  DOWNSTREAM(FEET) =    430.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  2812.10   CHANNEL SLOPE =  0.0676
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.311
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                C       17.20      0.25     1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      17.14
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.25
  AVERAGE FLOW DEPTH(FEET) =   0.89   TRAVEL TIME(MIN.) =   6.47
  Tc(MIN.) =   18.35
  SUBAREA AREA(ACRES) =    17.20       SUBAREA RUNOFF(CFS) =   31.91
  EFFECTIVE AREA(ACRES) =     17.60     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       17.6         PEAK FLOW RATE(CFS) =      32.66

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.13   FLOW VELOCITY(FEET/SEC.) =   8.49
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    304.00 =    3112.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    304.00 TO NODE    306.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   430.00  DOWNSTREAM(FEET) =   425.00
  FLOW LENGTH(FEET) =   115.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  14.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  15.88
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      32.66
  PIPE TRAVEL TIME(MIN.) =   0.12    Tc(MIN.) =   18.47
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    306.00 =    3227.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    306.00 TO NODE    306.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   18.47
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.303
  SUBAREA LOSS RATE DATA(AMC  II):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                C       17.20      0.25      1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA AREA(ACRES) =   17.20      SUBAREA RUNOFF(CFS) =   31.77
  EFFECTIVE AREA(ACRES) =     34.80   AREA-AVERAGED Fm(INCH/HR) =  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  1.00
  TOTAL AREA(ACRES) =       34.8       PEAK FLOW RATE(CFS) =      64.29

****************************************************************************
  FLOW PROCESS FROM NODE    306.00 TO NODE    308.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   425.00  DOWNSTREAM(FEET) =   422.30
  FLOW LENGTH(FEET) =   281.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  26.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  10.60
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      64.29
  PIPE TRAVEL TIME(MIN.) =   0.44    Tc(MIN.) =   18.91
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    308.00 =    3508.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    308.00 TO NODE    311.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   422.30  DOWNSTREAM(FEET) =   414.70
  FLOW LENGTH(FEET) =    83.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  18.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  24.19
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      64.29
  PIPE TRAVEL TIME(MIN.) =   0.06    Tc(MIN.) =   18.97
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    311.00 =    3591.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    311.00 TO NODE    311.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   18.97
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.268
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"                C        2.20      0.25      1.000    77
  NATURAL FAIR COVER
  "OPEN BRUSH"                D        1.10      0.20      1.000    83
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.23
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA AREA(ACRES) =    3.30      SUBAREA RUNOFF(CFS) =    6.04
  EFFECTIVE AREA(ACRES) =     38.10   AREA-AVERAGED Fm(INCH/HR) =  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  1.00
  TOTAL AREA(ACRES) =       38.1       PEAK FLOW RATE(CFS) =      69.26

****************************************************************************
```

```
 FLOW PROCESS FROM NODE    311.00 TO NODE    313.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   414.70  DOWNSTREAM(FEET) =   407.40
 FLOW LENGTH(FEET) =   387.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  33.0 INCH PIPE IS  26.4 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =  13.58
 ESTIMATED PIPE DIAMETER(INCH) =  33.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =      69.26
 PIPE TRAVEL TIME(MIN.) =   0.47    Tc(MIN.) =   19.44
 LONGEST FLOWPATH FROM NODE    300.00 TO NODE    313.00 =    3978.10 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    313.00 TO NODE    313.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =   19.44
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.237
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 CONDOMINIUMS               A        3.80      0.40     0.350    32
 CONDOMINIUMS               C        4.30      0.25     0.350    69
 CONDOMINIUMS               D        0.20      0.20     0.350    75
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.32
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
 SUBAREA AREA(ACRES) =    8.30      SUBAREA RUNOFF(CFS) =   15.88
 EFFECTIVE AREA(ACRES) =     46.40   AREA-AVERAGED Fm(INCH/HR) =  0.22
 AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.88
 TOTAL AREA(ACRES) =       46.4       PEAK FLOW RATE(CFS) =      84.05

****************************************************************************
 FLOW PROCESS FROM NODE    313.00 TO NODE    314.00 IS CODE =  31
----------------------------------------------------------------------------
 >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
 >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
 ELEVATION DATA: UPSTREAM(FEET) =   407.40  DOWNSTREAM(FEET) =   401.80
 FLOW LENGTH(FEET) =   250.00   MANNING'S N =  0.013
 DEPTH OF FLOW IN  36.0 INCH PIPE IS  25.8 INCHES
 PIPE-FLOW VELOCITY(FEET/SEC.) =  15.49
 ESTIMATED PIPE DIAMETER(INCH) =  36.00    NUMBER OF PIPES =   1
 PIPE-FLOW(CFS) =      84.05
 PIPE TRAVEL TIME(MIN.) =   0.27    Tc(MIN.) =   19.71
 LONGEST FLOWPATH FROM NODE    300.00 TO NODE    314.00 =    4228.10 FEET.

****************************************************************************
 FLOW PROCESS FROM NODE    314.00 TO NODE    314.00 IS CODE =  81
----------------------------------------------------------------------------
 >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
 MAINLINE Tc(MIN.) =   19.71
 *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.219
 SUBAREA LOSS RATE DATA(AMC  II):
  DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
      LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
 CONDOMINIUMS               A        1.10      0.40     0.350    32
 CONDOMINIUMS               B        1.30      0.30     0.350    56
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.35
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
```

```
  SUBAREA AREA(ACRES) =    2.40      SUBAREA RUNOFF(CFS) =    4.53
  EFFECTIVE AREA(ACRES) =     48.80   AREA-AVERAGED Fm(INCH/HR) =  0.22
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap =  0.86
  TOTAL AREA(ACRES) =       48.8       PEAK FLOW RATE(CFS) =      87.86

****************************************************************************
  FLOW PROCESS FROM NODE    314.00 TO NODE    315.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   401.80  DOWNSTREAM(FEET) =   395.20
  FLOW LENGTH(FEET) =   126.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  30.0 INCH PIPE IS  23.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  21.23
  ESTIMATED PIPE DIAMETER(INCH) =  30.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      87.86
  PIPE TRAVEL TIME(MIN.) =   0.10    Tc(MIN.) =   19.81
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    315.00 =    4354.10 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =       48.8  TC(MIN.) =     19.81
  EFFECTIVE AREA(ACRES) =     48.80  AREA-AVERAGED Fm(INCH/HR)=  0.22
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap = 0.857
  PEAK FLOW RATE(CFS)   =      87.86
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
            RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
           (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
         (c) Copyright 1983-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:

                        Fuscoe Engineering, Inc.
                           600 Wilshire Blvd
                               Suite 1470
                         Los Angeles, CA 90017

 ************************* DESCRIPTION OF STUDY *************************
* GATEWAY VILLAGE PROPOSED CONDITION-MITIGATED                          *
* SUBAREA 'D' 25 YEAR STORM                                             *
* 12/4/2024 CK                                                          *
 ************************************************************************

  FILE NAME: GVDPR25M.DAT
  TIME/DATE OF STUDY: 16:17 12/04/2024
========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
========================================================================
                    --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.018/0.018/0.020   0.67    2.00 0.0312 0.167 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE    300.00 TO NODE    302.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   300.00
  ELEVATION DATA: UPSTREAM(FEET) =    640.00  DOWNSTREAM(FEET) =    620.00
```

```
  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   11.882
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.955
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        0.20      0.25     1.000    77   11.88
  NATURAL FAIR COVER
  "OPEN BRUSH"               D        0.20      0.20     1.000    83   11.88
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.23
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      0.98
  TOTAL AREA(ACRES) =      0.40   PEAK FLOW RATE(CFS) =      0.98

****************************************************************************
  FLOW PROCESS FROM NODE    302.00 TO NODE    304.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    620.00  DOWNSTREAM(FEET) =    430.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =  2812.10   CHANNEL SLOPE =  0.0676
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.311
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               C       17.20      0.25     1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      17.14
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   7.25
  AVERAGE FLOW DEPTH(FEET) =   0.89   TRAVEL TIME(MIN.) =   6.47
  Tc(MIN.) =   18.35
  SUBAREA AREA(ACRES) =    17.20       SUBAREA RUNOFF(CFS) =   31.91
  EFFECTIVE AREA(ACRES) =     17.60     AREA-AVERAGED Fm(INCH/HR) =   0.25
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   1.00
  TOTAL AREA(ACRES) =       17.6         PEAK FLOW RATE(CFS) =      32.66

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.13   FLOW VELOCITY(FEET/SEC.) =   8.49
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    304.00 =    3112.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    304.00 TO NODE    306.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   430.00  DOWNSTREAM(FEET) =   425.00
  FLOW LENGTH(FEET) =   115.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  14.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  15.88
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
```

```
  PIPE-FLOW(CFS) =      32.66
  PIPE TRAVEL TIME(MIN.) =   0.12    Tc(MIN.) =   18.47
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    306.00 =    3227.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    306.00 TO NODE    306.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   18.47
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.303
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               C       17.20      0.25     1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA AREA(ACRES) =   17.20      SUBAREA RUNOFF(CFS) =   31.77
  EFFECTIVE AREA(ACRES) =     34.80   AREA-AVERAGED Fm(INCH/HR) =  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  1.00
  TOTAL AREA(ACRES) =       34.8       PEAK FLOW RATE(CFS) =      64.29

****************************************************************************
  FLOW PROCESS FROM NODE    306.00 TO NODE    308.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   425.00  DOWNSTREAM(FEET) =   422.30
  FLOW LENGTH(FEET) =   281.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  26.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  10.60
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      64.29
  PIPE TRAVEL TIME(MIN.) =   0.44    Tc(MIN.) =   18.91
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    308.00 =    3508.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    308.00 TO NODE    311.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   422.30  DOWNSTREAM(FEET) =   414.70
  FLOW LENGTH(FEET) =    83.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  18.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  24.19
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      64.29
  PIPE TRAVEL TIME(MIN.) =   0.06    Tc(MIN.) =   18.97
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    311.00 =    3591.10 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE    311.00 TO NODE    311.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
```

```
================================================================================
  MAINLINE Tc(MIN.) =   18.97
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.268
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        2.20      0.25     1.000    77
  NATURAL FAIR COVER
  "OPEN BRUSH"               D        1.10      0.20     1.000    83
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.23
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA AREA(ACRES) =    3.30      SUBAREA RUNOFF(CFS) =    6.04
  EFFECTIVE AREA(ACRES) =     38.10   AREA-AVERAGED Fm(INCH/HR) =  0.25
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  1.00
  TOTAL AREA(ACRES) =       38.1       PEAK FLOW RATE(CFS) =      69.26

********************************************************************************
  FLOW PROCESS FROM NODE    311.00 TO NODE    313.00 IS CODE =  31
--------------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   414.70  DOWNSTREAM(FEET) =   407.40
  FLOW LENGTH(FEET) =   387.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  33.0 INCH PIPE IS  26.4 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  13.58
  ESTIMATED PIPE DIAMETER(INCH) =  33.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      69.26
  PIPE TRAVEL TIME(MIN.) =   0.47    Tc(MIN.) =   19.44
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    313.00 =    3978.10 FEET.

********************************************************************************
  FLOW PROCESS FROM NODE    313.00 TO NODE    313.00 IS CODE =  16
--------------------------------------------------------------------------------
  >>>>>USER SPECIFIED CONSTANT SOURCE FLOW AT NODE<<<<<
================================================================================
  USER-SPECIFIED CONSTANT SOURCE FLOW =     7.90(CFS)
  USER-SPECIFIED AREA ASSOCIATED TO SOURCE FLOW =     8.30(ACRES)
  * CUMULATIVE SOURCE FLOW DATA: FLOW(CFS) =     7.90  AREA(AC.) =     8.30
  * SUMMED DATA: FLOW(CFS) =    77.16    TOTAL AREA(ACRES) =    46.40

********************************************************************************
  FLOW PROCESS FROM NODE    313.00 TO NODE    314.00 IS CODE =  31
--------------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   407.40  DOWNSTREAM(FEET) =   401.80
  FLOW LENGTH(FEET) =   250.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  36.0 INCH PIPE IS  24.2 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  15.27
  ESTIMATED PIPE DIAMETER(INCH) =  36.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      77.16
  PIPE TRAVEL TIME(MIN.) =   0.27    Tc(MIN.) =   19.72
  * TOTAL SOURCE FLOW(CFS) =       7.90
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    314.00 =    4228.10 FEET.
```

```
****************************************************************************
  FLOW PROCESS FROM NODE    314.00 TO NODE    314.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   19.72
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.219
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               A        1.10      0.40     0.350    32
  CONDOMINIUMS               B        1.30      0.30     0.350    56
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.35
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    2.40      SUBAREA RUNOFF(CFS) =    4.53
  EFFECTIVE AREA(ACRES) =     40.50   AREA-AVERAGED Fm(INCH/HR) =  0.24
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.96
  TOTAL AREA(ACRES) =       40.5       PEAK FLOW RATE(CFS) =      72.10

  * SOURCE FLOW DATA: FLOW(CFS) =       7.90     AREA(ACRES) =        8.3
  * SUMMED DATA: FLOW(CFS) =      80.00    TOTAL AREA(ACRES) =       48.8

****************************************************************************
  FLOW PROCESS FROM NODE    314.00 TO NODE    315.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   401.80  DOWNSTREAM(FEET) =   395.20
  FLOW LENGTH(FEET) =   126.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  30.0 INCH PIPE IS  21.7 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  21.01
  ESTIMATED PIPE DIAMETER(INCH) =  30.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      80.00
  PIPE TRAVEL TIME(MIN.) =   0.10    Tc(MIN.) =   19.82
  * TOTAL SOURCE FLOW(CFS) =       7.90
  LONGEST FLOWPATH FROM NODE    300.00 TO NODE    315.00 =    4354.10 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =       40.5  TC(MIN.) =     19.82
  EFFECTIVE AREA(ACRES) =     40.50  AREA-AVERAGED Fm(INCH/HR)=  0.24
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap = 0.961
  PEAK FLOW RATE(CFS)   =      72.10
  * CUMULATIVE SOURCE FLOW DATA: FLOW(CFS) =       7.90  AREA(AC.) =
8.3
  * SUMMED DATA: FLOW(CFS) =      80.00    TOTAL AREA(ACRES) =       48.8
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                              Analysis prepared by:

                             Fuscoe Engineering, Inc.
                              15535 Sand Canyon Ave
                                    Suite 100
                                 Irvine, CA 92618

 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                      *
* SUBAREA 'E' 25 YEAR STORM                                               *
* 11/25/2024 JZ                                                          *
 **************************************************************************

  FILE NAME: GVEPR25.DAT
  TIME/DATE OF STUDY: 10:22 11/25/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.020/0.020/0.020   0.50    2.00 0.0313 0.125 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE     10.00 TO NODE     11.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   229.00
  ELEVATION DATA: UPSTREAM(FEET) =    413.00  DOWNSTREAM(FEET) =    404.60

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    6.128
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  4.299
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS                A        1.40      0.40      0.350    32    6.13
  CONDOMINIUMS                B        0.60      0.30      0.350    56    6.13
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.37
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =      7.50
  TOTAL AREA(ACRES) =      2.00   PEAK FLOW RATE(CFS) =      7.50

****************************************************************************
  FLOW PROCESS FROM NODE     11.00 TO NODE     12.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    404.60  DOWNSTREAM(FEET) =    401.30
  CHANNEL LENGTH THRU SUBAREA(FEET) =   241.00   CHANNEL SLOPE =  0.0137
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.899
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                A        1.20      0.40      0.350    32
  CONDOMINIUMS                B        0.30      0.30      0.350    56
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.38
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      10.05
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.48
  AVERAGE FLOW DEPTH(FEET) =   0.98   TRAVEL TIME(MIN.) =   1.15
  Tc(MIN.) =    7.28
  SUBAREA AREA(ACRES) =     1.50       SUBAREA RUNOFF(CFS) =    5.08
  EFFECTIVE AREA(ACRES) =      3.50     AREA-AVERAGED Fm(INCH/HR) =   0.13
  AREA-AVERAGED Fp(INCH/HR) =   0.37  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        3.5         PEAK FLOW RATE(CFS) =      11.87

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.04   FLOW VELOCITY(FEET/SEC.) =   3.64
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     12.00 =     470.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     12.00 TO NODE     13.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   394.30  DOWNSTREAM(FEET) =   390.90
  FLOW LENGTH(FEET) =    55.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   8.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  14.15
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      11.87
  PIPE TRAVEL TIME(MIN.) =   0.06    Tc(MIN.) =    7.35
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     13.00 =     525.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     13.00 TO NODE     13.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
```

```
  MAINLINE Tc(MIN.) =    7.35
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.879
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        3.90      0.25     0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    3.90      SUBAREA RUNOFF(CFS) =   13.31
  EFFECTIVE AREA(ACRES) =      7.40   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.31  AREA-AVERAGED Ap =  0.35
  TOTAL AREA(ACRES) =        7.4       PEAK FLOW RATE(CFS) =      25.12

****************************************************************************
  FLOW PROCESS FROM NODE     13.00 TO NODE     14.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   390.90  DOWNSTREAM(FEET) =   389.30
  FLOW LENGTH(FEET) =    58.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  21.0 INCH PIPE IS  16.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  12.15
  ESTIMATED PIPE DIAMETER(INCH) =  21.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      25.12
  PIPE TRAVEL TIME(MIN.) =   0.08    Tc(MIN.) =    7.43
  LONGEST FLOWPATH FROM NODE     10.00 TO NODE     14.00 =     583.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     14.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
  TIME OF CONCENTRATION(MIN.) =    7.43
  RAINFALL INTENSITY(INCH/HR) =   3.86
  AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.31
  AREA-AVERAGED Ap =  0.35
  EFFECTIVE STREAM AREA(ACRES) =       7.40
  TOTAL STREAM AREA(ACRES) =       7.40
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      25.12

****************************************************************************
  FLOW PROCESS FROM NODE     14.10 TO NODE     14.20 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    459.00  DOWNSTREAM(FEET) =    403.50

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =   10.258
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.212
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  NATURAL FAIR COVER
  "OPEN BRUSH"               C        1.20      0.25     1.000    77   10.26
```

```
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  SUBAREA RUNOFF(CFS) =      3.20
  TOTAL AREA(ACRES) =      1.20   PEAK FLOW RATE(CFS) =      3.20

****************************************************************************
  FLOW PROCESS FROM NODE     14.20 TO NODE     14.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   396.50  DOWNSTREAM(FEET) =   389.30
  FLOW LENGTH(FEET) =   334.00   MANNING'S N =  0.013
  ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000
  DEPTH OF FLOW IN  18.0 INCH PIPE IS   5.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   6.76
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       3.20
  PIPE TRAVEL TIME(MIN.) =   0.82    Tc(MIN.) =   11.08
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     14.00 =     664.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     14.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   11.08
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.075
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 A        1.40      0.40      0.100    32
  COMMERCIAL                 B        0.10      0.30      0.100    56
  COMMERCIAL                 C        0.30      0.25      0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.37
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.80      SUBAREA RUNOFF(CFS) =    4.92
  EFFECTIVE AREA(ACRES) =      3.00   AREA-AVERAGED Fm(INCH/HR) =  0.12
  AREA-AVERAGED Fp(INCH/HR) =  0.27  AREA-AVERAGED Ap =  0.46
  TOTAL AREA(ACRES) =        3.0       PEAK FLOW RATE(CFS) =       7.97

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     14.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
  >>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
  TIME OF CONCENTRATION(MIN.) =   11.08
  RAINFALL INTENSITY(INCH/HR) =   3.07
  AREA-AVERAGED Fm(INCH/HR) =  0.12
  AREA-AVERAGED Fp(INCH/HR) =  0.27
  AREA-AVERAGED Ap =  0.46
  EFFECTIVE STREAM AREA(ACRES) =       3.00
  TOTAL STREAM AREA(ACRES) =       3.00
  PEAK FLOW RATE(CFS) AT CONFLUENCE =       7.97

  ** CONFLUENCE DATA **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)  (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
```

```
     1       25.12    7.43    3.856  0.31( 0.11) 0.35       7.4       10.00
     2        7.97   11.08    3.075  0.27( 0.12) 0.46       3.0       14.10

  RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
  CONFLUENCE FORMULA USED FOR  2 STREAMS.

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
     1       31.87    7.43    3.856  0.30( 0.11) 0.37       9.4       10.00
     2       27.85   11.08    3.075  0.29( 0.11) 0.38      10.4       14.10

  COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:
  PEAK FLOW RATE(CFS) =      31.87    Tc(MIN.) =     7.43
  EFFECTIVE AREA(ACRES) =       9.41   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.30  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       10.4
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     14.00 =     664.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     14.00 TO NODE     15.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   389.30  DOWNSTREAM(FEET) =   377.10
  FLOW LENGTH(FEET) =   494.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  18.1 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  12.51
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      31.87
  PIPE TRAVEL TIME(MIN.) =   0.66    Tc(MIN.) =    8.09
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     15.00 =    1158.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     15.00 TO NODE     15.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    8.09
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.675
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               A        2.50      0.40     0.350    32
  CONDOMINIUMS               B        0.80      0.30     0.350    56
  CONDOMINIUMS               C        0.40      0.25     0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.36
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    3.70      SUBAREA RUNOFF(CFS) =   11.82
  EFFECTIVE AREA(ACRES) =     13.11   AREA-AVERAGED Fm(INCH/HR) =  0.12
  AREA-AVERAGED Fp(INCH/HR) =  0.31  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       14.1       PEAK FLOW RATE(CFS) =      42.00

****************************************************************************
  FLOW PROCESS FROM NODE     15.00 TO NODE     15.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    8.09
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.675
```

```
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        3.60      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    3.60      SUBAREA RUNOFF(CFS) =   11.62
  EFFECTIVE AREA(ACRES) =     16.71   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.30  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       17.7       PEAK FLOW RATE(CFS) =      53.62

****************************************************************************
  FLOW PROCESS FROM NODE     15.00 TO NODE     16.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   377.10  DOWNSTREAM(FEET) =   367.20
  FLOW LENGTH(FEET) =   356.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  30.0 INCH PIPE IS  20.4 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  15.10
  ESTIMATED PIPE DIAMETER(INCH) =  30.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      53.62
  PIPE TRAVEL TIME(MIN.) =   0.39    Tc(MIN.) =    8.48
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     16.00 =    1514.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     16.00 TO NODE     16.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    8.48
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.577
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        2.70      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    2.70      SUBAREA RUNOFF(CFS) =    8.48
  EFFECTIVE AREA(ACRES) =     19.41   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.29  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       20.4       PEAK FLOW RATE(CFS) =      60.64

****************************************************************************
  FLOW PROCESS FROM NODE     16.00 TO NODE     17.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   367.20  DOWNSTREAM(FEET) =   365.20
  FLOW LENGTH(FEET) =    58.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  30.0 INCH PIPE IS  20.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  16.86
  ESTIMATED PIPE DIAMETER(INCH) =  30.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      60.64
  PIPE TRAVEL TIME(MIN.) =   0.06    Tc(MIN.) =    8.54
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     17.00 =    1572.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     17.00 TO NODE     17.00 IS CODE =  81
```

```
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    8.54
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.564
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 A        0.30      0.40      0.100    32
  COMMERCIAL                 B        0.10      0.30      0.100    56
  COMMERCIAL                 C        1.40      0.25      0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.28
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.80      SUBAREA RUNOFF(CFS) =    5.73
  EFFECTIVE AREA(ACRES) =     21.21   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29  AREA-AVERAGED Ap =  0.34
  TOTAL AREA(ACRES) =       22.2       PEAK FLOW RATE(CFS) =      66.13

****************************************************************************
  FLOW PROCESS FROM NODE     17.00 TO NODE     18.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   365.20  DOWNSTREAM(FEET) =   363.40
  FLOW LENGTH(FEET) =    91.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  33.0 INCH PIPE IS  24.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  13.83
  ESTIMATED PIPE DIAMETER(INCH) =  33.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      66.13
  PIPE TRAVEL TIME(MIN.) =   0.11    Tc(MIN.) =    8.65
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     18.00 =    1663.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.00 TO NODE     18.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
  TIME OF CONCENTRATION(MIN.) =    8.65
  RAINFALL INTENSITY(INCH/HR) =   3.54
  AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29
  AREA-AVERAGED Ap =  0.34
  EFFECTIVE STREAM AREA(ACRES) =      21.21
  TOTAL STREAM AREA(ACRES) =      22.20
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      66.13

****************************************************************************
  FLOW PROCESS FROM NODE     18.10 TO NODE     18.20 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    391.00  DOWNSTREAM(FEET) =    378.60

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    7.059
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.968
```

```
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS                A        0.40      0.40      0.350    32    7.06
  CONDOMINIUMS                B        1.00      0.30      0.350    56    7.06
  CONDOMINIUMS                C        1.00      0.25      0.350    69    7.06
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.30
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =      8.35
  TOTAL AREA(ACRES) =      2.40   PEAK FLOW RATE(CFS) =      8.35

****************************************************************************
  FLOW PROCESS FROM NODE     18.20 TO NODE     18.30 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    378.60  DOWNSTREAM(FEET) =    374.90
  CHANNEL LENGTH THRU SUBAREA(FEET) =   369.00   CHANNEL SLOPE =  0.0100
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.459
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                B        0.80      0.30      0.350    56
  CONDOMINIUMS                C        1.10      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      11.23
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.17
  AVERAGE FLOW DEPTH(FEET) =   1.09   TRAVEL TIME(MIN.) =   1.94
  Tc(MIN.) =    9.00
  SUBAREA AREA(ACRES) =     1.90       SUBAREA RUNOFF(CFS) =    5.75
  EFFECTIVE AREA(ACRES) =      4.30     AREA-AVERAGED Fm(INCH/HR) =   0.10
  AREA-AVERAGED Fp(INCH/HR) =   0.28  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        4.3         PEAK FLOW RATE(CFS) =      13.00

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.15   FLOW VELOCITY(FEET/SEC.) =   3.29
  LONGEST FLOWPATH FROM NODE     18.10 TO NODE     18.30 =     699.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.30 TO NODE     18.40 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   367.90  DOWNSTREAM(FEET) =   365.70
  FLOW LENGTH(FEET) =    59.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  10.7 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.94
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      13.00
  PIPE TRAVEL TIME(MIN.) =   0.08    Tc(MIN.) =    9.08
  LONGEST FLOWPATH FROM NODE     18.10 TO NODE     18.40 =     758.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.40 TO NODE     18.40 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
```

```
==============================================================================
  MAINLINE Tc(MIN.) =    9.08
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.441
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 B        0.80      0.30     0.100    56
  COMMERCIAL                 C        0.40      0.25     0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.28
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.20      SUBAREA RUNOFF(CFS) =    3.69
  EFFECTIVE AREA(ACRES) =      5.50   AREA-AVERAGED Fm(INCH/HR) =  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.30
  TOTAL AREA(ACRES) =        5.5       PEAK FLOW RATE(CFS) =      16.62

******************************************************************************
  FLOW PROCESS FROM NODE     18.40 TO NODE     18.00 IS CODE =  31
------------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
==============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   365.70  DOWNSTREAM(FEET) =   363.40
  FLOW LENGTH(FEET) =    43.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  11.1 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  14.50
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      16.62
  PIPE TRAVEL TIME(MIN.) =   0.05    Tc(MIN.) =    9.13
  LONGEST FLOWPATH FROM NODE     18.10 TO NODE     18.00 =     801.00 FEET.

******************************************************************************
  FLOW PROCESS FROM NODE     18.00 TO NODE     18.00 IS CODE =   1
------------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
  >>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
==============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
  TIME OF CONCENTRATION(MIN.) =    9.13
  RAINFALL INTENSITY(INCH/HR) =   3.43
  AREA-AVERAGED Fm(INCH/HR) =  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.28
  AREA-AVERAGED Ap =  0.30
  EFFECTIVE STREAM AREA(ACRES) =       5.50
  TOTAL STREAM AREA(ACRES) =       5.50
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      16.62

  ** CONFLUENCE DATA **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       66.13    8.65    3.538  0.29( 0.10) 0.34      21.2      10.00
      1       56.09   12.34    2.892  0.29( 0.10) 0.34      22.2      14.10
      2       16.62    9.13    3.431  0.28( 0.08) 0.30       5.5      18.10

  RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
  CONFLUENCE FORMULA USED FOR  2 STREAMS.

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       82.37    8.65    3.538  0.29( 0.10) 0.33      26.4      10.00
```

```
      2       81.43    9.13    3.431  0.29( 0.10) 0.33      26.8       18.10
      3       70.03   12.34    2.892  0.29( 0.10) 0.33      27.7       14.10

  COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:
  PEAK FLOW RATE(CFS) =      82.37    Tc(MIN.) =     8.65
  EFFECTIVE AREA(ACRES) =      26.42   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29  AREA-AVERAGED Ap =  0.33
  TOTAL AREA(ACRES) =       27.7
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     18.00 =    1663.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     18.00 TO NODE     19.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   363.40  DOWNSTREAM(FEET) =   360.90
  FLOW LENGTH(FEET) =   127.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  36.0 INCH PIPE IS  26.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  14.61
  ESTIMATED PIPE DIAMETER(INCH) =  36.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      82.37
  PIPE TRAVEL TIME(MIN.) =   0.14    Tc(MIN.) =    8.79
  LONGEST FLOWPATH FROM NODE     14.10 TO NODE     19.00 =    1790.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.00 TO NODE     19.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
  TIME OF CONCENTRATION(MIN.) =    8.79
  RAINFALL INTENSITY(INCH/HR) =   3.51
  AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.29
  AREA-AVERAGED Ap =  0.33
  EFFECTIVE STREAM AREA(ACRES) =      26.42
  TOTAL STREAM AREA(ACRES) =      27.70
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      82.37

****************************************************************************
  FLOW PROCESS FROM NODE     19.10 TO NODE     19.20 IS CODE =  21
----------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
============================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    467.50  DOWNSTREAM(FEET) =    458.50

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    6.355
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  4.211
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  COMMERCIAL                 C        0.30      0.25      0.100    69    6.36
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA RUNOFF(CFS) =      1.13
  TOTAL AREA(ACRES) =      0.30   PEAK FLOW RATE(CFS) =      1.13
```

```
****************************************************************************
  FLOW PROCESS FROM NODE     19.20 TO NODE     19.30 IS CODE =  62
----------------------------------------------------------------------------
  >>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>(STREET TABLE SECTION #  1 USED)<<<<<
============================================================================
  UPSTREAM ELEVATION(FEET) =  458.50  DOWNSTREAM ELEVATION(FEET) =  397.30
  STREET LENGTH(FEET) =  1205.00   CURB HEIGHT(INCHES) =  6.0
  STREET HALFWIDTH(FEET) = 30.00

  DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) =  20.00
  INSIDE STREET CROSSFALL(DECIMAL) =  0.020
  OUTSIDE STREET CROSSFALL(DECIMAL)  =  0.020

  SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF =  1
  STREET PARKWAY CROSSFALL(DECIMAL)  =  0.020
  Manning's FRICTION FACTOR for Streetflow Section(curb-to-curb) =   0.0150
  Manning's FRICTION FACTOR for Back-of-Walk Flow Section =   0.0200

    **TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =       2.38
    STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:
    STREET FLOW DEPTH(FEET) =  0.24
    HALFSTREET FLOOD WIDTH(FEET) =    6.41
    AVERAGE FLOW VELOCITY(FEET/SEC.) =    4.26
    PRODUCT OF DEPTH&VELOCITY(FT*FT/SEC.) =    1.04
  STREET FLOW TRAVEL TIME(MIN.) =   4.72   Tc(MIN.) =   11.07
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.076
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                 C        0.90      0.25     0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    0.90      SUBAREA RUNOFF(CFS) =    2.47
  EFFECTIVE AREA(ACRES) =      1.20    AREA-AVERAGED Fm(INCH/HR) =  0.02
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.10
  TOTAL AREA(ACRES) =        1.2        PEAK FLOW RATE(CFS) =       3.30

  END OF SUBAREA STREET FLOW HYDRAULICS:
  DEPTH(FEET) = 0.27   HALFSTREET FLOOD WIDTH(FEET) =   7.59
  FLOW VELOCITY(FEET/SEC.) =  4.55   DEPTH*VELOCITY(FT*FT/SEC.) =   1.22
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.30 =    1535.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.30 TO NODE     19.40 IS CODE =  91
----------------------------------------------------------------------------
  >>>>>COMPUTE "V" GUTTER FLOW TRAVEL TIME THRU SUBAREA<<<<<
============================================================================
  UPSTREAM NODE ELEVATION(FEET) =    397.30
  DOWNSTREAM NODE ELEVATION(FEET) =    373.00
  CHANNEL LENGTH THRU SUBAREA(FEET) =   152.00
  "V" GUTTER WIDTH(FEET) =   2.00   GUTTER HIKE(FEET) =  0.500
  PAVEMENT LIP(FEET) =  0.010   MANNING'S N = .0150
  PAVEMENT CROSSFALL(DECIMAL NOTATION) = 0.02000
  MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.049
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  NATURAL FAIR COVER
```

```
  "OPEN BRUSH"                C        2.40      0.25     1.000    77
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  1.000
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      6.32
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =  14.59
  AVERAGE FLOW DEPTH(FEET) =   0.50   FLOOD WIDTH(FEET) =    2.00
  "V" GUTTER FLOW TRAVEL TIME(MIN.) =   0.17   Tc(MIN.) =   11.24
  SUBAREA AREA(ACRES) =    2.40       SUBAREA RUNOFF(CFS) =    6.05
  EFFECTIVE AREA(ACRES) =    3.60     AREA-AVERAGED Fm(INCH/HR) =   0.17
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   0.70
  TOTAL AREA(ACRES) =        3.6         PEAK FLOW RATE(CFS) =       9.31

  END OF SUBAREA "V" GUTTER HYDRAULICS:
  DEPTH(FEET) =  0.54   FLOOD WIDTH(FEET) =    4.84
  FLOW VELOCITY(FEET/SEC.) =  15.09   DEPTH*VELOCITY(FT*FT/SEC) =   8.13
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.40 =    1687.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.40 TO NODE     19.50 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   366.00  DOWNSTREAM(FEET) =   364.20
  FLOW LENGTH(FEET) =   185.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  13.6 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   6.48
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =       9.31
  PIPE TRAVEL TIME(MIN.) =   0.48    Tc(MIN.) =   11.72
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.50 =    1872.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.50 TO NODE     19.50 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   11.72
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.978
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        1.00      0.25     0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    1.00      SUBAREA RUNOFF(CFS) =    2.60
  EFFECTIVE AREA(ACRES) =      4.60   AREA-AVERAGED Fm(INCH/HR) =  0.16
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.62
  TOTAL AREA(ACRES) =        4.6       PEAK FLOW RATE(CFS) =      11.68

****************************************************************************
  FLOW PROCESS FROM NODE     19.50 TO NODE     19.60 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   364.20  DOWNSTREAM(FEET) =   362.00
  FLOW LENGTH(FEET) =   225.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  21.0 INCH PIPE IS  13.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   7.00
  ESTIMATED PIPE DIAMETER(INCH) =  21.00    NUMBER OF PIPES =   1
```

```
  PIPE-FLOW(CFS) =      11.68
  PIPE TRAVEL TIME(MIN.) =   0.54    Tc(MIN.) =   12.26
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.60 =    2097.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.60 TO NODE     19.60 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   12.26
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  2.904
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  PUBLIC PARK                C        1.40      0.25     0.850    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.850
  SUBAREA AREA(ACRES) =    1.40      SUBAREA RUNOFF(CFS) =    3.39
  EFFECTIVE AREA(ACRES) =      6.00   AREA-AVERAGED Fm(INCH/HR) =  0.17
  AREA-AVERAGED Fp(INCH/HR) =  0.25  AREA-AVERAGED Ap =  0.68
  TOTAL AREA(ACRES) =        6.0       PEAK FLOW RATE(CFS) =      14.77

****************************************************************************
  FLOW PROCESS FROM NODE     19.60 TO NODE     19.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   362.00  DOWNSTREAM(FEET) =   360.90
  FLOW LENGTH(FEET) =    50.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  18.0 INCH PIPE IS  14.3 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   9.79
  ESTIMATED PIPE DIAMETER(INCH) =  18.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      14.77
  PIPE TRAVEL TIME(MIN.) =   0.09    Tc(MIN.) =   12.34
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.00 =    2147.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.00 TO NODE     19.00 IS CODE =   1
----------------------------------------------------------------------------
  >>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
  >>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
============================================================================
  TOTAL NUMBER OF STREAMS =  2
  CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
  TIME OF CONCENTRATION(MIN.) =   12.34
  RAINFALL INTENSITY(INCH/HR) =   2.89
  AREA-AVERAGED Fm(INCH/HR) =  0.17
  AREA-AVERAGED Fp(INCH/HR) =  0.25
  AREA-AVERAGED Ap =  0.68
  EFFECTIVE STREAM AREA(ACRES) =       6.00
  TOTAL STREAM AREA(ACRES) =       6.00
  PEAK FLOW RATE(CFS) AT CONFLUENCE =      14.77

  ** CONFLUENCE DATA **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       82.37    8.79    3.505  0.29( 0.10) 0.33      26.4      10.00
      1       81.43    9.27    3.400  0.29( 0.10) 0.33      26.8      18.10
      1       70.03   12.49    2.872  0.29( 0.10) 0.33      27.7      14.10
      2       14.77   12.34    2.893  0.25( 0.17) 0.68       6.0      19.10
```

```
  RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
  CONFLUENCE FORMULA USED FOR  2 STREAMS.

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)     Ap     Ae     HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)    NODE
      1       95.26    8.79    3.505  0.28( 0.11) 0.38      30.7      10.00
      2       94.60    9.27    3.400  0.28( 0.11) 0.38      31.3      18.10
      3       85.34   12.34    2.893  0.28( 0.11) 0.40      33.7      19.10
      4       84.69   12.49    2.872  0.28( 0.11) 0.40      33.7      14.10

  COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:
  PEAK FLOW RATE(CFS) =      95.26    Tc(MIN.) =     8.79
  EFFECTIVE AREA(ACRES) =      30.69   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.38
  TOTAL AREA(ACRES) =       33.7
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     19.00 =    2147.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     19.00 TO NODE     20.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   360.90  DOWNSTREAM(FEET) =   350.40
  FLOW LENGTH(FEET) =   364.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  36.0 INCH PIPE IS  25.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  17.57
  ESTIMATED PIPE DIAMETER(INCH) =  36.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      95.26
  PIPE TRAVEL TIME(MIN.) =   0.35    Tc(MIN.) =    9.14
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     20.00 =    2511.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     20.00 TO NODE     20.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    9.14
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.430
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               B        3.00      0.30     0.350    56
  CONDOMINIUMS               C        1.20      0.25     0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.29
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    4.20      SUBAREA RUNOFF(CFS) =   12.59
  EFFECTIVE AREA(ACRES) =     34.89   AREA-AVERAGED Fm(INCH/HR) =  0.11
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.38
  TOTAL AREA(ACRES) =       37.9       PEAK FLOW RATE(CFS) =     104.37

****************************************************************************
  FLOW PROCESS FROM NODE     20.00 TO NODE     20.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    9.14
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.430
  SUBAREA LOSS RATE DATA(AMC  II):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                C        4.60      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    4.60      SUBAREA RUNOFF(CFS) =   13.84
  EFFECTIVE AREA(ACRES) =     39.49   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.37
  TOTAL AREA(ACRES) =       42.5       PEAK FLOW RATE(CFS) =     118.21

****************************************************************************
  FLOW PROCESS FROM NODE     20.00 TO NODE     21.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   350.40  DOWNSTREAM(FEET) =   346.90
  FLOW LENGTH(FEET) =   152.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  39.0 INCH PIPE IS  30.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  16.77
  ESTIMATED PIPE DIAMETER(INCH) =  39.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =     118.21
  PIPE TRAVEL TIME(MIN.) =   0.15    Tc(MIN.) =    9.29
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     21.00 =    2663.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     21.00 TO NODE     21.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =    9.29
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.398
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                  C        1.10      0.25      0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    1.10      SUBAREA RUNOFF(CFS) =    3.34
  EFFECTIVE AREA(ACRES) =     40.59   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       43.6       PEAK FLOW RATE(CFS) =     120.42

****************************************************************************
  FLOW PROCESS FROM NODE     21.00 TO NODE     22.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   346.90  DOWNSTREAM(FEET) =   342.10
  FLOW LENGTH(FEET) =    67.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  33.0 INCH PIPE IS  23.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  26.18
  ESTIMATED PIPE DIAMETER(INCH) =  33.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =     120.42
  PIPE TRAVEL TIME(MIN.) =   0.04    Tc(MIN.) =    9.33
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     22.00 =    2730.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     22.00 TO NODE     22.00 IS CODE =  81
----------------------------------------------------------------------------
```

```
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
================================================================================
  MAINLINE Tc(MIN.) =    9.33
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.389
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS              B        4.60      0.30     0.350    56
  CONDOMINIUMS              C        0.80      0.25     0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.29
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    5.40      SUBAREA RUNOFF(CFS) =   15.97
  EFFECTIVE AREA(ACRES) =     45.99   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       49.0       PEAK FLOW RATE(CFS) =     136.07

********************************************************************************
  FLOW PROCESS FROM NODE     22.00 TO NODE     23.00 IS CODE =  31
--------------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   342.10  DOWNSTREAM(FEET) =   339.90
  FLOW LENGTH(FEET) =   434.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  54.0 INCH PIPE IS  44.1 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   9.78
  ESTIMATED PIPE DIAMETER(INCH) =  54.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =     136.07
  PIPE TRAVEL TIME(MIN.) =   0.74    Tc(MIN.) =   10.07
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     23.00 =    3164.00 FEET.

********************************************************************************
  FLOW PROCESS FROM NODE     23.00 TO NODE     23.00 IS CODE =  81
--------------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
================================================================================
  MAINLINE Tc(MIN.) =   10.07
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.246
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap     SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                C        0.90      0.25     0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    0.90      SUBAREA RUNOFF(CFS) =    2.61
  EFFECTIVE AREA(ACRES) =     46.89   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       49.9       PEAK FLOW RATE(CFS) =     136.07
  NOTE: PEAK FLOW RATE DEFAULTED TO UPSTREAM VALUE

********************************************************************************
  FLOW PROCESS FROM NODE     23.00 TO NODE     24.00 IS CODE =  31
--------------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   339.90  DOWNSTREAM(FEET) =   339.50
  FLOW LENGTH(FEET) =    56.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  51.0 INCH PIPE IS  40.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  11.17
  ESTIMATED PIPE DIAMETER(INCH) =  51.00    NUMBER OF PIPES =   1
```

```
  PIPE-FLOW(CFS) =     136.07
  PIPE TRAVEL TIME(MIN.) =   0.08    Tc(MIN.) =   10.15
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     24.00 =    3220.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     24.00 TO NODE     24.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   10.15
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.231
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               C        4.50      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =    4.50      SUBAREA RUNOFF(CFS) =   12.73
  EFFECTIVE AREA(ACRES) =     51.39   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       54.4       PEAK FLOW RATE(CFS) =     144.84

****************************************************************************
  FLOW PROCESS FROM NODE     24.00 TO NODE     25.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   339.50  DOWNSTREAM(FEET) =   333.30
  FLOW LENGTH(FEET) =   505.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  48.0 INCH PIPE IS  36.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  14.03
  ESTIMATED PIPE DIAMETER(INCH) =  48.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =     144.84
  PIPE TRAVEL TIME(MIN.) =   0.60    Tc(MIN.) =   10.75
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     25.00 =    3725.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE     25.00 TO NODE     25.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   10.75
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.127
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE            GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS               A        1.40      0.40      0.350    32
  CONDOMINIUMS               C        8.80      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA AREA(ACRES) =   10.20      SUBAREA RUNOFF(CFS) =   27.84
  EFFECTIVE AREA(ACRES) =     61.59   AREA-AVERAGED Fm(INCH/HR) =  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap =  0.36
  TOTAL AREA(ACRES) =       64.6       PEAK FLOW RATE(CFS) =     167.90

****************************************************************************
  FLOW PROCESS FROM NODE     25.00 TO NODE     26.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
```

```
================================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   333.30  DOWNSTREAM(FEET) =   331.50
  FLOW LENGTH(FEET) =   177.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  54.0 INCH PIPE IS  38.9 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =  13.69
  ESTIMATED PIPE DIAMETER(INCH) =  54.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =     167.90
  PIPE TRAVEL TIME(MIN.) =   0.22    Tc(MIN.) =   10.97
  LONGEST FLOWPATH FROM NODE     19.10 TO NODE     26.00 =    3902.00 FEET.
================================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =       64.6  TC(MIN.) =     10.97
  EFFECTIVE AREA(ACRES) =     61.59  AREA-AVERAGED Fm(INCH/HR)=  0.10
  AREA-AVERAGED Fp(INCH/HR) =  0.28  AREA-AVERAGED Ap = 0.356
  PEAK FLOW RATE(CFS)   =     167.90

  ** PEAK FLOW RATE TABLE **
   STREAM       Q      Tc   Intensity   Fp(Fm)      Ap      Ae      HEADWATER
   NUMBER     (CFS)   (MIN.) (INCH/HR) (INCH/HR)          (ACRES)     NODE
      1      167.90   10.97    3.092  0.28( 0.10) 0.36      61.6       10.00
      2      165.35   11.46    3.017  0.28( 0.10) 0.36      62.2       18.10
      3      148.43   14.58    2.632  0.27( 0.10) 0.37      64.6       19.10
      4      147.59   14.74    2.616  0.27( 0.10) 0.37      64.6       14.10
================================================================================
================================================================================
  END OF RATIONAL METHOD ANALYSIS
```

```
**************************************************************************
             RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE
            (Reference: 1986 ORANGE COUNTY HYDROLOGY CRITERION)
          (c) Copyright 1983-2016 Advanced Engineering Software (aes)
              Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                              Analysis prepared by:

                             Fuscoe Engineering, Inc.
                              15535 Sand Canyon Ave
                                    Suite 100
                                 Irvine, CA 92618

 ************************** DESCRIPTION OF STUDY **************************
* GATEWAY VILLAGE PROPOSED HYDROLOGY                                      *
* SUBAREA 'F' 25 YEAR STORM                                               *
* 11/19/2024                                                              *
 **************************************************************************

  FILE NAME: GVFPR25.DAT
  TIME/DATE OF STUDY: 09:39 11/25/2024
==========================================================================
  USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:
==========================================================================
                     --*TIME-OF-CONCENTRATION MODEL*--

  USER SPECIFIED STORM EVENT(YEAR) =   25.00
  SPECIFIED MINIMUM PIPE SIZE(INCH) =  18.00
  SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95
  *DATA BANK RAINFALL USED*
  *ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD*

  *USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL*
     HALF-  CROWN TO   STREET-CROSSFALL:   CURB  GUTTER-GEOMETRIES:  MANNING
     WIDTH  CROSSFALL  IN-  / OUT-/PARK-  HEIGHT  WIDTH  LIP   HIKE  FACTOR
NO.   (FT)     (FT)    SIDE / SIDE/ WAY    (FT)    (FT)  (FT)  (FT)    (n)
===  =====  =========  =================  ======  ===== ====== ===== =======
  1   30.0     20.0    0.020/0.020/0.020   0.50    2.00 0.0313 0.125 0.0150

  GLOBAL STREET FLOW-DEPTH CONSTRAINTS:
    1. Relative Flow-Depth =  0.00 FEET
       as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
    2. (Depth)*(Velocity) Constraint =  6.0 (FT*FT/S)
  *SIZE PIPE WITH A FLOW CAPACITY GREATER THAN
   OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.*
  *USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

**************************************************************************
  FLOW PROCESS FROM NODE      1.00 TO NODE      2.00 IS CODE =  21
--------------------------------------------------------------------------
  >>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
  >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
==========================================================================
  INITIAL SUBAREA FLOW-LENGTH(FEET) =   330.00
  ELEVATION DATA: UPSTREAM(FEET) =    354.60  DOWNSTREAM(FEET) =    347.60

  Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
  SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =    7.914
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.720
  SUBAREA Tc AND LOSS RATE DATA(AMC  II):
```

```
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS   Tc
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
  CONDOMINIUMS                B        0.40      0.30      0.350    56    7.91
  CONDOMINIUMS                C        3.00      0.25      0.350    69    7.91
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.26
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  SUBAREA RUNOFF(CFS) =     11.11
  TOTAL AREA(ACRES) =      3.40   PEAK FLOW RATE(CFS) =     11.11

****************************************************************************
  FLOW PROCESS FROM NODE      2.00 TO NODE      3.00 IS CODE =  51
----------------------------------------------------------------------------
  >>>>>COMPUTE TRAPEZOIDAL CHANNEL FLOW<<<<<
  >>>>>TRAVELTIME THRU SUBAREA (EXISTING ELEMENT)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =    347.60  DOWNSTREAM(FEET) =    343.70
  CHANNEL LENGTH THRU SUBAREA(FEET) =   391.00   CHANNEL SLOPE =  0.0100
  CHANNEL BASE(FEET) =    0.00   "Z" FACTOR =   3.000
  MANNING'S FACTOR = 0.030   MAXIMUM DEPTH(FEET) =   2.00
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.290
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/       SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE             GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  CONDOMINIUMS                B        0.10      0.30      0.350    56
  CONDOMINIUMS                C        2.40      0.25      0.350    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.25
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.350
  TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) =      14.71
  TRAVEL TIME THRU SUBAREA BASED ON VELOCITY(FEET/SEC.) =   3.40
  AVERAGE FLOW DEPTH(FEET) =   1.20   TRAVEL TIME(MIN.) =   1.92
  Tc(MIN.) =    9.83
  SUBAREA AREA(ACRES) =     2.50       SUBAREA RUNOFF(CFS) =    7.20
  EFFECTIVE AREA(ACRES) =      5.90     AREA-AVERAGED Fm(INCH/HR) =   0.09
  AREA-AVERAGED Fp(INCH/HR) =   0.25  AREA-AVERAGED Ap =   0.35
  TOTAL AREA(ACRES) =        5.9         PEAK FLOW RATE(CFS) =      17.00

  END OF SUBAREA CHANNEL FLOW HYDRAULICS:
  DEPTH(FEET) =  1.27   FLOW VELOCITY(FEET/SEC.) =   3.52
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      3.00 =     721.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE      3.00 TO NODE      4.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   337.70  DOWNSTREAM(FEET) =   337.20
  FLOW LENGTH(FEET) =   131.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  27.0 INCH PIPE IS  20.2 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   5.32
  ESTIMATED PIPE DIAMETER(INCH) =  27.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      17.00
  PIPE TRAVEL TIME(MIN.) =   0.41    Tc(MIN.) =   10.24
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      4.00 =     852.00 FEET.

****************************************************************************
  FLOW PROCESS FROM NODE      4.00 TO NODE      4.00 IS CODE =  81
----------------------------------------------------------------------------
  >>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
============================================================================
  MAINLINE Tc(MIN.) =   10.24
```

```
  *  25 YEAR RAINFALL INTENSITY(INCH/HR) =  3.215
  SUBAREA LOSS RATE DATA(AMC  II):
   DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp         Ap      SCS
       LAND USE           GROUP   (ACRES)  (INCH/HR)  (DECIMAL)  CN
  COMMERCIAL                A        0.50      0.40      0.100    32
  COMMERCIAL                C        0.30      0.25      0.100    69
  SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.34
  SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.100
  SUBAREA AREA(ACRES) =    0.80      SUBAREA RUNOFF(CFS) =    2.29
  EFFECTIVE AREA(ACRES) =      6.70   AREA-AVERAGED Fm(INCH/HR) =  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap =  0.32
  TOTAL AREA(ACRES) =        6.7       PEAK FLOW RATE(CFS) =      18.89

****************************************************************************
  FLOW PROCESS FROM NODE      4.00 TO NODE      5.00 IS CODE =  31
----------------------------------------------------------------------------
  >>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
  >>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
============================================================================
  ELEVATION DATA: UPSTREAM(FEET) =   337.20  DOWNSTREAM(FEET) =   336.25
  FLOW LENGTH(FEET) =   118.00   MANNING'S N =  0.013
  DEPTH OF FLOW IN  24.0 INCH PIPE IS  18.8 INCHES
  PIPE-FLOW VELOCITY(FEET/SEC.) =   7.17
  ESTIMATED PIPE DIAMETER(INCH) =  24.00    NUMBER OF PIPES =   1
  PIPE-FLOW(CFS) =      18.89
  PIPE TRAVEL TIME(MIN.) =   0.27    Tc(MIN.) =   10.51
  LONGEST FLOWPATH FROM NODE      1.00 TO NODE      5.00 =     970.00 FEET.
============================================================================
  END OF STUDY SUMMARY:
  TOTAL AREA(ACRES)     =        6.7  TC(MIN.) =     10.51
  EFFECTIVE AREA(ACRES) =      6.70  AREA-AVERAGED Fm(INCH/HR)=  0.08
  AREA-AVERAGED Fp(INCH/HR) =  0.26  AREA-AVERAGED Ap = 0.320
  PEAK FLOW RATE(CFS)   =      18.89
============================================================================
============================================================================
  END OF RATIONAL METHOD ANALYSIS
```

# APPENDIX 6

## Detention Basin Sizing and Routing Calculations

```
******************************************************************************
          NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
                    AND LOW LOSS FRACTION ESTIMATIONS
==============================================================================
        (C) Copyright 1989-2016 Advanced Engineering Software (aes)
            Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:




******************************************************************************
------------------------------------------------------------------------------

 Problem Descriptions:
  GATEWAY VILLAGE PROPOSED HYDROLOGY
  SUBAREA 'D6' 25-YEAR STORM
  12/3/2024 BY CK
==============================================================================
*** NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
    AND LOW LOSS FRACTION ESTIMATIONS FOR AMC II:

    TOTAL 24-HOUR DURATION RAINFALL DEPTH =     4.49 (inches)

    SOIL-COVER     AREA      PERCENT OF    SCS CURVE    LOSS RATE
       TYPE      (Acres)   PERVIOUS AREA     NUMBER    Fp(in./hr.)     YIELD
         1         3.80       35.00            32.       0.400        0.616
         2         4.30       35.00            69.       0.250        0.740
         3         0.20       35.00            75.       0.200        0.775

    TOTAL AREA (Acres) =      8.30

    AREA-AVERAGED LOSS RATE, Fm (in./hr.) =  0.111

    AREA-AVERAGED LOW LOSS FRACTION, Y = 0.316
==============================================================================
```

```
******************************************************************************
                    SMALL AREA UNIT HYDROGRAPH MODEL
==============================================================================
         (C) Copyright 1989-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:




******************************************************************************
------------------------------------------------------------------------------

 Problem Descriptions:
  GATEWAY VILLAGE PROPOSED HYDROLOGY
  SUBAREA 'D6' 25-YEAR STORM UH
  12/3/2024 BY CK
------------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.90
    TOTAL CATCHMENT AREA(ACRES) =    8.30
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.111
    LOW LOSS FRACTION = 0.316
    TIME OF CONCENTRATION(MIN.) = 19.44
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =  25
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.87
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  1.15
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  1.94
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  2.71
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  4.49

------------------------------------------------------------------------------

    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =     2.09
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     1.02

******************************************************************************
  TIME     VOLUME       Q    0.        5.0      10.0      15.0      20.0
 (HOURS)    (AF)      (CFS)
------------------------------------------------------------------------------
  0.12      0.0018      0.35  Q         .         .         .         .
  0.45      0.0112      0.35  Q         .         .         .         .
  0.77      0.0207      0.36  Q         .         .         .         .
  1.10      0.0303      0.36  Q         .         .         .         .
  1.42      0.0401      0.37  Q         .         .         .         .
  1.74      0.0500      0.37  Q         .         .         .         .
  2.07      0.0600      0.38  Q         .         .         .         .
  2.39      0.0702      0.38  Q         .         .         .         .
  2.72      0.0806      0.39  Q         .         .         .         .
  3.04      0.0911      0.39  Q         .         .         .         .
  3.36      0.1017      0.40  Q         .         .         .         .
  3.69      0.1125      0.41  Q         .         .         .         .
  4.01      0.1236      0.42  Q         .         .         .         .
  4.34      0.1348      0.42  Q         .         .         .         .
  4.66      0.1462      0.43  Q         .         .         .         .
  4.98      0.1578      0.44  Q         .         .         .         .
  5.31      0.1696      0.45  Q         .         .         .         .
```

| | | | |
|---|---|---|---|
| 5.63 | 0.1816 | 0.45 | Q |
| 5.96 | 0.1939 | 0.46 | Q |
| 6.28 | 0.2064 | 0.47 | Q |
| 6.60 | 0.2192 | 0.48 | Q |
| 6.93 | 0.2322 | 0.49 | Q |
| 7.25 | 0.2456 | 0.51 | .Q |
| 7.58 | 0.2592 | 0.51 | .Q |
| 7.90 | 0.2732 | 0.53 | .Q |
| 8.22 | 0.2876 | 0.54 | .Q |
| 8.55 | 0.3023 | 0.56 | .Q |
| 8.87 | 0.3174 | 0.57 | .Q |
| 9.20 | 0.3329 | 0.59 | .Q |
| 9.52 | 0.3489 | 0.60 | .Q |
| 9.84 | 0.3654 | 0.63 | .Q |
| 10.17 | 0.3824 | 0.64 | .Q |
| 10.49 | 0.4000 | 0.67 | .Q |
| 10.82 | 0.4183 | 0.69 | .Q |
| 11.14 | 0.4372 | 0.73 | .Q |
| 11.46 | 0.4569 | 0.75 | .Q |
| 11.79 | 0.4775 | 0.79 | .Q |
| 12.11 | 0.4991 | 0.82 | .Q |
| 12.44 | 0.5255 | 1.15 | . Q |
| 12.76 | 0.5568 | 1.19 | . Q |
| 13.08 | 0.5897 | 1.27 | . Q |
| 13.41 | 0.6244 | 1.32 | . Q |
| 13.73 | 0.6612 | 1.43 | . Q |
| 14.06 | 0.7005 | 1.50 | . Q |
| 14.38 | 0.7428 | 1.65 | . Q |
| 14.70 | 0.7886 | 1.77 | . Q |
| 15.03 | 0.8418 | 2.21 | . Q |
| 15.35 | 0.9054 | 2.55 | . Q |
| 15.68 | 0.9815 | 3.14 | . Q |
| 16.00 | 1.0884 | 4.84 | . Q. |
| 16.32 | 1.3658 | 15.88 | . .Q |
| 16.65 | 1.6181 | 2.97 | . Q |
| 16.97 | 1.6840 | 1.95 | . Q |
| 17.30 | 1.7313 | 1.58 | . Q |
| 17.62 | 1.7707 | 1.37 | . Q |
| 17.94 | 1.8055 | 1.23 | . Q |
| 18.27 | 1.8352 | 0.99 | .Q |
| 18.59 | 1.8587 | 0.77 | .Q |
| 18.92 | 1.8785 | 0.71 | .Q |
| 19.24 | 1.8968 | 0.66 | .Q |
| 19.56 | 1.9138 | 0.62 | .Q |
| 19.89 | 1.9298 | 0.58 | .Q |
| 20.21 | 1.9449 | 0.55 | .Q |
| 20.54 | 1.9593 | 0.52 | .Q |
| 20.86 | 1.9729 | 0.50 | Q |
| 21.18 | 1.9860 | 0.48 | Q |
| 21.51 | 1.9985 | 0.46 | Q |
| 21.83 | 2.0105 | 0.44 | Q |
| 22.16 | 2.0221 | 0.43 | Q |
| 22.48 | 2.0334 | 0.41 | Q |
| 22.80 | 2.0442 | 0.40 | Q |
| 23.13 | 2.0547 | 0.39 | Q |
| 23.45 | 2.0649 | 0.37 | Q |
| 23.78 | 2.0748 | 0.36 | Q |
| 24.10 | 2.0844 | 0.35 | Q |
| 24.42 | 2.0892 | 0.00 | Q |

TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:
(Note: 100% of Peak Flow Rate estimate assumed to have
an instantaneous time duration)

| Percentile of Estimated Peak Flow Rate | Duration (minutes) |
|---|---|
| 0% | 1458.0 |
| 10% | 175.0 |
| 20% | 38.9 |
| 30% | 38.9 |
| 40% | 19.4 |
| 50% | 19.4 |
| 60% | 19.4 |
| 70% | 19.4 |
| 80% | 19.4 |
| 90% | 19.4 |

```
******************************************************************************
                    SMALL AREA UNIT HYDROGRAPH MODEL
==============================================================================
         (C) Copyright 1989-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:




******************************************************************************
------------------------------------------------------------------------------

 Problem Descriptions:
  GATEWAY VILLAGE PROPOSED HYDROLOGY
  SUBAREA 'D6' 25-YEAR STORM UH
  12/3/2024 BY CK
------------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.90
    TOTAL CATCHMENT AREA(ACRES) =    8.30
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.111
    LOW LOSS FRACTION = 0.316
    TIME OF CONCENTRATION(MIN.) = 19.44
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =  25
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.87
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  1.15
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  1.94
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  2.71
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  4.49

------------------------------------------------------------------------------

    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =     2.09
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     1.02

******************************************************************************
  TIME     VOLUME       Q    0.        5.0      10.0      15.0      20.0
 (HOURS)    (AF)      (CFS)
------------------------------------------------------------------------------
  0.12      0.0018      0.35  Q         .         .         .         .
  0.45      0.0112      0.35  Q         .         .         .         .
  0.77      0.0207      0.36  Q         .         .         .         .
  1.10      0.0303      0.36  Q         .         .         .         .
  1.42      0.0401      0.37  Q         .         .         .         .
  1.74      0.0500      0.37  Q         .         .         .         .
  2.07      0.0600      0.38  Q         .         .         .         .
  2.39      0.0702      0.38  Q         .         .         .         .
  2.72      0.0806      0.39  Q         .         .         .         .
  3.04      0.0911      0.39  Q         .         .         .         .
  3.36      0.1017      0.40  Q         .         .         .         .
  3.69      0.1125      0.41  Q         .         .         .         .
  4.01      0.1236      0.42  Q         .         .         .         .
  4.34      0.1348      0.42  Q         .         .         .         .
  4.66      0.1462      0.43  Q         .         .         .         .
  4.98      0.1578      0.44  Q         .         .         .         .
  5.31      0.1696      0.45  Q         .         .         .         .
```

| | | | |
|---|---|---|---|
| 5.63 | 0.1816 | 0.45 | Q |
| 5.96 | 0.1939 | 0.46 | Q |
| 6.28 | 0.2064 | 0.47 | Q |
| 6.60 | 0.2192 | 0.48 | Q |
| 6.93 | 0.2322 | 0.49 | Q |
| 7.25 | 0.2456 | 0.51 | .Q |
| 7.58 | 0.2592 | 0.51 | .Q |
| 7.90 | 0.2732 | 0.53 | .Q |
| 8.22 | 0.2876 | 0.54 | .Q |
| 8.55 | 0.3023 | 0.56 | .Q |
| 8.87 | 0.3174 | 0.57 | .Q |
| 9.20 | 0.3329 | 0.59 | .Q |
| 9.52 | 0.3489 | 0.60 | .Q |
| 9.84 | 0.3654 | 0.63 | .Q |
| 10.17 | 0.3824 | 0.64 | .Q |
| 10.49 | 0.4000 | 0.67 | .Q |
| 10.82 | 0.4183 | 0.69 | .Q |
| 11.14 | 0.4372 | 0.73 | .Q |
| 11.46 | 0.4569 | 0.75 | .Q |
| 11.79 | 0.4775 | 0.79 | .Q |
| 12.11 | 0.4991 | 0.82 | .Q |
| 12.44 | 0.5255 | 1.15 | . Q |
| 12.76 | 0.5568 | 1.19 | . Q |
| 13.08 | 0.5897 | 1.27 | . Q |
| 13.41 | 0.6244 | 1.32 | . Q |
| 13.73 | 0.6612 | 1.43 | . Q |
| 14.06 | 0.7005 | 1.50 | . Q |
| 14.38 | 0.7428 | 1.65 | . Q |
| 14.70 | 0.7886 | 1.77 | . Q |
| 15.03 | 0.8418 | 2.21 | . Q |
| 15.35 | 0.9054 | 2.55 | . Q |
| 15.68 | 0.9815 | 3.14 | . Q |
| 16.00 | 1.0884 | 4.84 | . Q. |
| 16.32 | 1.3658 | 15.88 | . .Q |
| 16.65 | 1.6181 | 2.97 | . Q |
| 16.97 | 1.6840 | 1.95 | . Q |
| 17.30 | 1.7313 | 1.58 | . Q |
| 17.62 | 1.7707 | 1.37 | . Q |
| 17.94 | 1.8055 | 1.23 | . Q |
| 18.27 | 1.8352 | 0.99 | .Q |
| 18.59 | 1.8587 | 0.77 | .Q |
| 18.92 | 1.8785 | 0.71 | .Q |
| 19.24 | 1.8968 | 0.66 | .Q |
| 19.56 | 1.9138 | 0.62 | .Q |
| 19.89 | 1.9298 | 0.58 | .Q |
| 20.21 | 1.9449 | 0.55 | .Q |
| 20.54 | 1.9593 | 0.52 | .Q |
| 20.86 | 1.9729 | 0.50 | Q |
| 21.18 | 1.9860 | 0.48 | Q |
| 21.51 | 1.9985 | 0.46 | Q |
| 21.83 | 2.0105 | 0.44 | Q |
| 22.16 | 2.0221 | 0.43 | Q |
| 22.48 | 2.0334 | 0.41 | Q |
| 22.80 | 2.0442 | 0.40 | Q |
| 23.13 | 2.0547 | 0.39 | Q |
| 23.45 | 2.0649 | 0.37 | Q |
| 23.78 | 2.0748 | 0.36 | Q |
| 24.10 | 2.0844 | 0.35 | Q |
| 24.42 | 2.0892 | 0.00 | Q |

TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:
(Note: 100% of Peak Flow Rate estimate assumed to have
an instantaneous time duration)


| Percentile of Estimated Peak Flow Rate | Duration (minutes) |
|---|---|
| 0% | 1458.0 |
| 10% | 175.0 |
| 20% | 38.9 |
| 30% | 38.9 |
| 40% | 19.4 |
| 50% | 19.4 |
| 60% | 19.4 |
| 70% | 19.4 |
| 80% | 19.4 |
| 90% | 19.4 |

Problem Descriptions:
GATEWAY VILLAGE PROPOSED HYDROLOGY
SUBAREA 'D6' 25-YEAR STORM UH
12/3/2024 BY CK

==========

FLOW-THROUGH DETENTION BASIN MODEL

SPECIFIED BASIN CONDITIONS ARE AS FOLLOWS:
CONSTANT HYDROGRAPH TIME UNIT(MINUTES) = 19.440
DEAD STORAGE(AF) = 0.00
SPECIFIED DEAD STORAGE(AF) FILLED = 0.00
ASSUMED INITIAL DEPTH(FEET) IN STORAGE BASIN = 0.00

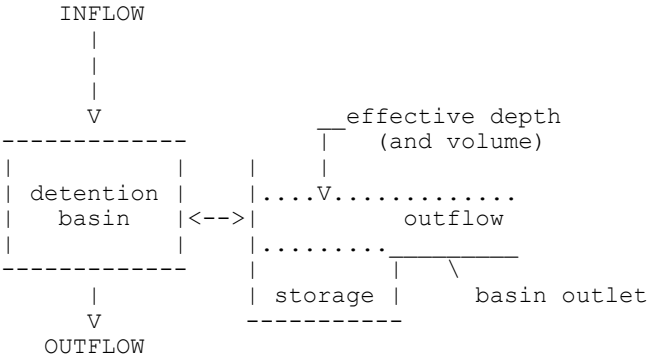


DEPTH-VS.-STORAGE AND DEPTH-VS.-DISCHARGE INFORMATION:
TOTAL NUMBER OF BASIN DEPTH INFORMATION ENTRIES = 20

| *BASIN-DEPTH (FEET) | STORAGE (ACRE-FEET) | OUTFLOW (CFS) ** | **BASIN-DEPTH (FEET) | STORAGE (ACRE-FEET) | OUTFLOW (CFS) * |
|---|---|---|---|---|---|
| 0.000 | 0.000 | 0.000** | 0.370 | 0.021 | 0.390* |
| 0.740 | 0.042 | 1.480** | 1.110 | 0.063 | 2.940* |
| 1.470 | 0.085 | 3.730** | 1.840 | 0.106 | 4.380* |
| 2.210 | 0.127 | 4.950** | 2.580 | 0.148 | 5.450* |
| 2.950 | 0.169 | 5.920** | 3.320 | 0.190 | 6.350* |
| 3.680 | 0.211 | 6.750** | 4.050 | 0.233 | 7.130* |
| 4.420 | 0.254 | 7.490** | 4.790 | 0.275 | 7.830* |
| 5.160 | 0.296 | 8.160** | 5.530 | 0.317 | 8.480* |
| 5.890 | 0.338 | 8.870** | 6.260 | 0.359 | 9.080* |
| 6.630 | 0.381 | 9.360** | 7.000 | 0.402 | 9.640* |

---

BASIN STORAGE, OUTFLOW AND DEPTH ROUTING VALUES:

| INTERVAL NUMBER | DEPTH (FEET) | {S-O*DT/2} (ACRE-FEET) | {S+O*DT/2} (ACRE-FEET) |
|---|---|---|---|

| | | | |
|---|---|---|---|
| 1 | 0.00 | 0.00000 | 0.00000 |
| 2 | 0.37 | 0.01588 | 0.02632 |
| 3 | 0.74 | 0.02249 | 0.06211 |
| 4 | 1.11 | 0.02404 | 0.10276 |
| 5 | 1.47 | 0.03466 | 0.13454 |
| 6 | 1.84 | 0.04706 | 0.16434 |
| 7 | 2.21 | 0.06063 | 0.19317 |
| 8 | 2.58 | 0.07503 | 0.22097 |
| 9 | 2.95 | 0.08994 | 0.24846 |
| 10 | 3.32 | 0.10528 | 0.27532 |
| 11 | 3.68 | 0.12103 | 0.30177 |
| 12 | 4.05 | 0.13714 | 0.32806 |
| 13 | 4.42 | 0.15342 | 0.35398 |
| 14 | 4.79 | 0.17007 | 0.37973 |
| 15 | 5.16 | 0.18675 | 0.40525 |
| 16 | 5.53 | 0.20367 | 0.43073 |
| 17 | 5.89 | 0.21954 | 0.45706 |
| 18 | 6.26 | 0.23793 | 0.48107 |
| 19 | 6.63 | 0.25528 | 0.50592 |
| 20 | 7.00 | 0.27264 | 0.53076 |

WHERE S=STORAGE(AF);O=OUTFLOW(AF/MIN.);DT=UNIT INTERVAL(MIN.)

---

DETENTION BASIN ROUTING RESULTS:

NOTE: COMPUTED BASIN DEPTH, OUTFLOW, AND STORAGE QUANTITIES OCCUR AT THE GIVEN TIME. BASIN INFLOW VALUES REPRESENT THE AVERAGE INFLOW DURING THE RECENT HYDROGRAPH UNIT INTERVAL.

| TIME (HRS) | DEAD-STORAGE FILLED(AF) | INFLOW (CFS) | EFFECTIVE DEPTH(FT) | OUTFLOW (CFS) | EFFECTIVE VOLUME(AF) |
|---|---|---|---|---|---|
| 0.124 | 0.000 | 0.35 | 0.13 | 0.07 | 0.008 |
| 0.448 | 0.000 | 0.35 | 0.21 | 0.18 | 0.012 |
| 0.772 | 0.000 | 0.36 | 0.26 | 0.25 | 0.015 |
| 1.096 | 0.000 | 0.36 | 0.29 | 0.29 | 0.017 |
| 1.420 | 0.000 | 0.37 | 0.32 | 0.32 | 0.018 |
| 1.744 | 0.000 | 0.37 | 0.33 | 0.34 | 0.019 |
| 2.068 | 0.000 | 0.38 | 0.34 | 0.35 | 0.019 |
| 2.392 | 0.000 | 0.38 | 0.35 | 0.36 | 0.020 |
| 2.716 | 0.000 | 0.39 | 0.36 | 0.37 | 0.020 |
| 3.040 | 0.000 | 0.39 | 0.36 | 0.38 | 0.021 |
| 3.364 | 0.000 | 0.40 | 0.37 | 0.39 | 0.021 |
| 3.688 | 0.000 | 0.41 | 0.37 | 0.40 | 0.021 |
| 4.012 | 0.000 | 0.42 | 0.38 | 0.41 | 0.022 |
| 4.336 | 0.000 | 0.42 | 0.38 | 0.42 | 0.022 |
| 4.660 | 0.000 | 0.43 | 0.38 | 0.42 | 0.022 |
| 4.984 | 0.000 | 0.44 | 0.39 | 0.43 | 0.022 |
| 5.308 | 0.000 | 0.45 | 0.39 | 0.44 | 0.022 |
| 5.632 | 0.000 | 0.45 | 0.39 | 0.45 | 0.022 |
| 5.956 | 0.000 | 0.46 | 0.39 | 0.46 | 0.022 |
| 6.280 | 0.000 | 0.47 | 0.40 | 0.47 | 0.023 |
| 6.604 | 0.000 | 0.48 | 0.40 | 0.48 | 0.023 |
| 6.928 | 0.000 | 0.49 | 0.40 | 0.49 | 0.023 |
| 7.252 | 0.000 | 0.51 | 0.41 | 0.50 | 0.023 |
| 7.576 | 0.000 | 0.51 | 0.41 | 0.51 | 0.023 |
| 7.900 | 0.000 | 0.53 | 0.42 | 0.52 | 0.024 |
| 8.224 | 0.000 | 0.54 | 0.42 | 0.53 | 0.024 |
| 8.548 | 0.000 | 0.56 | 0.43 | 0.55 | 0.024 |
| 8.872 | 0.000 | 0.57 | 0.43 | 0.56 | 0.025 |
| 9.196 | 0.000 | 0.59 | 0.44 | 0.58 | 0.025 |
| 9.520 | 0.000 | 0.60 | 0.44 | 0.59 | 0.025 |
| 9.844 | 0.000 | 0.63 | 0.45 | 0.61 | 0.026 |
| 10.168 | 0.000 | 0.64 | 0.45 | 0.63 | 0.026 |
| 10.492 | 0.000 | 0.67 | 0.46 | 0.65 | 0.026 |
| 10.816 | 0.000 | 0.69 | 0.47 | 0.68 | 0.027 |
| 11.140 | 0.000 | 0.73 | 0.48 | 0.70 | 0.027 |

| | | | | | |
|---|---|---|---|---|---|
| 11.464 | 0.000 | 0.75 | 0.49 | 0.73 | 0.028 |
| 11.788 | 0.000 | 0.79 | 0.50 | 0.76 | 0.029 |
| 12.112 | 0.000 | 0.82 | 0.51 | 0.80 | 0.029 |
| 12.436 | 0.000 | 1.15 | 0.61 | 0.95 | 0.035 |
| 12.760 | 0.000 | 1.19 | 0.63 | 1.13 | 0.036 |
| 13.084 | 0.000 | 1.27 | 0.66 | 1.21 | 0.038 |
| 13.408 | 0.000 | 1.32 | 0.68 | 1.28 | 0.039 |
| 13.732 | 0.000 | 1.43 | 0.72 | 1.36 | 0.041 |
| 14.056 | 0.000 | 1.50 | 0.74 | 1.45 | 0.042 |
| 14.380 | 0.000 | 1.65 | 0.78 | 1.57 | 0.045 |
| 14.704 | 0.000 | 1.77 | 0.81 | 1.71 | 0.046 |
| 15.028 | 0.000 | 2.21 | 0.92 | 1.98 | 0.053 |
| 15.352 | 0.000 | 2.55 | 1.01 | 2.36 | 0.058 |
| 15.676 | 0.000 | 3.14 | 1.16 | 2.80 | 0.067 |
| 16.000 | 0.000 | 4.84 | 1.73 | 3.62 | 0.099 |
| 16.324 | 0.000 | 15.88 | 6.07 | 6.58 | 0.348 |
| 16.648 | 0.000 | 2.97 | 3.77 | 7.90 | 0.216 |
| 16.972 | 0.000 | 1.95 | 2.00 | 5.73 | 0.115 |
| 17.296 | 0.000 | 1.58 | 1.04 | 3.65 | 0.059 |
| 17.620 | 0.000 | 1.37 | 0.72 | 2.05 | 0.041 |
| 17.944 | 0.000 | 1.23 | 0.67 | 1.35 | 0.038 |
| 18.268 | 0.000 | 0.99 | 0.59 | 1.15 | 0.034 |
| 18.592 | 0.000 | 0.77 | 0.52 | 0.93 | 0.029 |
| 18.916 | 0.000 | 0.71 | 0.48 | 0.77 | 0.028 |
| 19.240 | 0.000 | 0.66 | 0.47 | 0.70 | 0.027 |
| 19.564 | 0.000 | 0.62 | 0.45 | 0.65 | 0.026 |
| 19.888 | 0.000 | 0.58 | 0.44 | 0.61 | 0.025 |
| 20.212 | 0.000 | 0.55 | 0.43 | 0.57 | 0.024 |
| 20.536 | 0.000 | 0.52 | 0.42 | 0.54 | 0.024 |
| 20.860 | 0.000 | 0.50 | 0.41 | 0.52 | 0.023 |
| 21.184 | 0.000 | 0.48 | 0.40 | 0.49 | 0.023 |
| 21.508 | 0.000 | 0.46 | 0.39 | 0.47 | 0.023 |
| 21.832 | 0.000 | 0.44 | 0.39 | 0.45 | 0.022 |
| 22.156 | 0.000 | 0.43 | 0.38 | 0.44 | 0.022 |
| 22.480 | 0.000 | 0.41 | 0.38 | 0.42 | 0.022 |
| 22.804 | 0.000 | 0.40 | 0.37 | 0.41 | 0.021 |
| 23.128 | 0.000 | 0.39 | 0.37 | 0.40 | 0.021 |
| 23.452 | 0.000 | 0.37 | 0.36 | 0.39 | 0.021 |
| 23.776 | 0.000 | 0.36 | 0.36 | 0.38 | 0.020 |
| 24.100 | 0.000 | 0.35 | 0.35 | 0.37 | 0.020 |
| 24.424 | 0.000 | 0.00 | 0.21 | 0.29 | 0.012 |
| 24.748 | 0.000 | 0.00 | 0.13 | 0.18 | 0.007 |
| 25.072 | 0.000 | 0.00 | 0.08 | 0.11 | 0.004 |
| 25.396 | 0.000 | 0.00 | 0.05 | 0.06 | 0.003 |
| 25.720 | 0.000 | 0.00 | 0.03 | 0.04 | 0.002 |
| 26.044 | 0.000 | 0.00 | 0.02 | 0.02 | 0.001 |

**********
NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
AND LOW LOSS FRACTION ESTIMATIONS

(C) Copyright 1989-2016 Advanced Engineering Software (aes)
Ver. 23.0 Release Date: 07/01/2016 License ID 1355

Analysis prepared by:

**********

Problem Descriptions:
GATEWAY VILLAGE PROPOSED HYDROMOD
SUBAREAS D6 & D7 2-YEAR STORM
12/5/2024 BY CK

*** NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
AND LOW LOSS FRACTION ESTIMATIONS FOR AMC I:

TOTAL 24-HOUR DURATION RAINFALL DEPTH = 2.05 (inches)

| SOIL-COVER TYPE | AREA (Acres) | PERCENT OF PERVIOUS AREA | SCS CURVE NUMBER | LOSS RATE Fp(in./hr.) | YIELD |
|---|---|---|---|---|---|
| 1 | 3.80 | 35.00 | 32.(AMC II) | 0.400 | 0.578 |
| 2 | 4.30 | 35.00 | 69.(AMC II) | 0.250 | 0.578 |
| 3 | 0.20 | 35.00 | 75.(AMC II) | 0.200 | 0.585 |

TOTAL AREA (Acres) = 8.30

AREA-AVERAGED LOSS RATE, $\overline{Fm}$ (in./hr.) = 0.111

AREA-AVERAGED LOW LOSS FRACTION, $\overline{Y}$ = 0.422

```
**************************************************************************
                    SMALL AREA UNIT HYDROGRAPH MODEL
==========================================================================
         (C) Copyright 1989-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:




**************************************************************************
--------------------------------------------------------------------------

 Problem Descriptions:
  GATEWAY VILLAGE PROPOSED HYDROMOD
  SUBAREAS D6 & D7 2-YEAR STORM UH
  12/5/2024 BY CK
--------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.90
    TOTAL CATCHMENT AREA(ACRES) =    8.30
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.111
    LOW LOSS FRACTION = 0.422
    TIME OF CONCENTRATION(MIN.) = 10.09
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =   2
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.19
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  0.53
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  0.89
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  1.22
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  2.05

--------------------------------------------------------------------------

    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =     0.80
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     0.61

**************************************************************************
  TIME     VOLUME       Q    0.        5.0      10.0      15.0      20.0
 (HOURS)    (AF)      (CFS)
--------------------------------------------------------------------------
  0.02      0.0000      0.00  Q         .         .         .         .
  0.19      0.0010      0.14  Q         .         .         .         .
  0.36      0.0029      0.14  Q         .         .         .         .
  0.53      0.0048      0.14  Q         .         .         .         .
  0.70      0.0068      0.14  Q         .         .         .         .
  0.86      0.0088      0.14  Q         .         .         .         .
  1.03      0.0107      0.14  Q         .         .         .         .
  1.20      0.0127      0.14  Q         .         .         .         .
  1.37      0.0147      0.15  Q         .         .         .         .
  1.54      0.0168      0.15  Q         .         .         .         .
  1.71      0.0188      0.15  Q         .         .         .         .
  1.87      0.0209      0.15  Q         .         .         .         .
  2.04      0.0229      0.15  Q         .         .         .         .
```

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 2.21 | 0.0250 | 0.15 | Q | . | . | . | . |
| 2.38 | 0.0271 | 0.15 | Q | . | . | . | . |
| 2.55 | 0.0292 | 0.15 | Q | . | . | . | . |
| 2.71 | 0.0314 | 0.15 | Q | . | . | . | . |
| 2.88 | 0.0335 | 0.16 | Q | . | . | . | . |
| 3.05 | 0.0357 | 0.16 | Q | . | . | . | . |
| 3.22 | 0.0379 | 0.16 | Q | . | . | . | . |
| 3.39 | 0.0401 | 0.16 | Q | . | . | . | . |
| 3.56 | 0.0423 | 0.16 | Q | . | . | . | . |
| 3.72 | 0.0445 | 0.16 | Q | . | . | . | . |
| 3.89 | 0.0468 | 0.16 | Q | . | . | . | . |
| 4.06 | 0.0491 | 0.16 | Q | . | . | . | . |
| 4.23 | 0.0514 | 0.17 | Q | . | . | . | . |
| 4.40 | 0.0537 | 0.17 | Q | . | . | . | . |
| 4.56 | 0.0560 | 0.17 | Q | . | . | . | . |
| 4.73 | 0.0584 | 0.17 | Q | . | . | . | . |
| 4.90 | 0.0608 | 0.17 | Q | . | . | . | . |
| 5.07 | 0.0632 | 0.17 | Q | . | . | . | . |
| 5.24 | 0.0656 | 0.18 | Q | . | . | . | . |
| 5.41 | 0.0681 | 0.18 | Q | . | . | . | . |
| 5.57 | 0.0705 | 0.18 | Q | . | . | . | . |
| 5.74 | 0.0730 | 0.18 | Q | . | . | . | . |
| 5.91 | 0.0756 | 0.18 | Q | . | . | . | . |
| 6.08 | 0.0781 | 0.18 | Q | . | . | . | . |
| 6.25 | 0.0807 | 0.19 | Q | . | . | . | . |
| 6.41 | 0.0833 | 0.19 | Q | . | . | . | . |
| 6.58 | 0.0859 | 0.19 | Q | . | . | . | . |
| 6.75 | 0.0886 | 0.19 | Q | . | . | . | . |
| 6.92 | 0.0913 | 0.19 | Q | . | . | . | . |
| 7.09 | 0.0940 | 0.20 | Q | . | . | . | . |
| 7.26 | 0.0968 | 0.20 | Q | . | . | . | . |
| 7.42 | 0.0995 | 0.20 | Q | . | . | . | . |
| 7.59 | 0.1024 | 0.20 | Q | . | . | . | . |
| 7.76 | 0.1052 | 0.21 | Q | . | . | . | . |
| 7.93 | 0.1081 | 0.21 | Q | . | . | . | . |
| 8.10 | 0.1111 | 0.21 | Q | . | . | . | . |
| 8.26 | 0.1140 | 0.21 | Q | . | . | . | . |
| 8.43 | 0.1170 | 0.22 | Q | . | . | . | . |
| 8.60 | 0.1201 | 0.22 | Q | . | . | . | . |
| 8.77 | 0.1232 | 0.22 | Q | . | . | . | . |
| 8.94 | 0.1263 | 0.23 | Q | . | . | . | . |
| 9.11 | 0.1295 | 0.23 | Q | . | . | . | . |
| 9.27 | 0.1327 | 0.23 | Q | . | . | . | . |
| 9.44 | 0.1360 | 0.24 | Q | . | . | . | . |
| 9.61 | 0.1394 | 0.24 | Q | . | . | . | . |
| 9.78 | 0.1427 | 0.25 | Q | . | . | . | . |
| 9.95 | 0.1462 | 0.25 | Q | . | . | . | . |
| 10.11 | 0.1497 | 0.26 | Q | . | . | . | . |
| 10.28 | 0.1533 | 0.26 | Q | . | . | . | . |
| 10.45 | 0.1569 | 0.26 | Q | . | . | . | . |
| 10.62 | 0.1606 | 0.27 | Q | . | . | . | . |
| 10.79 | 0.1644 | 0.27 | Q | . | . | . | . |
| 10.95 | 0.1682 | 0.28 | Q | . | . | . | . |
| 11.12 | 0.1721 | 0.29 | Q | . | . | . | . |
| 11.29 | 0.1761 | 0.29 | Q | . | . | . | . |
| 11.46 | 0.1802 | 0.30 | Q | . | . | . | . |
| 11.63 | 0.1844 | 0.30 | Q | . | . | . | . |
| 11.80 | 0.1887 | 0.31 | Q | . | . | . | . |
| 11.96 | 0.1931 | 0.32 | Q | . | . | . | . |
| 12.13 | 0.1979 | 0.38 | Q | . | . | . | . |
| 12.30 | 0.2034 | 0.41 | Q | . | . | . | . |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 12.47 | 0.2091 | 0.42 | Q | . | . | . | . |
| 12.64 | 0.2150 | 0.43 | Q | . | . | . | . |
| 12.80 | 0.2211 | 0.44 | Q | . | . | . | . |
| 12.97 | 0.2273 | 0.45 | Q | . | . | . | . |
| 13.14 | 0.2337 | 0.47 | Q | . | . | . | . |
| 13.31 | 0.2403 | 0.48 | Q | . | . | . | . |
| 13.48 | 0.2471 | 0.50 | .Q | . | . | . | . |
| 13.65 | 0.2542 | 0.51 | .Q | . | . | . | . |
| 13.81 | 0.2615 | 0.54 | .Q | . | . | . | . |
| 13.98 | 0.2691 | 0.56 | .Q | . | . | . | . |
| 14.15 | 0.2772 | 0.61 | .Q | . | . | . | . |
| 14.32 | 0.2858 | 0.63 | .Q | . | . | . | . |
| 14.49 | 0.2949 | 0.67 | .Q | . | . | . | . |
| 14.65 | 0.3044 | 0.70 | .Q | . | . | . | . |
| 14.82 | 0.3146 | 0.76 | .Q | . | . | . | . |
| 14.99 | 0.3254 | 0.80 | .Q | . | . | . | . |
| 15.16 | 0.3372 | 0.89 | .Q | . | . | . | . |
| 15.33 | 0.3501 | 0.96 | .Q | . | . | . | . |
| 15.50 | 0.3635 | 0.98 | .Q | . | . | . | . |
| 15.66 | 0.3780 | 1.10 | . Q | . | . | . | . |
| 15.83 | 0.3991 | 1.93 | .  Q | . | . | . | . |
| 16.00 | 0.4329 | 2.94 | .    Q | . | . | . | . |
| 16.17 | 0.5261 | 10.47 | . | . | Q | . | . |
| 16.34 | 0.6085 | 1.38 | . Q | . | . | . | . |
| 16.50 | 0.6252 | 1.03 | . Q | . | . | . | . |
| 16.67 | 0.6383 | 0.84 | .Q | . | . | . | . |
| 16.84 | 0.6492 | 0.73 | .Q | . | . | . | . |
| 17.01 | 0.6588 | 0.65 | .Q | . | . | . | . |
| 17.18 | 0.6673 | 0.57 | .Q | . | . | . | . |
| 17.35 | 0.6749 | 0.53 | .Q | . | . | . | . |
| 17.51 | 0.6820 | 0.49 | Q | . | . | . | . |
| 17.68 | 0.6886 | 0.46 | Q | . | . | . | . |
| 17.85 | 0.6948 | 0.44 | Q | . | . | . | . |
| 18.02 | 0.7007 | 0.41 | Q | . | . | . | . |
| 18.19 | 0.7058 | 0.32 | Q | . | . | . | . |
| 18.35 | 0.7102 | 0.31 | Q | . | . | . | . |
| 18.52 | 0.7144 | 0.29 | Q | . | . | . | . |
| 18.69 | 0.7184 | 0.28 | Q | . | . | . | . |
| 18.86 | 0.7223 | 0.27 | Q | . | . | . | . |
| 19.03 | 0.7260 | 0.26 | Q | . | . | . | . |
| 19.20 | 0.7295 | 0.25 | Q | . | . | . | . |
| 19.36 | 0.7330 | 0.24 | Q | . | . | . | . |
| 19.53 | 0.7363 | 0.24 | Q | . | . | . | . |
| 19.70 | 0.7395 | 0.23 | Q | . | . | . | . |
| 19.87 | 0.7427 | 0.22 | Q | . | . | . | . |
| 20.04 | 0.7457 | 0.22 | Q | . | . | . | . |
| 20.20 | 0.7487 | 0.21 | Q | . | . | . | . |
| 20.37 | 0.7516 | 0.21 | Q | . | . | . | . |
| 20.54 | 0.7544 | 0.20 | Q | . | . | . | . |
| 20.71 | 0.7572 | 0.20 | Q | . | . | . | . |
| 20.88 | 0.7599 | 0.19 | Q | . | . | . | . |
| 21.05 | 0.7625 | 0.19 | Q | . | . | . | . |
| 21.21 | 0.7651 | 0.18 | Q | . | . | . | . |
| 21.38 | 0.7676 | 0.18 | Q | . | . | . | . |
| 21.55 | 0.7701 | 0.18 | Q | . | . | . | . |
| 21.72 | 0.7725 | 0.17 | Q | . | . | . | . |
| 21.89 | 0.7749 | 0.17 | Q | . | . | . | . |
| 22.05 | 0.7772 | 0.17 | Q | . | . | . | . |
| 22.22 | 0.7795 | 0.16 | Q | . | . | . | . |
| 22.39 | 0.7818 | 0.16 | Q | . | . | . | . |
| 22.56 | 0.7840 | 0.16 | Q | . | . | . | . |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 22.73 | 0.7862 | 0.16 | Q | . | . | . | . |
| 22.89 | 0.7884 | 0.15 | Q | . | . | . | . |
| 23.06 | 0.7905 | 0.15 | Q | . | . | . | . |
| 23.23 | 0.7926 | 0.15 | Q | . | . | . | . |
| 23.40 | 0.7946 | 0.15 | Q | . | . | . | . |
| 23.57 | 0.7966 | 0.14 | Q | . | . | . | . |
| 23.74 | 0.7986 | 0.14 | Q | . | . | . | . |
| 23.90 | 0.8006 | 0.14 | Q | . | . | . | . |
| 24.07 | 0.8025 | 0.14 | Q | . | . | . | . |
| 24.24 | 0.8035 | 0.00 | Q | . | . | . | . |

---

TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:
(Note: 100% of Peak Flow Rate estimate assumed to have
an instantaneous time duration)


| Percentile of Estimated Peak Flow Rate | Duration (minutes) |
|---|---|
| 0% | 1442.9 |
| 10% | 50.5 |
| 20% | 20.2 |
| 30% | 10.1 |
| 40% | 10.1 |
| 50% | 10.1 |
| 60% | 10.1 |
| 70% | 10.1 |
| 80% | 10.1 |
| 90% | 10.1 |

Problem Descriptions:
GATEWAY VILLAGE PROPOSED HYDROMOD
SUBAREAS D6 & D7 2-YEAR STORM UH DETENTION
12/5/2024 BY CK

==========

FLOW-THROUGH DETENTION BASIN MODEL

SPECIFIED BASIN CONDITIONS ARE AS FOLLOWS:
CONSTANT HYDROGRAPH TIME UNIT(MINUTES) = 10.090
DEAD STORAGE(AF) = 0.00
SPECIFIED DEAD STORAGE(AF) FILLED = 0.00
ASSUMED INITIAL DEPTH(FEET) IN STORAGE BASIN = 0.00

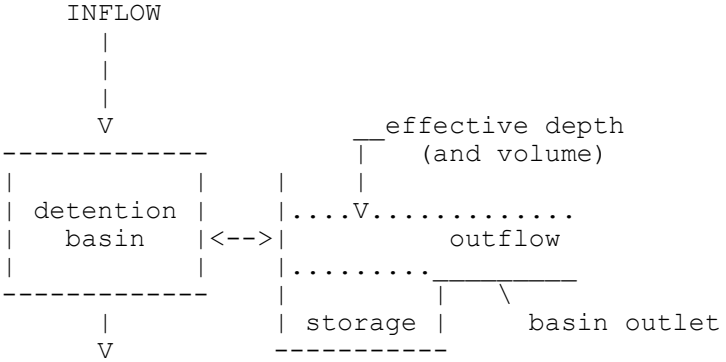

OUTFLOW

DEPTH-VS.-STORAGE AND DEPTH-VS.-DISCHARGE INFORMATION:
TOTAL NUMBER OF BASIN DEPTH INFORMATION ENTRIES = 20

| *BASIN-DEPTH (FEET) | STORAGE (ACRE-FEET) | OUTFLOW (CFS) ** | **BASIN-DEPTH (FEET) | STORAGE (ACRE-FEET) | OUTFLOW (CFS) * |
|---|---|---|---|---|---|
| 0.000 | 0.000 | 0.000** | 0.370 | 0.021 | 0.390* |
| 0.740 | 0.042 | 1.480** | 1.110 | 0.063 | 2.940* |
| 1.470 | 0.085 | 3.730** | 1.840 | 0.106 | 4.380* |
| 2.210 | 0.129 | 4.950** | 2.580 | 0.148 | 5.450* |
| 2.950 | 0.169 | 5.920** | 3.320 | 0.190 | 6.350* |
| 3.680 | 0.211 | 6.750** | 4.050 | 0.233 | 7.130* |
| 4.420 | 0.254 | 7.490** | 4.790 | 0.275 | 7.830* |
| 5.160 | 0.296 | 8.160** | 5.530 | 0.317 | 8.480* |
| 5.890 | 0.338 | 8.870** | 6.260 | 0.359 | 9.080* |
| 6.630 | 0.381 | 9.360** | 7.000 | 0.402 | 9.640* |

BASIN STORAGE, OUTFLOW AND DEPTH ROUTING VALUES:

| INTERVAL NUMBER | DEPTH (FEET) | {S-O*DT/2} (ACRE-FEET) | {S+O*DT/2} (ACRE-FEET) |
|---|---|---|---|
| 1 | 0.00 | 0.00000 | 0.00000 |
| 2 | 0.37 | 0.01839 | 0.02381 |
| 3 | 0.74 | 0.03202 | 0.05258 |
| 4 | 1.11 | 0.04297 | 0.08383 |
| 5 | 1.47 | 0.05868 | 0.11052 |
| 6 | 1.84 | 0.07526 | 0.13614 |
| 7 | 2.21 | 0.09450 | 0.16330 |
| 8 | 2.58 | 0.11013 | 0.18587 |
| 9 | 2.95 | 0.12806 | 0.21034 |
| 10 | 3.32 | 0.14617 | 0.23443 |
| 11 | 3.68 | 0.16449 | 0.25831 |
| 12 | 4.05 | 0.18305 | 0.28215 |
| 13 | 4.42 | 0.20165 | 0.30575 |
| 14 | 4.79 | 0.22049 | 0.32931 |
| 15 | 5.16 | 0.23930 | 0.35270 |
| 16 | 5.53 | 0.25827 | 0.37613 |
| 17 | 5.89 | 0.27666 | 0.39994 |
| 18 | 6.26 | 0.29640 | 0.42260 |
| 19 | 6.63 | 0.31556 | 0.44564 |
| 20 | 7.00 | 0.33471 | 0.46869 |

WHERE S=STORAGE(AF);O=OUTFLOW(AF/MIN.);DT=UNIT INTERVAL(MIN.)

DETENTION BASIN ROUTING RESULTS:
NOTE: COMPUTED BASIN DEPTH, OUTFLOW, AND STORAGE QUANTITIES OCCUR AT THE GIVEN TIME. BASIN INFLOW VALUES REPRESENT THE AVERAGE INFLOW DURING THE RECENT HYDROGRAPH UNIT INTERVAL.

| TIME (HRS) | DEAD-STORAGE FILLED(AF) | INFLOW (CFS) | EFFECTIVE DEPTH(FT) | OUTFLOW (CFS) | EFFECTIVE VOLUME(AF) |
|---|---|---|---|---|---|
| 0.024 | 0.000 | 0.00 | 0.00 | 0.00 | 0.000 |
| 0.192 | 0.000 | 0.14 | 0.03 | 0.02 | 0.002 |
| 0.360 | 0.000 | 0.14 | 0.05 | 0.04 | 0.003 |
| 0.529 | 0.000 | 0.14 | 0.07 | 0.07 | 0.004 |
| 0.697 | 0.000 | 0.14 | 0.09 | 0.08 | 0.005 |
| 0.865 | 0.000 | 0.14 | 0.10 | 0.10 | 0.006 |
| 1.033 | 0.000 | 0.14 | 0.11 | 0.11 | 0.006 |
| 1.201 | 0.000 | 0.14 | 0.11 | 0.12 | 0.006 |
| 1.369 | 0.000 | 0.15 | 0.12 | 0.12 | 0.007 |
| 1.538 | 0.000 | 0.15 | 0.12 | 0.13 | 0.007 |

| | | | | | |
|---|---|---|---|---|---|
| 1.706 | 0.000 | 0.15 | 0.13 | 0.13 | 0.007 |
| 1.874 | 0.000 | 0.15 | 0.13 | 0.14 | 0.007 |
| 2.042 | 0.000 | 0.15 | 0.13 | 0.14 | 0.008 |
| 2.210 | 0.000 | 0.15 | 0.13 | 0.14 | 0.008 |
| 2.378 | 0.000 | 0.15 | 0.14 | 0.14 | 0.008 |
| 2.547 | 0.000 | 0.15 | 0.14 | 0.15 | 0.008 |
| 2.715 | 0.000 | 0.15 | 0.14 | 0.15 | 0.008 |
| 2.883 | 0.000 | 0.16 | 0.14 | 0.15 | 0.008 |
| 3.051 | 0.000 | 0.16 | 0.14 | 0.15 | 0.008 |
| 3.219 | 0.000 | 0.16 | 0.14 | 0.15 | 0.008 |
| 3.387 | 0.000 | 0.16 | 0.15 | 0.15 | 0.008 |
| 3.556 | 0.000 | 0.16 | 0.15 | 0.15 | 0.008 |
| 3.724 | 0.000 | 0.16 | 0.15 | 0.16 | 0.008 |
| 3.892 | 0.000 | 0.16 | 0.15 | 0.16 | 0.009 |
| 4.060 | 0.000 | 0.16 | 0.15 | 0.16 | 0.009 |
| 4.228 | 0.000 | 0.17 | 0.15 | 0.16 | 0.009 |
| 4.396 | 0.000 | 0.17 | 0.15 | 0.16 | 0.009 |
| 4.565 | 0.000 | 0.17 | 0.16 | 0.16 | 0.009 |
| 4.733 | 0.000 | 0.17 | 0.16 | 0.16 | 0.009 |
| 4.901 | 0.000 | 0.17 | 0.16 | 0.17 | 0.009 |
| 5.069 | 0.000 | 0.17 | 0.16 | 0.17 | 0.009 |
| 5.237 | 0.000 | 0.18 | 0.16 | 0.17 | 0.009 |
| 5.405 | 0.000 | 0.18 | 0.16 | 0.17 | 0.009 |
| 5.574 | 0.000 | 0.18 | 0.16 | 0.17 | 0.009 |
| 5.742 | 0.000 | 0.18 | 0.17 | 0.17 | 0.009 |
| 5.910 | 0.000 | 0.18 | 0.17 | 0.18 | 0.010 |
| 6.078 | 0.000 | 0.18 | 0.17 | 0.18 | 0.010 |
| 6.246 | 0.000 | 0.19 | 0.17 | 0.18 | 0.010 |
| 6.414 | 0.000 | 0.19 | 0.17 | 0.18 | 0.010 |
| 6.583 | 0.000 | 0.19 | 0.17 | 0.18 | 0.010 |
| 6.751 | 0.000 | 0.19 | 0.18 | 0.19 | 0.010 |
| 6.919 | 0.000 | 0.19 | 0.18 | 0.19 | 0.010 |
| 7.087 | 0.000 | 0.20 | 0.18 | 0.19 | 0.010 |
| 7.255 | 0.000 | 0.20 | 0.18 | 0.19 | 0.010 |
| 7.424 | 0.000 | 0.20 | 0.18 | 0.19 | 0.011 |
| 7.592 | 0.000 | 0.20 | 0.19 | 0.20 | 0.011 |
| 7.760 | 0.000 | 0.21 | 0.19 | 0.20 | 0.011 |
| 7.928 | 0.000 | 0.21 | 0.19 | 0.20 | 0.011 |
| 8.096 | 0.000 | 0.21 | 0.19 | 0.20 | 0.011 |
| 8.264 | 0.000 | 0.21 | 0.20 | 0.21 | 0.011 |
| 8.432 | 0.000 | 0.22 | 0.20 | 0.21 | 0.011 |
| 8.601 | 0.000 | 0.22 | 0.20 | 0.21 | 0.011 |
| 8.769 | 0.000 | 0.22 | 0.20 | 0.21 | 0.012 |
| 8.937 | 0.000 | 0.23 | 0.21 | 0.22 | 0.012 |
| 9.105 | 0.000 | 0.23 | 0.21 | 0.22 | 0.012 |
| 9.273 | 0.000 | 0.23 | 0.21 | 0.22 | 0.012 |
| 9.441 | 0.000 | 0.24 | 0.22 | 0.23 | 0.012 |
| 9.610 | 0.000 | 0.24 | 0.22 | 0.23 | 0.012 |
| 9.778 | 0.000 | 0.25 | 0.22 | 0.23 | 0.013 |
| 9.946 | 0.000 | 0.25 | 0.23 | 0.24 | 0.013 |
| 10.114 | 0.000 | 0.26 | 0.23 | 0.24 | 0.013 |
| 10.282 | 0.000 | 0.26 | 0.23 | 0.24 | 0.013 |
| 10.450 | 0.000 | 0.26 | 0.24 | 0.25 | 0.014 |
| 10.619 | 0.000 | 0.27 | 0.24 | 0.25 | 0.014 |
| 10.787 | 0.000 | 0.27 | 0.25 | 0.26 | 0.014 |
| 10.955 | 0.000 | 0.28 | 0.25 | 0.26 | 0.014 |
| 11.123 | 0.000 | 0.29 | 0.25 | 0.27 | 0.015 |
| 11.291 | 0.000 | 0.29 | 0.26 | 0.27 | 0.015 |
| 11.460 | 0.000 | 0.30 | 0.26 | 0.28 | 0.015 |
| 11.628 | 0.000 | 0.30 | 0.27 | 0.28 | 0.015 |
| 11.796 | 0.000 | 0.31 | 0.28 | 0.29 | 0.016 |

| | | | | | |
|---|---|---|---|---|---|
| 11.964 | 0.000 | 0.32 | 0.28 | 0.29 | 0.016 |
| 12.132 | 0.000 | 0.38 | 0.30 | 0.31 | 0.017 |
| 12.300 | 0.000 | 0.41 | 0.32 | 0.33 | 0.018 |
| 12.469 | 0.000 | 0.42 | 0.34 | 0.35 | 0.019 |
| 12.637 | 0.000 | 0.43 | 0.35 | 0.36 | 0.020 |
| 12.805 | 0.000 | 0.44 | 0.37 | 0.38 | 0.021 |
| 12.973 | 0.000 | 0.45 | 0.38 | 0.40 | 0.022 |
| 13.141 | 0.000 | 0.47 | 0.39 | 0.43 | 0.022 |
| 13.309 | 0.000 | 0.48 | 0.40 | 0.45 | 0.023 |
| 13.477 | 0.000 | 0.50 | 0.40 | 0.47 | 0.023 |
| 13.646 | 0.000 | 0.51 | 0.41 | 0.49 | 0.023 |
| 13.814 | 0.000 | 0.54 | 0.41 | 0.51 | 0.024 |
| 13.982 | 0.000 | 0.56 | 0.42 | 0.53 | 0.024 |
| 14.150 | 0.000 | 0.61 | 0.43 | 0.56 | 0.025 |
| 14.318 | 0.000 | 0.63 | 0.44 | 0.59 | 0.025 |
| 14.486 | 0.000 | 0.67 | 0.46 | 0.62 | 0.026 |
| 14.655 | 0.000 | 0.70 | 0.47 | 0.66 | 0.027 |
| 14.823 | 0.000 | 0.76 | 0.48 | 0.70 | 0.028 |
| 14.991 | 0.000 | 0.80 | 0.50 | 0.74 | 0.028 |
| 15.159 | 0.000 | 0.89 | 0.52 | 0.80 | 0.030 |
| 15.327 | 0.000 | 0.96 | 0.54 | 0.86 | 0.031 |
| 15.495 | 0.000 | 0.98 | 0.56 | 0.92 | 0.032 |
| 15.664 | 0.000 | 1.10 | 0.59 | 0.98 | 0.033 |
| 15.832 | 0.000 | 1.93 | 0.75 | 1.27 | 0.043 |
| 16.000 | 0.000 | 2.94 | 0.98 | 1.97 | 0.056 |
| 16.168 | 0.000 | 10.47 | 2.56 | 3.93 | 0.147 |
| 16.336 | 0.000 | 1.38 | 1.73 | 4.81 | 0.099 |
| 16.504 | 0.000 | 1.03 | 1.12 | 3.58 | 0.064 |
| 16.673 | 0.000 | 0.84 | 0.77 | 2.28 | 0.044 |
| 16.841 | 0.000 | 0.73 | 0.62 | 1.36 | 0.035 |
| 17.009 | 0.000 | 0.65 | 0.53 | 1.00 | 0.030 |
| 17.177 | 0.000 | 0.57 | 0.48 | 0.79 | 0.027 |
| 17.345 | 0.000 | 0.53 | 0.45 | 0.66 | 0.025 |
| 17.514 | 0.000 | 0.49 | 0.42 | 0.58 | 0.024 |
| 17.682 | 0.000 | 0.46 | 0.41 | 0.53 | 0.023 |
| 17.850 | 0.000 | 0.44 | 0.40 | 0.48 | 0.023 |
| 18.018 | 0.000 | 0.41 | 0.39 | 0.45 | 0.022 |
| 18.186 | 0.000 | 0.32 | 0.37 | 0.41 | 0.021 |
| 18.354 | 0.000 | 0.31 | 0.35 | 0.38 | 0.020 |
| 18.522 | 0.000 | 0.29 | 0.33 | 0.36 | 0.019 |
| 18.691 | 0.000 | 0.28 | 0.32 | 0.34 | 0.018 |
| 18.859 | 0.000 | 0.27 | 0.30 | 0.33 | 0.017 |
| 19.027 | 0.000 | 0.26 | 0.29 | 0.31 | 0.017 |
| 19.195 | 0.000 | 0.25 | 0.28 | 0.30 | 0.016 |
| 19.363 | 0.000 | 0.24 | 0.27 | 0.29 | 0.015 |
| 19.531 | 0.000 | 0.24 | 0.26 | 0.28 | 0.015 |
| 19.700 | 0.000 | 0.23 | 0.25 | 0.27 | 0.014 |
| 19.868 | 0.000 | 0.22 | 0.24 | 0.26 | 0.014 |
| 20.036 | 0.000 | 0.22 | 0.23 | 0.25 | 0.013 |
| 20.204 | 0.000 | 0.21 | 0.23 | 0.24 | 0.013 |
| 20.372 | 0.000 | 0.21 | 0.22 | 0.23 | 0.012 |
| 20.541 | 0.000 | 0.20 | 0.21 | 0.23 | 0.012 |
| 20.709 | 0.000 | 0.20 | 0.21 | 0.22 | 0.012 |
| 20.877 | 0.000 | 0.19 | 0.20 | 0.21 | 0.011 |
| 21.045 | 0.000 | 0.19 | 0.20 | 0.21 | 0.011 |
| 21.213 | 0.000 | 0.18 | 0.19 | 0.20 | 0.011 |
| 21.381 | 0.000 | 0.18 | 0.19 | 0.20 | 0.011 |
| 21.549 | 0.000 | 0.18 | 0.18 | 0.19 | 0.010 |
| 21.718 | 0.000 | 0.17 | 0.18 | 0.19 | 0.010 |
| 21.886 | 0.000 | 0.17 | 0.17 | 0.19 | 0.010 |
| 22.054 | 0.000 | 0.17 | 0.17 | 0.18 | 0.010 |

| | | | | | |
|---|---|---|---|---|---|
| 22.222 | 0.000 | 0.16 | 0.17 | 0.18 | 0.010 |
| 22.390 | 0.000 | 0.16 | 0.16 | 0.17 | 0.009 |
| 22.559 | 0.000 | 0.16 | 0.16 | 0.17 | 0.009 |
| 22.727 | 0.000 | 0.16 | 0.16 | 0.17 | 0.009 |
| 22.895 | 0.000 | 0.15 | 0.16 | 0.16 | 0.009 |
| 23.063 | 0.000 | 0.15 | 0.15 | 0.16 | 0.009 |
| 23.231 | 0.000 | 0.15 | 0.15 | 0.16 | 0.009 |
| 23.399 | 0.000 | 0.15 | 0.15 | 0.16 | 0.008 |
| 23.568 | 0.000 | 0.14 | 0.15 | 0.15 | 0.008 |
| 23.736 | 0.000 | 0.14 | 0.14 | 0.15 | 0.008 |
| 23.904 | 0.000 | 0.14 | 0.14 | 0.15 | 0.008 |
| 24.072 | 0.000 | 0.14 | 0.14 | 0.15 | 0.008 |
| 24.240 | 0.000 | 0.00 | 0.11 | 0.13 | 0.006 |
| 24.408 | 0.000 | 0.00 | 0.08 | 0.10 | 0.005 |
| 24.577 | 0.000 | 0.00 | 0.06 | 0.08 | 0.004 |
| 24.745 | 0.000 | 0.00 | 0.05 | 0.06 | 0.003 |
| 24.913 | 0.000 | 0.00 | 0.04 | 0.05 | 0.002 |
| 25.081 | 0.000 | 0.00 | 0.03 | 0.04 | 0.002 |
| 25.249 | 0.000 | 0.00 | 0.02 | 0.03 | 0.001 |
| 25.417 | 0.000 | 0.00 | 0.02 | 0.02 | 0.001 |

```
**************************************************************************
          NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
                    AND LOW LOSS FRACTION ESTIMATIONS
==========================================================================
         (C) Copyright 1989-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:




**************************************************************************
--------------------------------------------------------------------------

 Problem Descriptions:
  Gateway Hydrograph/ Detention Routing
  Proposed Condition
  2-year storm event
==========================================================================
*** NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
    AND LOW LOSS FRACTION ESTIMATIONS FOR AMC I:

    TOTAL 24-HOUR DURATION RAINFALL DEPTH =     2.05 (inches)

    SOIL-COVER     AREA      PERCENT OF    SCS CURVE    LOSS RATE
       TYPE      (Acres)   PERVIOUS AREA     NUMBER    Fp(in./hr.)     YIELD
         1         6.90       35.00       32.(AMC II)      0.400        0.578
         2        11.10       35.00       56.(AMC II)      0.300        0.578
         3        33.60       35.00       69.(AMC II)      0.250        0.578
         4         1.70       10.00       32.(AMC II)      0.400        0.801
         5         1.00       10.00       56.(AMC II)      0.300        0.801
         6         5.30       10.00       69.(AMC II)      0.250        0.801
         7         3.60      100.00       80.(AMC II)      0.250        0.055
         8         1.40       85.00       69.(AMC II)      0.250        0.134

    TOTAL AREA (Acres) =     64.60

                                  _
    AREA-AVERAGED LOSS RATE, Fm (in./hr.) =  0.101

                                  _
    AREA-AVERAGED LOW LOSS FRACTION, Y = 0.433
==========================================================================

 Problem Descriptions:
  Gateway Hydrograph/ Detention Routing
  Proposed Condition (calibration coef: 0.8653)
  2-year storm event
--------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.87
    TOTAL CATCHMENT AREA(ACRES) =   64.60
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.101
    LOW LOSS FRACTION = 0.433
    TIME OF CONCENTRATION(MIN.) = 11.20
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =   2
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.19
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  0.53
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  0.89
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  1.22
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  2.05

--------------------------------------------------------------------------
```

```
    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =     5.97
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     5.07

*******************************************************************************
  TIME      VOLUME        Q    0.        20.0      40.0      60.0      80.0
 (HOURS)     (AF)       (CFS)
-------------------------------------------------------------------------------
  0.13       0.0056      1.01  Q         .         .         .         .
  0.32       0.0213      1.02  Q         .         .         .         .
  0.51       0.0371      1.03  Q         .         .         .         .
  0.69       0.0530      1.03  Q         .         .         .         .
  0.88       0.0690      1.04  Q         .         .         .         .
  1.07       0.0852      1.05  Q         .         .         .         .
  1.25       0.1015      1.06  Q         .         .         .         .
  1.44       0.1179      1.07  Q         .         .         .         .
  1.63       0.1344      1.08  Q         .         .         .         .
  1.81       0.1511      1.08  Q         .         .         .         .
  2.00       0.1679      1.10  Q         .         .         .         .
  2.19       0.1849      1.10  Q         .         .         .         .
  2.37       0.2019      1.11  Q         .         .         .         .
  2.56       0.2192      1.12  Q         .         .         .         .
  2.75       0.2366      1.13  Q         .         .         .         .
  2.93       0.2541      1.14  Q         .         .         .         .
  3.12       0.2718      1.15  Q         .         .         .         .
  3.31       0.2897      1.16  Q         .         .         .         .
  3.49       0.3077      1.18  Q         .         .         .         .
  3.68       0.3259      1.18  Q         .         .         .         .
  3.87       0.3442      1.20  Q         .         .         .         .
  4.05       0.3628      1.20  Q         .         .         .         .
  4.24       0.3815      1.22  Q         .         .         .         .
  4.43       0.4004      1.23  Q         .         .         .         .
  4.61       0.4194      1.25  Q         .         .         .         .
  4.80       0.4387      1.25  Q         .         .         .         .
  4.99       0.4582      1.27  Q         .         .         .         .
  5.17       0.4779      1.28  Q         .         .         .         .
  5.36       0.4978      1.30  Q         .         .         .         .
  5.55       0.5179      1.31  Q         .         .         .         .
  5.73       0.5382      1.33  Q         .         .         .         .
  5.92       0.5588      1.34  Q         .         .         .         .
  6.11       0.5796      1.36  Q         .         .         .         .
  6.29       0.6006      1.37  Q         .         .         .         .
  6.48       0.6219      1.39  Q         .         .         .         .
  6.67       0.6435      1.40  Q         .         .         .         .
  6.85       0.6653      1.43  Q         .         .         .         .
  7.04       0.6874      1.44  Q         .         .         .         .
  7.23       0.7097      1.46  Q         .         .         .         .
  7.41       0.7324      1.48  Q         .         .         .         .
  7.60       0.7554      1.50  Q         .         .         .         .
  7.79       0.7787      1.52  Q         .         .         .         .
  7.97       0.8023      1.55  Q         .         .         .         .
  8.16       0.8263      1.56  Q         .         .         .         .
  8.35       0.8506      1.59  Q         .         .         .         .
  8.53       0.8752      1.61  Q         .         .         .         .
  8.72       0.9003      1.64  Q         .         .         .         .
  8.91       0.9258      1.66  Q         .         .         .         .
  9.09       0.9516      1.70  Q         .         .         .         .
  9.28       0.9779      1.71  Q         .         .         .         .
  9.47       1.0047      1.75  Q         .         .         .         .
  9.65       1.0319      1.77  Q         .         .         .         .
  9.84       1.0596      1.82  Q         .         .         .         .
 10.03       1.0879      1.84  Q         .         .         .         .
 10.21       1.1166      1.89  Q         .         .         .         .
 10.40       1.1460      1.92  Q         .         .         .         .
 10.59       1.1759      1.97  Q         .         .         .         .
 10.77       1.2065      2.00  Q         .         .         .         .
 10.96       1.2378      2.06  .Q        .         .         .         .
 11.15       1.2698      2.09  .Q        .         .         .         .
 11.33       1.3025      2.16  .Q        .         .         .         .
```

| | | | |
|---|---|---|---|
| 11.52 | 1.3360 | 2.19 | .Q |
| 11.71 | 1.3704 | 2.27 | .Q |
| 11.89 | 1.4057 | 2.31 | .Q |
| 12.08 | 1.4426 | 2.47 | .Q |
| 12.27 | 1.4845 | 2.96 | .Q |
| 12.45 | 1.5310 | 3.07 | .Q |
| 12.64 | 1.5789 | 3.13 | .Q |
| 12.83 | 1.6282 | 3.26 | .Q |
| 13.01 | 1.6790 | 3.33 | .Q |
| 13.20 | 1.7315 | 3.48 | .Q |
| 13.39 | 1.7858 | 3.56 | .Q |
| 13.57 | 1.8421 | 3.75 | .Q |
| 13.76 | 1.9007 | 3.85 | .Q |
| 13.95 | 1.9620 | 4.08 | . Q |
| 14.13 | 2.0261 | 4.23 | . Q |
| 14.32 | 2.0948 | 4.68 | . Q |
| 14.51 | 2.1685 | 4.87 | . Q |
| 14.69 | 2.2469 | 5.30 | . Q |
| 14.88 | 2.3306 | 5.56 | . Q |
| 15.07 | 2.4214 | 6.21 | . Q |
| 15.25 | 2.5205 | 6.64 | . Q |
| 15.44 | 2.6292 | 7.46 | . Q |
| 15.63 | 2.7463 | 7.72 | . Q |
| 15.81 | 2.9114 | 13.69 | . Q |
| 16.00 | 3.1782 | 20.90 | . Q |
| 16.19 | 3.9094 | 73.90 | . Q |
| 16.37 | 4.5558 | 9.89 | . Q |
| 16.56 | 4.6873 | 7.16 | . Q |
| 16.75 | 4.7877 | 5.86 | . Q |
| 16.93 | 4.8720 | 5.07 | . Q |
| 17.12 | 4.9460 | 4.52 | . Q |
| 17.31 | 5.0114 | 3.96 | .Q |
| 17.49 | 5.0702 | 3.65 | .Q |
| 17.68 | 5.1246 | 3.40 | .Q |
| 17.87 | 5.1754 | 3.19 | .Q |
| 18.05 | 5.2233 | 3.02 | .Q |
| 18.24 | 5.2647 | 2.35 | .Q |
| 18.43 | 5.3001 | 2.23 | .Q |
| 18.61 | 5.3336 | 2.12 | .Q |
| 18.80 | 5.3656 | 2.03 | .Q |
| 18.99 | 5.3962 | 1.94 | Q |
| 19.17 | 5.4255 | 1.87 | Q |
| 19.36 | 5.4538 | 1.80 | Q |
| 19.55 | 5.4810 | 1.73 | Q |
| 19.73 | 5.5073 | 1.68 | Q |
| 19.92 | 5.5328 | 1.62 | Q |
| 20.11 | 5.5575 | 1.58 | Q |
| 20.29 | 5.5814 | 1.53 | Q |
| 20.48 | 5.6047 | 1.49 | Q |
| 20.67 | 5.6274 | 1.45 | Q |
| 20.85 | 5.6495 | 1.41 | Q |
| 21.04 | 5.6711 | 1.38 | Q |
| 21.23 | 5.6921 | 1.35 | Q |
| 21.41 | 5.7127 | 1.32 | Q |
| 21.60 | 5.7328 | 1.29 | Q |
| 21.79 | 5.7525 | 1.26 | Q |
| 21.97 | 5.7717 | 1.24 | Q |
| 22.16 | 5.7906 | 1.21 | Q |
| 22.35 | 5.8092 | 1.19 | Q |
| 22.53 | 5.8274 | 1.17 | Q |
| 22.72 | 5.8452 | 1.15 | Q |
| 22.91 | 5.8628 | 1.13 | Q |
| 23.09 | 5.8800 | 1.11 | Q |
| 23.28 | 5.8969 | 1.09 | Q |
| 23.47 | 5.9136 | 1.07 | Q |
| 23.65 | 5.9300 | 1.06 | Q |
| 23.84 | 5.9462 | 1.04 | Q |
| 24.03 | 5.9621 | 1.02 | Q |
| 24.21 | 5.9700 | 0.00 | Q |

```
--------------------------------------------------------------------------------
--------------------------------------------------------------------------------
    TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:
    (Note: 100% of Peak Flow Rate estimate assumed to have
    an instantaneous time duration)

    Percentile of Estimated                Duration
        Peak Flow Rate                     (minutes)
    ======================                 =========
               0%                           1444.8
              10%                             67.2
              20%                             22.4
              30%                             11.2
              40%                             11.2
              50%                             11.2
              60%                             11.2
              70%                             11.2
              80%                             11.2
              90%                             11.2

 Problem Descriptions:
  Gateway Hydrograph/ Detention Routing
  Proposed Condition (calibration coef: 0.8653)
  2-year storm event
--------------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.87
    TOTAL CATCHMENT AREA(ACRES) =   64.60
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.101
    LOW LOSS FRACTION = 0.433
    TIME OF CONCENTRATION(MIN.) = 11.20
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =   2
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.19
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  0.53
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  0.89
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  1.22
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  2.05

--------------------------------------------------------------------------------

    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =     5.97
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     5.07

********************************************************************************
  TIME     VOLUME       Q    0.       20.0      40.0      60.0      80.0
 (HOURS)    (AF)      (CFS)
--------------------------------------------------------------------------------
  0.13      0.0056      1.01  Q         .         .         .         .
  0.32      0.0213      1.02  Q         .         .         .         .
  0.51      0.0371      1.03  Q         .         .         .         .
  0.69      0.0530      1.03  Q         .         .         .         .
  0.88      0.0690      1.04  Q         .         .         .         .
  1.07      0.0852      1.05  Q         .         .         .         .
  1.25      0.1015      1.06  Q         .         .         .         .
  1.44      0.1179      1.07  Q         .         .         .         .
  1.63      0.1344      1.08  Q         .         .         .         .
  1.81      0.1511      1.08  Q         .         .         .         .
  2.00      0.1679      1.10  Q         .         .         .         .
  2.19      0.1849      1.10  Q         .         .         .         .
  2.37      0.2019      1.11  Q         .         .         .         .
  2.56      0.2192      1.12  Q         .         .         .         .
  2.75      0.2366      1.13  Q         .         .         .         .
  2.93      0.2541      1.14  Q         .         .         .         .
  3.12      0.2718      1.15  Q         .         .         .         .
  3.31      0.2897      1.16  Q         .         .         .         .
```

| | | | |
|---|---|---|---|
| 3.49 | 0.3077 | 1.18 | Q |
| 3.68 | 0.3259 | 1.18 | Q |
| 3.87 | 0.3442 | 1.20 | Q |
| 4.05 | 0.3628 | 1.20 | Q |
| 4.24 | 0.3815 | 1.22 | Q |
| 4.43 | 0.4004 | 1.23 | Q |
| 4.61 | 0.4194 | 1.25 | Q |
| 4.80 | 0.4387 | 1.25 | Q |
| 4.99 | 0.4582 | 1.27 | Q |
| 5.17 | 0.4779 | 1.28 | Q |
| 5.36 | 0.4978 | 1.30 | Q |
| 5.55 | 0.5179 | 1.31 | Q |
| 5.73 | 0.5382 | 1.33 | Q |
| 5.92 | 0.5588 | 1.34 | Q |
| 6.11 | 0.5796 | 1.36 | Q |
| 6.29 | 0.6006 | 1.37 | Q |
| 6.48 | 0.6219 | 1.39 | Q |
| 6.67 | 0.6435 | 1.40 | Q |
| 6.85 | 0.6653 | 1.43 | Q |
| 7.04 | 0.6874 | 1.44 | Q |
| 7.23 | 0.7097 | 1.46 | Q |
| 7.41 | 0.7324 | 1.48 | Q |
| 7.60 | 0.7554 | 1.50 | Q |
| 7.79 | 0.7787 | 1.52 | Q |
| 7.97 | 0.8023 | 1.55 | Q |
| 8.16 | 0.8263 | 1.56 | Q |
| 8.35 | 0.8506 | 1.59 | Q |
| 8.53 | 0.8752 | 1.61 | Q |
| 8.72 | 0.9003 | 1.64 | Q |
| 8.91 | 0.9258 | 1.66 | Q |
| 9.09 | 0.9516 | 1.70 | Q |
| 9.28 | 0.9779 | 1.71 | Q |
| 9.47 | 1.0047 | 1.75 | Q |
| 9.65 | 1.0319 | 1.77 | Q |
| 9.84 | 1.0596 | 1.82 | Q |
| 10.03 | 1.0879 | 1.84 | Q |
| 10.21 | 1.1166 | 1.89 | Q |
| 10.40 | 1.1460 | 1.92 | Q |
| 10.59 | 1.1759 | 1.97 | Q |
| 10.77 | 1.2065 | 2.00 | Q |
| 10.96 | 1.2378 | 2.06 | .Q |
| 11.15 | 1.2698 | 2.09 | .Q |
| 11.33 | 1.3025 | 2.16 | .Q |
| 11.52 | 1.3360 | 2.19 | .Q |
| 11.71 | 1.3704 | 2.27 | .Q |
| 11.89 | 1.4057 | 2.31 | .Q |
| 12.08 | 1.4426 | 2.47 | .Q |
| 12.27 | 1.4845 | 2.96 | .Q |
| 12.45 | 1.5310 | 3.07 | .Q |
| 12.64 | 1.5789 | 3.13 | .Q |
| 12.83 | 1.6282 | 3.26 | .Q |
| 13.01 | 1.6790 | 3.33 | .Q |
| 13.20 | 1.7315 | 3.48 | .Q |
| 13.39 | 1.7858 | 3.56 | .Q |
| 13.57 | 1.8421 | 3.75 | .Q |
| 13.76 | 1.9007 | 3.85 | .Q |
| 13.95 | 1.9620 | 4.08 | . Q |
| 14.13 | 2.0261 | 4.23 | . Q |
| 14.32 | 2.0948 | 4.68 | . Q |
| 14.51 | 2.1685 | 4.87 | . Q |
| 14.69 | 2.2469 | 5.30 | . Q |
| 14.88 | 2.3306 | 5.56 | . Q |
| 15.07 | 2.4214 | 6.21 | . Q |
| 15.25 | 2.5205 | 6.64 | . Q |
| 15.44 | 2.6292 | 7.46 | . Q |
| 15.63 | 2.7463 | 7.72 | . Q |
| 15.81 | 2.9114 | 13.69 | . Q |
| 16.00 | 3.1782 | 20.90 | . Q |
| 16.19 | 3.9094 | 73.90 | . Q |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 16.37 | 4.5558 | 9.89 | . Q | . | . | . | . |
| 16.56 | 4.6873 | 7.16 | . Q | . | . | . | . |
| 16.75 | 4.7877 | 5.86 | . Q | . | . | . | . |
| 16.93 | 4.8720 | 5.07 | . Q | . | . | . | . |
| 17.12 | 4.9460 | 4.52 | . Q | . | . | . | . |
| 17.31 | 5.0114 | 3.96 | .Q | . | . | . | . |
| 17.49 | 5.0702 | 3.65 | .Q | . | . | . | . |
| 17.68 | 5.1246 | 3.40 | .Q | . | . | . | . |
| 17.87 | 5.1754 | 3.19 | .Q | . | . | . | . |
| 18.05 | 5.2233 | 3.02 | .Q | . | . | . | . |
| 18.24 | 5.2647 | 2.35 | .Q | . | . | . | . |
| 18.43 | 5.3001 | 2.23 | .Q | . | . | . | . |
| 18.61 | 5.3336 | 2.12 | .Q | . | . | . | . |
| 18.80 | 5.3656 | 2.03 | .Q | . | . | . | . |
| 18.99 | 5.3962 | 1.94 | Q | . | . | . | . |
| 19.17 | 5.4255 | 1.87 | Q | . | . | . | . |
| 19.36 | 5.4538 | 1.80 | Q | . | . | . | . |
| 19.55 | 5.4810 | 1.73 | Q | . | . | . | . |
| 19.73 | 5.5073 | 1.68 | Q | . | . | . | . |
| 19.92 | 5.5328 | 1.62 | Q | . | . | . | . |
| 20.11 | 5.5575 | 1.58 | Q | . | . | . | . |
| 20.29 | 5.5814 | 1.53 | Q | . | . | . | . |
| 20.48 | 5.6047 | 1.49 | Q | . | . | . | . |
| 20.67 | 5.6274 | 1.45 | Q | . | . | . | . |
| 20.85 | 5.6495 | 1.41 | Q | . | . | . | . |
| 21.04 | 5.6711 | 1.38 | Q | . | . | . | . |
| 21.23 | 5.6921 | 1.35 | Q | . | . | . | . |
| 21.41 | 5.7127 | 1.32 | Q | . | . | . | . |
| 21.60 | 5.7328 | 1.29 | Q | . | . | . | . |
| 21.79 | 5.7525 | 1.26 | Q | . | . | . | . |
| 21.97 | 5.7717 | 1.24 | Q | . | . | . | . |
| 22.16 | 5.7906 | 1.21 | Q | . | . | . | . |
| 22.35 | 5.8092 | 1.19 | Q | . | . | . | . |
| 22.53 | 5.8274 | 1.17 | Q | . | . | . | . |
| 22.72 | 5.8452 | 1.15 | Q | . | . | . | . |
| 22.91 | 5.8628 | 1.13 | Q | . | . | . | . |
| 23.09 | 5.8800 | 1.11 | Q | . | . | . | . |
| 23.28 | 5.8969 | 1.09 | Q | . | . | . | . |
| 23.47 | 5.9136 | 1.07 | Q | . | . | . | . |
| 23.65 | 5.9300 | 1.06 | Q | . | . | . | . |
| 23.84 | 5.9462 | 1.04 | Q | . | . | . | . |
| 24.03 | 5.9621 | 1.02 | Q | . | . | . | . |
| 24.21 | 5.9700 | 0.00 | Q | . | . | . | . |

**TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:**
**(Note: 100% of Peak Flow Rate estimate assumed to have an instantaneous time duration)**

| Percentile of Estimated Peak Flow Rate | Duration (minutes) |
|---|---|
| 0% | 1444.8 |
| 10% | 67.2 |
| 20% | 22.4 |
| 30% | 11.2 |
| 40% | 11.2 |
| 50% | 11.2 |
| 60% | 11.2 |
| 70% | 11.2 |
| 80% | 11.2 |
| 90% | 11.2 |

**Problem Descriptions:**
**Gateway Hydrograph/ Detention Routing**
**Proposed Condition (calibration coef: 0.8653)**
**2-year storm event**

```
    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.87
    TOTAL CATCHMENT AREA(ACRES) =   64.60
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.101
    LOW LOSS FRACTION = 0.433
    TIME OF CONCENTRATION(MIN.) = 11.20
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =   2
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.19
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  0.53
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  0.89
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  1.22
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  2.05

--------------------------------------------------------------------------------

    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =     5.97
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     5.07

********************************************************************************
  TIME     VOLUME       Q    0.       20.0      40.0      60.0      80.0
 (HOURS)    (AF)      (CFS)
--------------------------------------------------------------------------------
  0.13      0.0056      1.01  Q         .         .         .         .
  0.32      0.0213      1.02  Q         .         .         .         .
  0.51      0.0371      1.03  Q         .         .         .         .
  0.69      0.0530      1.03  Q         .         .         .         .
  0.88      0.0690      1.04  Q         .         .         .         .
  1.07      0.0852      1.05  Q         .         .         .         .
  1.25      0.1015      1.06  Q         .         .         .         .
  1.44      0.1179      1.07  Q         .         .         .         .
  1.63      0.1344      1.08  Q         .         .         .         .
  1.81      0.1511      1.08  Q         .         .         .         .
  2.00      0.1679      1.10  Q         .         .         .         .
  2.19      0.1849      1.10  Q         .         .         .         .
  2.37      0.2019      1.11  Q         .         .         .         .
  2.56      0.2192      1.12  Q         .         .         .         .
  2.75      0.2366      1.13  Q         .         .         .         .
  2.93      0.2541      1.14  Q         .         .         .         .
  3.12      0.2718      1.15  Q         .         .         .         .
  3.31      0.2897      1.16  Q         .         .         .         .
  3.49      0.3077      1.18  Q         .         .         .         .
  3.68      0.3259      1.18  Q         .         .         .         .
  3.87      0.3442      1.20  Q         .         .         .         .
  4.05      0.3628      1.20  Q         .         .         .         .
  4.24      0.3815      1.22  Q         .         .         .         .
  4.43      0.4004      1.23  Q         .         .         .         .
  4.61      0.4194      1.25  Q         .         .         .         .
  4.80      0.4387      1.25  Q         .         .         .         .
  4.99      0.4582      1.27  Q         .         .         .         .
  5.17      0.4779      1.28  Q         .         .         .         .
  5.36      0.4978      1.30  Q         .         .         .         .
  5.55      0.5179      1.31  Q         .         .         .         .
  5.73      0.5382      1.33  Q         .         .         .         .
  5.92      0.5588      1.34  Q         .         .         .         .
  6.11      0.5796      1.36  Q         .         .         .         .
  6.29      0.6006      1.37  Q         .         .         .         .
  6.48      0.6219      1.39  Q         .         .         .         .
  6.67      0.6435      1.40  Q         .         .         .         .
  6.85      0.6653      1.43  Q         .         .         .         .
  7.04      0.6874      1.44  Q         .         .         .         .
  7.23      0.7097      1.46  Q         .         .         .         .
  7.41      0.7324      1.48  Q         .         .         .         .
  7.60      0.7554      1.50  Q         .         .         .         .
  7.79      0.7787      1.52  Q         .         .         .         .
  7.97      0.8023      1.55  Q         .         .         .         .
  8.16      0.8263      1.56  Q         .         .         .         .
```

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 8.35 | 0.8506 | 1.59 | Q | . | . | . | . |
| 8.53 | 0.8752 | 1.61 | Q | . | . | . | . |
| 8.72 | 0.9003 | 1.64 | Q | . | . | . | . |
| 8.91 | 0.9258 | 1.66 | Q | . | . | . | . |
| 9.09 | 0.9516 | 1.70 | Q | . | . | . | . |
| 9.28 | 0.9779 | 1.71 | Q | . | . | . | . |
| 9.47 | 1.0047 | 1.75 | Q | . | . | . | . |
| 9.65 | 1.0319 | 1.77 | Q | . | . | . | . |
| 9.84 | 1.0596 | 1.82 | Q | . | . | . | . |
| 10.03 | 1.0879 | 1.84 | Q | . | . | . | . |
| 10.21 | 1.1166 | 1.89 | Q | . | . | . | . |
| 10.40 | 1.1460 | 1.92 | Q | . | . | . | . |
| 10.59 | 1.1759 | 1.97 | Q | . | . | . | . |
| 10.77 | 1.2065 | 2.00 | Q | . | . | . | . |
| 10.96 | 1.2378 | 2.06 | .Q | . | . | . | . |
| 11.15 | 1.2698 | 2.09 | .Q | . | . | . | . |
| 11.33 | 1.3025 | 2.16 | .Q | . | . | . | . |
| 11.52 | 1.3360 | 2.19 | .Q | . | . | . | . |
| 11.71 | 1.3704 | 2.27 | .Q | . | . | . | . |
| 11.89 | 1.4057 | 2.31 | .Q | . | . | . | . |
| 12.08 | 1.4426 | 2.47 | .Q | . | . | . | . |
| 12.27 | 1.4845 | 2.96 | .Q | . | . | . | . |
| 12.45 | 1.5310 | 3.07 | .Q | . | . | . | . |
| 12.64 | 1.5789 | 3.13 | .Q | . | . | . | . |
| 12.83 | 1.6282 | 3.26 | .Q | . | . | . | . |
| 13.01 | 1.6790 | 3.33 | .Q | . | . | . | . |
| 13.20 | 1.7315 | 3.48 | .Q | . | . | . | . |
| 13.39 | 1.7858 | 3.56 | .Q | . | . | . | . |
| 13.57 | 1.8421 | 3.75 | .Q | . | . | . | . |
| 13.76 | 1.9007 | 3.85 | .Q | . | . | . | . |
| 13.95 | 1.9620 | 4.08 | . Q | . | . | . | . |
| 14.13 | 2.0261 | 4.23 | . Q | . | . | . | . |
| 14.32 | 2.0948 | 4.68 | . Q | . | . | . | . |
| 14.51 | 2.1685 | 4.87 | . Q | . | . | . | . |
| 14.69 | 2.2469 | 5.30 | . Q | . | . | . | . |
| 14.88 | 2.3306 | 5.56 | . Q | . | . | . | . |
| 15.07 | 2.4214 | 6.21 | . Q | . | . | . | . |
| 15.25 | 2.5205 | 6.64 | . Q | . | . | . | . |
| 15.44 | 2.6292 | 7.46 | . Q | . | . | . | . |
| 15.63 | 2.7463 | 7.72 | . Q | . | . | . | . |
| 15.81 | 2.9114 | 13.69 | . Q | . | . | . | . |
| 16.00 | 3.1782 | 20.90 | . Q | . | . | . | . |
| 16.19 | 3.9094 | 73.90 | . | . | . | . Q | . |
| 16.37 | 4.5558 | 9.89 | . Q | . | . | . | . |
| 16.56 | 4.6873 | 7.16 | . Q | . | . | . | . |
| 16.75 | 4.7877 | 5.86 | . Q | . | . | . | . |
| 16.93 | 4.8720 | 5.07 | . Q | . | . | . | . |
| 17.12 | 4.9460 | 4.52 | . Q | . | . | . | . |
| 17.31 | 5.0114 | 3.96 | .Q | . | . | . | . |
| 17.49 | 5.0702 | 3.65 | .Q | . | . | . | . |
| 17.68 | 5.1246 | 3.40 | .Q | . | . | . | . |
| 17.87 | 5.1754 | 3.19 | .Q | . | . | . | . |
| 18.05 | 5.2233 | 3.02 | .Q | . | . | . | . |
| 18.24 | 5.2647 | 2.35 | .Q | . | . | . | . |
| 18.43 | 5.3001 | 2.23 | .Q | . | . | . | . |
| 18.61 | 5.3336 | 2.12 | .Q | . | . | . | . |
| 18.80 | 5.3656 | 2.03 | .Q | . | . | . | . |
| 18.99 | 5.3962 | 1.94 | Q | . | . | . | . |
| 19.17 | 5.4255 | 1.87 | Q | . | . | . | . |
| 19.36 | 5.4538 | 1.80 | Q | . | . | . | . |
| 19.55 | 5.4810 | 1.73 | Q | . | . | . | . |
| 19.73 | 5.5073 | 1.68 | Q | . | . | . | . |
| 19.92 | 5.5328 | 1.62 | Q | . | . | . | . |
| 20.11 | 5.5575 | 1.58 | Q | . | . | . | . |
| 20.29 | 5.5814 | 1.53 | Q | . | . | . | . |
| 20.48 | 5.6047 | 1.49 | Q | . | . | . | . |
| 20.67 | 5.6274 | 1.45 | Q | . | . | . | . |
| 20.85 | 5.6495 | 1.41 | Q | . | . | . | . |
| 21.04 | 5.6711 | 1.38 | Q | . | . | . | . |


```
 21.23      5.6921      1.35  Q         .         .         .         .
 21.41      5.7127      1.32  Q         .         .         .         .
 21.60      5.7328      1.29  Q         .         .         .         .
 21.79      5.7525      1.26  Q         .         .         .         .
 21.97      5.7717      1.24  Q         .         .         .         .
 22.16      5.7906      1.21  Q         .         .         .         .
 22.35      5.8092      1.19  Q         .         .         .         .
 22.53      5.8274      1.17  Q         .         .         .         .
 22.72      5.8452      1.15  Q         .         .         .         .
 22.91      5.8628      1.13  Q         .         .         .         .
 23.09      5.8800      1.11  Q         .         .         .         .
 23.28      5.8969      1.09  Q         .         .         .         .
 23.47      5.9136      1.07  Q         .         .         .         .
 23.65      5.9300      1.06  Q         .         .         .         .
 23.84      5.9462      1.04  Q         .         .         .         .
 24.03      5.9621      1.02  Q         .         .         .         .
 24.21      5.9700      0.00  Q         .         .         .         .
 ----------------------------------------------------------------------
--------------------------------------------------------------------------------
    TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:
    (Note: 100% of Peak Flow Rate estimate assumed to have
    an instantaneous time duration)

    Percentile of Estimated                Duration
        Peak Flow Rate                     (minutes)
    ======================                 =========
              0%                            1444.8
             10%                              67.2
             20%                              22.4
             30%                              11.2
             40%                              11.2
             50%                              11.2
             60%                              11.2
             70%                              11.2
             80%                              11.2
             90%                              11.2

  Problem Descriptions:
   Gateway Hydrograph/ Detention Routing
   Proposed Condition (calibration coef: 0.8653)
   2-year storm event


================================================================================
     FLOW-THROUGH DETENTION BASIN MODEL

     SPECIFIED BASIN CONDITIONS ARE AS FOLLOWS:
     CONSTANT HYDROGRAPH TIME UNIT(MINUTES) =   11.200
     DEAD STORAGE(AF) =       0.00
     SPECIFIED DEAD STORAGE(AF) FILLED =       0.00
     ASSUMED INITIAL DEPTH(FEET) IN STORAGE BASIN =    0.40
```

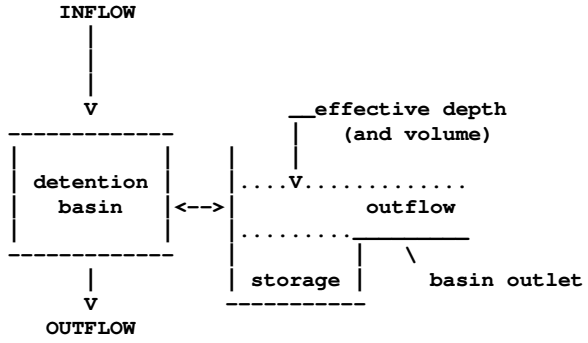

150' x 150' footprint
(7' depth)

DEPTH-VS.-STORAGE AND DEPTH-VS.-DISCHARGE INFORMATION:
TOTAL NUMBER OF BASIN DEPTH INFORMATION ENTRIES = 13

| *BASIN-DEPTH (FEET) | STORAGE (ACRE-FEET) | OUTFLOW (CFS) | ** | BASIN-DEPTH (FEET) | STORAGE (ACRE-FEET) | OUTFLOW (CFS) | * |
|---|---|---|---|---|---|---|---|
| 0.000 | 0.000 | 0.000 | ** | 0.250 | 0.130 | 1.000 | * |
| 0.500 | 0.260 | 2.000 | ** | 0.750 | 0.390 | 3.000 | * |
| 1.000 | 0.520 | 4.000 | ** | 1.250 | 0.650 | 5.000 | * |
| 1.500 | 0.770 | 10.400 | ** | 1.750 | 0.900 | 14.600 | * |
| 2.000 | 1.030 | 17.900 | ** | 2.250 | 1.160 | 20.700 | * |
| 2.500 | 1.290 | 23.100 | ** | 3.000 | 1.550 | 27.400 | * |
| 3.500 | 1.810 | 31.000 | ** | | | | |

BASIN STORAGE, OUTFLOW AND DEPTH ROUTING VALUES:


| INTERVAL NUMBER | DEPTH (FEET) | {S-O*DT/2} (ACRE-FEET) | {S+O*DT/2} (ACRE-FEET) |
|---|---|---|---|
| 1 | 0.00 | 0.00000 | 0.00000 |
| 2 | 0.25 | 0.12229 | 0.13771 |
| 3 | 0.50 | 0.24457 | 0.27543 |
| 4 | 0.75 | 0.36686 | 0.41314 |
| 5 | 1.00 | 0.48915 | 0.55085 |
| 6 | 1.25 | 0.61143 | 0.68857 |
| 7 | 1.50 | 0.68978 | 0.85022 |
| 8 | 1.75 | 0.78738 | 1.01262 |
| 9 | 2.00 | 0.89193 | 1.16807 |
| 10 | 2.25 | 1.00033 | 1.31967 |
| 11 | 2.50 | 1.11182 | 1.46818 |
| 12 | 3.00 | 1.33865 | 1.76135 |
| 13 | 3.50 | 1.57088 | 2.04912 |

WHERE S=STORAGE(AF);O=OUTFLOW(AF/MIN.);DT=UNIT INTERVAL(MIN.)

DETENTION BASIN ROUTING RESULTS:
NOTE: COMPUTED BASIN DEPTH, OUTFLOW, AND STORAGE QUANTITIES OCCUR AT THE GIVEN TIME. BASIN INFLOW VALUES REPRESENT THE AVERAGE INFLOW DURING THE RECENT HYDROGRAPH UNIT INTERVAL.

| TIME (HRS) | DEAD-STORAGE FILLED(AF) | INFLOW (CFS) | EFFECTIVE DEPTH(FT) | OUTFLOW (CFS) | EFFECTIVE VOLUME(AF) |
|---|---|---|---|---|---|
| 0.133 | 0.000 | 1.01 | 0.38 | 1.57 | 0.199 |
| 0.320 | 0.000 | 1.02 | 0.37 | 1.51 | 0.192 |
| 0.507 | 0.000 | 1.03 | 0.36 | 1.45 | 0.185 |
| 0.693 | 0.000 | 1.03 | 0.35 | 1.40 | 0.180 |
| 0.880 | 0.000 | 1.04 | 0.34 | 1.36 | 0.175 |
| 1.067 | 0.000 | 1.05 | 0.33 | 1.33 | 0.171 |
| 1.253 | 0.000 | 1.06 | 0.32 | 1.30 | 0.167 |
| 1.440 | 0.000 | 1.07 | 0.31 | 1.27 | 0.164 |
| 1.627 | 0.000 | 1.08 | 0.31 | 1.25 | 0.161 |
| 1.813 | 0.000 | 1.08 | 0.31 | 1.23 | 0.159 |
| 2.000 | 0.000 | 1.10 | 0.30 | 1.21 | 0.157 |
| 2.187 | 0.000 | 1.10 | 0.30 | 1.20 | 0.155 |
| 2.373 | 0.000 | 1.11 | 0.30 | 1.19 | 0.154 |
| 2.560 | 0.000 | 1.12 | 0.29 | 1.18 | 0.153 |
| 2.747 | 0.000 | 1.13 | 0.29 | 1.18 | 0.153 |
| 2.933 | 0.000 | 1.14 | 0.29 | 1.17 | 0.152 |
| 3.120 | 0.000 | 1.15 | 0.29 | 1.17 | 0.152 |
| 3.307 | 0.000 | 1.16 | 0.29 | 1.17 | 0.152 |
| 3.493 | 0.000 | 1.18 | 0.29 | 1.17 | 0.152 |
| 3.680 | 0.000 | 1.18 | 0.29 | 1.17 | 0.152 |
| 3.867 | 0.000 | 1.20 | 0.29 | 1.17 | 0.152 |
| 4.053 | 0.000 | 1.20 | 0.29 | 1.17 | 0.153 |
| 4.240 | 0.000 | 1.22 | 0.30 | 1.18 | 0.154 |
| 4.427 | 0.000 | 1.23 | 0.30 | 1.18 | 0.154 |
| 4.613 | 0.000 | 1.25 | 0.30 | 1.19 | 0.155 |
| 4.800 | 0.000 | 1.25 | 0.30 | 1.20 | 0.156 |
| 4.987 | 0.000 | 1.27 | 0.30 | 1.20 | 0.157 |
| 5.173 | 0.000 | 1.28 | 0.30 | 1.21 | 0.158 |
| 5.360 | 0.000 | 1.30 | 0.31 | 1.22 | 0.159 |
| 5.547 | 0.000 | 1.31 | 0.31 | 1.23 | 0.161 |

| | | | | | |
|---|---|---|---|---|---|
| 5.733 | 0.000 | 1.33 | 0.31 | 1.24 | 0.162 |
| 5.920 | 0.000 | 1.34 | 0.31 | 1.25 | 0.163 |
| 6.107 | 0.000 | 1.36 | 0.32 | 1.26 | 0.165 |
| 6.293 | 0.000 | 1.37 | 0.32 | 1.27 | 0.166 |
| 6.480 | 0.000 | 1.39 | 0.32 | 1.28 | 0.168 |
| 6.667 | 0.000 | 1.40 | 0.33 | 1.30 | 0.169 |
| 6.853 | 0.000 | 1.43 | 0.33 | 1.31 | 0.171 |
| 7.040 | 0.000 | 1.44 | 0.33 | 1.32 | 0.173 |
| 7.227 | 0.000 | 1.46 | 0.34 | 1.34 | 0.175 |
| 7.413 | 0.000 | 1.48 | 0.34 | 1.35 | 0.177 |
| 7.600 | 0.000 | 1.50 | 0.34 | 1.37 | 0.179 |
| 7.787 | 0.000 | 1.52 | 0.35 | 1.38 | 0.181 |
| 7.973 | 0.000 | 1.55 | 0.35 | 1.40 | 0.183 |
| 8.160 | 0.000 | 1.56 | 0.36 | 1.42 | 0.185 |
| 8.347 | 0.000 | 1.59 | 0.36 | 1.44 | 0.188 |
| 8.533 | 0.000 | 1.61 | 0.37 | 1.45 | 0.190 |
| 8.720 | 0.000 | 1.64 | 0.37 | 1.47 | 0.193 |
| 8.907 | 0.000 | 1.66 | 0.38 | 1.49 | 0.195 |
| 9.093 | 0.000 | 1.70 | 0.38 | 1.51 | 0.198 |
| 9.280 | 0.000 | 1.71 | 0.39 | 1.53 | 0.201 |
| 9.467 | 0.000 | 1.75 | 0.39 | 1.56 | 0.204 |
| 9.653 | 0.000 | 1.77 | 0.40 | 1.58 | 0.207 |
| 9.840 | 0.000 | 1.82 | 0.40 | 1.60 | 0.210 |
| 10.027 | 0.000 | 1.84 | 0.41 | 1.63 | 0.214 |
| 10.213 | 0.000 | 1.89 | 0.42 | 1.66 | 0.217 |
| 10.400 | 0.000 | 1.92 | 0.42 | 1.68 | 0.221 |
| 10.587 | 0.000 | 1.97 | 0.43 | 1.71 | 0.225 |
| 10.773 | 0.000 | 2.00 | 0.44 | 1.74 | 0.229 |
| 10.960 | 0.000 | 2.06 | 0.45 | 1.77 | 0.233 |
| 11.147 | 0.000 | 2.09 | 0.46 | 1.81 | 0.237 |
| 11.333 | 0.000 | 2.16 | 0.47 | 1.84 | 0.242 |
| 11.520 | 0.000 | 2.19 | 0.47 | 1.88 | 0.247 |
| 11.707 | 0.000 | 2.27 | 0.48 | 1.92 | 0.252 |
| 11.893 | 0.000 | 2.31 | 0.50 | 1.96 | 0.258 |
| 12.080 | 0.000 | 2.47 | 0.51 | 2.01 | 0.265 |
| 12.267 | 0.000 | 2.96 | 0.53 | 2.09 | 0.278 |
| 12.453 | 0.000 | 3.07 | 0.56 | 2.19 | 0.292 |
| 12.640 | 0.000 | 3.13 | 0.59 | 2.29 | 0.305 |
| 12.827 | 0.000 | 3.26 | 0.61 | 2.39 | 0.318 |
| 13.013 | 0.000 | 3.33 | 0.64 | 2.50 | 0.331 |
| 13.200 | 0.000 | 3.48 | 0.66 | 2.60 | 0.344 |
| 13.387 | 0.000 | 3.56 | 0.69 | 2.70 | 0.358 |
| 13.573 | 0.000 | 3.75 | 0.72 | 2.81 | 0.372 |
| 13.760 | 0.000 | 3.85 | 0.74 | 2.92 | 0.387 |
| 13.947 | 0.000 | 4.08 | 0.77 | 3.04 | 0.403 |
| 14.133 | 0.000 | 4.23 | 0.81 | 3.16 | 0.419 |
| 14.320 | 0.000 | 4.68 | 0.85 | 3.31 | 0.440 |
| 14.507 | 0.000 | 4.87 | 0.89 | 3.47 | 0.462 |
| 14.693 | 0.000 | 5.30 | 0.94 | 3.65 | 0.487 |
| 14.880 | 0.000 | 5.56 | 0.99 | 3.85 | 0.514 |
| 15.067 | 0.000 | 6.21 | 1.05 | 4.08 | 0.547 |
| 15.253 | 0.000 | 6.64 | 1.12 | 4.34 | 0.582 |
| 15.440 | 0.000 | 7.46 | 1.20 | 4.64 | 0.625 |
| 15.627 | 0.000 | 7.72 | 1.28 | 5.22 | 0.664 |
| 15.813 | 0.000 | 13.69 | 1.47 | 7.71 | 0.756 |
| 16.000 | 0.000 | 20.80 | 1.74 | 12.07 | 0.893 |
| 16.187 | 0.000 | 73.90 | 3.28 | 21.88 | 1.695 |
| 16.373 | 0.000 | 9.89 | 2.76 | 27.37 | 1.425 |
| 16.560 | 0.000 | 7.16 | 2.28 | 23.19 | 1.178 |
| 16.747 | 0.000 | 5.86 | 1.90 | 18.81 | 0.978 |
| 16.933 | 0.000 | 5.07 | 1.62 | 14.51 | 0.833 |
| 17.120 | 0.000 | 4.52 | 1.43 | 10.68 | 0.738 |
| 17.307 | 0.000 | 3.96 | 1.31 | 7.66 | 0.681 |
| 17.493 | 0.000 | 3.65 | 1.25 | 5.69 | 0.649 |
| 17.680 | 0.000 | 3.40 | 1.20 | 4.90 | 0.626 |
| 17.867 | 0.000 | 3.19 | 1.16 | 4.72 | 0.602 |
| 18.053 | 0.000 | 3.02 | 1.11 | 4.54 | 0.579 |
| 18.240 | 0.000 | 2.35 | 1.05 | 4.33 | 0.548 |
| 18.427 | 0.000 | 2.23 | 1.00 | 4.11 | 0.519 |

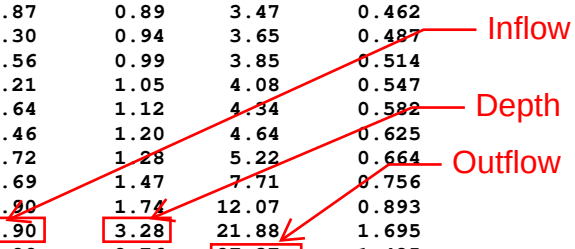

| | | | | | |
|---|---|---|---|---|---|
| 18.613 | 0.000 | 2.12 | 0.95 | 3.89 | 0.492 |
| 18.800 | 0.000 | 2.03 | 0.90 | 3.69 | 0.466 |
| 18.987 | 0.000 | 1.94 | 0.85 | 3.50 | 0.442 |
| 19.173 | 0.000 | 1.87 | 0.81 | 3.32 | 0.420 |
| 19.360 | 0.000 | 1.80 | 0.77 | 3.15 | 0.399 |
| 19.547 | 0.000 | 1.73 | 0.73 | 3.00 | 0.380 |
| 19.733 | 0.000 | 1.68 | 0.70 | 2.85 | 0.362 |
| 19.920 | 0.000 | 1.62 | 0.66 | 2.72 | 0.345 |
| 20.107 | 0.000 | 1.58 | 0.63 | 2.59 | 0.329 |
| 20.293 | 0.000 | 1.53 | 0.60 | 2.48 | 0.314 |
| 20.480 | 0.000 | 1.49 | 0.58 | 2.37 | 0.301 |
| 20.667 | 0.000 | 1.45 | 0.55 | 2.27 | 0.288 |
| 20.853 | 0.000 | 1.41 | 0.53 | 2.17 | 0.277 |
| 21.040 | 0.000 | 1.38 | 0.51 | 2.09 | 0.266 |
| 21.227 | 0.000 | 1.35 | 0.49 | 2.01 | 0.256 |
| 21.413 | 0.000 | 1.32 | 0.47 | 1.93 | 0.246 |
| 21.600 | 0.000 | 1.29 | 0.46 | 1.86 | 0.237 |
| 21.787 | 0.000 | 1.26 | 0.44 | 1.79 | 0.229 |
| 21.973 | 0.000 | 1.24 | 0.43 | 1.73 | 0.222 |
| 22.160 | 0.000 | 1.21 | 0.41 | 1.68 | 0.214 |
| 22.347 | 0.000 | 1.19 | 0.40 | 1.62 | 0.208 |
| 22.533 | 0.000 | 1.17 | 0.39 | 1.57 | 0.201 |
| 22.720 | 0.000 | 1.15 | 0.38 | 1.53 | 0.196 |
| 22.907 | 0.000 | 1.13 | 0.37 | 1.48 | 0.190 |
| 23.093 | 0.000 | 1.11 | 0.36 | 1.44 | 0.185 |
| 23.280 | 0.000 | 1.09 | 0.35 | 1.40 | 0.180 |
| 23.467 | 0.000 | 1.07 | 0.34 | 1.37 | 0.176 |
| 23.653 | 0.000 | 1.06 | 0.33 | 1.33 | 0.171 |
| 23.840 | 0.000 | 1.04 | 0.32 | 1.30 | 0.167 |
| 24.027 | 0.000 | 1.02 | 0.31 | 1.27 | 0.163 |
| 24.213 | 0.000 | 0.00 | 0.28 | 1.19 | 0.145 |
| 24.400 | 0.000 | 0.00 | 0.25 | 1.05 | 0.129 |
| 24.587 | 0.000 | 0.00 | 0.22 | 0.94 | 0.114 |
| 24.773 | 0.000 | 0.00 | 0.20 | 0.83 | 0.102 |
| 24.960 | 0.000 | 0.00 | 0.17 | 0.74 | 0.090 |
| 25.147 | 0.000 | 0.00 | 0.15 | 0.65 | 0.080 |
| 25.333 | 0.000 | 0.00 | 0.14 | 0.58 | 0.071 |
| 25.520 | 0.000 | 0.00 | 0.12 | 0.52 | 0.063 |
| 25.707 | 0.000 | 0.00 | 0.11 | 0.46 | 0.056 |
| 25.893 | 0.000 | 0.00 | 0.10 | 0.41 | 0.050 |
| 26.080 | 0.000 | 0.00 | 0.09 | 0.36 | 0.044 |
| 26.267 | 0.000 | 0.00 | 0.08 | 0.32 | 0.039 |
| 26.453 | 0.000 | 0.00 | 0.07 | 0.29 | 0.035 |
| 26.640 | 0.000 | 0.00 | 0.06 | 0.25 | 0.031 |
| 26.827 | 0.000 | 0.00 | 0.05 | 0.22 | 0.027 |
| 27.013 | 0.000 | 0.00 | 0.05 | 0.20 | 0.024 |
| 27.200 | 0.000 | 0.00 | 0.04 | 0.18 | 0.022 |
| 27.387 | 0.000 | 0.00 | 0.04 | 0.16 | 0.019 |
| 27.573 | 0.000 | 0.00 | 0.03 | 0.14 | 0.017 |
| 27.760 | 0.000 | 0.00 | 0.03 | 0.12 | 0.015 |
| 27.947 | 0.000 | 0.00 | 0.03 | 0.11 | 0.013 |
| 28.133 | 0.000 | 0.00 | 0.02 | 0.10 | 0.012 |
| 28.320 | 0.000 | 0.00 | 0.02 | 0.09 | 0.011 |
| 28.507 | 0.000 | 0.00 | 0.02 | 0.08 | 0.009 |
| 28.693 | 0.000 | 0.00 | 0.02 | 0.07 | 0.008 |
| 28.880 | 0.000 | 0.00 | 0.01 | 0.06 | 0.007 |
| 29.067 | 0.000 | 0.00 | 0.01 | 0.05 | 0.007 |
| 29.253 | 0.000 | 0.00 | 0.01 | 0.05 | 0.006 |
| 29.440 | 0.000 | 0.00 | 0.01 | 0.04 | 0.005 |
| 29.627 | 0.000 | 0.00 | 0.01 | 0.04 | 0.005 |
| 29.813 | 0.000 | 0.00 | 0.01 | 0.03 | 0.004 |
| 30.000 | 0.000 | 0.00 | 0.01 | 0.03 | 0.004 |
| 30.187 | 0.000 | 0.00 | 0.01 | 0.03 | 0.003 |
| 30.373 | 0.000 | 0.00 | 0.01 | 0.02 | 0.003 |
| 30.560 | 0.000 | 0.00 | 0.00 | 0.02 | 0.003 |
| 30.747 | 0.000 | 0.00 | 0.00 | 0.02 | 0.002 |
| 30.933 | 0.000 | 0.00 | 0.00 | 0.02 | 0.002 |
| 31.120 | 0.000 | 0.00 | 0.00 | 0.01 | 0.002 |
| 31.307 | 0.000 | 0.00 | 0.00 | 0.01 | 0.002 |

| | | | | | |
|---|---|---|---|---|---|
| 31.493 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 31.680 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 31.867 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 32.053 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |

```
**************************************************************************
          NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
                AND LOW LOSS FRACTION ESTIMATIONS
==========================================================================
        (C) Copyright 1989-2016 Advanced Engineering Software (aes)
            Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                        Analysis prepared by:




**************************************************************************
--------------------------------------------------------------------------

 Problem Descriptions:
  Gateway Hydrograph
  Proposed Condition
  25-year storm event
```

WATERSHED 'E'

```
==========================================================================
*** NON-HOMOGENEOUS WATERSHED AREA-AVERAGED LOSS RATE (Fm)
    AND LOW LOSS FRACTION ESTIMATIONS FOR AMC II:

    TOTAL 24-HOUR DURATION RAINFALL DEPTH =     4.49 (inches)
```

| SOIL-COVER TYPE | AREA (Acres) | PERCENT OF PERVIOUS AREA | SCS CURVE NUMBER | LOSS RATE Fp(in./hr.) | YIELD |
|---|---|---|---|---|---|
| 1 | 6.90 | 35.00 | 32. | 0.400 | 0.616 |
| 2 | 11.10 | 35.00 | 56. | 0.300 | 0.677 |
| 3 | 33.60 | 35.00 | 69. | 0.250 | 0.740 |
| 4 | 1.70 | 10.00 | 32. | 0.400 | 0.853 |
| 5 | 1.00 | 10.00 | 56. | 0.300 | 0.870 |
| 6 | 5.30 | 10.00 | 69. | 0.250 | 0.888 |
| 7 | 3.60 | 100.00 | 80. | 0.250 | 0.546 |
| 8 | 1.40 | 85.00 | 69. | 0.250 | 0.444 |

```
    TOTAL AREA (Acres) =     64.60

    AREA-AVERAGED LOSS RATE, Fm (in./hr.) =  0.101

    AREA-AVERAGED LOW LOSS FRACTION, Y = 0.284
==========================================================================

 Problem Descriptions:
  Gateway Hydrograph
  Proposed Condition (calibration coefficient: 0.86165)
  25-year storm event
--------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.86
    TOTAL CATCHMENT AREA(ACRES) =   64.60
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.101
    LOW LOSS FRACTION = 0.284
    TIME OF CONCENTRATION(MIN.) = 10.20
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =  25
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.87
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  1.15
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  1.94
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  2.71
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  4.49

--------------------------------------------------------------------------
```

```
**************************************************************************
                    SMALL AREA UNIT HYDROGRAPH MODEL
==========================================================================
         (C) Copyright 1989-2016 Advanced Engineering Software (aes)
             Ver. 23.0  Release Date: 07/01/2016  License ID 1355

                          Analysis prepared by:




**************************************************************************
--------------------------------------------------------------------------

 Problem Descriptions:
  Gateway Flood Hydrograph Routing
  Proposed Condition (calib coef: 0.86165)
  25-year storm event
--------------------------------------------------------------------------


    RATIONAL METHOD CALIBRATION COEFFICIENT = 0.86
    TOTAL CATCHMENT AREA(ACRES) =   64.60
    SOIL-LOSS RATE, Fm,(INCH/HR) =  0.101
    LOW LOSS FRACTION = 0.284
    TIME OF CONCENTRATION(MIN.) = 10.20
    SMALL AREA PEAK Q COMPUTED USING PEAK FLOW RATE FORMULA
    ORANGE COUNTY "VALLEY" RAINFALL VALUES ARE USED
    RETURN FREQUENCY(YEARS) =  25
       5-MINUTE POINT RAINFALL VALUE(INCHES) =  0.40
      30-MINUTE POINT RAINFALL VALUE(INCHES) =  0.87
       1-HOUR   POINT RAINFALL VALUE(INCHES) =  1.15
       3-HOUR   POINT RAINFALL VALUE(INCHES) =  1.94
       6-HOUR   POINT RAINFALL VALUE(INCHES) =  2.71
      24-HOUR   POINT RAINFALL VALUE(INCHES) =  4.49

--------------------------------------------------------------------------

    TOTAL CATCHMENT   RUNOFF  VOLUME(ACRE-FEET) =    15.98
    TOTAL CATCHMENT SOIL-LOSS VOLUME(ACRE-FEET) =     8.19

**************************************************************************
  TIME     VOLUME       Q    0.       45.0      90.0     135.0     180.0
 (HOURS)    (AF)      (CFS)
--------------------------------------------------------------------------
  0.02      0.0000      0.00  Q         .         .         .         .
  0.19      0.0191      2.72  Q         .         .         .         .
  0.36      0.0575      2.74  Q         .         .         .         .
  0.53      0.0961      2.76  Q         .         .         .         .
  0.70      0.1350      2.77  Q         .         .         .         .
  0.87      0.1742      2.80  Q         .         .         .         .
  1.04      0.2136      2.81  Q         .         .         .         .
  1.21      0.2533      2.84  Q         .         .         .         .
  1.38      0.2933      2.85  Q         .         .         .         .
  1.55      0.3336      2.88  Q         .         .         .         .
  1.72      0.3743      2.90  Q         .         .         .         .
  1.89      0.4152      2.93  Q         .         .         .         .
  2.06      0.4564      2.94  Q         .         .         .         .
  2.23      0.4979      2.97  Q         .         .         .         .
  2.40      0.5398      2.99  Q         .         .         .         .
  2.57      0.5820      3.02  Q         .         .         .         .
  2.74      0.6245      3.04  Q         .         .         .         .
  2.91      0.6674      3.07  Q         .         .         .         .
  3.08      0.7106      3.09  Q         .         .         .         .
  3.25      0.7542      3.12  Q         .         .         .         .
  3.42      0.7982      3.14  Q         .         .         .         .
```

WATERSHED 'E'

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 3.59 | 0.8425 | 3.17 | Q | . | . | . | . |
| 3.76 | 0.8872 | 3.19 | Q | . | . | . | . |
| 3.93 | 0.9323 | 3.23 | Q | . | . | . | . |
| 4.10 | 0.9778 | 3.25 | Q | . | . | . | . |
| 4.27 | 1.0237 | 3.29 | Q | . | . | . | . |
| 4.44 | 1.0701 | 3.31 | Q | . | . | . | . |
| 4.61 | 1.1168 | 3.35 | Q | . | . | . | . |
| 4.78 | 1.1640 | 3.37 | Q | . | . | . | . |
| 4.95 | 1.2117 | 3.41 | Q | . | . | . | . |
| 5.12 | 1.2598 | 3.44 | Q | . | . | . | . |
| 5.29 | 1.3084 | 3.48 | Q | . | . | . | . |
| 5.46 | 1.3575 | 3.51 | Q | . | . | . | . |
| 5.63 | 1.4071 | 3.55 | Q | . | . | . | . |
| 5.80 | 1.4572 | 3.58 | Q | . | . | . | . |
| 5.97 | 1.5078 | 3.63 | Q | . | . | . | . |
| 6.14 | 1.5590 | 3.65 | Q | . | . | . | . |
| 6.31 | 1.6107 | 3.71 | Q | . | . | . | . |
| 6.48 | 1.6630 | 3.74 | Q | . | . | . | . |
| 6.65 | 1.7159 | 3.79 | Q | . | . | . | . |
| 6.82 | 1.7693 | 3.82 | Q | . | . | . | . |
| 6.99 | 1.8234 | 3.88 | Q | . | . | . | . |
| 7.16 | 1.8782 | 3.91 | Q | . | . | . | . |
| 7.33 | 1.9336 | 3.98 | Q | . | . | . | . |
| 7.50 | 1.9897 | 4.01 | Q | . | . | . | . |
| 7.67 | 2.0465 | 4.08 | Q | . | . | . | . |
| 7.84 | 2.1040 | 4.11 | Q | . | . | . | . |
| 8.01 | 2.1623 | 4.19 | Q | . | . | . | . |
| 8.18 | 2.2214 | 4.22 | Q | . | . | . | . |
| 8.35 | 2.2813 | 4.30 | Q | . | . | . | . |
| 8.52 | 2.3420 | 4.34 | Q | . | . | . | . |
| 8.69 | 2.4036 | 4.42 | Q | . | . | . | . |
| 8.86 | 2.4660 | 4.47 | Q | . | . | . | . |
| 9.03 | 2.5294 | 4.56 | .Q | . | . | . | . |
| 9.20 | 2.5938 | 4.61 | .Q | . | . | . | . |
| 9.37 | 2.6592 | 4.70 | .Q | . | . | . | . |
| 9.54 | 2.7257 | 4.75 | .Q | . | . | . | . |
| 9.71 | 2.7932 | 4.86 | .Q | . | . | . | . |
| 9.88 | 2.8619 | 4.92 | .Q | . | . | . | . |
| 10.05 | 2.9318 | 5.03 | .Q | . | . | . | . |
| 10.22 | 3.0029 | 5.09 | .Q | . | . | . | . |
| 10.39 | 3.0754 | 5.22 | .Q | . | . | . | . |
| 10.56 | 3.1492 | 5.29 | .Q | . | . | . | . |
| 10.73 | 3.2245 | 5.43 | .Q | . | . | . | . |
| 10.90 | 3.3013 | 5.50 | .Q | . | . | . | . |
| 11.07 | 3.3797 | 5.66 | .Q | . | . | . | . |
| 11.24 | 3.4597 | 5.74 | .Q | . | . | . | . |
| 11.41 | 3.5416 | 5.91 | .Q | . | . | . | . |
| 11.58 | 3.6254 | 6.01 | .Q | . | . | . | . |
| 11.75 | 3.7111 | 6.20 | .Q | . | . | . | . |
| 11.92 | 3.7990 | 6.31 | .Q | . | . | . | . |
| 12.09 | 3.8936 | 7.16 | .Q | . | . | . | . |
| 12.26 | 4.0056 | 8.78 | .Q | . | . | . | . |
| 12.43 | 4.1310 | 9.06 | . Q | . | . | . | . |
| 12.60 | 4.2593 | 9.21 | . Q | . | . | . | . |
| 12.77 | 4.3909 | 9.53 | . Q | . | . | . | . |
| 12.94 | 4.5259 | 9.70 | . Q | . | . | . | . |
| 13.11 | 4.6648 | 10.07 | . Q | . | . | . | . |
| 13.28 | 4.8077 | 10.27 | . Q | . | . | . | . |
| 13.45 | 4.9551 | 10.72 | . Q | . | . | . | . |
| 13.62 | 5.1074 | 10.96 | . Q | . | . | . | . |
| 13.79 | 5.2652 | 11.50 | . Q | . | . | . | . |
| 13.96 | 5.4289 | 11.80 | . Q | . | . | . | . |
| 14.13 | 5.5988 | 12.38 | . Q | . | . | . | . |
| 14.30 | 5.7750 | 12.71 | . Q | . | . | . | . |
| 14.47 | 5.9598 | 13.60 | . Q | . | . | . | . |
| 14.64 | 6.1545 | 14.12 | . Q | . | . | . | . |
| 14.81 | 6.3649 | 15.83 | . Q | . | . | . | . |
| 14.98 | 6.5946 | 16.88 | . Q | . | . | . | . |
| 15.15 | 6.8502 | 19.51 | . Q | . | . | . | . |

| | | | |
|---|---|---|---|
| 15.32 | 7.1364 | 21.22 | . Q . . . . |
| 15.49 | 7.4385 | 21.79 | . Q . . . . |
| 15.66 | 7.7649 | 24.68 | . Q . . . . |
| 15.83 | 8.2230 | 40.53 | . Q. . . . |
| 16.00 | 8.9077 | 56.94 | . . Q . . . |
| 16.17 | 10.5217 | 172.80 | . . . . Q . |
| 16.34 | 11.9437 | 29.63 | . Q . . . . |
| 16.51 | 12.3157 | 23.32 | . Q . . . . |
| 16.68 | 12.6065 | 18.09 | . Q . . . . |
| 16.85 | 12.8383 | 14.91 | . Q . . . . |
| 17.02 | 13.0353 | 13.13 | . Q . . . . |
| 17.19 | 13.2128 | 12.13 | . Q . . . . |
| 17.36 | 13.3768 | 11.22 | . Q . . . . |
| 17.53 | 13.5293 | 10.49 | . Q . . . . |
| 17.70 | 13.6724 | 9.88 | . Q . . . . |
| 17.87 | 13.8075 | 9.36 | . Q . . . . |
| 18.04 | 13.9360 | 8.92 | .Q . . . . |
| 18.21 | 14.0437 | 6.42 | .Q . . . . |
| 18.38 | 14.1317 | 6.10 | .Q . . . . |
| 18.55 | 14.2155 | 5.83 | .Q . . . . |
| 18.72 | 14.2956 | 5.58 | .Q . . . . |
| 18.89 | 14.3724 | 5.36 | .Q . . . . |
| 19.06 | 14.4462 | 5.16 | .Q . . . . |
| 19.23 | 14.5174 | 4.97 | .Q . . . . |
| 19.40 | 14.5861 | 4.81 | .Q . . . . |
| 19.57 | 14.6526 | 4.65 | .Q . . . . |
| 19.74 | 14.7170 | 4.51 | .Q . . . . |
| 19.91 | 14.7795 | 4.38 | Q . . . . |
| 20.08 | 14.8402 | 4.26 | Q . . . . |
| 20.25 | 14.8993 | 4.15 | Q . . . . |
| 20.42 | 14.9568 | 4.04 | Q . . . . |
| 20.59 | 15.0129 | 3.94 | Q . . . . |
| 20.76 | 15.0677 | 3.85 | Q . . . . |
| 20.93 | 15.1212 | 3.76 | Q . . . . |
| 21.10 | 15.1735 | 3.68 | Q . . . . |
| 21.27 | 15.2246 | 3.60 | Q . . . . |
| 21.44 | 15.2747 | 3.53 | Q . . . . |
| 21.61 | 15.3238 | 3.46 | Q . . . . |
| 21.78 | 15.3719 | 3.39 | Q . . . . |
| 21.95 | 15.4191 | 3.33 | Q . . . . |
| 22.12 | 15.4655 | 3.27 | Q . . . . |
| 22.29 | 15.5110 | 3.21 | Q . . . . |
| 22.46 | 15.5557 | 3.16 | Q . . . . |
| 22.63 | 15.5997 | 3.10 | Q . . . . |
| 22.80 | 15.6429 | 3.05 | Q . . . . |
| 22.97 | 15.6854 | 3.00 | Q . . . . |
| 23.14 | 15.7273 | 2.96 | Q . . . . |
| 23.31 | 15.7685 | 2.91 | Q . . . . |
| 23.48 | 15.8091 | 2.87 | Q . . . . |
| 23.65 | 15.8492 | 2.83 | Q . . . . |
| 23.82 | 15.8886 | 2.79 | Q . . . . |
| 23.99 | 15.9275 | 2.75 | Q . . . . |
| 24.16 | 15.9659 | 2.72 | Q . . . . |
| 24.33 | 15.9850 | 0.00 | Q . . . . |

**TIME DURATION(minutes) OF PERCENTILES OF ESTIMATED PEAK FLOW RATE:**
**(Note: 100% of Peak Flow Rate estimate assumed to have an instantaneous time duration)**


| Percentile of Estimated Peak Flow Rate | Duration (minutes) |
|---|---|
| 0% | 1448.4 |
| 10% | 102.0 |
| 20% | 30.6 |
| 30% | 20.4 |
| 40% | 10.2 |
| 50% | 10.2 |

```
              60%                              10.2
              70%                              10.2
              80%                              10.2
              90%                              10.2

  Problem Descriptions:
   Gateway Flood Hydrograph Routing
   Proposed Condition (calib coef: 0.86165)
   25-year storm event


================================================================================
     FLOW-THROUGH DETENTION BASIN MODEL

     SPECIFIED BASIN CONDITIONS ARE AS FOLLOWS:
     CONSTANT HYDROGRAPH TIME UNIT(MINUTES) =   10.200
     DEAD STORAGE(AF) =       0.00
     SPECIFIED DEAD STORAGE(AF) FILLED =       0.00
     ASSUMED INITIAL DEPTH(FEET) IN STORAGE BASIN =    0.00
```

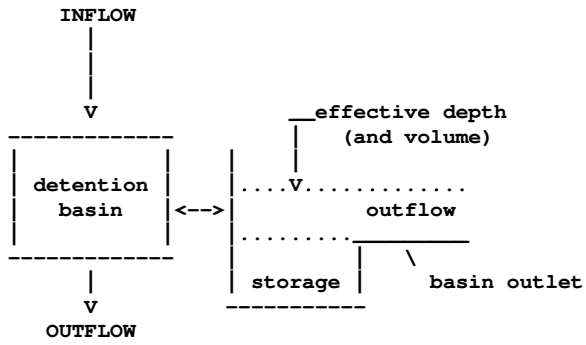


150' x 150' footprint
(7' depth)

```
     DEPTH-VS.-STORAGE AND DEPTH-VS.-DISCHARGE INFORMATION:
     TOTAL NUMBER OF BASIN DEPTH INFORMATION ENTRIES =  20
     *BASIN-DEPTH   STORAGE    OUTFLOW  **BASIN-DEPTH   STORAGE    OUTFLOW  *
     *    (FEET)  (ACRE-FEET)    (CFS)   **    (FEET)  (ACRE-FEET)    (CFS)   *
     *       0.000      0.000      0.000**       0.250      0.130      1.000*
     *       0.500      0.260      2.000**       0.750      0.390      3.000*
     *       1.000      0.520      4.000**       1.250      0.650      5.000*
     *       1.500      0.770     10.400**       1.750      0.900     14.600*
     *       2.000      1.030     17.900**       2.250      1.160     20.700*
     *       2.500      1.290     23.100**       3.000      1.550     27.400*
     *       3.500      1.810     31.000**       4.000      2.070     36.300*
     *       4.500      2.320     41.800**       5.000      2.580     49.500*
     *       5.500      2.840     55.900**       6.000      3.100     61.300*
     *       6.500      3.360     66.100**       7.000      3.620     70.500*
--------------------------------------------------------------------------------
     BASIN STORAGE, OUTFLOW AND DEPTH ROUTING VALUES:
      INTERVAL   DEPTH    {S-O*DT/2}   {S+O*DT/2}
       NUMBER   (FEET)   (ACRE-FEET)  (ACRE-FEET)
           1     0.00       0.00000      0.00000
           2     0.25       0.12298      0.13702
           3     0.50       0.24595      0.27405
           4     0.75       0.36893      0.41107
           5     1.00       0.49190      0.54810
           6     1.25       0.61488      0.68512
           7     1.50       0.69694      0.84306
           8     1.75       0.79744      1.00256
           9     2.00       0.90426      1.15574
          10     2.25       1.01459      1.30541
          11     2.50       1.12773      1.45227
          12     3.00       1.35752      1.74248
          13     3.50       1.59223      2.02777
```

| | | | |
|---|---|---|---|
| 14 | 4.00 | 1.81500 | 2.32500 |
| 15 | 4.50 | 2.02636 | 2.61364 |
| 16 | 5.00 | 2.23227 | 2.92773 |
| 17 | 5.50 | 2.44731 | 3.23269 |
| 18 | 6.00 | 2.66938 | 3.53062 |
| 19 | 6.50 | 2.89566 | 3.82434 |
| 20 | 7.00 | 3.12475 | 4.11525 |


WHERE S=STORAGE(AF);O=OUTFLOW(AF/MIN.);DT=UNIT INTERVAL(MIN.)

DETENTION BASIN ROUTING RESULTS:

NOTE: COMPUTED BASIN DEPTH, OUTFLOW, AND STORAGE QUANTITIES OCCUR AT THE GIVEN TIME. BASIN INFLOW VALUES REPRESENT THE AVERAGE INFLOW DURING THE RECENT HYDROGRAPH UNIT INTERVAL.

| TIME (HRS) | DEAD-STORAGE FILLED(AF) | INFLOW (CFS) | EFFECTIVE DEPTH(FT) | OUTFLOW (CFS) | EFFECTIVE VOLUME(AF) |
|---|---|---|---|---|---|
| 0.020 | 0.000 | 0.00 | 0.00 | 0.00 | 0.000 |
| 0.190 | 0.000 | 2.72 | 0.07 | 0.14 | 0.036 |
| 0.360 | 0.000 | 2.74 | 0.13 | 0.41 | 0.069 |
| 0.530 | 0.000 | 2.76 | 0.19 | 0.65 | 0.099 |
| 0.700 | 0.000 | 2.77 | 0.24 | 0.86 | 0.126 |
| 0.870 | 0.000 | 2.80 | 0.29 | 1.06 | 0.150 |
| 1.040 | 0.000 | 2.81 | 0.33 | 1.24 | 0.172 |
| 1.210 | 0.000 | 2.84 | 0.37 | 1.40 | 0.192 |
| 1.380 | 0.000 | 2.85 | 0.41 | 1.55 | 0.211 |
| 1.550 | 0.000 | 2.88 | 0.44 | 1.69 | 0.228 |
| 1.720 | 0.000 | 2.90 | 0.47 | 1.81 | 0.243 |
| 1.890 | 0.000 | 2.93 | 0.49 | 1.92 | 0.257 |
| 2.060 | 0.000 | 2.94 | 0.52 | 2.03 | 0.270 |
| 2.230 | 0.000 | 2.97 | 0.54 | 2.12 | 0.282 |
| 2.400 | 0.000 | 2.99 | 0.56 | 2.21 | 0.293 |
| 2.570 | 0.000 | 3.02 | 0.58 | 2.29 | 0.303 |
| 2.740 | 0.000 | 3.04 | 0.60 | 2.37 | 0.312 |
| 2.910 | 0.000 | 3.07 | 0.62 | 2.44 | 0.321 |
| 3.080 | 0.000 | 3.09 | 0.63 | 2.50 | 0.329 |
| 3.250 | 0.000 | 3.12 | 0.65 | 2.56 | 0.337 |
| 3.420 | 0.000 | 3.14 | 0.66 | 2.62 | 0.344 |
| 3.590 | 0.000 | 3.17 | 0.68 | 2.68 | 0.351 |
| 3.760 | 0.000 | 3.19 | 0.69 | 2.73 | 0.358 |
| 3.930 | 0.000 | 3.23 | 0.70 | 2.78 | 0.364 |
| 4.100 | 0.000 | 3.25 | 0.71 | 2.83 | 0.370 |
| 4.270 | 0.000 | 3.29 | 0.72 | 2.87 | 0.376 |
| 4.440 | 0.000 | 3.31 | 0.73 | 2.91 | 0.382 |
| 4.610 | 0.000 | 3.35 | 0.74 | 2.96 | 0.387 |
| 4.780 | 0.000 | 3.37 | 0.75 | 3.00 | 0.392 |
| 4.950 | 0.000 | 3.41 | 0.76 | 3.04 | 0.398 |
| 5.120 | 0.000 | 3.44 | 0.77 | 3.08 | 0.403 |
| 5.290 | 0.000 | 3.48 | 0.78 | 3.12 | 0.408 |
| 5.460 | 0.000 | 3.51 | 0.79 | 3.16 | 0.413 |
| 5.630 | 0.000 | 3.55 | 0.80 | 3.19 | 0.418 |
| 5.800 | 0.000 | 3.58 | 0.81 | 3.23 | 0.423 |
| 5.970 | 0.000 | 3.63 | 0.82 | 3.27 | 0.428 |
| 6.140 | 0.000 | 3.65 | 0.83 | 3.31 | 0.433 |
| 6.310 | 0.000 | 3.71 | 0.84 | 3.35 | 0.438 |
| 6.480 | 0.000 | 3.74 | 0.85 | 3.38 | 0.443 |
| 6.650 | 0.000 | 3.79 | 0.86 | 3.42 | 0.448 |
| 6.820 | 0.000 | 3.82 | 0.87 | 3.46 | 0.453 |
| 6.990 | 0.000 | 3.88 | 0.88 | 3.50 | 0.458 |
| 7.160 | 0.000 | 3.91 | 0.89 | 3.54 | 0.463 |
| 7.330 | 0.000 | 3.98 | 0.90 | 3.58 | 0.469 |
| 7.500 | 0.000 | 4.01 | 0.91 | 3.63 | 0.474 |
| 7.670 | 0.000 | 4.08 | 0.92 | 3.67 | 0.480 |
| 7.840 | 0.000 | 4.11 | 0.93 | 3.71 | 0.485 |
| 8.010 | 0.000 | 4.19 | 0.95 | 3.76 | 0.491 |
| 8.180 | 0.000 | 4.22 | 0.96 | 3.80 | 0.497 |
| 8.350 | 0.000 | 4.30 | 0.97 | 3.85 | 0.504 |
| 8.520 | 0.000 | 4.34 | 0.98 | 3.90 | 0.510 |
| 8.690 | 0.000 | 4.42 | 0.99 | 3.95 | 0.517 |

| | | | | | |
|---|---|---|---|---|---|
| 8.860 | 0.000 | 4.47 | 1.01 | 4.00 | 0.523 |
| 9.030 | 0.000 | 4.56 | 1.02 | 4.05 | 0.530 |
| 9.200 | 0.000 | 4.61 | 1.03 | 4.11 | 0.537 |
| 9.370 | 0.000 | 4.70 | 1.05 | 4.16 | 0.545 |
| 9.540 | 0.000 | 4.75 | 1.06 | 4.22 | 0.552 |
| 9.710 | 0.000 | 4.86 | 1.08 | 4.28 | 0.561 |
| 9.880 | 0.000 | 4.92 | 1.09 | 4.34 | 0.569 |
| 10.050 | 0.000 | 5.03 | 1.11 | 4.41 | 0.577 |
| 10.220 | 0.000 | 5.09 | 1.13 | 4.48 | 0.586 |
| 10.390 | 0.000 | 5.22 | 1.15 | 4.55 | 0.596 |
| 10.560 | 0.000 | 5.29 | 1.16 | 4.62 | 0.605 |
| 10.730 | 0.000 | 5.43 | 1.18 | 4.69 | 0.615 |
| 10.900 | 0.000 | 5.50 | 1.20 | 4.77 | 0.626 |
| 11.070 | 0.000 | 5.66 | 1.22 | 4.86 | 0.637 |
| 11.240 | 0.000 | 5.74 | 1.25 | 4.94 | 0.648 |
| 11.410 | 0.000 | 5.91 | 1.27 | 5.18 | 0.658 |
| 11.580 | 0.000 | 6.01 | 1.28 | 5.53 | 0.665 |
| 11.750 | 0.000 | 6.20 | 1.29 | 5.81 | 0.671 |
| 11.920 | 0.000 | 6.31 | 1.30 | 6.02 | 0.675 |
| 12.090 | 0.000 | 7.16 | 1.32 | 6.36 | 0.686 |
| 12.260 | 0.000 | 8.78 | 1.37 | 7.14 | 0.709 |
| 12.430 | 0.000 | 9.06 | 1.40 | 7.99 | 0.724 |
| 12.600 | 0.000 | 9.21 | 1.42 | 8.54 | 0.733 |
| 12.770 | 0.000 | 9.53 | 1.44 | 8.94 | 0.742 |
| 12.940 | 0.000 | 9.70 | 1.45 | 9.26 | 0.748 |
| 13.110 | 0.000 | 10.07 | 1.47 | 9.56 | 0.755 |
| 13.280 | 0.000 | 10.27 | 1.48 | 9.85 | 0.761 |
| 13.450 | 0.000 | 10.72 | 1.50 | 10.16 | 0.769 |
| 13.620 | 0.000 | 10.96 | 1.51 | 10.46 | 0.776 |
| 13.790 | 0.000 | 11.50 | 1.53 | 10.75 | 0.786 |
| 13.960 | 0.000 | 11.80 | 1.55 | 11.09 | 0.796 |
| 14.130 | 0.000 | 12.38 | 1.58 | 11.46 | 0.809 |
| 14.300 | 0.000 | 12.71 | 1.60 | 11.86 | 0.821 |
| 14.470 | 0.000 | 13.60 | 1.63 | 12.34 | 0.839 |
| 14.640 | 0.000 | 14.12 | 1.67 | 12.90 | 0.856 |
| 14.810 | 0.000 | 15.83 | 1.72 | 13.67 | 0.886 |
| 14.980 | 0.000 | 16.88 | 1.78 | 14.61 | 0.918 |
| 15.150 | 0.000 | 19.51 | 1.89 | 15.73 | 0.971 |
| 15.320 | 0.000 | 21.22 | 2.00 | 17.14 | 1.029 |
| 15.490 | 0.000 | 21.79 | 2.09 | 18.38 | 1.076 |
| 15.660 | 0.000 | 24.68 | 2.22 | 19.66 | 1.147 |
| 15.830 | 0.000 | 40.53 | 2.71 | 22.65 | 1.398 |
| 16.000 | 0.000 | 56.94 | 3.49 | 27.92 | 1.806 |
| 16.170 | 0.000 | 172.80 | 6.83 | 49.97 | 3.532 |
| 16.340 | 0.000 | 29.63 | 5.89 | 64.54 | 3.041 |
| 16.510 | 0.000 | 23.32 | 5.03 | 54.99 | 2.596 |
| 16.680 | 0.000 | 18.09 | 4.30 | 44.76 | 2.221 |
| 16.850 | 0.000 | 14.91 | 3.71 | 36.43 | 1.919 |
| 17.020 | 0.000 | 13.13 | 3.22 | 31.12 | 1.666 |
| 17.190 | 0.000 | 12.13 | 2.81 | 27.39 | 1.452 |
| 17.360 | 0.000 | 11.22 | 2.46 | 24.24 | 1.269 |
| 17.530 | 0.000 | 10.49 | 2.17 | 21.25 | 1.118 |
| 17.700 | 0.000 | 9.88 | 1.94 | 18.43 | 0.998 |
| 17.870 | 0.000 | 9.36 | 1.76 | 15.91 | 0.906 |
| 18.040 | 0.000 | 8.92 | 1.63 | 13.68 | 0.839 |
| 18.210 | 0.000 | 6.42 | 1.50 | 11.46 | 0.768 |
| 18.380 | 0.000 | 6.10 | 1.40 | 9.29 | 0.723 |
| 18.550 | 0.000 | 5.83 | 1.35 | 7.69 | 0.697 |
| 18.720 | 0.000 | 5.58 | 1.31 | 6.74 | 0.680 |
| 18.890 | 0.000 | 5.36 | 1.29 | 6.13 | 0.670 |
| 19.060 | 0.000 | 5.16 | 1.27 | 5.71 | 0.662 |
| 19.230 | 0.000 | 4.97 | 1.26 | 5.40 | 0.656 |
| 19.400 | 0.000 | 4.81 | 1.25 | 5.16 | 0.651 |
| 19.570 | 0.000 | 4.65 | 1.24 | 5.01 | 0.646 |
| 19.740 | 0.000 | 4.51 | 1.23 | 4.95 | 0.640 |
| 19.910 | 0.000 | 4.38 | 1.22 | 4.90 | 0.633 |
| 20.080 | 0.000 | 4.26 | 1.20 | 4.84 | 0.625 |
| 20.250 | 0.000 | 4.15 | 1.18 | 4.77 | 0.616 |
| 20.420 | 0.000 | 4.04 | 1.17 | 4.70 | 0.607 |

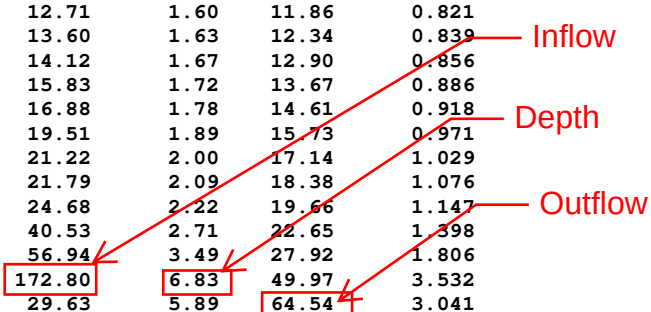

| | | | | | |
|---|---|---|---|---|---|
| 20.590 | 0.000 | 3.94 | 1.15 | 4.63 | 0.597 |
| 20.760 | 0.000 | 3.85 | 1.13 | 4.55 | 0.587 |
| 20.930 | 0.000 | 3.76 | 1.11 | 4.48 | 0.577 |
| 21.100 | 0.000 | 3.68 | 1.09 | 4.40 | 0.567 |
| 21.270 | 0.000 | 3.60 | 1.07 | 4.32 | 0.557 |
| 21.440 | 0.000 | 3.53 | 1.05 | 4.25 | 0.547 |
| 21.610 | 0.000 | 3.46 | 1.03 | 4.17 | 0.537 |
| 21.780 | 0.000 | 3.39 | 1.01 | 4.09 | 0.527 |
| 21.950 | 0.000 | 3.33 | 0.99 | 4.02 | 0.517 |
| 22.120 | 0.000 | 3.27 | 0.98 | 3.94 | 0.508 |
| 22.290 | 0.000 | 3.21 | 0.96 | 3.87 | 0.499 |
| 22.460 | 0.000 | 3.16 | 0.94 | 3.80 | 0.490 |
| 22.630 | 0.000 | 3.10 | 0.92 | 3.73 | 0.481 |
| 22.800 | 0.000 | 3.05 | 0.91 | 3.66 | 0.472 |
| 22.970 | 0.000 | 3.00 | 0.89 | 3.60 | 0.464 |
| 23.140 | 0.000 | 2.96 | 0.88 | 3.54 | 0.456 |
| 23.310 | 0.000 | 2.91 | 0.86 | 3.47 | 0.448 |
| 23.480 | 0.000 | 2.87 | 0.85 | 3.41 | 0.440 |
| 23.650 | 0.000 | 2.83 | 0.83 | 3.36 | 0.433 |
| 23.820 | 0.000 | 2.79 | 0.82 | 3.30 | 0.425 |
| 23.990 | 0.000 | 2.75 | 0.80 | 3.25 | 0.418 |
| 24.160 | 0.000 | 2.72 | 0.79 | 3.19 | 0.412 |
| 24.330 | 0.000 | 0.00 | 0.71 | 3.00 | 0.370 |
| 24.500 | 0.000 | 0.00 | 0.64 | 2.70 | 0.332 |
| 24.670 | 0.000 | 0.00 | 0.57 | 2.42 | 0.298 |
| 24.840 | 0.000 | 0.00 | 0.51 | 2.17 | 0.267 |
| 25.010 | 0.000 | 0.00 | 0.46 | 1.95 | 0.240 |
| 25.180 | 0.000 | 0.00 | 0.41 | 1.75 | 0.215 |
| 25.350 | 0.000 | 0.00 | 0.37 | 1.57 | 0.193 |
| 25.520 | 0.000 | 0.00 | 0.33 | 1.41 | 0.173 |
| 25.690 | 0.000 | 0.00 | 0.30 | 1.26 | 0.156 |
| 25.860 | 0.000 | 0.00 | 0.27 | 1.13 | 0.140 |
| 26.030 | 0.000 | 0.00 | 0.24 | 1.02 | 0.125 |
| 26.200 | 0.000 | 0.00 | 0.22 | 0.91 | 0.112 |
| 26.370 | 0.000 | 0.00 | 0.19 | 0.82 | 0.101 |
| 26.540 | 0.000 | 0.00 | 0.17 | 0.74 | 0.091 |
| 26.710 | 0.000 | 0.00 | 0.16 | 0.66 | 0.081 |
| 26.880 | 0.000 | 0.00 | 0.14 | 0.59 | 0.073 |
| 27.050 | 0.000 | 0.00 | 0.13 | 0.53 | 0.065 |
| 27.220 | 0.000 | 0.00 | 0.11 | 0.48 | 0.059 |
| 27.390 | 0.000 | 0.00 | 0.10 | 0.43 | 0.053 |
| 27.560 | 0.000 | 0.00 | 0.09 | 0.38 | 0.047 |
| 27.730 | 0.000 | 0.00 | 0.08 | 0.35 | 0.042 |
| 27.900 | 0.000 | 0.00 | 0.07 | 0.31 | 0.038 |
| 28.070 | 0.000 | 0.00 | 0.07 | 0.28 | 0.034 |
| 28.240 | 0.000 | 0.00 | 0.06 | 0.25 | 0.031 |
| 28.410 | 0.000 | 0.00 | 0.05 | 0.22 | 0.028 |
| 28.580 | 0.000 | 0.00 | 0.05 | 0.20 | 0.025 |
| 28.750 | 0.000 | 0.00 | 0.04 | 0.18 | 0.022 |
| 28.920 | 0.000 | 0.00 | 0.04 | 0.16 | 0.020 |
| 29.090 | 0.000 | 0.00 | 0.03 | 0.15 | 0.018 |
| 29.260 | 0.000 | 0.00 | 0.03 | 0.13 | 0.016 |
| 29.430 | 0.000 | 0.00 | 0.03 | 0.12 | 0.014 |
| 29.600 | 0.000 | 0.00 | 0.02 | 0.11 | 0.013 |
| 29.770 | 0.000 | 0.00 | 0.02 | 0.09 | 0.012 |
| 29.940 | 0.000 | 0.00 | 0.02 | 0.08 | 0.010 |
| 30.110 | 0.000 | 0.00 | 0.02 | 0.08 | 0.009 |
| 30.280 | 0.000 | 0.00 | 0.02 | 0.07 | 0.008 |
| 30.450 | 0.000 | 0.00 | 0.01 | 0.06 | 0.008 |
| 30.620 | 0.000 | 0.00 | 0.01 | 0.05 | 0.007 |
| 30.790 | 0.000 | 0.00 | 0.01 | 0.05 | 0.006 |
| 30.960 | 0.000 | 0.00 | 0.01 | 0.04 | 0.005 |
| 31.130 | 0.000 | 0.00 | 0.01 | 0.04 | 0.005 |
| 31.300 | 0.000 | 0.00 | 0.01 | 0.04 | 0.004 |
| 31.470 | 0.000 | 0.00 | 0.01 | 0.03 | 0.004 |
| 31.640 | 0.000 | 0.00 | 0.01 | 0.03 | 0.004 |
| 31.810 | 0.000 | 0.00 | 0.01 | 0.03 | 0.003 |
| 31.980 | 0.000 | 0.00 | 0.01 | 0.02 | 0.003 |
| 32.150 | 0.000 | 0.00 | 0.00 | 0.02 | 0.003 |

| | | | | | |
|---|---|---|---|---|---|
| 32.320 | 0.000 | 0.00 | 0.00 | 0.02 | 0.002 |
| 32.490 | 0.000 | 0.00 | 0.00 | 0.02 | 0.002 |
| 32.660 | 0.000 | 0.00 | 0.00 | 0.01 | 0.002 |
| 32.830 | 0.000 | 0.00 | 0.00 | 0.01 | 0.002 |
| 33.000 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 33.170 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 33.340 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 33.510 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |
| 33.680 | 0.000 | 0.00 | 0.00 | 0.01 | 0.001 |

# WATERSHED 'E'

| Detention Tank Volume and Outflow (Gateway) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| H (ft) | Length (ft) | Width (ft) | Square Feet (SF) | Area (Acre) | Total Volume (ac-ft) | Total Volume (cf) | Outflow w/30" orifice at basin bottom (cfs) | Outflow w/24" orifice at 3.5ft above bottom (cfs) | Total outflow (cfs) |
| 0 | 150 | 150 | 22500 | 0.52 | 0.00 | 0 | 0.0 | 0.0 | 0.0 |
| 0.25 | 150 | 150 | 22500 | 0.52 | 0.13 | 5625 | 1.0 | 0.0 | 1.0 |
| 0.50 | 150 | 150 | 22500 | 0.52 | 0.26 | 11250 | 2.0 | 0.0 | 2.0 |
| 0.75 | 150 | 150 | 22500 | 0.52 | 0.39 | 16875 | 3.0 | 0.0 | 3.0 |
| 1.00 | 150 | 150 | 22500 | 0.52 | 0.52 | 22500 | 4.0 | 0.0 | 4.0 |
| 1.25 | 150 | 150 | 22500 | 0.52 | 0.65 | 28125 | 5.0 | 0.0 | 5.0 |
| 1.50 | 150 | 150 | 22500 | 0.52 | 0.77 | 33750 | 10.4 | 0.0 | 10.4 |
| 1.75 | 150 | 150 | 22500 | 0.52 | 0.90 | 39375 | 14.6 | 0.0 | 14.6 |
| 2.00 | 150 | 150 | 22500 | 0.52 | 1.03 | 45000 | 17.9 | 0.0 | 17.9 |
| 2.25 | 150 | 150 | 22500 | 0.52 | 1.16 | 50625 | 20.7 | 0.0 | 20.7 |
| 2.50 | 150 | 150 | 22500 | 0.52 | 1.29 | 56250 | 23.1 | 0.0 | 23.1 |
| 2.75 | 150 | 150 | 22500 | 0.52 | 1.42 | 61875 | 25.3 | 0.0 | 25.3 |
| 3.00 | 150 | 150 | 22500 | 0.52 | 1.55 | 67500 | 27.4 | 0.0 | 27.4 |
| 3.25 | 150 | 150 | 22500 | 0.52 | 1.68 | 73125 | 29.3 | 0.0 | 29.3 |
| 3.50 | 150 | 150 | 22500 | 0.52 | 1.81 | 78750 | 31.0 | 0.0 | 31.0 |
| 3.75 | 150 | 150 | 22500 | 0.52 | 1.94 | 84375 | 32.7 | 1.0 | 33.7 |
| 4.00 | 150 | 150 | 22500 | 0.52 | 2.07 | 90000 | 34.3 | 2.0 | 36.3 |
| 4.25 | 150 | 150 | 22500 | 0.52 | 2.20 | 95625 | 35.8 | 3.0 | 38.8 |
| 4.50 | 150 | 150 | 22500 | 0.52 | 2.32 | 101250 | 37.3 | 4.5 | 41.8 |
| 4.75 | 150 | 150 | 22500 | 0.52 | 2.45 | 106875 | 38.7 | 6.6 | 45.3 |
| 5.00 | 150 | 150 | 22500 | 0.52 | 2.58 | 112500 | 40.1 | 9.4 | 49.5 |
| 5.25 | 150 | 150 | 22500 | 0.52 | 2.71 | 118125 | 41.4 | 11.5 | 52.9 |
| 5.50 | 150 | 150 | 22500 | 0.52 | 2.84 | 123750 | 42.7 | 13.2 | 55.9 |
| 5.75 | 150 | 150 | 22500 | 0.52 | 2.97 | 129375 | 43.9 | 14.8 | 58.7 |
| 6.00 | 150 | 150 | 22500 | 0.52 | 3.10 | 135000 | 45.1 | 16.2 | 61.3 |
| 6.25 | 150 | 150 | 22500 | 0.52 | 3.23 | 140625 | 46.3 | 17.5 | 63.8 |
| 6.50 | 150 | 150 | 22500 | 0.52 | 3.36 | 146250 | 47.4 | 18.7 | 66.1 |
| 6.75 | 150 | 150 | 22500 | 0.52 | 3.49 | 151875 | 48.5 | 19.9 | 68.4 |
| 7.00 | 150 | 150 | 22500 | 0.52 | 3.62 | 157500 | 49.6 | 20.9 | 70.5 |

# Rating Table for Circular Orifice - 3

| Project Description | |
|---|---|
| Solve For | Discharge |

| Input Data | |
|---|---|
| Headwater Elevation | 7.000 ft |
| Centroid Elevation | 1.250 ft |
| Tailwater Elevation | 0.000 ft |
| Discharge Coefficient | 0.526 |
| Diameter | 30.0 in |

| Headwater Elevation (ft) | Discharge (cfs) | Velocity (ft/s) |
|---|---|---|
| 0.000 | | (N/A) |
| 0.250 | | (N/A) |
| 0.500 | | (N/A) |
| 0.750 | | (N/A) |
| 1.000 | | (N/A) |
| 1.250 | | (N/A) |
| 1.500 | 10.35 | 2.11 |
| 1.750 | 14.63 | 2.98 |
| 2.000 | 17.92 | 3.65 |
| 2.250 | 20.69 | 4.22 |
| 2.500 | 23.13 | 4.71 |
| 2.750 | 25.34 | 5.16 |
| 3.000 | 27.37 | 5.58 |
| 3.250 | 29.26 | 5.96 |
| 3.500 | 31.04 | 6.32 |
| 3.750 | 32.72 | 6.67 |
| 4.000 | 34.31 | 6.99 |
| 4.250 | 35.84 | 7.30 |
| 4.500 | 37.30 | 7.60 |
| 4.750 | 38.71 | 7.89 |
| 5.000 | 40.07 | 8.16 |
| 5.250 | 41.38 | 8.43 |
| 5.500 | 42.66 | 8.69 |
| 5.750 | 43.90 | 8.94 |
| 6.000 | 45.10 | 9.19 |
| 6.250 | 46.27 | 9.43 |
| 6.500 | 47.41 | 9.66 |
| 6.750 | 48.53 | 9.89 |
| 7.000 | 49.62 | 10.11 |

# Rating Table for Circular Orifice - 3

| Project Description | |
|---|---|
| Solve For | Discharge |

| Input Data | |
|---|---|
| Headwater Elevation | 7.000 ft |
| Centroid Elevation | 1.000 ft |
| Tailwater Elevation | 0.000 ft |
| Discharge Coefficient | 0.526 |
| Diameter | 24.0 in |

| Headwater Elevation (ft) | Discharge (cfs) | Velocity (ft/s) |
|---|---|---|
| 0.000 | | (N/A) |
| 0.250 | | (N/A) |
| 0.500 | | (N/A) |
| 0.750 | | (N/A) |
| 1.000 | | (N/A) |
| 1.250 | 6.62 | 2.11 |
| 1.500 | 9.36 | 2.98 |
| 1.750 | 11.47 | 3.65 |
| 2.000 | 13.24 | 4.22 |
| 2.250 | 14.81 | 4.71 |
| 2.500 | 16.22 | 5.16 |
| 2.750 | 17.52 | 5.58 |
| 3.000 | 18.73 | 5.96 |
| 3.250 | 19.86 | 6.32 |
| 3.500 | 20.94 | 6.67 |
| 3.750 | 21.96 | 6.99 |
| 4.000 | 22.94 | 7.30 |
| 4.250 | 23.87 | 7.60 |
| 4.500 | 24.78 | 7.89 |
| 4.750 | 25.65 | 8.16 |
| 5.000 | 26.49 | 8.43 |
| 5.250 | 27.30 | 8.69 |
| 5.500 | 28.09 | 8.94 |
| 5.750 | 28.86 | 9.19 |
| 6.000 | 29.61 | 9.43 |
| 6.250 | 30.34 | 9.66 |
| 6.500 | 31.06 | 9.89 |
| 6.750 | 31.76 | 10.11 |
| 7.000 | 32.44 | 10.33 |

# APPENDIX 7

## Existing Condition 25-Year Storm Hydrology Map

**HYDROLOGIC SOIL GROUP: "A", "B", "C", & "D"**

## LEGEND


- MAJOR DRAINAGE BOUNDARY
- SUB-DRAINAGE BOUNDARY
- SOIL TYPE BOUNDARY
- OFFSITE DRAINAGE BOUNDARY (PER TTM 19179)
- OFFSITE SUB-AREA BOUNDARY (PER TTM 19179)
- L=XXX' — FLOWLINE AND FLOWLINE LENGTH
- A / 12 — SUBAREA DESIGNATION / SUBAREA (ACRES)
- 10 — NODE NUMBER
- Q25 — CALCULATED RUNOFF FOR 25 YR FREQ.
- Q2 — CALCULATED RUNOFF FOR 2 YR FREQ.
- Tc — TIME OF CONCENTRATION
- Ls — FLOW PATH LENGTH (SURFACE)
- Lp — FLOW PATH LENGTH (PIPE)
- COI — CITY OF IRVINE

| EXISTING CONDITION | | | | | |
|---|---|---|---|---|---|
| NODE | SUBAREA | AREA (AC) | $Q_{25}$ (CFS) | $T_{C2}$ (MIN) | 25-YR VOLUME (AC-FT) |
| 3 | B | 0.5 | 1.1 | 13.3 | 4.01 |
| 15 | F | 25.6 | 44.0 | 20.5 | |
| 25 | E | 38.9 | 69.9 | 19.2 | |
| | REMAINING* | 34.9 | | | |
| | TOTAL | 99.9 | 115.0 | - | |

* INCLUDES THE REMAINING AREA WITHIN THE PROPERTY LINE AND OUTSIDE OF THE MAJOR BOUNDARIES.

TOTAL WATERSHED BOUNDARY = 63.3 ACRES

**NOTE:**
(*) VALUES SHOWN WERE TAKEN FROM THE JEFFREY ROAD EXTENSION HYDROLOGY/HYDRAULIC REPORT, PREPARED BY WILSON MIKAMI CORPORATION, AND DATED SEPTEMBER 2019.

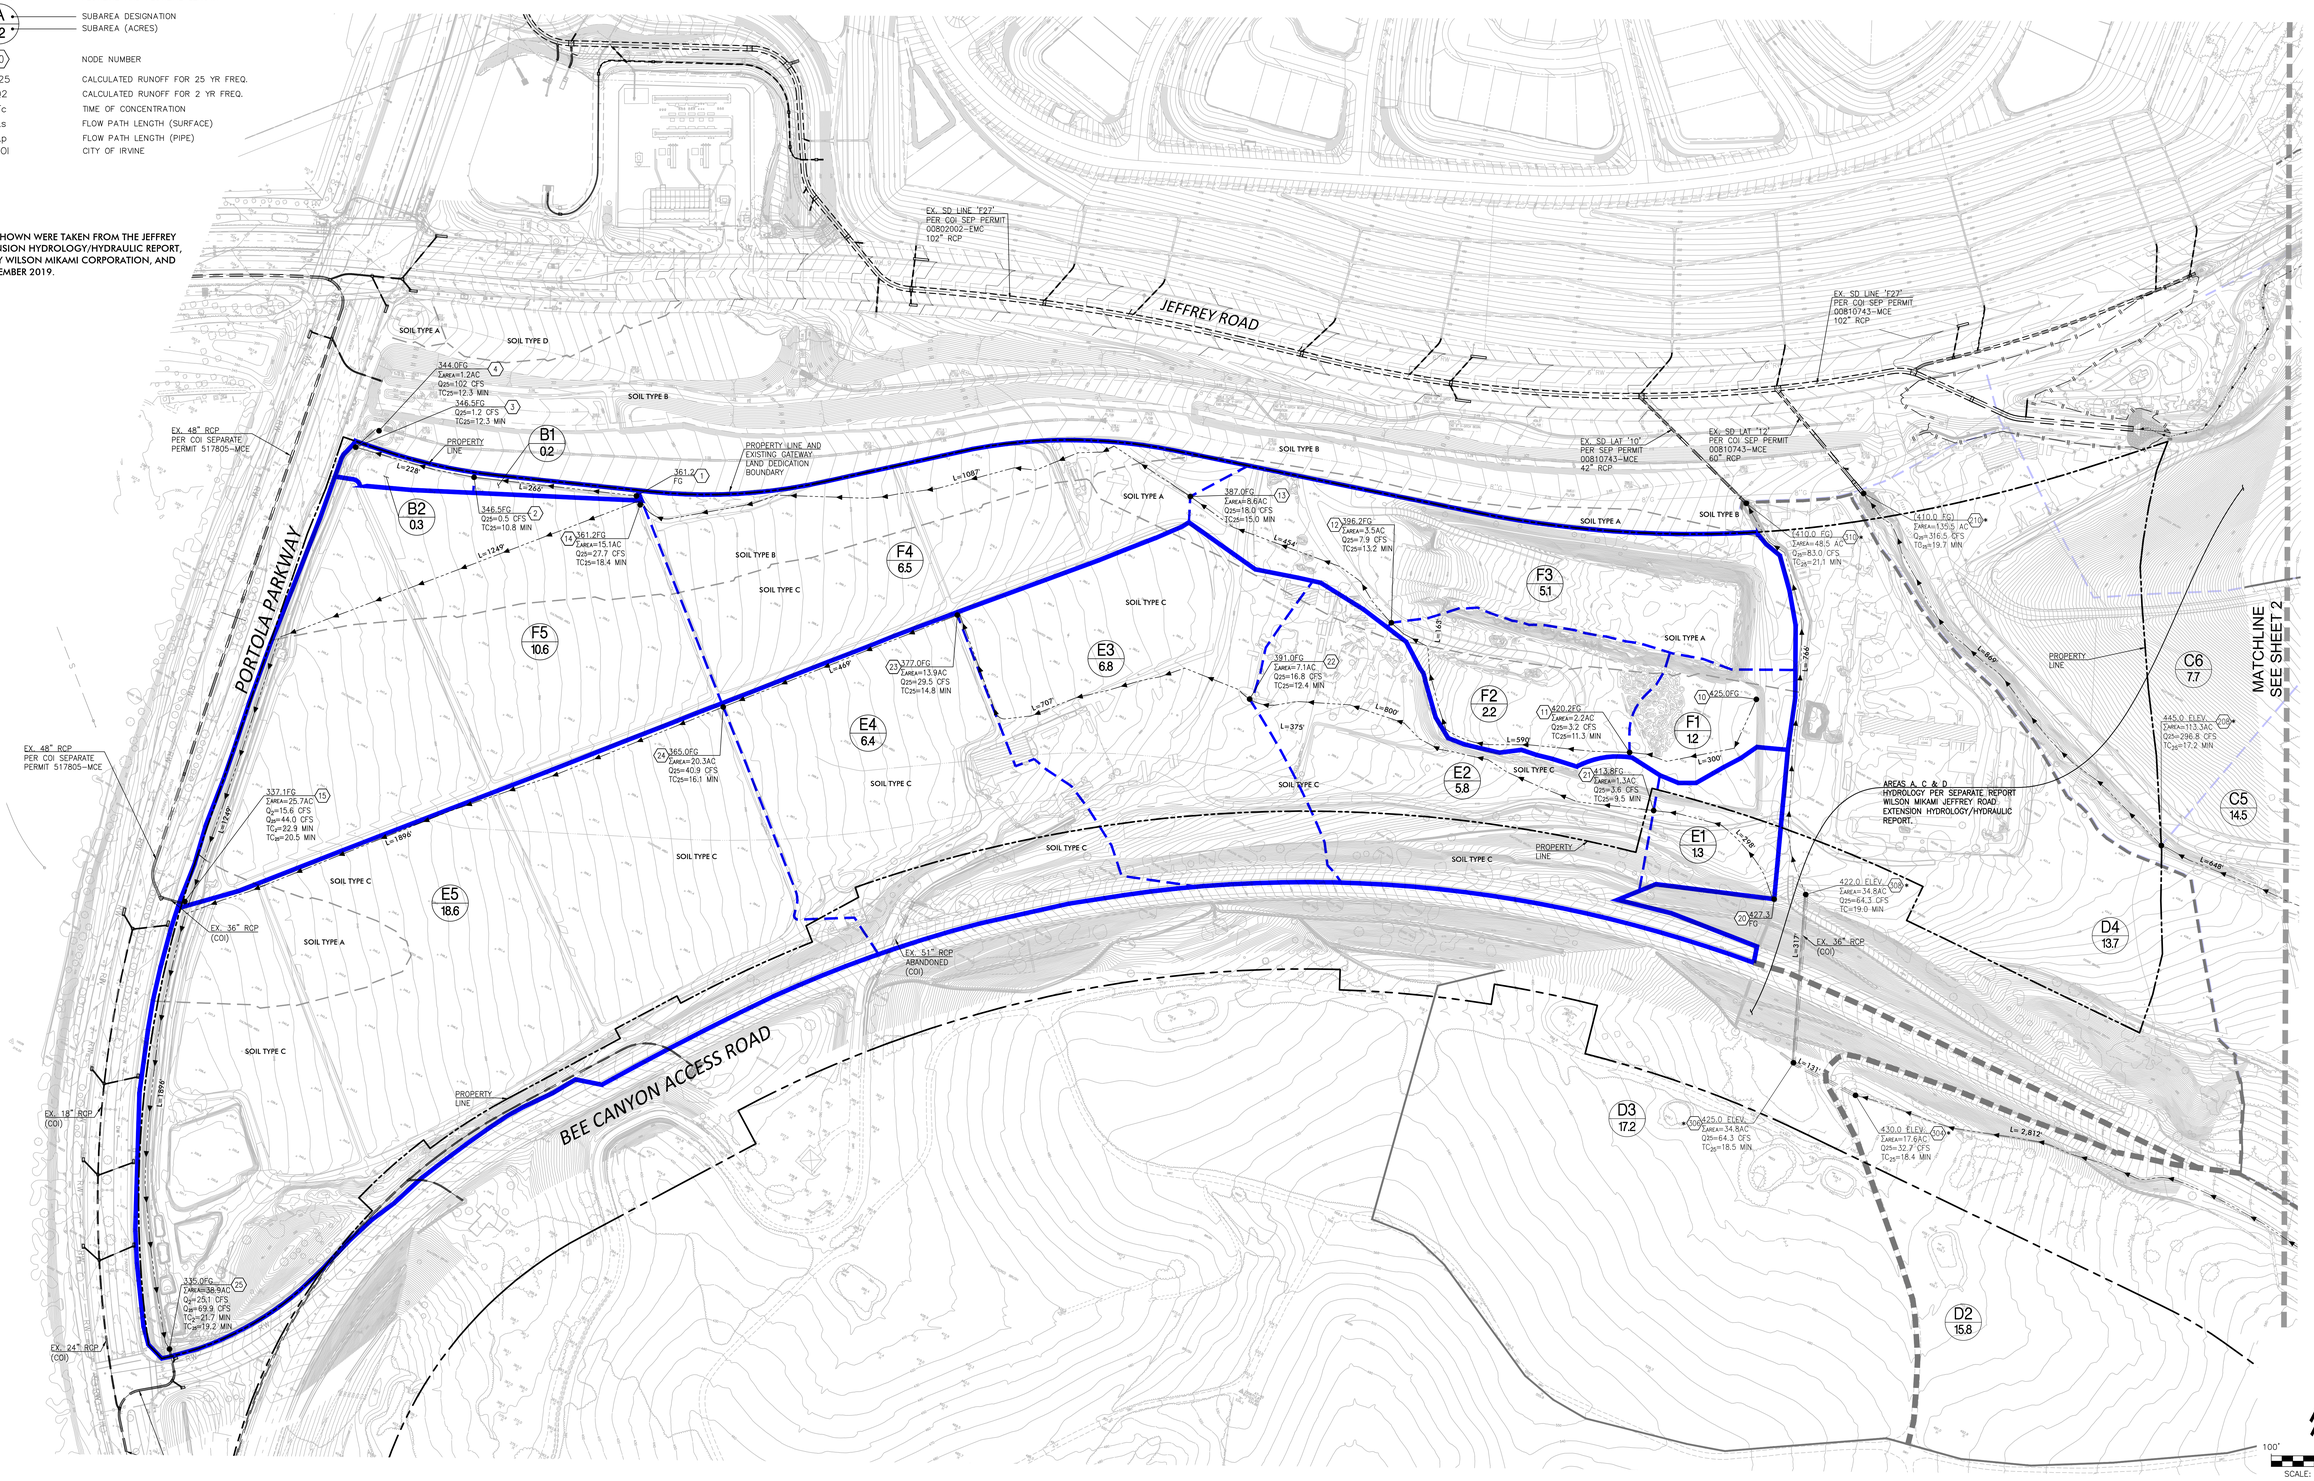


| REVISIONS | | | | | |
|---|---|---|---|---|---|
| NO. | INIT. | DATE | DESCRIPTION | APP'D | DATE |
| | | | | | |


FUSCOE ENGINEERING
15535 Sand Canyon Ave, Suite 100
Irvine, California 92618
949.474.1960
fuscoe.com


GATEWAY VILLAGE

EXISTING HYDROLOGY MAP

JOB NO. 308-092
DRAWN BY: JZ
SHEET 1 of 2


I:\Projects\308-092\...\Report\Hydrology\Preliminary Hydrology\Hydrology Maps\308-092-an-Existing Hydrology Maps.dwg (12/2/2024 3:45 PM) Plotted by: James Zocker

# APPENDIX 8


## Proposed Condition 25-Year Storm Hydrology Map

**HYDROLOGIC SOIL GROUP: "A", "B", "C", & "D"**

## LEGEND

- MAJOR DRAINAGE BOUNDARY
- SUB-DRAINAGE BOUNDARY C
- SUB-DRAINAGE BOUNDARY D
- SUB-DRAINAGE BOUNDARY E
- SUB-DRAINAGE BOUNDARY F
- SOIL TYPE BOUNDARY
- DRAINAGE BOUNDARY (PER WILSON MIKAMI REPORT)
- SUB-DRAINAGE BOUNDARY (PER WILSON MIKAMI REPORT)
- FLOWLINE
- DETENTION BASIN
- A / 12 — SUBAREA DESIGNATION / SUBAREA (ACRES)
- 10 — NODE NUMBER
- Q25 — CALCULATED RUNOFF FOR 25 YR FREQ.
- Tc — TIME OF CONCENTRATION
- L — FLOW PATH LENGTH (SURFACE)
- COI — CITY OF IRVINE

**NOTE:**
(*) VALUES SHOWN WERE TAKEN FROM THE JEFFREY ROAD EXTENSION HYDROLOGY/HYDRAULIC REPORT, PREPARED BY WILSON MIKAMI CORPORATION, AND DATED SEPTEMBER 2019.

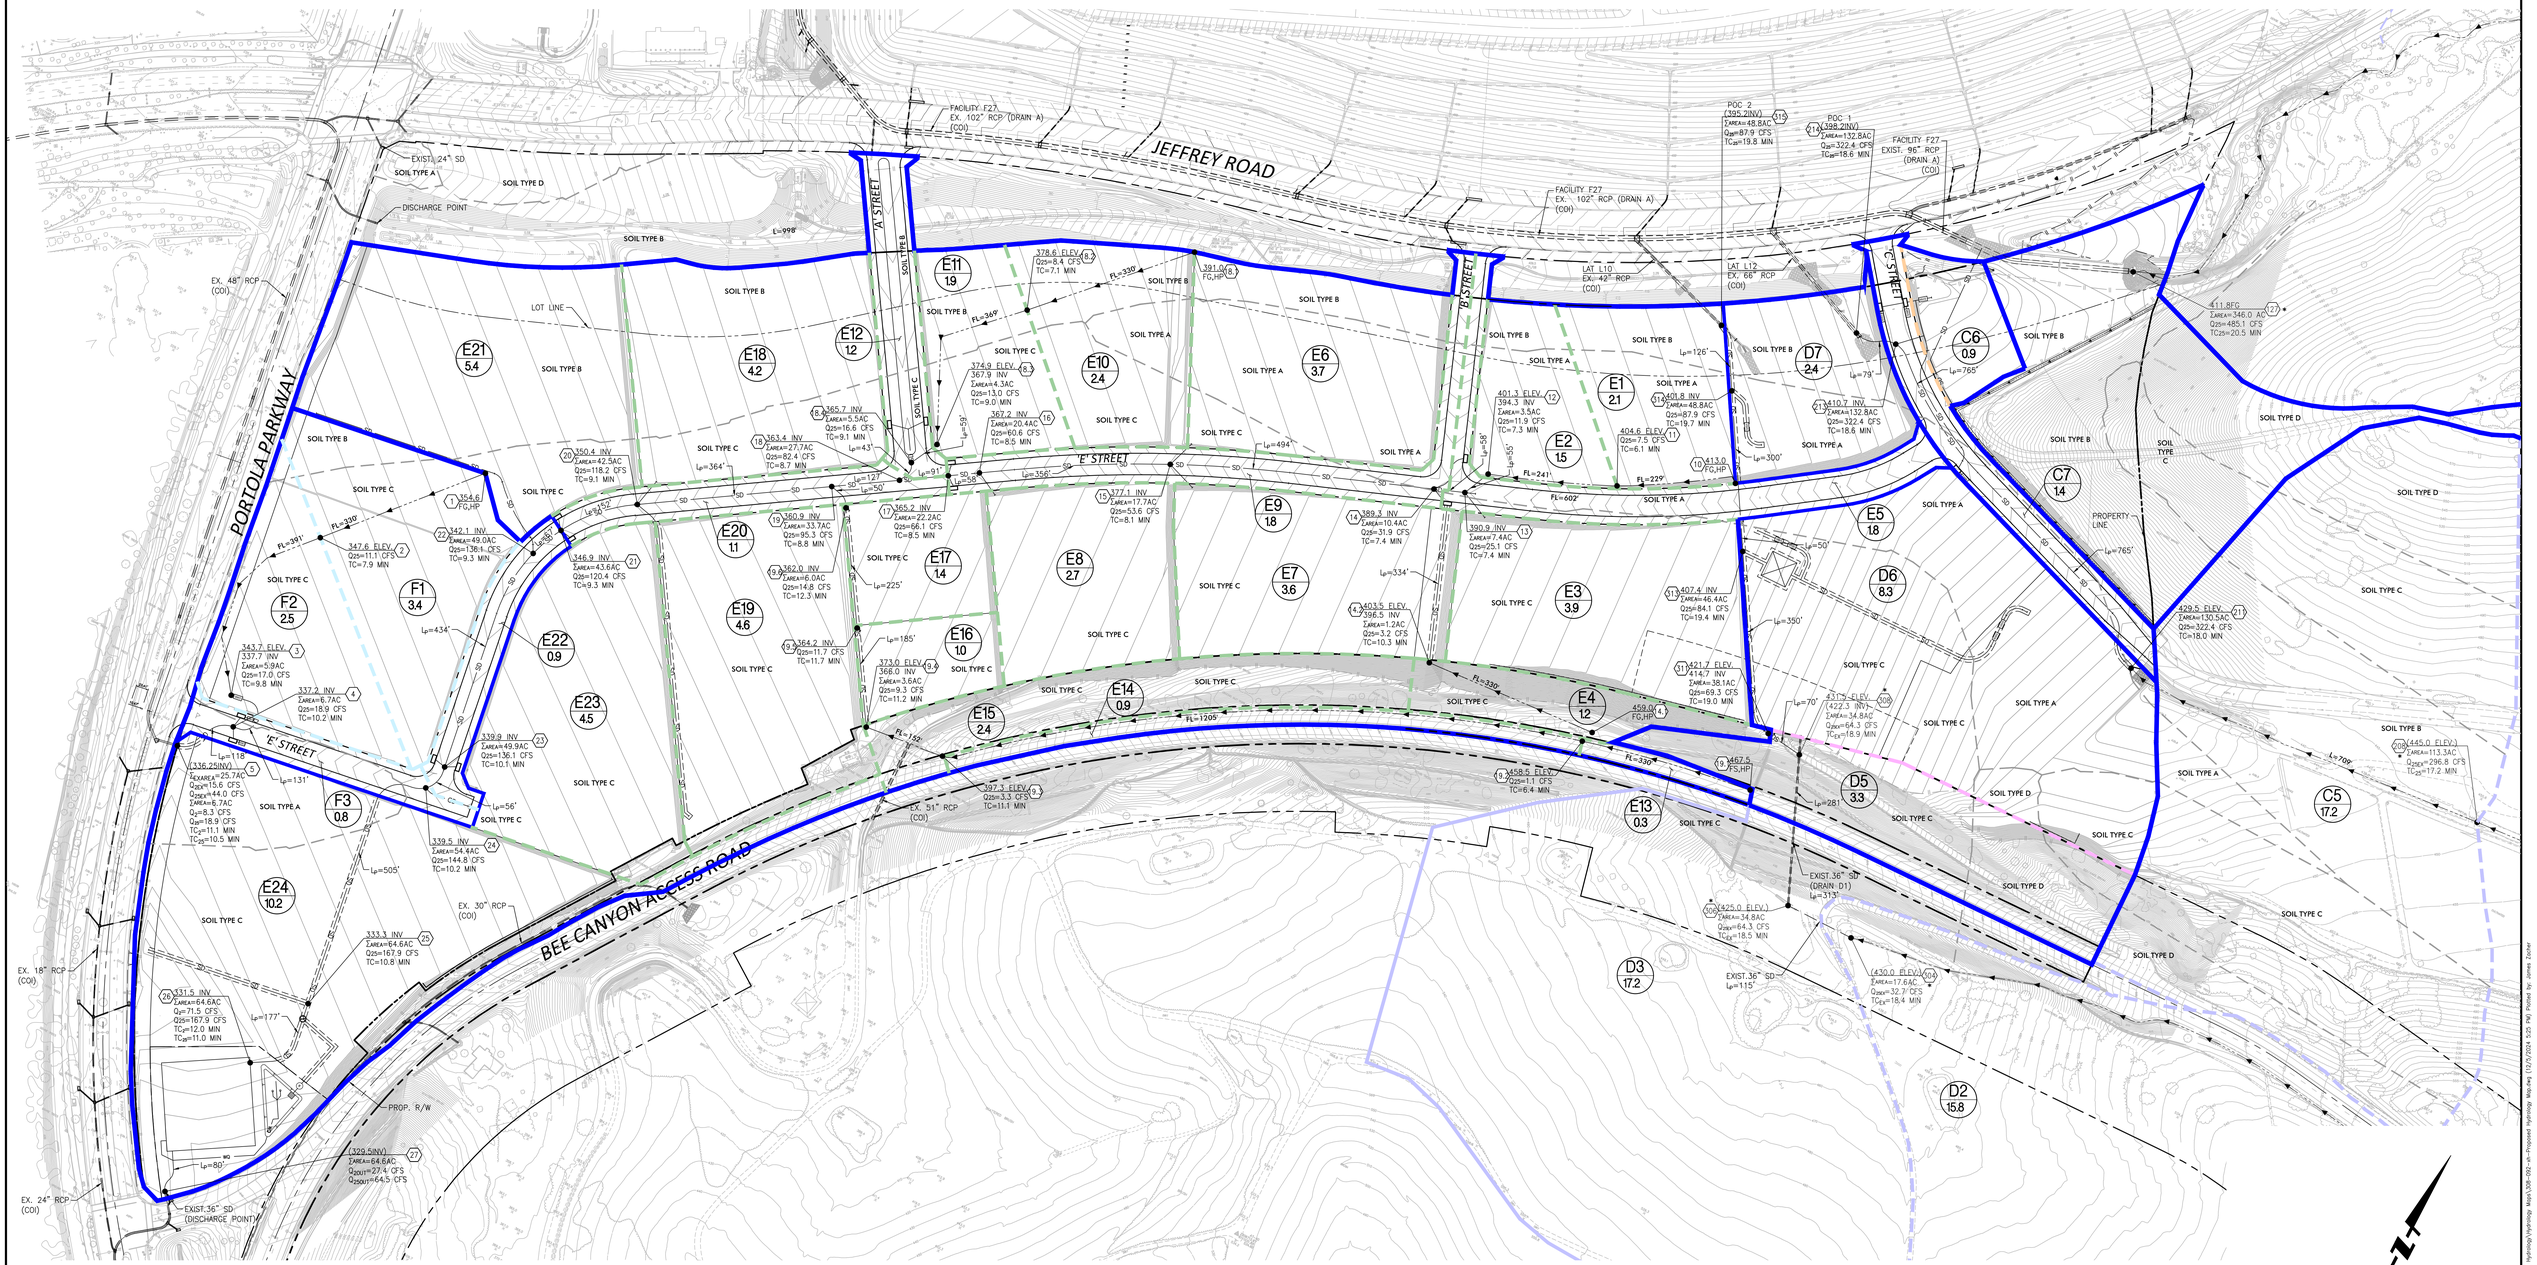


| REVISIONS | | | | | |
|---|---|---|---|---|---|
| NO. | INIT. | DATE | DESCRIPTION | APP'D | DATE |


FUSCOE ENGINEERING
15535 Sand Canyon Ave, Suite 100
Irvine, California 92618
949.474.1960 fuscoe.com


GATEWAY VILLAGE

PROPOSED HYDROLOGY MAP

JOB NO. 308-092
DRAWN BY: JZ
SHEET 1 of 1


P:\Projects\308\092\Civil\Design\Hydrology\Preliminary\Drawings\Hydrology Maps\Proposed Hydrology.dwg, 12/6/2021 12:36:08 PM, Jason Zhang, 1:1, 2020 Autodesk, Inc. All rights reserved.

# APPENDIX 9


## Existing Condition 2-Year Hydromod Map for Watersheds 'C' & 'D'

HYDROLOGIC SOIL GROUP: "A", "B", "C", & "D"

## LEGEND

- MAJOR DRAINAGE BOUNDARY
- SUB-DRAINAGE BOUNDARY 'C'
- SUB-DRAINAGE BOUNDARY 'D'
- SOIL TYPE BOUNDARY
- DRAINAGE BOUNDARY (PER WILSON MIKAMI REPORT)
- SUB-DRAINAGE BOUNDARY (PER WILSON MIKAMI REPORT)
- FLOWLINE
- A / 1.2 — SUBAREA DESIGNATION / SUBAREA (ACRES)
- 10 — NODE NUMBER
- Q2 — CALCULATED RUNOFF FOR 2 YR FREQ.
- Tc — TIME OF CONCENTRATION
- L — FLOW PATH LENGTH (SURFACE)
- COI — CITY OF IRVINE

**NOTE:**
(*) VALUES SHOWN WERE TAKEN FROM THE JEFFREY ROAD EXTENSION HYDROLOGY/HYDRAULIC REPORT, PREPARED BY WILSON MIKAMI CORPORATION, AND DATED SEPTEMBER 2019.

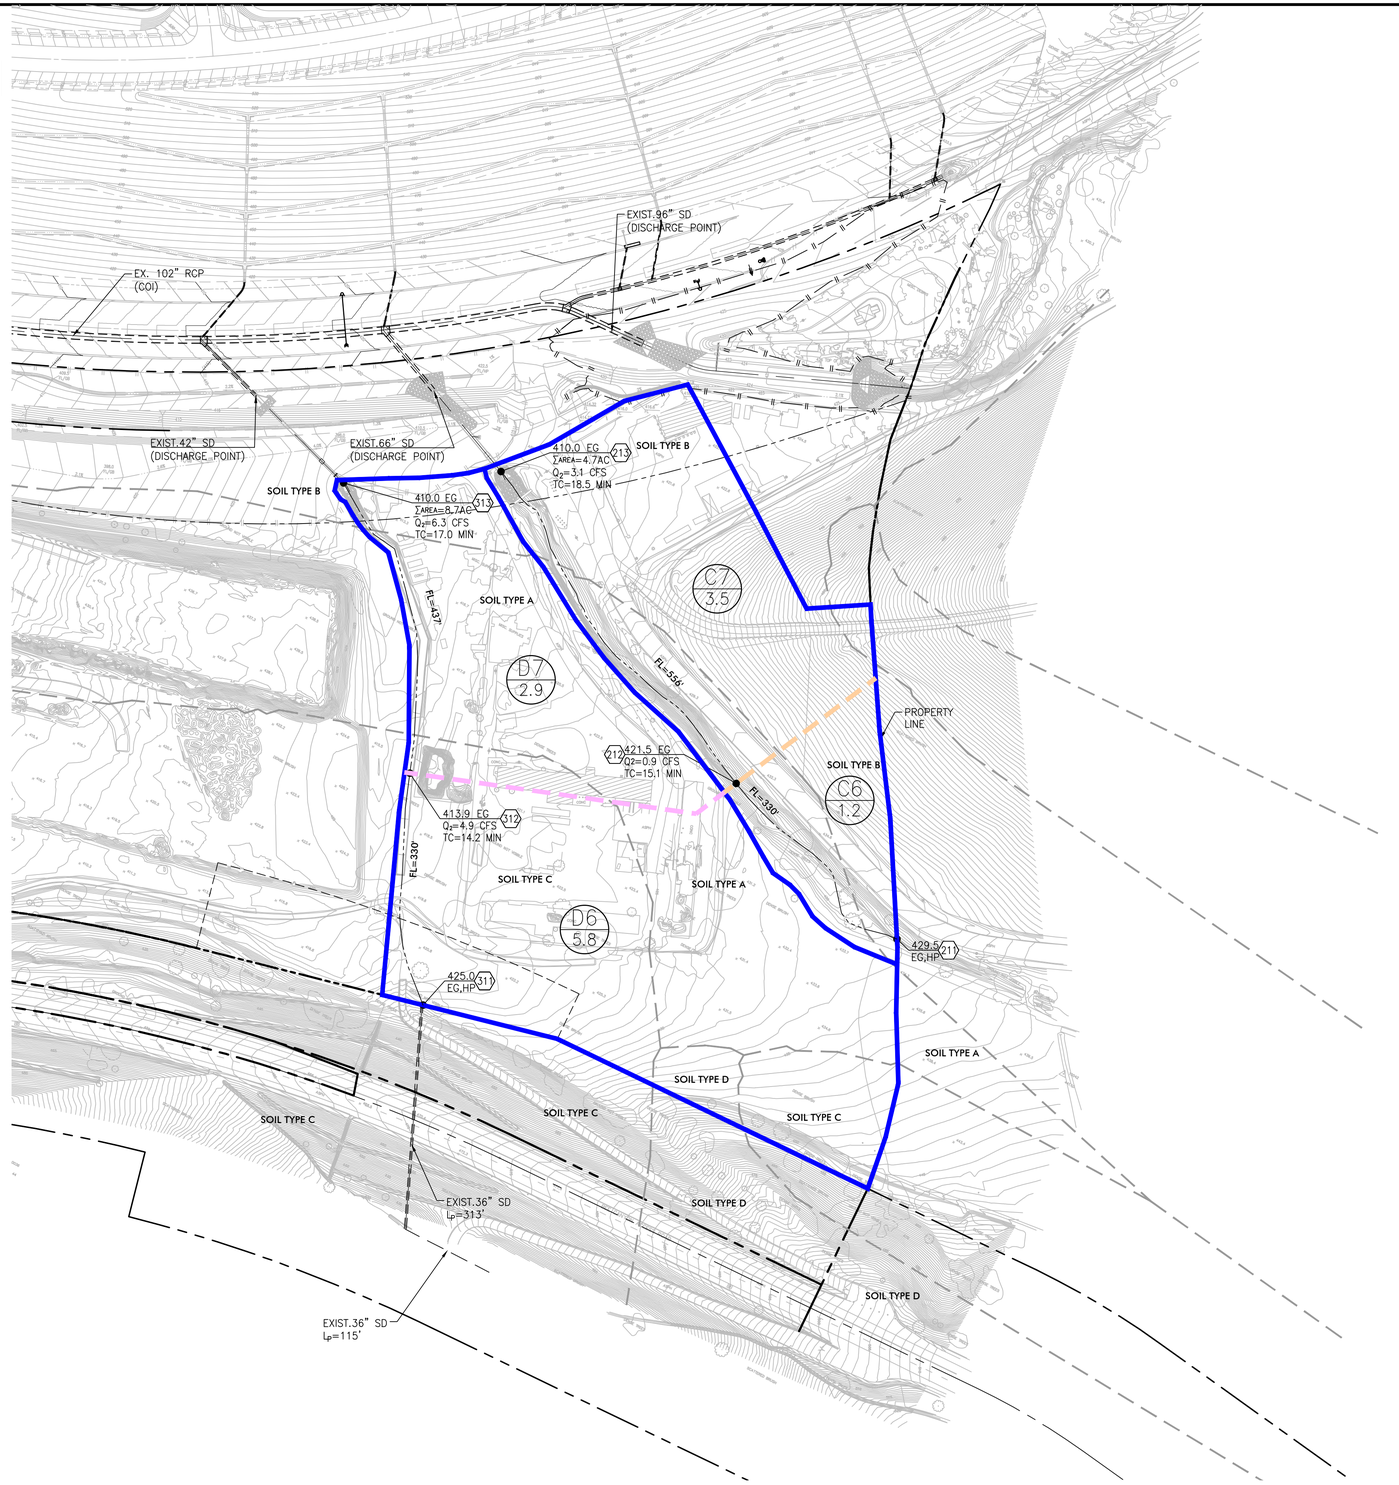


100' 0' 50' 100'
SCALE: 1" = 100'

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| NO. | INIT. | DATE | DESCRIPTION | APP'D | DATE |
| | | | | | |


FUSCOE ENGINEERING
15535 Sand Canyon Ave, Suite 100
Irvine, California 92618
949.474.1960 fuscoe.com


GATEWAY VILLAGE

EXISTING HYDROMOD MAP FOR WATERSHED 'C' & 'D'

JOB NO. 308-092
DRAWN BY: JZ
SHEET 1 of 1


F:\Projects\308\092_Support Files\Reports\Hydrology\Preliminary Hydrology Maps\308-092-xh-Existing 2 yr Hydromod Map.dwg (12/5/2024 5:26 PM) Plotted by: Brandon Muse

# APPENDIX 10


## Proposed Condition 2-Year Hydromod Map for Watersheds 'C' & 'D'

**HYDROLOGIC SOIL GROUP: "A", "B", "C", & "D"**

## LEGEND

- MAJOR DRAINAGE BOUNDARY
- SUB-DRAINAGE BOUNDARY 'C'
- SUB-DRAINAGE BOUNDARY 'D'
- SOIL TYPE BOUNDARY
- DRAINAGE BOUNDARY (PER WILSON MIKAMI REPORT)
- SUB-DRAINAGE BOUNDARY (PER WILSON MIKAMI REPORT)
- FLOWLINE
- A / 1.2 — SUBAREA DESIGNATION / SUBAREA (ACRES)
- 10 — NODE NUMBER
- Q2 — CALCULATED RUNOFF FOR 2 YR FREQ.
- Tc — TIME OF CONCENTRATION
- L — FLOW PATH LENGTH (SURFACE)
- COI — CITY OF IRVINE

NOTE:
(*) VALUES SHOWN WERE TAKEN FROM THE JEFFREY ROAD EXTENSION HYDROLOGY/HYDRAULIC REPORT, PREPARED BY WILSON MIKAMI CORPORATION, AND DATED SEPTEMBER 2019.

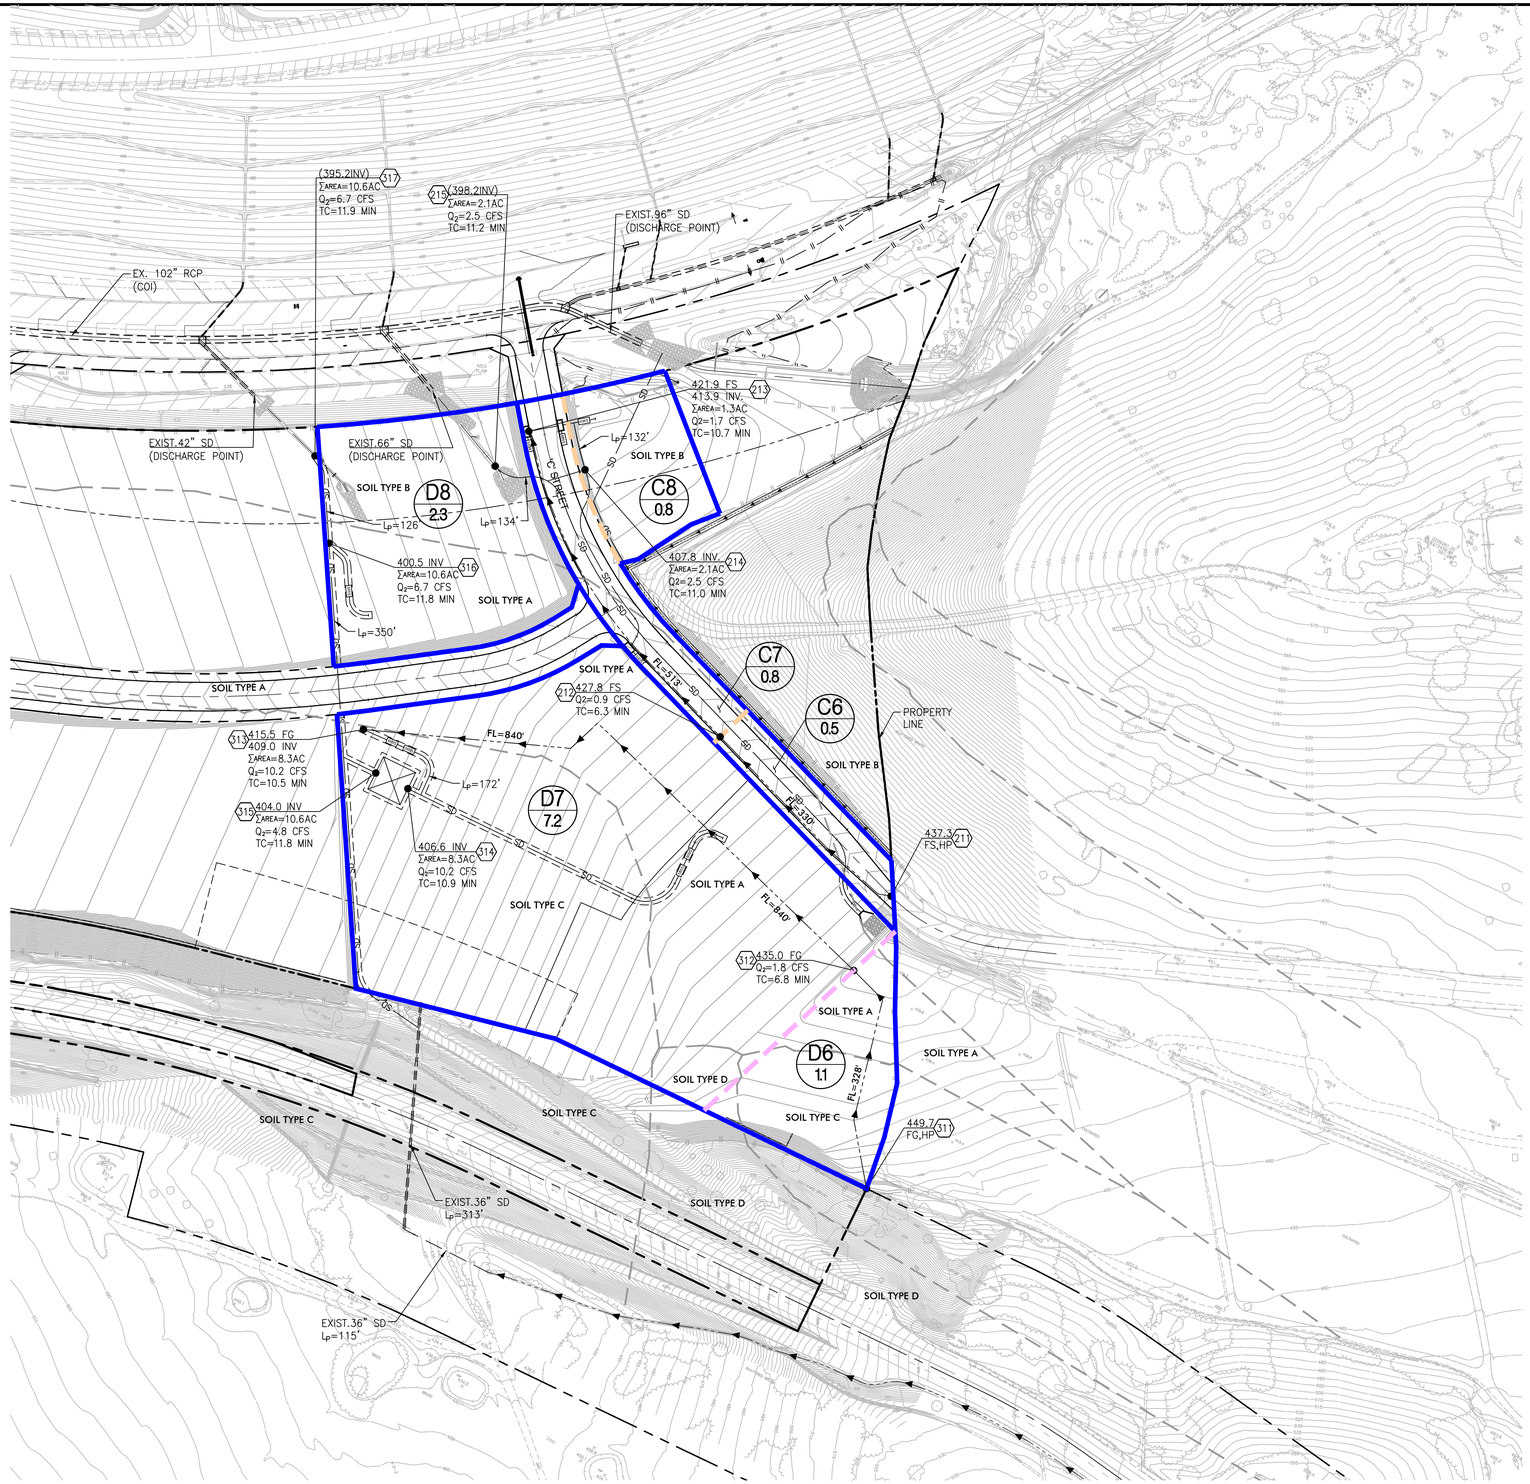


100' 0' 50' 100'
SCALE: 1" = 100'

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| NO. | INIT. | DATE | DESCRIPTION | APP'D | DATE |
| | | | | | |


FUSCOE ENGINEERING
15535 Sand Canyon Ave, Suite 100
Irvine, California 92618
949.474.1960 fuscoe.com


GATEWAY VILLAGE


PROPOSED HYDROMOD MAP FOR WATERSHED 'C' & 'D'

JOB NO. 308-092
DRAWN BY: JZ
SHEET 1 of 1


F:\Projects\308\092_Support Files\Reports\Hydrology\Hydrology\Preliminary Hydrology\Hydrology Maps\308-092-xh-Proposed 2 yr Hydromod Map.dwg (12/5/2024 5:22 PM) Plotted by: James Zacher

# APPENDIX 11

## Hunsaker Hydrology Map for T.T. 16927 – PA-9B, PA-9C2




*VICINITY MAP*
NTS

## LEGEND

- MAJOR DRAINAGE BOUNDARY
- MINOR DRAINAGE BOUNDARY
- 100 — NODE NUMBER
- A / 1.0 — AREA DESIGNATION / AREA ACREAGE (IN ACRES)
- Qm =8.0cfs / Qloc=8.0cfs / tc=15.0 — PEAK FLOW RATE / TIME OF CONCENTRATION
- ΣQm =8.0cfs / ΣQloc=10.0cfs / tc=15.0 — PEAK CONFLUENCE FLOW RATE / TIME OF CONCENTRATION
- PROPOSED STORM DRAIN
- B — SOIL GROUP

WATERSHED BOUNDARY PER APPROVED DRAINAGE DESIGN REPORT, SAN DEIGO FLOOD CONTROL MASTERPLAN – PERS CANYON WASHUPDATE, APPROVED AUGUST 27, 1996,

(HYDROLOGY FROM NODE 300 TO 304 PER RBF HYDROLOGY STUDY FOR CHANNEL FACILITY NO. F25S05, DATED FEB 28, 2003)

WATERSHED BOUNDARY PER APPROVED DRAINAGE DESIGN REPORT, STATE ROUTES 133 & 241, SECTION 8, JANUARY 27, 1997, DESIGN SUBMITTAL NO. E08RXXD-02.

HICKS CANYON
EXISTING CULVERT
EXISTING DRAINAGE CHANNEL
EXISTING 36" RCP
HICKS CANYON
FUTURE JEFFREY ROAD EXTENSION
FUTURE UNDERPASS
JEFFREY ROAD
AREA "A"
SIPHON RESERVOIR
EXISTING 30" RCP
EX. 18" RCP
EXISTING 36" RCP
EX. 2–36" RCP
EXISTING CULVERT
EX. 24" RCP
EX. 36" RCP
EX. 78" RCP
PORTOLA PARKWAY
EX. 36" RCP TO BE ABANDONED
EXISTING 42" RCP
EXISTING C.B.
SAND CANYON AVENUE
SAN DIEGO FREEWAY (SR-405)

PROJECT SITE
SEE EXHIBIT 1 HYDROLOGY MAP FOR THIS AREA

MAP DATE IDENTIFIER
DATE OF LATEST CHANGE TO THIS MAP
06/28/06 BY: A.LEE
DATE OF THIS PLOT
06/28/06

1" = 200'

200 100 0 200 600
GRAPHIC SCALE 1"=200'

Prepared For:

IRVINE COMMUNITY DEVELOPMENT COMPANY
A Division of The Irvine Company
550 Newport Center Drive
Newport Beach, CA 92660
Telephone: (714)720–2000

Prepared By:

HUNSAKER & ASSOCIATES IRVINE, INC.
PLANNING • ENGINEERING • SURVEYING
Three Hughes • Irvine, CA 92618 • PH: (949) 583-1010 • FX: (949) 583-0759

# EXHIBIT 2
# OFF-SITE HYDROLOGY MAP for ROUGH GRADING
# T.T. 16927 - PA-9B, PA-9C2
# PHASE I
# City of Irvine