

Appendix D-2

Geotechnical Investigation

Proposed Industrial Building and Trailer Storage
South Side of West Nance Street, 550± Feet
West of North Webster Avenue, Perris,
California, for Lake Creek Industrial, LLC
Southern California Geotechnical
November 2022

**GEOTECHNICAL INVESTIGATION
PROPOSED INDUSTRIAL BUILDING
AND TRAILER STORAGE**

South Side of West Nance Street, 550± feet West
of North Webster Avenue
Perris, California
for
Lake Creek Industrial, LLC



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

November 21, 2022

Lake Creek Industrial, LLC
1302 Brittany Cross Road
Santa Ana, California 92705



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

Attention: Mr. Mike Tonkonogy
Manager

Project No.: **22G250-1**

Subject: **Geotechnical Investigation**
Proposed Industrial Building and Trailer Storage
South Side of West Nance Street, 550± feet West of North Webster Avenue
Perris, California

Gentlemen:

In accordance with your request, we have conducted a geotechnical investigation at the subject site. We are pleased to present this report summarizing the conclusions and recommendations developed from our investigation.

We sincerely appreciate the opportunity to be of service on this project. We look forward to providing additional consulting services during the course of the project. If we may be of further assistance in any manner, please contact our office.

Respectfully Submitted,

SOUTHERN CALIFORNIA GEOTECHNICAL, INC.

Joseph Lozano Leon
Staff Engineer

Robert G. Trazo, GE 2655
Principal Engineer



Distribution: (1) Addressee

TABLE OF CONTENTS

1.0 EXECUTIVE SUMMARY	1
2.0 SCOPE OF SERVICES	3
3.0 SITE AND PROJECT DESCRIPTION	4
3.1 Site Conditions	4
3.2 Proposed Development	4
4.0 SUBSURFACE EXPLORATION	6
4.1 Scope of Exploration/Sampling Methods	6
4.2 Geotechnical Conditions	6
5.0 LABORATORY TESTING	8
6.0 CONCLUSIONS AND RECOMMENDATIONS	10
6.1 Seismic Design Considerations	10
6.2 Geotechnical Design Considerations	12
6.3 Site Grading Recommendations	15
6.4 Construction Considerations	18
6.5 Foundation Design and Construction	20
6.6 Floor Slab Design and Construction	22
6.7 Exterior Flatwork Design and Construction	23
6.8 Retaining Wall Design and Construction	23
6.9 Pavement Design Parameters	26
7.0 GENERAL COMMENTS	28
APPENDICES	
A Plate 1: Site Location Map Plate 2: Boring Location Plan	
B Boring Logs	
C Laboratory Test Results	
D Grading Guide Specifications	
E Seismic Design Parameters	

1.0 EXECUTIVE SUMMARY

Presented below is a brief summary of the conclusions and recommendations of this investigation. Since this summary is not all inclusive, it should be read in complete context with the entire report.

Geotechnical Design Considerations

- Most of the borings encountered artificial fill soils. The fill soils extend to depths of 2½ to 4½± feet and are considered to consist of undocumented fill soils.
- The undocumented fill soils are generally underlain by older alluvium. However, younger alluvium was encountered beneath the undocumented fill at boring No. B-9, extending to a depth of 8± feet below the existing site grades.
- The near-surface younger and older alluvium possesses varying strengths and densities. The results of laboratory testing indicate that the near-surface soils within the upper 5 to 6± feet possess a potential for moderate to severe collapse when exposed to moisture infiltration as well as excessive consolidation when exposed to load increases in the range of those that will be exerted by the new foundations.
- The near-surface soils, in their present condition, are not considered suitable to support the foundation loads of the new building, and could result in excessive post-construction settlements.

Site Preparation

- Initial site preparation should include stripping of any surficial vegetation. The surficial vegetation, and any organic soils should be properly disposed of off-site.
- Remedial grading should be performed within the proposed building area in order to remove any soils disturbed during stripping and a portion of the near-surface native alluvium. The soils within the proposed building area should be overexcavated to a depth of 5 feet below existing grade and to a depth of at least 3 feet below proposed building pad subgrade elevations. Within the influence zones of the new foundations, the overexcavation should extend to a depth of at least 3 feet below proposed foundation bearing grade.
- The overexcavation areas should extend at least 5 feet beyond the building and foundation perimeters, and to an extent equal to the depth of fill placed below the foundation bearing grade, whichever is greater.
- After overexcavation has been completed, the subgrade soils should be evaluated by the geotechnical engineer to identify any additional soils that should be overexcavated. The resulting subgrade should then be scarified to a depth of 12 inches, moisture conditioned or air dried to 2 to 4 percent above optimum, and recompact to at least 90 percent of the ASTM D-1557 maximum dry density. The previously excavated soils may then be replaced as compacted structural fill.
- The new pavement and flatwork subgrade soils are recommended to be scarified to a depth of 12± inches, moisture conditioned and recompact to at least 90 percent of the ASTM D-1557 maximum dry density.

Building Foundations

- Conventional shallow foundations, supported in newly placed compacted fill.
- 2,500 lbs/ft² maximum allowable soil bearing pressure.

- 1,500 lbs/ft² if the full recommended lateral extent of remedial grading cannot be achieved.
- Reinforcement consisting of at least four (4) No. 5 rebars (2 top and 2 bottom) in strip footings, due to the presence of low expansive soils. Additional reinforcement may be necessary for structural considerations.

Building Floor Slab

- Conventional Slab-on-Grade: minimum 6 inches thick.
- Modulus of Subgrade Reaction: $k = 100$ psi/in.
- Minimum slab reinforcement: Reinforcement of the floor slab should consist of No. 3 bars at 18-inches on center in both directions due to presence of low expansive soils.
- The actual thickness and reinforcement of the floor slab should be determined by the structural engineer.

Pavement Design Recommendations

ASPHALT PAVEMENTS (R=30)					
Materials	Thickness (inches)				
	Auto Parking and Auto Drive Lanes (TI = 4.0 to 5.0)	Truck Traffic			
		TI = 6.0	TI = 7.0	TI = 8.0	TI = 9.0
Asphalt Concrete	3	3½	4	5	5½
Aggregate Base	6	8	10	11	13
Compacted Subgrade	12	12	12	12	12

PORTLAND CEMENT CONCRETE PAVEMENTS (R = 30)				
Materials	Thickness (inches)			
	Autos and Light Truck Traffic (TI = 6.0)	Truck Traffic		
		TI = 7.0	TI = 8.0	TI = 9.0
PCC	5	5½	6½	8
Compacted Subgrade (95% minimum compaction)	12	12	12	12

2.0 SCOPE OF SERVICES

The scope of services performed for this project was in accordance with our Proposal No. 22P298R, dated October 19, 2022. The scope of services included a visual site reconnaissance, subsurface exploration, field and laboratory testing, and geotechnical engineering analysis to provide criteria for preparing the design of the building foundations, building floor slab, and parking lot pavements along with site preparation recommendations and construction considerations for the proposed development. The evaluation of the environmental aspects of this site was beyond the scope of services for this geotechnical investigation.

3.0 SITE AND PROJECT DESCRIPTION

3.1 Site Conditions

The overall site is located on the south side of West Nance Street, 550± feet west of North Webster Avenue. The site is separated by a rectangular-shaped property, 0.93± acres in size, into two (2) portions, west and east. The west site is bounded to the north by West Nance Street, to the west by a dirt road, to the south by an industrial building, and to the east by a residential property. The east site is bounded to the north by West Nance Street, to the west by a residential property, and to the south and east by commercial/industrial developments. The general locations of both sites are illustrated on the Site Location Map, enclosed as Plate 1 in Appendix A of this report.

West Site

The site consists of a rectangular-shaped property, 1.99± acres in size. The site consists of two (2) rectangular-shaped parcels which are currently vacant and undeveloped. The ground surface consists of tilled soil with sparse native grass and weed growth. Detailed topographic information was not available at the time of this report. Based on elevations obtained from Google Earth, and visual observations made at the time of the subsurface investigation, the overall site topography gently slopes downward to the east-northeast at a gradient of less than 1 percent.

East Site

The site consists of a rectangular-shaped property, 2.75± acres in size. The site consists of three (3) rectangular-shaped parcels which are currently vacant and undeveloped. The ground surface consists of tilled soil with sparse native grass and weed growth. Detailed topographic information was not available at the time of this report. Based on elevations obtained from Google Earth, and visual observations made at the time of the subsurface investigation, the overall site topography gently slopes downward to the east-northeast at a gradient of less than 1 percent.

3.2 Proposed Development

The most current conceptual site plans (Version 03) for both the west and east sites, prepared LHA, have been provided to our office by the client. Based on these plans, the sites will be developed as follows:

West Site

The west site will be developed with a 11,756± ft² industrial building located in the northern portion of the site. Dock-high doors will be constructed along a portion of the south building wall. The proposed building is expected to be surrounded by asphaltic concrete (AC) pavements in the parking and drive areas, Portland cement concrete (PCC) pavements in the loading dock area, and concrete flatwork and landscaped planters throughout the site.

Detailed structural information has not been provided. It is assumed that the new building will be a single-story structure of tilt-up concrete construction, typically supported on conventional shallow foundations with a concrete slab-on-grade floor. Based on the assumed construction, maximum column and wall loads are expected to be on the order of 100 kips and 4 to 7 kips per linear foot, respectively.

No significant amounts of below-grade construction, such as basements or crawl spaces, are expected to be included in the proposed development. Based on the assumed topography, cuts and fills of up to 2± feet are expected to be necessary to achieve the proposed site grades. It should be noted that this estimate does not include any remedial grading recommendations which are presented in a subsequent section of this report.

East Site

The east site will be developed as a trailer storage lot. This site is expected to be developed with AC or PCC pavements, landscaped areas, concrete flatwork, a guard shack, and screen walls. Based on the assumed topography, cuts and fills of up to 2± feet are expected to be necessary to achieve the proposed site grades.

4.0 SUBSURFACE EXPLORATION

4.1 Scope of Exploration/Sampling Methods

The subsurface exploration conducted for this project consisted of six (9) borings (identified as Boring Nos. B-1 through B-9) advanced to depths of 5 to 20± feet below the existing site grades. All of the borings were logged during drilling by a member of our staff.

The borings were advanced with hollow-stem augers, by a conventional truck-mounted drilling rig. Representative bulk and relatively undisturbed soil samples were taken during drilling. Relatively undisturbed soil samples were taken with a split barrel "California Sampler" containing a series of one inch long, 2.416± inch diameter brass rings. This sampling method is described in ASTM Test Method D-3550. In-situ samples were also taken using a 1.4± inch inside diameter split spoon sampler, in general accordance with ASTM D-1586. Both of these samplers are driven into the ground with successive blows of a 140-pound weight falling 30 inches. The blow counts obtained during driving are recorded for further analysis. Bulk samples were collected in plastic bags to retain their original moisture content. The relatively undisturbed ring samples were placed in molded plastic sleeves that were then sealed and transported to our laboratory.

The approximate locations of the borings are indicated on the Boring Location Plan, included as Plate 2 in Appendix A of this report. The Boring Logs, which illustrate the conditions encountered at the boring locations, as well as the results of some of the laboratory testing, are included in Appendix B.

4.2 Geotechnical Conditions

Artificial Fill

Artificial fill soils were encountered at the ground surface at all of the boring locations, with the exception of Boring Nos. B-2 and B-7, extending to depths of 2½ to 4½± feet below the existing site grades. The fill soils generally consist of medium dense to dense silty sands with varying clay content. Boring No. B-6 encountered a stratum consisting of hard sandy clays at the ground surface, extending to a depth of 2½± feet. The fill soils possess a mottled and disturbed appearance resulting in their classification as artificial fill.

Younger Alluvium

Native younger alluvium was encountered beneath the artificial fill soils at Boring No. B-9, extending to a depth of 8± feet below the existing site grades. The younger alluvium generally consists of medium dense clayey sands.

Older Alluvium

Native older alluvium was encountered at the ground surface at Boring Nos. B-2 and B-7, beneath the younger alluvium at Boring Nos. B-9, and beneath the artificial fill soils at the remaining boring locations, extending to at least the maximum depth explored of 20± feet below the existing site grades. The older alluvium generally consists of medium dense to very dense clayey sands with varying silt content, medium dense to very dense silty sands and sandy silts with varying clay content, and very stiff to hard sandy clays with varying silt content. Boring Nos. B-4 and B-9 encountered a stratum consisting of hard clayey silts at a depth of 17 to 20± feet.

Groundwater

Free water was not encountered during the drilling of any of the borings. Based on the moisture content of the recovered soil samples and the lack of free water in the borings, the static groundwater table is at a greater depth than 20± feet below existing site grades.

As a part of our research, we reviewed available groundwater data in order to determine groundwater levels for the site. Water level data was obtained from the California Department of Water Resources Water Data Library website, <https://wdl.water.ca.gov/waterdatalibrary/>. Two (2) monitoring wells on record (identified as Local Well Names: EMWD12471 and EMWD12474) are located within 650± feet from the center of the proposed building. Water level readings within these monitoring wells indicate a high groundwater level of 65± feet below the ground surface in March 2022.

5.0 LABORATORY TESTING

The soil samples recovered from the subsurface exploration were returned to our laboratory for further testing to determine selected physical and engineering properties of the soils. The tests are briefly discussed below. It should be noted that the test results are specific to the actual samples tested, and variations could be expected at other locations and depths.

Classification

All recovered soil samples were classified using the Unified Soil Classification System (USCS), in accordance with ASTM D-2488. The field identifications were then supplemented with additional visual classifications and/or by laboratory testing. The USCS classifications are shown on the Boring Logs and are periodically referenced throughout this report.

Density and Moisture Content

The density has been determined for selected relatively undisturbed ring samples. These densities were determined in general accordance with the method presented in ASTM D-2937. The results are recorded as dry unit weight in pounds per cubic foot. The moisture contents are determined in accordance with ASTM D-2216, and are expressed as a percentage of the dry weight. These test results are presented on the Boring Logs.

Consolidation

Selected soil samples were tested to determine their consolidation potential, in accordance with ASTM D-2435. The testing apparatus is designed to accept either natural or remolded samples in a one-inch high ring, approximately 2.416 inches in diameter. Each sample is then loaded incrementally in a geometric progression and the resulting deflection is recorded at selected time intervals. Porous stones are in contact with the top and bottom of the sample to permit the addition or release of pore water. The samples are typically inundated with water at an intermediate load to determine their potential for collapse or heave. The results of the consolidation testing are plotted on Plates C-1 through C-4 in Appendix C of this report.

Maximum Dry Density and Optimum Moisture Content

One representative bulk sample has been tested for its maximum dry density and optimum moisture content. The results have been obtained using the Modified Proctor procedure, per ASTM D-1557 and are presented on Plate C-5 in Appendix C of this report. This test is generally used to compare the in-situ densities of undisturbed field samples, and for later compaction testing. Additional testing of other soil types or soil mixes may be necessary at a later date.

Expansion Index

The expansion potential of the on-site soils was determined in general accordance with ASTM D-4829. The testing apparatus is designed to accept a 4-inch diameter, 1-in high, remolded sample. The sample is initially remolded to 50± 1 percent saturation and then loaded with a surcharge equivalent to 144 pounds per square foot. The sample is then inundated with water, and allowed

to swell against the surcharge. The resultant swell or consolidation is recorded after a 24-hour period. The results of the expansion index (EI) testing are as follows:

<u>Sample Identification</u>	<u>Expansion Index</u>	<u>Expansive Potential</u>
B-1 @ 0 to 5 feet	21	Low
B-7 @ 0 to 5 feet	43	Low

Soluble Sulfates

Representative samples of the near-surface soils were submitted to a subcontracted analytical laboratory for determination of soluble sulfate content. Soluble sulfates are naturally present in soils, and if the concentration is high enough, can result in degradation of concrete which comes into contact with these soils. The results of the soluble sulfate testing are presented below, and are discussed further in a subsequent section of this report.

<u>Sample Identification</u>	<u>Soluble Sulfates (%)</u>	<u>Sulfate Classification</u>
B-1 @ 0 to 5 feet	0.003	Not Applicable (S0)
B-7 @ 0 to 5 feet	0.004	Not Applicable (S0)

Corrosivity Testing

Representative bulk samples of the near-surface soils were submitted to a subcontracted corrosion engineering laboratory for determination of electrical resistivity, pH, and chloride concentrations. The resistivity of the soils is a measure of their potential to attack buried metal improvements such as utility lines. The results of some of these tests are presented below.

<u>Sample Identification</u>	<u>Saturated Resistivity (ohm-cm)</u>	<u>pH</u>	<u>Chlorides (mg/kg)</u>	<u>Nitrates (mg/kg)</u>	<u>Sulfides (mg/kg)</u>	<u>Redox Potential (mV)</u>
B-1 @ 0 to 5 feet	7,370	7.7	28.7	68.8	7.29	164
B-7 @ 0 to 5 feet	3,551	8.7	93.9	55.3	3.20	150

R-value

R (resistance)-value testing was conducted on one (1) representative sample of the near-surface soils obtained from the subject site. The R-value was determined in accordance with CA Test Method 301. This test provides a measure of the pavement support characteristics of the soils, and is used in the pavement thickness design procedure. The result of the R-value testing is as follows:

<u>Sample ID</u>	<u>R-Value</u>
B-7 @ 0 to 5 feet	30

6.0 CONCLUSIONS AND RECOMMENDATIONS

Based on the results of our review, field exploration, laboratory testing and geotechnical analysis, the proposed development is considered feasible from a geotechnical standpoint. The recommendations contained in this report should be taken into the design, construction, and grading considerations.

The recommendations are contingent upon all grading and foundation construction activities being monitored by the geotechnical engineer of record. The recommendations are provided with the assumption that an adequate program of client consultation, construction monitoring, and testing will be performed during the final design and construction phases to verify compliance with these recommendations. Maintaining Southern California Geotechnical, Inc., (SCG) as the geotechnical consultant from the beginning to the end of the project will provide continuity of services. The geotechnical engineering firm providing testing and observation services shall assume the responsibility of Geotechnical Engineer of Record.

The Grading Guide Specifications, included as Appendix D, should be considered part of this report, and should be incorporated into the project specifications. The contractor and/or owner of the development should bring to the attention of the geotechnical engineer any conditions that differ from those stated in this report, or which may be detrimental for the development.

6.1 Seismic Design Considerations

The subject site is located in an area which is subject to strong ground motions due to earthquakes. The performance of a site-specific seismic hazards analysis was beyond the scope of this investigation. However, numerous faults capable of producing significant ground motions are located near the subject site. Due to economic considerations, it is not generally considered reasonable to design a structure that is not susceptible to earthquake damage. Therefore, significant damage to structures may be unavoidable during large earthquakes. The proposed structure should, however, be designed to resist structural collapse and thereby provide reasonable protection from serious injury, catastrophic property damage and loss of life.

Faulting and Seismicity

Research of available maps indicates that the subject site is not located within an Alquist-Priolo Earthquake Fault Zone. In addition, our review of the Riverside County RCIT GIS website indicates that the site is not located within a Riverside County fault zone. Furthermore, SCG did not identify any evidence of faulting during the geotechnical investigation. Therefore, the possibility of significant fault rupture on the site is considered to be low. Therefore, the possibility of significant fault rupture on the site is considered to be low.

The potential for other geologic hazards such as seismically induced settlement, lateral spreading, tsunamis, inundation, seiches, flooding, and subsidence affecting the site is considered low.

Seismic Design Parameters

The 2019 California Building Code (CBC) provides procedures for earthquake resistant structural design that include considerations for on-site soil conditions, occupancy, and the configuration of the structure including the structural system and height. The seismic design parameters presented below are based on the soil profile and the proximity of known faults with respect to the subject site.

Based on standards in place at the time of this report, the proposed development is expected to be designed in accordance with the requirements of the 2019 edition of the California Building Code (CBC), which was adopted on January 1, 2020.

The 2019 CBC Seismic Design Parameters have been generated using the SEAOC/OSHPD Seismic Design Maps Tool, a web-based software application available at the website www.seismicmaps.org. This software application calculates seismic design parameters in accordance with several building code reference documents, including ASCE 7-16, upon which the 2019 CBC is based. The application utilizes a database of risk-targeted maximum considered earthquake (MCE_R) site accelerations at 0.01-degree intervals for each of the code documents. The tables below were created using data obtained from the application. The output generated from this program is included as Plate E-1 in Appendix E of this report.

The 2019 CBC requires that a site-specific ground motion study be performed in accordance with Section 11.4.8 of ASCE 7-16 for Site Class D sites with a mapped S_1 value greater than 0.2. However, Section 11.4.8 of ASCE 7-16 also indicates an exception to the requirement for a site-specific ground motion hazard analysis for certain structures on Site Class D sites. The commentary for Section 11 of ASCE 7-16 (Page 534 of Section C11 of ASCE 7-16) indicates that "In general, this exception effectively limits the requirements for site-specific hazard analysis to very tall and or flexible structures at Site Class D sites." **Based on our understanding of the proposed development, the seismic design parameters presented below were calculated assuming that the exception in Section 11.4.8 applies to the proposed structure at this site. However, the structural engineer should verify that this exception is applicable to the proposed structure.** Based on the exception, the spectral response accelerations presented below were calculated using the site coefficients (F_a and F_v) from Tables 1613.2.3(1) and 1613.2.3(2) presented in Section 16.4.4 of the 2019 CBC.

2019 CBC SEISMIC DESIGN PARAMETERS

Parameter		Value
Mapped Spectral Acceleration at 0.2 sec Period	S_s	1.500
Mapped Spectral Acceleration at 1.0 sec Period	S_1	0.576
Site Class	---	D
Site Modified Spectral Acceleration at 0.2 sec Period	S_{MS}	1.500
Site Modified Spectral Acceleration at 1.0 sec Period	S_{M1}	0.993
Design Spectral Acceleration at 0.2 sec Period	S_{DS}	1.000
Design Spectral Acceleration at 1.0 sec Period	S_{D1}	0.662

It should be noted that the site coefficient F_v and the parameters S_{M1} and S_{D1} were not included in the SEAOC/OSHPD Seismic Design Maps Tool output for the 2019 CBC. We calculated these parameters-based on Table 1613.2.3(2) in Section 16.4.4 of the 2019 CBC using the value of S_1 obtained from the Seismic Design Maps Tool, assuming that a site-specific ground motion hazards analysis is not required for the proposed building at this site.

Liquefaction

Liquefaction is the loss of strength in generally cohesionless, saturated soils when the pore-water pressure induced in the soil by a seismic event becomes equal to or exceeds the overburden pressure. The primary factors which influence the potential for liquefaction include groundwater table elevation, soil type and plasticity characteristics, relative density of the soil, initial confining pressure, and intensity and duration of ground shaking. The depth within which the occurrence of liquefaction may impact surface improvements is generally identified as the upper 50 feet below the existing ground surface. Liquefaction potential is greater in saturated, loose, poorly graded fine sands with a mean (d_{50}) grain size in the range of 0.075 to 0.2 mm (Seed and Idriss, 1971). Non-sensitive clayey (cohesive) soils which possess a plasticity index of at least 18 (Bray and Sancio, 2006) are generally not considered to be susceptible to liquefaction, nor are those soils which are above the historic static groundwater table.

The Riverside County RCIT GIS website indicates that the subject site is located within a zone of low liquefaction susceptibility. In addition, the subsurface conditions encountered at the boring locations are not considered to be conducive to liquefaction. Based on the mapping performed by the county of Riverside and the lack of a historic high ground water table within the upper 50± feet of the ground surface, liquefaction is not considered to be a design concern for this project.

6.2 Geotechnical Design Considerations

General

Most of the borings encountered artificial fill soils, extending to depths of 2½ to 4½± feet below the existing site grades. These soils possess variable densities and strengths and some of these fill soils possess a disturbed, mottled appearance. Additionally, no documentation regarding the placement and compaction of the existing fill soil soils has been provided to our office. The fill soils are therefore considered to be undocumented fill. The undocumented fill soils are generally underlain by older alluvium. However, younger alluvium was encountered beneath the undocumented fill at boring No. B-9, extending to a depth of 8± feet below the existing site grades. The near-surface younger and older alluvium possesses varying strengths and densities. The results of laboratory testing indicate that the near-surface soils within the upper 5 to 6± feet possess a potential for moderate to severe collapse when exposed to moisture infiltration as well as excessive consolidation when exposed to load increases in the range of those that will be exerted by the new foundations. By visual examination, the majority of the near-surface samples also possess calcareous nodules and veining throughout, and appear to be weakly cemented. Cemented soils with low relative densities are generally prone to settlement due to collapse when inundated with water. Based on these conditions, remedial grading will be necessary to remove the upper portion of the near-surface native alluvial soils, and any soils disturbed during the

stripping process, and replace these materials as compacted structural fill soils. The remedial grading will also serve to create more uniform support characteristics across the proposed building pad area.

Settlement

The recommended remedial grading will remove the existing undocumented fill soils and the potentially collapsible/compressible near-surface native alluvium, and replace these materials as compacted structural fill. The native soils that will remain in place below the recommended depth of overexcavation will not be subject to significant stress increases from the foundations of the new structure. Provided that the recommended remedial grading is completed, the post-construction static settlements of the proposed structure are expected to be less than 1.0 and 0.5 inches for total and differential settlements of shallow foundations, respectively.

Expansion

Laboratory testing performed on representative samples of the near-surface soils indicates that these materials possess a low expansion potential ($EI = 21$ and 43). Based on the presence of expansive soils at this site, care should be given to proper moisture conditioning of all building pad subgrade soils to a moisture content of 2 to 4 percent above the ASTM D-1557 optimum during site grading. In addition to adequately moisture conditioning the subgrade soils and fill soils during grading, special care must be taken to maintaining moisture content of these soils at 2 to 4 percent above the optimum moisture content. This will require the contractor to frequently moisture condition these soils throughout the grading process, unless grading occurs during a period of relatively wet weather. Civil and structural design considerations are presented in Section 6.4 of this report.

Soluble Sulfates

The results of the soluble sulfate testing indicate that the selected samples of the on-site soils correspond to Class S0 with respect to the American Concrete Institute (ACI) Publication 318-05 Building Code Requirements for Structural Concrete and Commentary, Section 4.3. Therefore, specialized concrete mix designs are not considered to be necessary, with regard to sulfate protection purposes. It is, however, recommended that additional soluble sulfate testing be conducted at the completion of rough grading to verify the soluble sulfate concentrations of the soils which are present at pad grade within the building area.

Corrosion Potential

The results of laboratory testing indicate that the tested samples of the on-site soils possess saturated resistivity values of 3,551 and 7,370 ohm-cm, and pH values of 7.7 and 8.7. The soils possess redox potentials of 150 and 164 mV and sulfide concentrations of 3.20 and 7.29 mg/kg. These test results have been evaluated in accordance with guidelines published by the Ductile Iron Pipe Research Association (DIPRA). The DIPRA guidelines consist of a point system by which characteristics of the soils are used to quantify the corrosivity characteristics of the site. Resistivity, pH, sulfide concentration, redox potential, and moisture content are the five factors that enter into the evaluation procedure. Based on these factors, and utilizing the DIPRA procedure, the on-site soils are considered to be mildly to moderately corrosive to ductile iron pipe. Therefore, polyethylene protection may be required for cast iron or ductile iron pipes.

Based on American Concrete Institute (ACI) Publication 318 Building Code Requirements for Structural Concrete and Commentary, reinforced concrete that is exposed to external sources of chlorides requires corrosion protection for the steel reinforcement contained within the concrete. The ACI318-14 indicates that Exposure Classes C1 and C2 are assigned to non-prestressed and prestressed concrete members, depending on the degree of exposure to external sources of moisture and chlorides in service. Furthermore, ACI318-14, Table 19.3.1.1, indicates that Exposure Class C1 pertains to concrete exposed to moisture but not an external source of chlorides. ACI 318 defines concrete exposed to moisture and an external source of chlorides as "severe" or exposure category C2. ACI 318 does not clearly define a specific chloride concentration at which contact with the adjacent soil will constitute a "C2" or severe exposure. However, the Caltrans Memo to Designers 10-5, Protection of Reinforcement Against Corrosion Due to Chlorides, Acids and Sulfates, dated June 2010, indicates that soils possessing chloride concentrations greater than 500 mg/kg are considered to be corrosive to reinforced concrete. The results of the laboratory testing indicate chloride concentrations ranging from 28.7 to 93.9 mg/kg. Although the soils contain some chlorides, we do not expect that the chloride concentrations of the tested soils are high enough to constitute a "severe" or C2 chloride exposure. Therefore, a chloride exposure category of C1 is considered appropriate for this site.

Nitrates present in soil can be corrosive to copper tubing at concentrations greater than 50 mg/kg. The tested samples possess nitrate concentrations ranging from 55.3 to 68.8 mg/kg. Based on these test results, the on-site soils are not considered to be corrosive to copper pipe. **Based on these test results, the on-site soils are considered to be corrosive to copper pipe**

Since SCG does not practice in the area of corrosion engineering, we recommend that the client contact a corrosion engineer to provide a more thorough evaluation of these test results.

Shrinkage/Subsidence

Removal and recompaction of the near-surface fill and younger alluvial soils is estimated to result in an average shrinkage of 3 to 13 percent. Where very dense/hard older alluvium is excavated and replaced as fill, bulking of 1 to 5 percent should be expected. It should be noted that these shrinkage and bulking estimates are based on dry density testing performed on small-diameter samples taken at the boring locations. If a more accurate and precise shrinkage estimate is desired, SCG can perform a shrinkage study involving several excavated test-pits where in-place densities are determined using in-situ testing methods instead of laboratory density testing on small-diameter samples. Please contact SCG for details and a cost estimate regarding a shrinkage study, if desired.

Minor ground subsidence is expected to occur in the soils below the zone of removal, due to settlement and machinery working. The subsidence is estimated to be 0.15 feet. This estimate may be used for grading in areas that are underlain by native alluvial soils.

These estimates are based on previous experience and the subsurface conditions encountered at the boring locations. The actual amount of subsidence is expected to be variable and will be dependent on the type of machinery used, repetitions of use, and dynamic effects, all of which are difficult to assess precisely.

Grading and Foundation Plan Review

It is recommended that we be provided with copies of the finalized grading and foundation plans, when they become available, for review with regard to the conclusions, recommendations, and assumptions contained within this report.

6.3 Site Grading Recommendations

The grading recommendations presented below are based on the subsurface conditions encountered at the boring locations, and our understanding of the proposed development. We recommend that all grading activities be completed in accordance with the Grading Guide Specifications included as Appendix D of this report, unless superseded by site-specific recommendations presented below.

Site Stripping

Initial site stripping should include removal of any surficial vegetation, as well as any underlying topsoil or other organic materials. This should include any weeds, grasses, shrubs, and trees. Root systems associated with the trees should be removed in their entirety, and the resultant excavations should be backfilled with compacted structural fill soils. The actual extent of site stripping should be determined in the field by the geotechnical engineer, based on the organic content and stability of the materials encountered. These materials should be disposed of off-site.

Treatment of Existing Soils: Building Pad

Remedial grading should be performed within the proposed building area in order to remove the existing undocumented fill soils, and a portion of the near-surface native alluvium. Based on conditions encountered at the boring locations, the existing soils within the proposed building area are recommended to be overexcavated to a depth of at least 5 feet below existing grades and to a depth of at least 3 feet below proposed building pad subgrade elevations, whichever is greater. The depth of the overexcavation should also extend to a depth sufficient to remove all undocumented fill soils and soils disturbed during site stripping. Within the influence zones of the new foundations, the overexcavation should extend to a depth of at least 3 feet below proposed foundation bearing grade.

The overexcavation areas should extend at least 5 feet beyond the building and foundation perimeters, and to an extent equal to the depth of fill placed below the foundation bearing grade, whichever is greater. If the proposed structure incorporates any exterior columns (such as for a canopy or overhang) the area of overexcavation should also encompass these areas.

Following completion of the overexcavation, the subgrade soils within the overexcavation areas should be evaluated by the geotechnical engineer to verify their suitability to serve as the structural fill subgrade, as well as to support the foundation loads of the new structure. This evaluation should include proofrolling and probing to identify any soft, loose, or otherwise unstable soils that must be removed. Some localized areas of deeper excavation may be required if any artificial fill or loose, porous, or low-density native soils are encountered at the base of the overexcavation.

After a suitable overexcavation subgrade has been achieved, the exposed soils should be scarified to a depth of at least 12 inches and moisture conditioned to achieve a moisture content of 2 to 4 percent above optimum moisture content. The subgrade soils should then be recompacted to at least 90 percent of the ASTM D-1557 maximum dry density.

The building pad area may then be raised to grade with previously excavated soils or imported, very low expansive structural fill. All structural fill soils present within the proposed building area should be compacted to at least 90 percent of the ASTM D-1557 maximum dry density.

Treatment of Existing Soils: Retaining Walls and Site Walls

The existing soils within the areas of any proposed retaining walls and site walls should be overexcavated to a depth of 3 feet below foundation bearing grade and replaced as compacted structural fill as discussed above for the proposed building pad. Any undocumented fill soils or disturbed native alluvium within any of these foundation areas should be removed in their entirety. The overexcavation areas should extend at least 3 feet beyond the foundation perimeters, and to an extent equal to the depth of fill below the new foundations. Any erection pads for tilt-up concrete walls are considered to be part of the foundation system. Therefore, these overexcavation recommendations are applicable to erection pads. The overexcavation subgrade soils should be evaluated by the geotechnical engineer prior to scarifying, moisture conditioning to within 2 to 4 percent above the optimum moisture content, and recompacting the upper 12 inches of exposed subgrade soils. The previously excavated soils may then be replaced as compacted structural fill.

If the full lateral recommended remedial grading cannot be completed for the proposed retaining walls and site walls located along property lines, the foundations for those walls should be designed using a reduced allowable bearing pressure. Furthermore, the contractor should take necessary precautions to protect the adjacent improvements during rough grading. Specialized grading techniques, such as A-B-C slot cuts, will likely be required during remedial grading. The geotechnical engineer of record should be contacted if additional recommendations, such as shoring design recommendations, are required during grading.

Treatment of Existing Soils: Parking and Drive Areas

Based on economic considerations, overexcavation of the existing near-surface existing soils in the new parking and drive areas is not considered warranted, with the exception of areas where lower strength or unstable soils are identified by the geotechnical engineer during grading. Subgrade preparation in the new parking and drive areas should initially consist of removal of all soils disturbed during stripping operations.

The geotechnical engineer should then evaluate the subgrade to identify any areas of additional unsuitable soils. Any such materials should be removed to a level of firm and unyielding soil. The exposed subgrade soils should then be scarified to a depth of 12± inches, moisture conditioned to 2 to 4 percent above the optimum moisture content, and recompacted to at least 90 percent of the ASTM D-1557 maximum dry density. Based on the presence of variable strength surficial soils throughout the site, it is expected that some isolated areas of additional overexcavation may be required to remove zones of lower strength, unsuitable soils.

The grading recommendations presented above for the proposed parking and drive areas assume that the owner and/or developer can tolerate minor amounts of settlement within these areas. The grading recommendations presented above do not mitigate the extent of undocumented fill or compressible/collapsible native alluvium in the parking and drive areas. As such, some settlement and associated pavement distress could occur. Typically, repair of such distressed areas involves significantly lower costs than completely mitigating these soils at the time of construction. If the owner cannot tolerate the risk of such settlements, the parking and drive areas should be overexcavated to a depth of 2 feet below proposed pavement subgrade elevation, with the resulting soils replaced as compacted structural fill.

Treatment of Existing Soils: Flatwork Areas

Subgrade preparation in the new flatwork areas should initially consist of removal of all soils disturbed during stripping operations. The geotechnical engineer should then evaluate the subgrade to identify any areas of additional unsuitable soils. The subgrade soils should then be scarified to a depth of 12± inches, moisture conditioned or air dried to 2 to 4 percent above optimum, and recompacted to at least 90 percent of the ASTM D-1557 maximum dry density. Based on the presence of variable strength alluvial soils throughout the subject site, it is expected that some isolated areas of additional overexcavation may be required to remove zones of lower strength, unsuitable soils.

As noted previously, the subject site is underlain by low expansive soils. Support of new flatwork on low expansive soils carries additional risk with respect to flatwork movement and potential distress. This report provides recommendations for moisture conditioning and additional steel reinforcement in the flatwork areas in order to minimize the potential effects of the expansive soils. However, if additional protection is desired, the client should consider the placement of a 2-foot-thick layer of non-expansive soil beneath all flatwork.

Fill Placement

- Fill soils should be placed in thin (6± inches), near-horizontal lifts, moisture conditioned (or air dried) to 2 to 4 percent above the optimum moisture content, and compacted.
- On-site soils may be used for fill provided they are cleaned of any debris to the satisfaction of the geotechnical engineer.
- All grading and fill placement activities should be completed in accordance with the requirements of the 2019 CBC and the grading code of the city of Perris and/or the county of Riverside.
- All fill soils should be compacted to at least 90 percent of the ASTM D-1557 maximum dry density. Fill soils should be well mixed.
- Compaction tests should be performed periodically by the geotechnical engineer as random verification of compaction and moisture content. These tests are intended to aid the contractor. Since the tests are taken at discrete locations and depths, they may not be indicative of the entire fill and therefore should not relieve the contractor of his responsibility to meet the job specifications.

Imported Structural Fill

All imported structural fill should consist of very low expansive ($EI < 20$), well graded soils possessing at least 10 percent fines (that portion of the sample passing the No. 200 sieve).

Additional specifications for structural fill are presented in the Grading Guide Specifications, included as Appendix D.

Utility Trench Backfill

In general, all utility trench backfill should be compacted to at least 90 percent of the ASTM D-1557 maximum dry density. As an alternative, a clean sand (minimum Sand Equivalent of 30) may be placed within trenches and compacted in place (jetting or flooding is not recommended). Compacted trench backfill should conform to the requirements of the local grading code, and more restrictive requirements may be indicated by the city of Perris and/or the county of Riverside. All utility trench backfills should be witnessed by the geotechnical engineer. The trench backfill soils should be compaction tested where possible; probed and visually evaluated elsewhere.

Utility trenches which parallel a footing, and extending below a 1h:1v (horizontal to vertical) plane projected from the outside edge of the footing should be backfilled with structural fill soils, compacted to at least 90 percent of the ASTM D-1557 standard. Pea gravel backfill should not be used for these trenches.

Any soils used to backfill voids around subsurface utility structures, such as manholes or vaults, should be placed as compacted structural fill. If it is not practical to place compacted fill in these areas, then such void spaces may be backfilled with lean concrete slurry. Uncompacted pea gravel or sand is not recommended for backfilling these voids since these materials have a potential to settle and thereby cause distress of pavements placed around these subterranean structures.

6.4 Construction Considerations

Excavation Considerations

The near-surface soils generally consist of moderate strength clayey sands and silty sands, with occasional sandy clays. These materials may be subject to minor to moderate caving within shallow excavations. Where caving does occur, flattened excavation slopes may be sufficient to provide excavation stability. On a preliminary basis, the inclination of temporary slopes should not exceed 2h:1v. Temporary excavations into older alluvium or clayey soils may be laid back at a 1.5h:1v, at the discretion of the geotechnical engineer at the time of grading. Deeper excavations may require some form of external stabilization such as shoring or bracing. Maintaining adequate moisture content within the near-surface soils will improve excavation stability. All excavation activities on this site should be conducted in accordance with Cal-OSHA regulations.

Moisture Sensitive Subgrade Soils

Some of the near-surface soils possess appreciable silt and clay content and may become unstable if exposed to significant moisture infiltration or disturbance by construction traffic. In addition, based on their granular content, some of the on-site soils will also be susceptible to erosion. The site should, therefore, be graded to prevent ponding of surface water and to prevent water from running into excavations.

If the construction schedule dictates that site grading will occur during a period of wet weather, allowances should be made for costs and delays associated with drying the on-site soils or import of a drier, less moisture sensitive fill material. Grading during wet or cool weather may also increase the depth of overexcavation in the pad area as well as the need for a stabilization layer.

Expansive Soils

The near-surface soils within the subject site have been determined to possess a low expansion potential. Therefore, care should be given to proper moisture conditioning of all subgrade soils to a moisture content of 2 to 4 percent above the Modified Proctor optimum during site grading. All imported fill soils should have very low expansive ($EI < 20$) characteristics. **In addition to adequately moisture conditioning the subgrade soils and fill soils during grading, special care must be taken to maintain the moisture content of these soils at 2 to 4 percent above the Modified Proctor optimum. This will require the contractor to frequently moisture condition these soils throughout the grading process, unless grading occurs during a period of relatively wet weather.**

Due to the presence of expansive soils at this site, provisions should be made to limit the potential for surface water to penetrate the soils immediately adjacent to the new structure. These provisions should include directing surface runoff into rain gutters and area drains, reducing the extent of landscaped areas around the structure, and sloping the ground surface away from the building. Where possible, it is recommended that landscaped planters not be located immediately adjacent to the proposed building. If landscaped planters around the building are necessary, it is recommended that drought tolerant plants or a drip irrigation system be utilized, to minimize the potential for deep moisture penetration around the structure. Presented below is a list of additional soil moisture control recommendations that should be considered by the owner, developer, and civil engineer:

- Ponding and areas of low flow gradients in unpaved walkways, grass and planter areas should be avoided. In general, minimum drainage gradients of 2 percent should be maintained in unpaved areas.
- Bare soil within five feet of proposed structure should be sloped at a minimum five percent gradient away from the structure (about three inches of fall in five feet), or the same area could be paved with a minimum surface gradient of one percent. Pavement is preferable.
- Decorative gravel ground cover tends to provide a reservoir for surface water and may hide areas of ponding or poor drainage. Decorative gravel is, therefore, not recommended and should not be utilized for landscaping unless equipped with a subsurface drainage system designed by a licensed landscape architect.
- Positive drainage devices, such as graded swales, paved ditches, and catch basins should be installed at appropriate locations within the area of proposed development.
- Concrete walks and flatwork should not obstruct the free flow of surface water to the appropriate drainage devices.
- Area drains should be recessed below grade to allow free flow of water into the drain. Concrete or brick flatwork joints should be sealed with mortar or flexible mastic.
- Gutter and downspout systems should be installed to capture all discharge from roof areas. Downspouts should discharge directly into a pipe or paved surface system to be conveyed off-site.
- Enclosed planters adjoining, or in close proximity to the proposed structure, should be sealed at the bottom and provided with subsurface collection systems and outlet pipes.

- Depressed planters should be raised with soil to promote runoff (minimum drainage gradient two percent or five percent, see above), and/or equipped with area drains to eliminate ponding.
- Drainage outfall locations should be selected to avoid erosion of slopes and/or properly armored to prevent erosion of graded surfaces. No drainage should be directed over or towards adjoining slopes.
- All drainage devices should be maintained on a regular basis, including frequent observations during the rainy season to keep the drains free of leaves, soil and other debris.
- Landscape irrigation should conform to the recommendations of the landscape architect and should be performed judiciously to preclude either soaking or excessive drying of the foundation soils. This should entail regular watering during the drier portions of the year and little or no irrigation during the rainy season. Automatic sprinkler systems should, therefore, be switched to manual operation during the rainy season. Good irrigation practice typically requires frequent application of limited quantities of water that are sufficient to sustain plant growth, but do not excessively wet the soils. Ponding and/or run-off of irrigation water are indications of excessive watering.

Other provisions, as determined by the landscape architect or civil engineer, may also be appropriate.

Groundwater

The static groundwater table is considered to exist at a depth greater than 20± feet or more below existing grade. Therefore, groundwater is not expected to impact the grading or foundation construction activities.

6.5 Foundation Design and Construction

Based on the preceding grading recommendations, it is assumed that the new building pad will be underlain by structural fill soils used to replace any undocumented fill soils and a portion of the near-surface alluvial soils. These new structural fill soils are expected to extend to a depth of at least 3 feet below proposed foundation bearing grade, underlain by 1± foot of additional soil that has been densified and moisture conditioned in place. Based on this subsurface profile, the proposed structure may be supported on conventional shallow foundations.

Foundation Design Parameters

New square and rectangular footings may be designed as follows:

- Maximum, net allowable soil bearing pressure: 2,500 lbs/ft².
- Maximum, net allowable soil bearing pressure: 1,500 lbs/ft² if the full recommended lateral extent of remedial grading cannot be achieved, typically for new footings along the property lines.
- Minimum wall/column footing width: 14 inches/24 inches.
- Minimum longitudinal steel reinforcement within strip footings: Four (4) No. 5 rebars (2 top and 2 bottom), due to the presence of low expansive soils. Additional reinforcement may be necessary for structural considerations.

- Minimum foundation embedment: 12 inches into suitable structural fill soils, and at least 18 inches below adjacent exterior grade. Interior column footings may be placed immediately beneath the floor slab.
- It is recommended that the perimeter building foundations be continuous across all exterior doorways. Any flatwork adjacent to the exterior doors should be doweled into the perimeter foundations in a manner determined by the structural engineer.

The allowable bearing pressures presented above may be increased by 1/3 when considering short duration wind or seismic loads. The minimum steel reinforcement recommended above is based on standard geotechnical practice. Additional rigidity may be necessary for structural considerations. The actual design of the foundations should be determined by the structural engineer.

Foundation Construction

The foundation subgrade soils should be evaluated at the time of overexcavation, as discussed in Section 6.3 of this report. It is further recommended that the foundation subgrade soils be evaluated by the geotechnical engineer immediately prior to steel or concrete placement. Soils suitable for direct foundation support should consist of newly placed structural fill, compacted to at least 90 percent of the ASTM D-1557 maximum dry density. Any unsuitable materials should be removed to a depth of suitable bearing compacted structural fill or suitable native alluvium (where reduced bearing pressures are utilized), with the resulting excavations backfilled with compacted fill soils. As an alternative, lean concrete slurry (500 to 1,500 psi) may be used to backfill such isolated overexcavations.

The foundation subgrade soils should also be properly moisture conditioned to 2 to 4 percent above the Modified Proctor optimum, to a depth of at least 12 inches below bearing grade. Since it is typically not feasible to increase the moisture content of the floor slab and foundation subgrade soils once rough grading has been completed, care should be taken to maintain the moisture content of the building pad subgrade soils throughout the construction process.

Estimated Foundation Settlements

Post-construction total and differential static settlements of shallow foundations designed and constructed in accordance with the previously presented recommendations are estimated to be less than 1.0 and 0.5 inches, respectively, under static conditions. Differential movements are expected to occur over a 50-foot span, thereby resulting in an angular distortion of less than 0.002 inches per inch.

Lateral Load Resistance

Lateral load resistance will be developed by a combination of friction acting at the base of foundations and slab and the passive earth pressure developed by footings below grade. The following friction and passive pressure may be used to resist lateral forces:

- Passive Earth Pressure: 275 lbs/ft³
- Friction Coefficient: 0.28

These are allowable values, and include a factor of safety. When combining friction and passive resistance, the passive pressure component should be reduced by one-third. These values assume that footings will be poured directly against compacted structural fill soils. The maximum allowable passive pressure is 2,500 lbs/ft².

6.6 Floor Slab Design and Construction

Subgrades which will support the new floor slab should be prepared in accordance with the recommendations contained in the ***Site Grading Recommendations*** section of this report. Based on the anticipated grading which will occur at this site, the floor of the proposed structure may be constructed as conventional slab-on-grade supported on newly placed structural fill, extending to a depth of at least 3 feet below finished pad grade. Based on geotechnical considerations, the floor slab may be designed as follows:

- Minimum slab thickness: 6 inches.
- Modulus of Subgrade Reaction: 100 psi/in.
- Minimum slab reinforcement: No. 3 bars at 18-inches on-center, in both directions, due to presence of low expansive soils. The actual floor slab reinforcement should be determined by the structural engineer, based upon the imposed loading.
- Slab underlayment: If moisture sensitive floor coverings will be used then minimum slab underlayment should consist of a moisture vapor barrier constructed below the entire slab area where such moisture sensitive floor coverings are expected. The moisture vapor barrier should meet or exceed the Class A rating as defined by ASTM E 1745-97 and have a permeance rating less than 0.01 perms as described in ASTM E 96-95 and ASTM E 154-88. A polyolefin material such as 15 mil Stego® Wrap Vapor Barrier or equivalent will meet these specifications. The moisture vapor barrier should be properly constructed in accordance with all applicable manufacturer specifications. Given that a rock free subgrade is anticipated and that a capillary break is not required, sand below the barrier is not required. The need for sand and/or the amount of sand above the moisture vapor barrier should be specified by the structural engineer or concrete contractor. The selection of sand above the barrier is not a geotechnical engineering issue and hence outside our purview. Where moisture sensitive floor coverings are not anticipated, the vapor barrier may be eliminated.
- Moisture condition the floor slab subgrade soils to 2 to 4 percent above the Modified Proctor optimum moisture content, to a depth of 12 inches. The moisture content of the floor slab subgrade soils should be verified by the geotechnical engineer within 24 hours prior to concrete placement.
- Proper concrete curing techniques should be utilized to reduce the potential for slab curling or the formation of excessive shrinkage cracks.
- The floor slab should be structurally connected to the foundations as detailed by the structural engineer.

The actual design of the floor slab should be completed by the structural engineer to verify adequate thickness and reinforcement.

6.7 Exterior Flatwork Design and Construction

Subgrades which will support new exterior slabs-on-grade for sidewalks, patios, and other concrete flatwork, should be prepared in accordance with the recommendations contained in the ***Grading Recommendations*** section of this report. Based on geotechnical considerations, exterior slabs on grade may be designed as follows:

- Minimum slab thickness: 4½ inches.
- Minimum slab reinforcement: No. 3 bars at 18 inches on center, in both directions.
- The flatwork at building entry areas should be structurally connected to the perimeter foundation that is recommended to span across the door opening. This recommendation is designed to reduce the potential for differential movement at this joint.
- Moisture condition the slab subgrade soils to at least 2 to 4 percent of optimum moisture content, to a depth of at least 12 inches. Adequate moisture conditioning should be verified by the geotechnical engineer 24 hours prior to concrete placement.
- Proper concrete curing techniques should be utilized to reduce the potential for slab curling or the formation of excessive shrinkage cracks.
- Control joints should be provided at a maximum spacing of 8 feet on center in two directions for slabs and at 6 feet on center for sidewalks. Control joints are intended to direct cracking. Minor cracking of exterior concrete slabs on grade should be expected.

Expansion or felt joints should be used at the interface of exterior slabs on grade and any fixed structures to permit relative movement.

6.8 Retaining Wall Design and Construction

Although not indicated on the site plan, some small (less than 6 feet in height) retaining walls may be required in truck court area and to facilitate the new site grades. The parameters recommended for use in the design of these walls are presented below.

Retaining Wall Design Parameters

Based on the soil conditions encountered at the boring locations, the following parameters may be used in the design of new retaining walls for this site. The following parameters assume that only the on-site soils will be utilized for retaining wall backfill. The near-surface soils generally consist of clayey sands and silty sands, with occasional sandy clays. Based on their classification, the sandy materials are expected to possess a friction angle of at least 30 degrees when compacted to at least 90 percent of the ASTM D-1557 maximum dry density. Soils consisting of sandy clays likely possess lower strengths and should not be used to backfill retaining walls.

If desired, SCG could provide design parameters for an alternative select backfill material behind the retaining walls. The use of select backfill material could result in lower lateral earth pressures. In order to use the design parameters for the imported select fill, this material must be placed within the entire active failure wedge. This wedge is defined as extending from the heel of the retaining wall upwards at an angle of approximately 60° from horizontal. If select backfill material behind the retaining wall is desired, SCG should be contacted for supplementary recommendations.

RETAINING WALL DESIGN PARAMETERS

Design Parameter		Soil Type
		On-site Clayey Sands and Silty Sands
Internal Friction Angle (ϕ)		30°
Unit Weight		135 lbs/ft ³
Equivalent Fluid Pressure:	Active Condition (level backfill)	45 lbs/ft ³
	Active Condition (2h:1v backfill)	73 lbs/ft ³
	At-Rest Condition (level backfill)	68 lbs/ft ³

The walls should be designed using a soil-footing coefficient of friction of 0.28 and an equivalent passive pressure of 275 lbs/ft³. The structural engineer should incorporate appropriate factors of safety in the design of the retaining walls.

The active earth pressure may be used for the design of retaining walls that do not directly support structures or support soils that in turn support structures and which will be allowed to deflect. The at-rest earth pressure should be used for walls that will not be allowed to deflect such as those which will support foundation bearing soils, or which will support foundation loads directly.

Where the soils on the toe side of the retaining wall are not covered by a "hard" surface such as a structure or pavement, the upper 1 foot of soil should be neglected when calculating passive resistance due to the potential for the material to become disturbed or degraded during the life of the structure.

Retaining Wall Foundation Design

The retaining wall foundations should be underlain by at least 3 feet of newly placed structural fill. Foundations to support new retaining walls should be designed in accordance with the general Foundation Design Parameters presented in a previous section of this report.

Seismic Lateral Earth Pressures

In accordance with the 2019 CBC, any retaining walls more than 6 feet in height must be designed for seismic lateral earth pressures. If walls 6 feet or more are required for this site, the

geotechnical engineer should be contacted for supplementary seismic lateral earth pressure recommendations.

Backfill Material

On-site soils may be used to backfill the retaining walls, provided that they are very low expansive ($EI < 20$) sandy soils. All backfill material placed within 3 feet of the back wall-face should have a particle size no greater than 3 inches. The retaining wall backfill materials should be well graded. It is recommended that a minimum 1-foot thick layer of free-draining granular material (less than 5 percent passing the No. 200 sieve) be placed against the face of the retaining walls. This material should extend from the top of the retaining wall footing to within 1 foot of the ground surface on the back side of the retaining wall. This material should be approved by the geotechnical engineer. In lieu of the 1-foot thick layer of free-draining material, a properly installed prefabricated drainage composite such as the MiraDRAIN 6000XL (or approved equivalent), which is specifically designed for use behind retaining walls, may be used. If the layer of free-draining material is not covered by an impermeable surface, such as a structure or pavement, a 12-inch thick layer of a low permeability soil should be placed over the backfill to reduce surface water migration to the underlying soils. The layer of free draining granular material should be separated from the backfill soils by a suitable geotextile, approved by the geotechnical engineer.

All retaining wall backfill should be placed and compacted under engineering controlled conditions in the necessary layer thicknesses to ensure an in-place density between 90 and 93 percent of the maximum dry density as determined by the Modified Proctor test (ASTM D1557). Care should be taken to avoid over-compaction of the soils behind the retaining walls, and the use of heavy compaction equipment should be avoided.

Subsurface Drainage

As previously indicated, the retaining wall design parameters are based upon drained backfill conditions. Consequently, some form of permanent drainage system will be necessary in conjunction with the appropriate backfill material. Subsurface drainage may consist of either:

- A weep hole drainage system typically consisting of a series of 2-inch diameter holes in the wall situated slightly above the ground surface elevation on the exposed side of the wall and at an approximate 10-foot on-center spacing. Alternatively, 4-inch diameter holes at an approximate 20-foot on-center spacing can be used for this type of drainage system. In addition, the weep holes should include a 2 cubic foot pocket of open graded gravel, surrounded by an approved geotextile fabric, at each weep hole location.
- A 4-inch diameter perforated pipe surrounded by 2 cubic feet of gravel per linear foot of drain placed behind the wall, above the retaining wall footing. The gravel layer should be wrapped in a suitable geotextile fabric to reduce the potential for migration of fines. The footing drain should be extended to daylight or tied into a storm drainage system. The actual design of this type of system should be determined by the civil engineer to verify that the drainage system possesses the adequate capacity and slope for its intended use.

Weep holes or a footing drain will not be required for building stem walls.

6.9 Pavement Design Parameters

Site preparation in the pavement area should be completed as previously recommended in the ***Site Grading Recommendations*** section of this report. The subsequent pavement recommendations assume proper drainage and construction monitoring, and are based on either PCA or CALTRANS design parameters for a twenty (20) year design period. However, these designs also assume a routine pavement maintenance program to obtain the anticipated 20-year pavement service life.

Pavement Subgrades

It is anticipated that the new pavements will be primarily supported on a layer of compacted structural fill, consisting of scarified, thoroughly moisture conditioned and recompacted existing soils. The on-site soils generally consist of clayey sands and silty sands, with occasional sandy clays. These soils are generally considered to possess good pavement support characteristics. Based on the R-value testing performed as part of our scope for this project, the subsequent pavement designs are based upon an R-value of 30. Any fill material imported to the site should have support characteristics equal to or greater than that of the on-site soils and be placed and compacted under engineering controlled conditions. It is recommended that R-value testing be performed after the completion of rough grading to verify the R-value of the as-graded parking subgrade.

Asphaltic Concrete

Presented below are the recommended thicknesses for new flexible pavement structures consisting of asphaltic concrete over a granular base. The pavement designs are based on the traffic indices (TI's) indicated. The client and/or civil engineer should verify that these TI's are representative of the anticipated traffic volumes. If the client and/or civil engineer determine that the expected traffic volume will exceed the applicable traffic index, we should be contacted for supplementary recommendations. The design traffic indices equate to the following approximate daily traffic volumes over a 20-year design life, assuming six operational traffic days per week.

Traffic Index	No. of Heavy Trucks per Day
4.0	0
5.0	1
6.0	3
7.0	11
8.0	35
9.0	93

For the purpose of the traffic volumes indicated above, a truck is defined as a 5-axle tractor trailer unit with one 8-kip axle and two 32-kip tandem axles. All of the traffic indices allow for 1,000 automobiles per day.

ASPHALT PAVEMENTS (R=30)					
Materials	Thickness (inches)				
	Auto Parking and Auto Drive Lanes (TI = 4.0 to 5.0)	Truck Traffic			
		TI = 6.0	TI = 7.0	TI = 8.0	TI = 9.0
Asphalt Concrete	3	3½	4	5	5½
Aggregate Base	6	8	10	11	13
Compacted Subgrade	12	12	12	12	12

The aggregate base course should be compacted to at least 95 percent of the ASTM D-1557 maximum dry density. The asphaltic concrete should be compacted to at least 95 percent of the batch plant-reported maximum density. The aggregate base course may consist of crushed aggregate base (CAB) or crushed miscellaneous base (CMB), which is a recycled gravel, asphalt and concrete material. The gradation, R-Value, Sand Equivalent, and Percentage Wear of the CAB or CMB should comply with appropriate specifications contained in the current edition of the "Greenbook" Standard Specifications for Public Works Construction.

Portland Cement Concrete

The preparation of the subgrade soils within concrete pavement areas should be performed as previously described for proposed asphalt pavement areas. The minimum recommended thicknesses for the Portland Cement Concrete pavement sections are as follows:

PORTLAND CEMENT CONCRETE PAVEMENTS (R = 30)				
Materials	Thickness (inches)			
	Autos and Light Truck Traffic (TI = 6.0)	Truck Traffic		
		TI = 7.0	TI = 8.0	TI = 9.0
PCC	5	5½	6½	8
Compacted Subgrade (95% minimum compaction)	12	12	12	12

The concrete should have a 28-day compressive strength of at least 3,000 psi. The maximum joint spacing within all of the PCC pavements is recommended to be equal to or less than 30 times the pavement thickness. Any reinforcement within the PCC pavements should be determined by the project structural engineer.

7.0 GENERAL COMMENTS


This report has been prepared as an instrument of service for use by the client, in order to aid in the evaluation of this property and to assist the architects and engineers in the design and preparation of the project plans and specifications. This report may be provided to the contractor(s) and other design consultants to disclose information relative to the project. However, this report is not intended to be utilized as a specification in and of itself, without appropriate interpretation by the project architect, civil engineer, and/or structural engineer. The reproduction and distribution of this report must be authorized by the client and Southern California Geotechnical, Inc. Furthermore, any reliance on this report by an unauthorized third party is at such party's sole risk, and we accept no responsibility for damage or loss which may occur. The client(s)' reliance upon this report is subject to the Engineering Services Agreement, incorporated into our proposal for this project.

The analysis of this site was based on a subsurface profile interpolated from limited discrete soil samples. While the materials encountered in the project area are considered to be representative of the total area, some variations should be expected between boring locations and sample depths. If the conditions encountered during construction vary significantly from those detailed herein, we should be contacted immediately to determine if the conditions alter the recommendations contained herein.

This report has been based on assumed or provided characteristics of the proposed development. It is recommended that the owner, client, architect, structural engineer, and civil engineer carefully review these assumptions to ensure that they are consistent with the characteristics of the proposed development. If discrepancies exist, they should be brought to our attention to verify that they do not affect the conclusions and recommendations contained herein. We also recommend that the project plans and specifications be submitted to our office for review to verify that our recommendations have been correctly interpreted.

The analysis, conclusions, and recommendations contained within this report have been promulgated in accordance with generally accepted professional geotechnical engineering practice. No other warranty is implied or expressed.


APPENDIX A

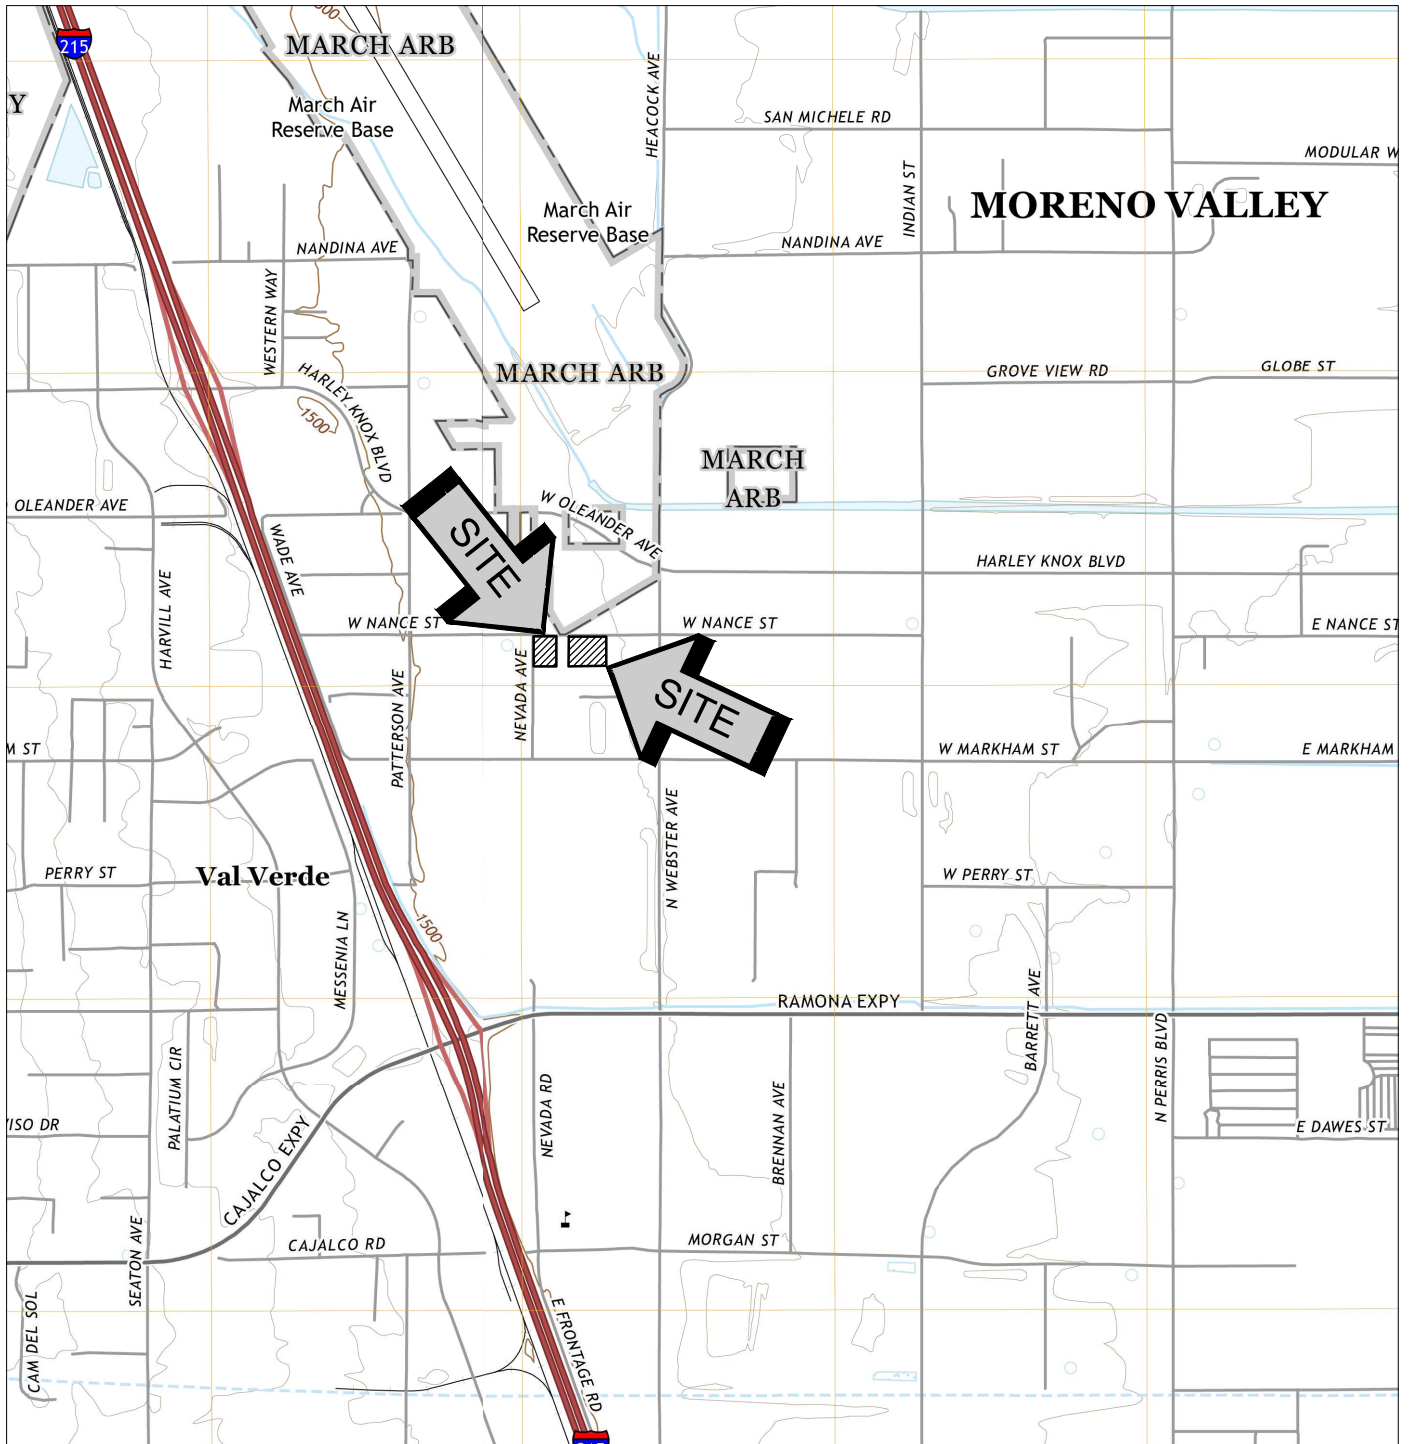

SOURCE: USGS TOPOGRAPHIC MAPS OF THE STEELE PEAK QUADRANGLE AND THE PERRIS QUADRANGLE, RIVERSIDE COUNTY, CALIFORNIA, 2021.



SITE LOCATION MAP	
PROPOSED INDUSTRIAL BUILDING AND TRAILER STORAGE	
PERRIS, CALIFORNIA	
SCALE: 1" = 2000'	 SOUTHERN CALIFORNIA GEOTECHNICAL
DRAWN: JLL	
CHKD: RGT	
SCG PROJECT 22G250-1	
PLATE 1	

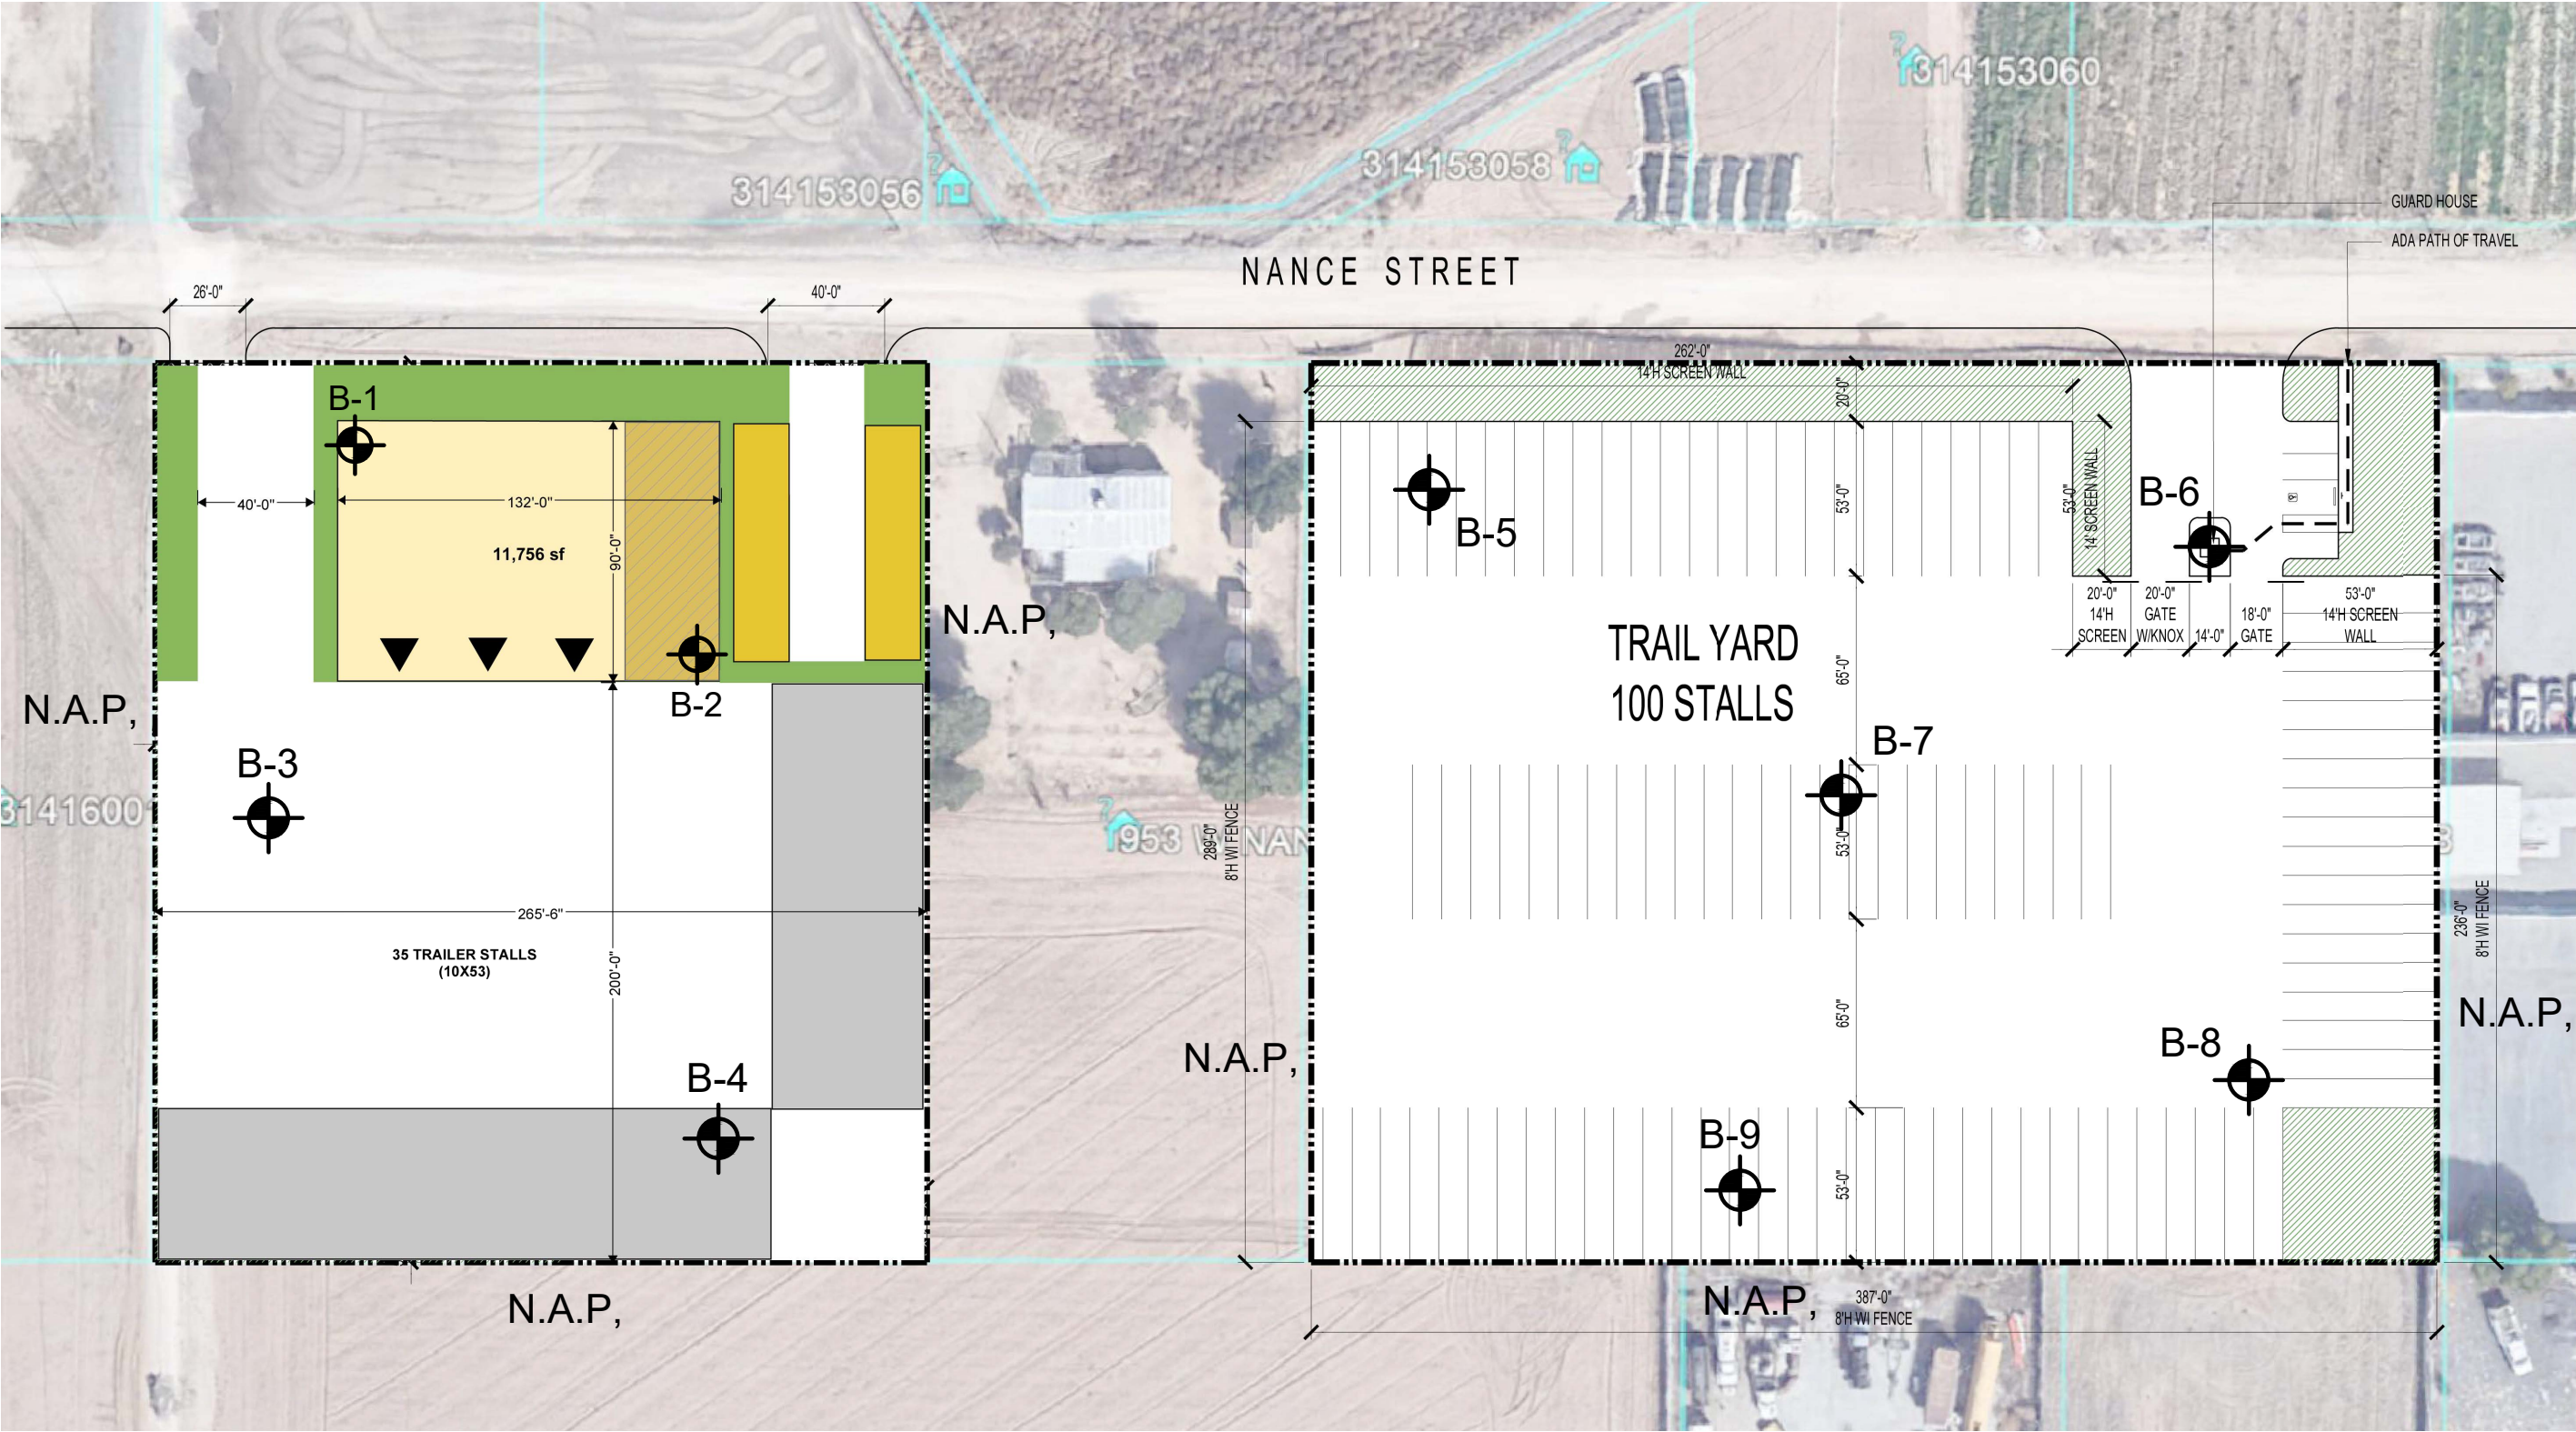

GEOTECHNICAL LEGEND

 APPROXIMATE BORING LOCATION











NOTE: CONCEPTUAL SITE PLAN (VERSION 3) PROVIDED BY THE CLIENT.

BORING LOCATION PLAN	
PROPOSED INDUSTRIAL BUILDING AND TRAILER STORAGE	
PERRIS, CALIFORNIA	
SCALE: 1" = 60'	 SOUTHERN CALIFORNIA GEOTECHNICAL
DRAWN: JLL	
CHKD: RGT	
SCG PROJECT 22G250-1	
PLATE 2	

APPENDIX B

BORING LOG LEGEND

SAMPLE TYPE	GRAPHICAL SYMBOL	SAMPLE DESCRIPTION
AUGER		SAMPLE COLLECTED FROM AUGER CUTTINGS, NO FIELD MEASUREMENT OF SOIL STRENGTH. (DISTURBED)
CORE		ROCK CORE SAMPLE: TYPICALLY TAKEN WITH A DIAMOND-TIPPED CORE BARREL. TYPICALLY USED ONLY IN HIGHLY CONSOLIDATED BEDROCK.
GRAB		SOIL SAMPLE TAKEN WITH NO SPECIALIZED EQUIPMENT, SUCH AS FROM A STOCKPILE OR THE GROUND SURFACE. (DISTURBED)
CS		CALIFORNIA SAMPLER: 2-1/2 INCH I.D. SPLIT BARREL SAMPLER, LINED WITH 1-INCH HIGH BRASS RINGS. DRIVEN WITH SPT HAMMER. (RELATIVELY UNDISTURBED)
NSR		NO RECOVERY: THE SAMPLING ATTEMPT DID NOT RESULT IN RECOVERY OF ANY SIGNIFICANT SOIL OR ROCK MATERIAL.
SPT		STANDARD PENETRATION TEST: SAMPLER IS A 1.4 INCH INSIDE DIAMETER SPLIT BARREL, DRIVEN 18 INCHES WITH THE SPT HAMMER. (DISTURBED)
SH		SHELBY TUBE: TAKEN WITH A THIN WALL SAMPLE TUBE, PUSHED INTO THE SOIL AND THEN EXTRACTED. (UNDISTURBED)
VANE		VANE SHEAR TEST: SOIL STRENGTH OBTAINED USING A 4 BLADED SHEAR DEVICE. TYPICALLY USED IN SOFT CLAYS-NO SAMPLE RECOVERED.

COLUMN DESCRIPTIONS

DEPTH:

Distance in feet below the ground surface.

SAMPLE:

Sample Type as depicted above.

BLOW COUNT:

Number of blows required to advance the sampler 12 inches using a 140 lb hammer with a 30-inch drop. 50/3" indicates penetration refusal (>50 blows) at 3 inches. WH indicates that the weight of the hammer was sufficient to push the sampler 6 inches or more.

POCKET PEN.:

Approximate shear strength of a cohesive soil sample as measured by pocket penetrometer.

GRAPHIC LOG:

Graphic Soil Symbol as depicted on the following page.

DRY DENSITY:

Dry density of an undisturbed or relatively undisturbed sample in lbs/ft³.

MOISTURE CONTENT:

Moisture content of a soil sample, expressed as a percentage of the dry weight.

LIQUID LIMIT:

The moisture content above which a soil behaves as a liquid.

PLASTIC LIMIT:

The moisture content above which a soil behaves as a plastic.

PASSING #200 SIEVE:

The percentage of the sample finer than the #200 standard sieve.

UNCONFINED SHEAR:

The shear strength of a cohesive soil sample, as measured in the unconfined state.

SOIL CLASSIFICATION CHART

MAJOR DIVISIONS			SYMBOLS		TYPICAL DESCRIPTIONS
			GRAPH	LETTER	
COARSE GRAINED SOILS MORE THAN 50% OF MATERIAL IS LARGER THAN NO. 200 SIEVE SIZE	GRAVEL AND GRAVELLY SOILS MORE THAN 50% OF COARSE FRACTION RETAINED ON NO. 4 SIEVE	CLEAN GRAVELS (LITTLE OR NO FINES)		GW	WELL-GRADED GRAVELS, GRAVEL - SAND MIXTURES, LITTLE OR NO FINES
				GP	POORLY-GRADED GRAVELS, GRAVEL - SAND MIXTURES, LITTLE OR NO FINES
		GRAVELS WITH FINES (APPRECIABLE AMOUNT OF FINES)		GM	SILTY GRAVELS, GRAVEL - SAND - SILT MIXTURES
				GC	CLAYEY GRAVELS, GRAVEL - SAND - CLAY MIXTURES
	SAND AND SANDY SOILS MORE THAN 50% OF COARSE FRACTION PASSING ON NO. 4 SIEVE	CLEAN SANDS (LITTLE OR NO FINES)		SW	WELL-GRADED SANDS, GRAVELLY SANDS, LITTLE OR NO FINES
				SP	POORLY-GRADED SANDS, GRAVELLY SAND, LITTLE OR NO FINES
		SANDS WITH FINES (APPRECIABLE AMOUNT OF FINES)		SM	SILTY SANDS, SAND - SILT MIXTURES
				SC	CLAYEY SANDS, SAND - CLAY MIXTURES
FINE GRAINED SOILS MORE THAN 50% OF MATERIAL IS SMALLER THAN NO. 200 SIEVE SIZE	SILTS AND CLAYS LIQUID LIMIT LESS THAN 50			ML	INORGANIC SILTS AND VERY FINE SANDS, ROCK FLOUR, SILTY OR CLAYEY FINE SANDS OR CLAYEY SILTS WITH SLIGHT PLASTICITY
				CL	INORGANIC CLAYS OF LOW TO MEDIUM PLASTICITY, GRAVELLY CLAYS, SANDY CLAYS, SILTY CLAYS, LEAN CLAYS
				OL	ORGANIC SILTS AND ORGANIC SILTY CLAYS OF LOW PLASTICITY
	SILTS AND CLAYS LIQUID LIMIT GREATER THAN 50			MH	INORGANIC SILTS, MICACEOUS OR DIATOMACEOUS FINE SAND OR SILTY SOILS
				CH	INORGANIC CLAYS OF HIGH PLASTICITY
				OH	ORGANIC CLAYS OF MEDIUM TO HIGH PLASTICITY, ORGANIC SILTS
HIGHLY ORGANIC SOILS			PT	PEAT, HUMUS, SWAMP SOILS WITH HIGH ORGANIC CONTENTS	

NOTE: DUAL SYMBOLS ARE USED TO INDICATE BORDERLINE SOIL CLASSIFICATIONS














JOB NO.: 22G250-1	DRILLING DATE: 10/21/22	WATER DEPTH: Dry
PROJECT: Prop. Industrial Building & Storage Trailer	DRILLING METHOD: Hollow Stem Auger	CAVE DEPTH: 18 feet
LOCATION: Perris, California	LOGGED BY: Caleb Brackett	READING TAKEN: At Completion

FIELD RESULTS					LABORATORY RESULTS							COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG	DESCRIPTION	DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
					<u>FILL</u> : Brown Silty fine to medium Sand, trace coarse Sand, trace to little Clay, dense-damp to moist	116	7					EI = 21 @ 0 to 5 feet
		55				118	6					
5		50/5"			<u>OLDER ALLUVIUM</u> : Gray Brown Clayey fine Sand, little medium Sand, little Silt, trace Calcareous nodules/veining, cemented, very dense-damp	117	5					
		63			Brown Silty fine to medium Sand, little Clay, slightly cemented, dense-damp	116	6					
		65			Brown Silty fine to medium Sand, little coarse Sand, trace Clay, dense-damp	114	5					
10		52										
					Light Brown Silty fine Sand to fine Sandy Silt, trace medium Sand, trace Clay, dense-damp to moist		8					
15		40										
							8					
20		46										
					Boring Terminated at 20'							

TBL 22G250-1.GPJ SoCALGEO.GDT 11/21/22



JOB NO.: 22G250-1	DRILLING DATE: 10/21/22	WATER DEPTH: Dry
PROJECT: Prop. Industrial Building & Storage Trailer	DRILLING METHOD: Hollow Stem Auger	CAVE DEPTH: 11 feet
LOCATION: Perris, California	LOGGED BY: Caleb Brackett	READING TAKEN: At Completion

FIELD RESULTS					GRAPHIC LOG	DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	DRY DENSITY (PCF)			MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)		
SURFACE ELEVATION: --- MSL													
5		50/5"	4.5		OLDER ALLUVIUM: Light Brown Silty fine to medium Sand, trace Clay, slightly cemented, slightly porous, dense to very dense-damp						@ 1 foot, No Sample Recovery		
		62			111	4							
		49			Light Brown to Brown Clayey fine to medium Sand to fine to medium Sandy Clay, little Silt, cemented, slightly porous, dense to hard-damp	103	6						
		36			Brown Silty fine to medium Sand, slightly cemented, slightly porous, medium dense-moist	112	8						
		52			Brown Silty fine Sand, trace to little medium Sand, little Clay, slightly porous, dense-damp	116	6						
10													
15		71			Brown Silty fine to medium Sand, trace Clay, very dense-moist		9						
Boring Terminated at 15'													

TBL 22G250-1.GPJ SoCALGEO.GDT 11/21/22



JOB NO.: 22G250-1				DRILLING DATE: 10/21/22				WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Storage Trailer				DRILLING METHOD: Hollow Stem Auger				CAVE DEPTH: 7 feet				
LOCATION: Perris, California				LOGGED BY: Caleb Brackett				READING TAKEN: At Completion				
FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
5		18			<u>FILL</u> : Light Brown Silty fine Sand, little medium Sand, trace Clay, medium dense-damp		4					
		22			<u>OLDER ALLUVIUM</u> : Brown Silty fine to medium Sand, little Clay, slightly cemented, trace Calcareous nodules/veining, medium dense-moist		8					
		17					10					
		44			@ 8½ feet, dense		10					
10					Boring Terminated at 10'							

TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22



JOB NO.: 22G250-1	DRILLING DATE: 10/21/22	WATER DEPTH: Dry
PROJECT: Prop. Industrial Building & Storage Trailer	DRILLING METHOD: Hollow Stem Auger	CAVE DEPTH: 18 feet
LOCATION: Perris, California	LOGGED BY: Caleb Brackett	READING TAKEN: At Completion

FIELD RESULTS				GRAPHIC LOG	DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)			DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
5		12			FILL: Brown Silty fine to medium Sand, trace coarse Sand, trace Clay, medium dense-damp		6					
		19			OLDER ALLUVIUM: Dark Brown Silty fine to medium Sand, little coarse Sand, trace Clay, medium dense-damp		5					
		13			Light Brown Silty fine Sand, little medium to coarse Sand, medium dense-damp		5					
		18					4					
	10											
15		24			Light Brown Silty fine Sand to fine Sandy Silt, trace medium Sand, trace Clay, medium dense-damp		7					
20		39			Brown Clayey Silt, little fine Sand, trace medium Sand, hard-damp to moist		10					
					Boring Terminated at 20'							









TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22



JOB NO.: 22G250-1					DRILLING DATE: 10/21/22					WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Storage Trailer					DRILLING METHOD: Hollow Stem Auger					CAVE DEPTH: 3 feet				
LOCATION: Perris, California					LOGGED BY: Caleb Brackett					READING TAKEN: At Completion				
FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS		
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)			
5					SURFACE ELEVATION: --- MSL									
		X	26		FILL: Light Brown Silty fine to medium Sand, trace coarse Sand, trace Clay, medium dense-damp		5							
		X	45		OLDER ALLUVIUM: Brown Silty fine to medium Sand, trace coarse Sand, trace Clay, slightly cemented, dense-damp		6							
Boring Terminated at 5'														







TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22



JOB NO.: 22G250-1				DRILLING DATE: 10/21/22				WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Storage Trailer				DRILLING METHOD: Hollow Stem Auger				CAVE DEPTH: 12 feet				
LOCATION: Perris, California				LOGGED BY: Caleb Brackett				READING TAKEN: At Completion				
FIELD RESULTS				GRAPHIC LOG	DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)			DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
5		50/5"	4.5		<u>FILL</u> : Brown fine Sandy Clay, little medium to coarse Sand, trace to little Silt, hard-dry to damp	110	3					@ 7 feet, No Sample Recovery
		75			<u>OLDER ALLUVIUM</u> : Light Brown Silty fine to medium Sand, trace coarse Sand, trace Clay, trace Calcareous nodules/veining, slightly cemented, dense to very dense-damp	120	4					
		71				117	3					
		50/5"			Brown Silty fine to medium Sand, trace coarse Sand, very dense-damp							
	10		50/5"			113	6					
15		50/4"					7					
	Boring Terminated at 15'											

TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22



JOB NO.: 22G250-1				DRILLING DATE: 10/21/22				WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Storage Trailer				DRILLING METHOD: Hollow Stem Auger				CAVE DEPTH: 8 feet				
LOCATION: Perris, California				LOGGED BY: Caleb Brackett				READING TAKEN: At Completion				
FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
5		28	4.5		OLDER ALLUVIUM: Light Brown fine Sandy Clay, little medium Sand, little Silt, very stiff-damp		5					EI = 43 @ 0 to 5 feet
		62			Brown Silty fine to medium Sand to fine to medium Sandy Silt, little Clay, dense to very dense-damp		5					
		42					4					
		50/5"					6					
10					Boring Terminated at 10'							

TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22



JOB NO.: 22G250-1	DRILLING DATE: 10/21/22	WATER DEPTH: Dry
PROJECT: Prop. Industrial Building & Storage Trailer	DRILLING METHOD: Hollow Stem Auger	CAVE DEPTH: 3 feet
LOCATION: Perris, California	LOGGED BY: Caleb Brackett	READING TAKEN: At Completion

FIELD RESULTS					LABORATORY RESULTS							COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG	DESCRIPTION	DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
5		36			<u>FILL</u> : Light Brown to Brown Silty fine to medium Sand, trace Clay, dense-damp		6					
		39			<u>OLDER ALLUVIUM</u> : Brown Silty fine to medium Sand, little Clay, trace coarse Sand, trace Calcareous nodules/veining, slightly cemented, dense-damp		6					
					Boring Terminated at 5'							

TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22




JOB NO.: 22G250-1				DRILLING DATE: 10/21/22				WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Storage Trailer				DRILLING METHOD: Hollow Stem Auger				CAVE DEPTH: 18 feet				
LOCATION: Perris, California				LOGGED BY: Caleb Brackett				READING TAKEN: At Completion				
FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
					<u>FILL</u> : Light Brown to Brown Silty fine to medium Sand, trace coarse Sand, medium dense-damp		5					
5		12										
		18			<u>YOUNGER ALLUVIUM</u> : Brown Clayey fine Sand, little medium Sand, little Silt, medium dense-damp to moist		8					
		25					8					
10		50/5"			<u>OLDER ALLUVIUM</u> : Brown Silty fine to medium Sand, trace coarse Sand, trace Clay, slightly cemented, dense to very dense-moist		9					
15		49					9					
						</						

TBL 22G250-1.GPJ SOCALGEO.GDT 11/21/22

APPENDIX

Consolidation/Collapse Test Results

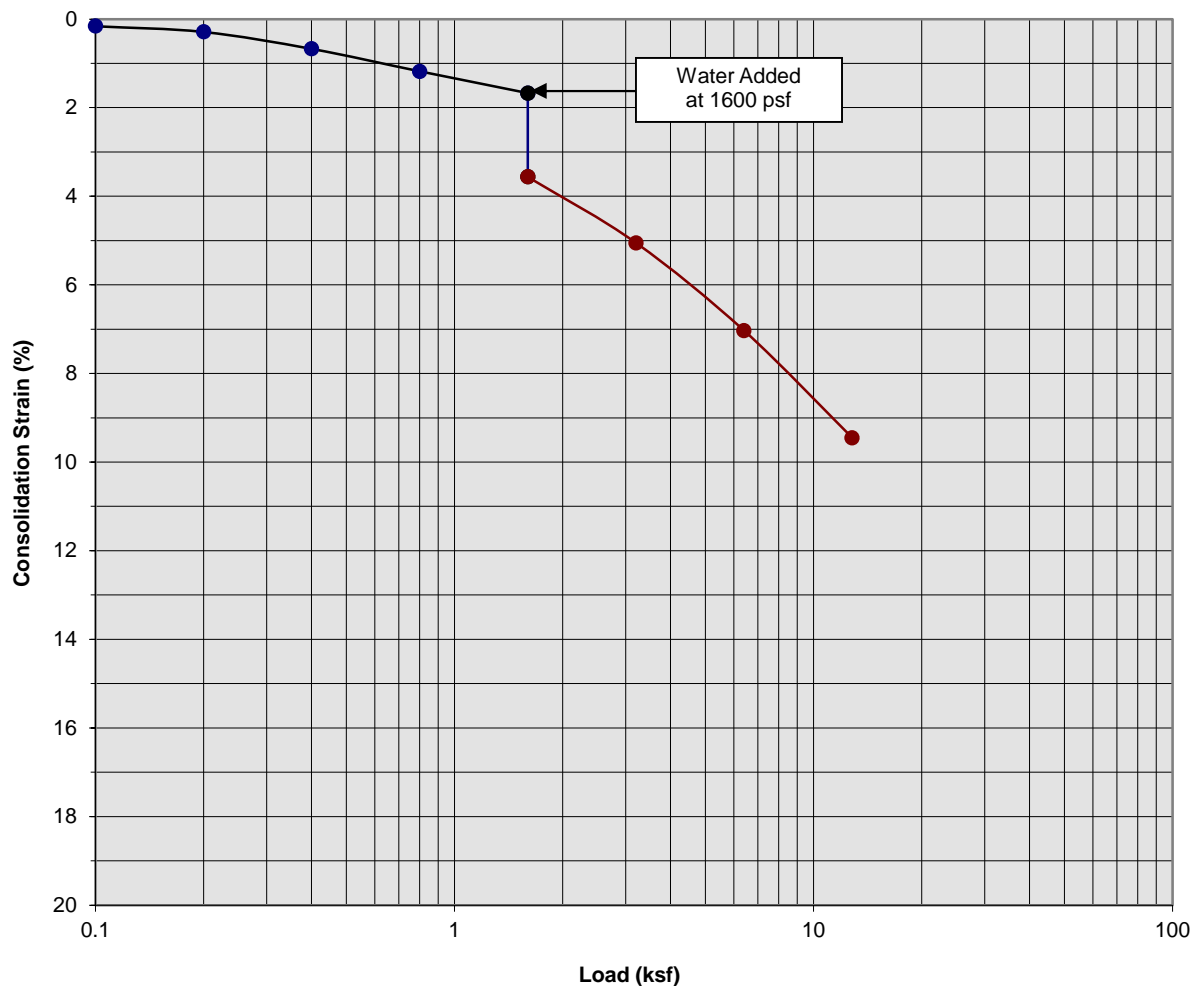

Classification: Light Brown Silty fine to medium Sand, trace Clay


Boring Number:	B-2	Initial Moisture Content (%)	4
Sample Number:	---	Final Moisture Content (%)	13
Depth (ft)	3 to 4	Initial Dry Density (pcf)	111.3
Specimen Diameter (in)	2.4	Final Dry Density (pcf)	122.3
Specimen Thickness (in)	1.0	Percent Collapse (%)	1.89

Proposed Industrial Building and Trailer Storage
Perris, California
Project No. 22G250-1
PLATE C- 1



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

Consolidation/Collapse Test Results

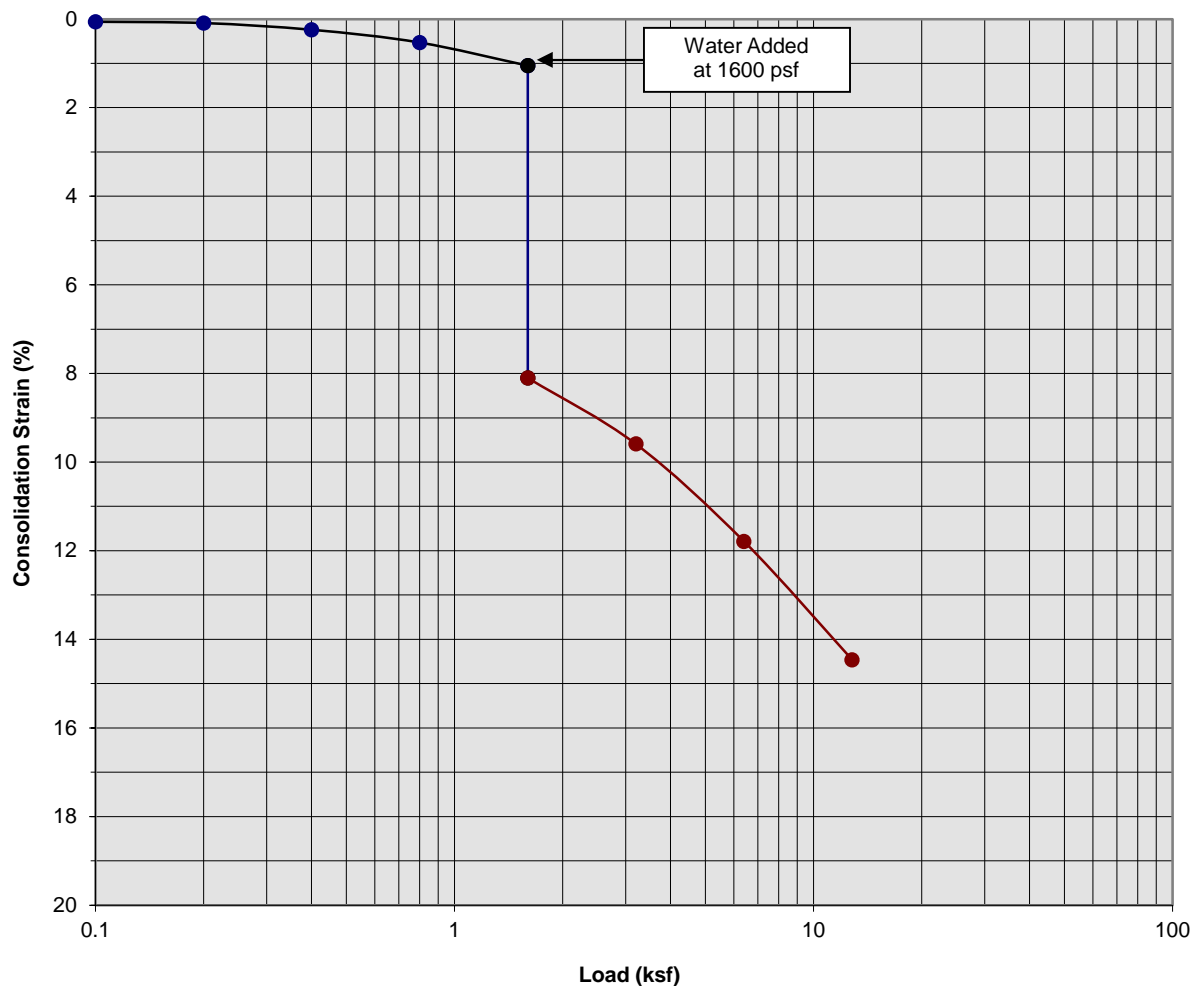

Classification: Lt Brown to Brown Clayey fine to medium Sand to fine to medium Sandy Clay


Boring Number:	B-2	Initial Moisture Content (%)	6
Sample Number:	---	Final Moisture Content (%)	14
Depth (ft)	5 to 6	Initial Dry Density (pcf)	103.0
Specimen Diameter (in)	2.4	Final Dry Density (pcf)	119.6
Specimen Thickness (in)	1.0	Percent Collapse (%)	7.05

Proposed Industrial Building and Trailer Storage
Perris, California
Project No. 22G250-1
PLATE C- 2



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

Consolidation/Collapse Test Results

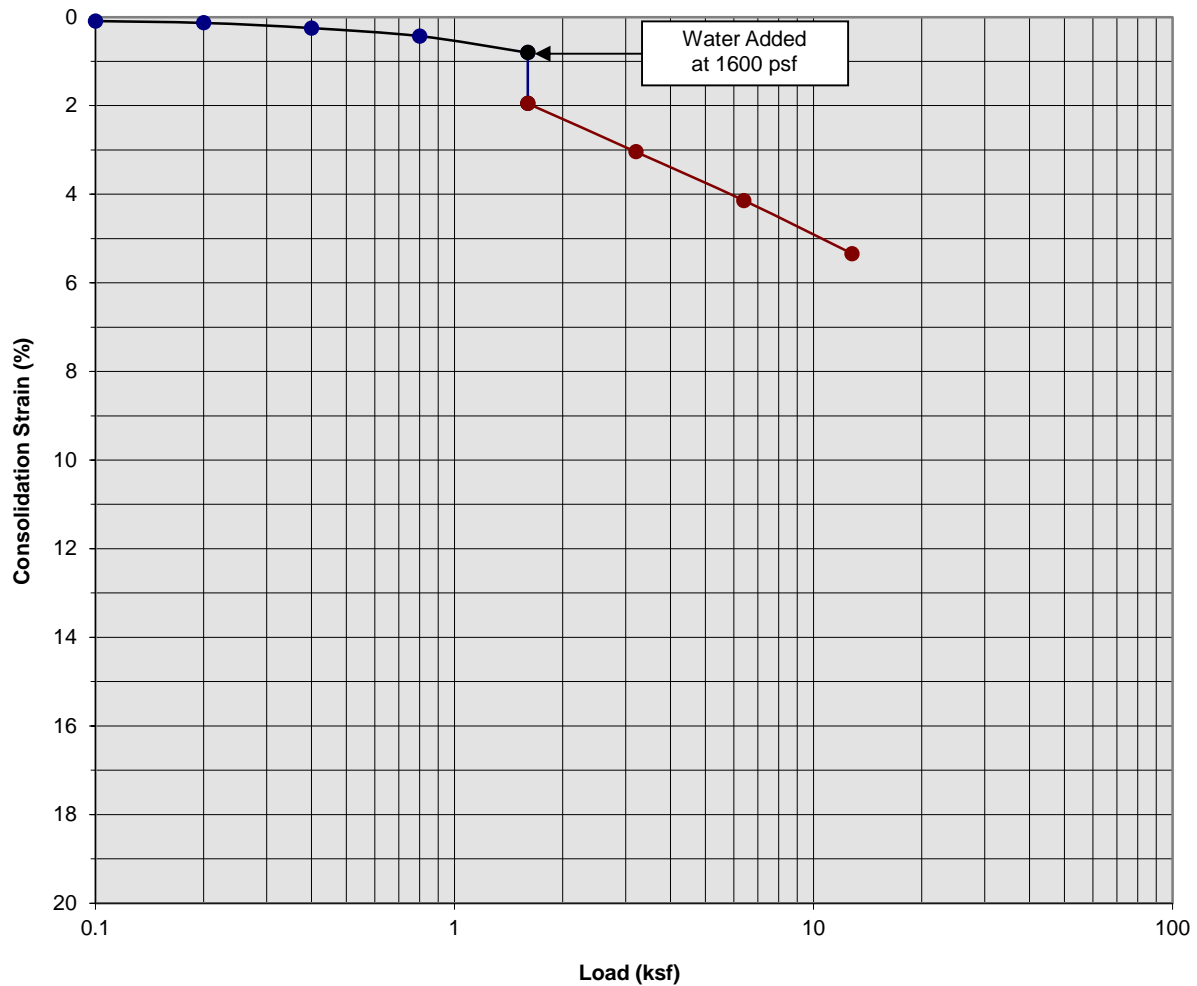

Classification: Brown Silty fine to medium Sand


Boring Number:	B-2	Initial Moisture Content (%)	8
Sample Number:	---	Final Moisture Content (%)	12
Depth (ft)	7 to 8	Initial Dry Density (pcf)	111.7
Specimen Diameter (in)	2.4	Final Dry Density (pcf)	118.3
Specimen Thickness (in)	1.0	Percent Collapse (%)	1.15

Proposed Industrial Building and Trailer Storage
Perris, California
Project No. 22G250-1
PLATE C- 3



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

Consolidation/Collapse Test Results

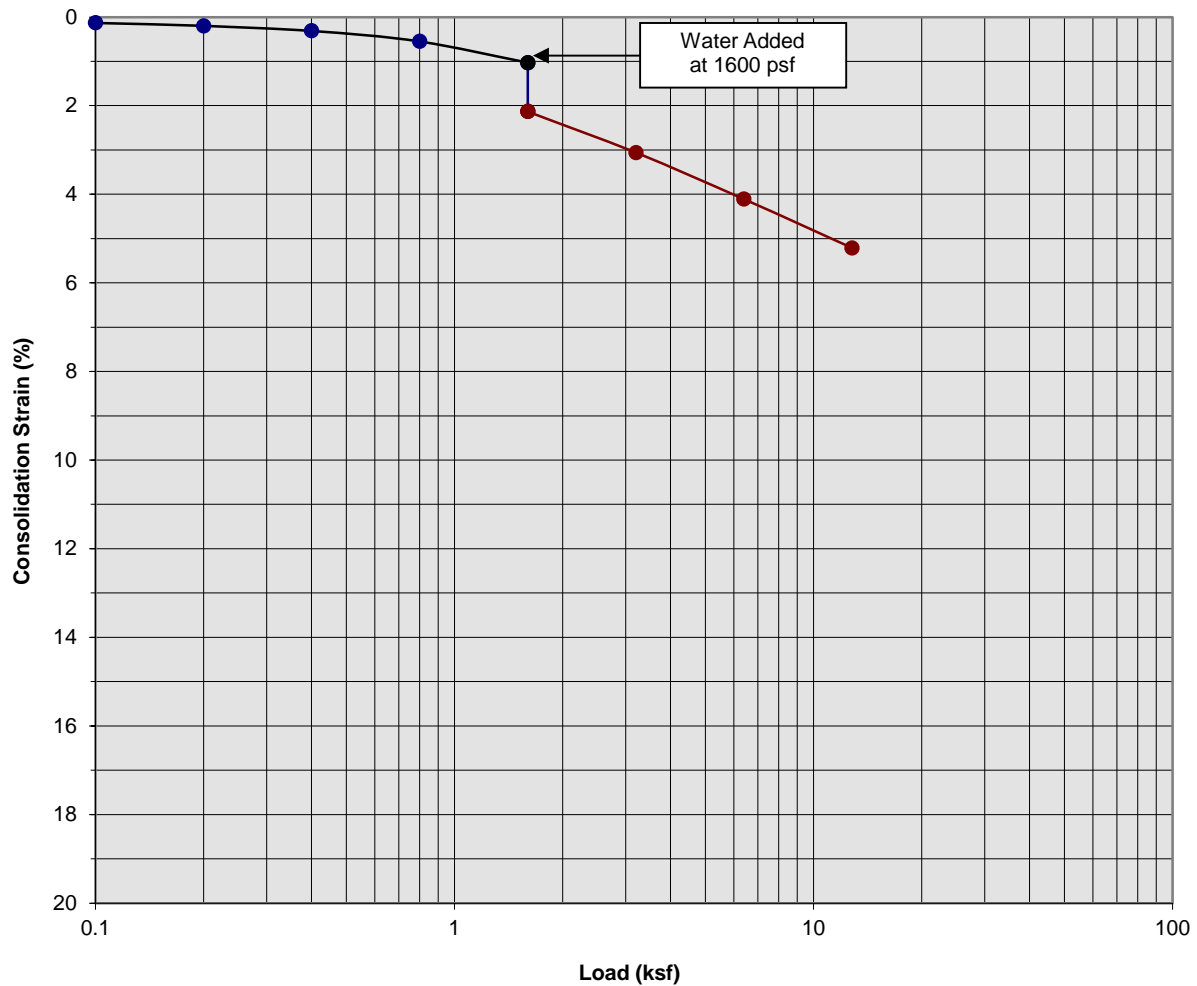

Classification: Brown Silty fine Sand, trace to little medium Sand, little Clay


Boring Number:	B-2	Initial Moisture Content (%)	6
Sample Number:	---	Final Moisture Content (%)	12
Depth (ft)	9 to 10	Initial Dry Density (pcf)	116.1
Specimen Diameter (in)	2.4	Final Dry Density (pcf)	121.8
Specimen Thickness (in)	1.0	Percent Collapse (%)	1.10

Proposed Industrial Building and Trailer Storage
Perris, California
Project No. 22G250-1
PLATE C- 4



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

Moisture/Density Relationship ASTM D-1557

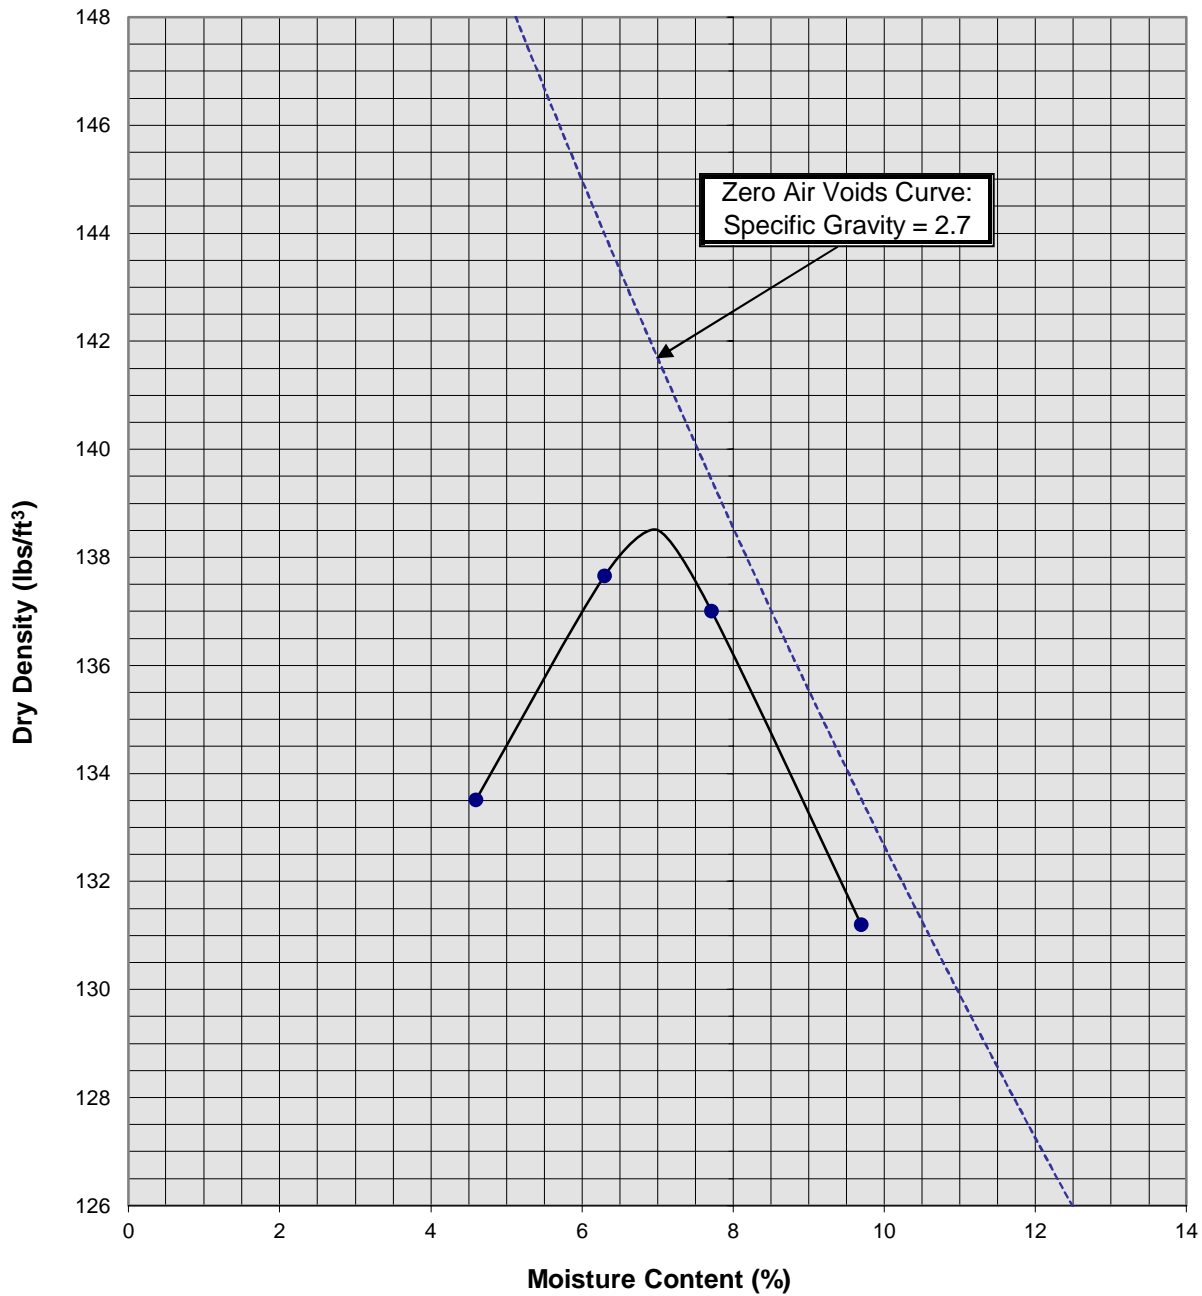

Soil ID Number	B-4 @ 0-5'
Optimum Moisture (%)	7
Maximum Dry Density (pcf)	138.5
Soil Classification	Brown to Dark Brown Silty fine to medium Sand, trace coarse Sand, trace Clay

Proposed Industrial Building and Trailer Storage
Perris, California
Project No. 22G250-1
PLATE C- 5



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

APPENDIX

GRADING GUIDE SPECIFICATIONS

These grading guide specifications are intended to provide typical procedures for grading operations. They are intended to supplement the recommendations contained in the geotechnical investigation report for this project. Should the recommendations in the geotechnical investigation report conflict with the grading guide specifications, the more site specific recommendations in the geotechnical investigation report will govern.

General

- The Earthwork Contractor is responsible for the satisfactory completion of all earthwork in accordance with the plans and geotechnical reports, and in accordance with city, county, and applicable building codes.
- The Geotechnical Engineer is the representative of the Owner/Builder for the purpose of implementing the report recommendations and guidelines. These duties are not intended to relieve the Earthwork Contractor of any responsibility to perform in a workman-like manner, nor is the Geotechnical Engineer to direct the grading equipment or personnel employed by the Contractor.
- The Earthwork Contractor is required to notify the Geotechnical Engineer of the anticipated work and schedule so that testing and inspections can be provided. If necessary, work may be stopped and redone if personnel have not been scheduled in advance.
- The Earthwork Contractor is required to have suitable and sufficient equipment on the job-site to process, moisture condition, mix and compact the amount of fill being placed to the approved compaction. In addition, suitable support equipment should be available to conform with recommendations and guidelines in this report.
- Canyon cleanouts, overexcavation areas, processed ground to receive fill, key excavations, subdrains and benches should be observed by the Geotechnical Engineer prior to placement of any fill. It is the Earthwork Contractor's responsibility to notify the Geotechnical Engineer of areas that are ready for inspection.
- Excavation, filling, and subgrade preparation should be performed in a manner and sequence that will provide drainage at all times and proper control of erosion. Precipitation, springs, and seepage water encountered shall be pumped or drained to provide a suitable working surface. The Geotechnical Engineer must be informed of springs or water seepage encountered during grading or foundation construction for possible revision to the recommended construction procedures and/or installation of subdrains.

Site Preparation

- The Earthwork Contractor is responsible for all clearing, grubbing, stripping and site preparation for the project in accordance with the recommendations of the Geotechnical Engineer.
- If any materials or areas are encountered by the Earthwork Contractor which are suspected of having toxic or environmentally sensitive contamination, the Geotechnical Engineer and Owner/Builder should be notified immediately.

- Major vegetation should be stripped and disposed of off-site. This includes trees, brush, heavy grasses and any materials considered unsuitable by the Geotechnical Engineer.
- Underground structures such as basements, cesspools or septic disposal systems, mining shafts, tunnels, wells and pipelines should be removed under the inspection of the Geotechnical Engineer and recommendations provided by the Geotechnical Engineer and/or city, county or state agencies. If such structures are known or found, the Geotechnical Engineer should be notified as soon as possible so that recommendations can be formulated.
- Any topsoil, slopewash, colluvium, alluvium and rock materials which are considered unsuitable by the Geotechnical Engineer should be removed prior to fill placement.
- Remaining voids created during site clearing caused by removal of trees, foundations basements, irrigation facilities, etc., should be excavated and filled with compacted fill.
- Subsequent to clearing and removals, areas to receive fill should be scarified to a depth of 10 to 12 inches, moisture conditioned and compacted
- The moisture condition of the processed ground should be at or slightly above the optimum moisture content as determined by the Geotechnical Engineer. Depending upon field conditions, this may require air drying or watering together with mixing and/or discing.

Compacted Fills

- Soil materials imported to or excavated on the property may be utilized in the fill, provided each material has been determined to be suitable in the opinion of the Geotechnical Engineer. Unless otherwise approved by the Geotechnical Engineer, all fill materials shall be free of deleterious, organic, or frozen matter, shall contain no chemicals that may result in the material being classified as "contaminated," and shall be very low to non-expansive with a maximum expansion index (EI) of 50. The top 12 inches of the compacted fill should have a maximum particle size of 3 inches, and all underlying compacted fill material a maximum 6-inch particle size, except as noted below.
- All soils should be evaluated and tested by the Geotechnical Engineer. Materials with high expansion potential, low strength, poor gradation or containing organic materials may require removal from the site or selective placement and/or mixing to the satisfaction of the Geotechnical Engineer.
- Rock fragments or rocks less than 6 inches in their largest dimensions, or as otherwise determined by the Geotechnical Engineer, may be used in compacted fill, provided the distribution and placement is satisfactory in the opinion of the Geotechnical Engineer.
- Rock fragments or rocks greater than 12 inches should be taken off-site or placed in accordance with recommendations and in areas designated as suitable by the Geotechnical Engineer. These materials should be placed in accordance with Plate D-8 of these Grading Guide Specifications and in accordance with the following recommendations:
 - Rocks 12 inches or more in diameter should be placed in rows at least 15 feet apart, 15 feet from the edge of the fill, and 10 feet or more below subgrade. Spaces should be left between each rock fragment to provide for placement and compaction of soil around the fragments.
 - Fill materials consisting of soil meeting the minimum moisture content requirements and free of oversize material should be placed between and over the rows of rock or

concrete. Ample water and compactive effort should be applied to the fill materials as they are placed in order that all of the voids between each of the fragments are filled and compacted to the specified density.

- Subsequent rows of rocks should be placed such that they are not directly above a row placed in the previous lift of fill. A minimum 5-foot offset between rows is recommended.
- To facilitate future trenching, oversized material should not be placed within the range of foundation excavations, future utilities or other underground construction unless specifically approved by the soil engineer and the developer/owner representative.
- Fill materials approved by the Geotechnical Engineer should be placed in areas previously prepared to receive fill and in evenly placed, near horizontal layers at about 6 to 8 inches in loose thickness, or as otherwise determined by the Geotechnical Engineer for the project.
- Each layer should be moisture conditioned to optimum moisture content, or slightly above, as directed by the Geotechnical Engineer. After proper mixing and/or drying, to evenly distribute the moisture, the layers should be compacted to at least 90 percent of the maximum dry density in compliance with ASTM D-1557-78 unless otherwise indicated.
- Density and moisture content testing should be performed by the Geotechnical Engineer at random intervals and locations as determined by the Geotechnical Engineer. These tests are intended as an aid to the Earthwork Contractor, so he can evaluate his workmanship, equipment effectiveness and site conditions. The Earthwork Contractor is responsible for compaction as required by the Geotechnical Report(s) and governmental agencies.
- Fill areas unused for a period of time may require moisture conditioning, processing and recompaction prior to the start of additional filling. The Earthwork Contractor should notify the Geotechnical Engineer of his intent so that an evaluation can be made.
- Fill placed on ground sloping at a 5-to-1 inclination (horizontal-to-vertical) or steeper should be benched into bedrock or other suitable materials, as directed by the Geotechnical Engineer. Typical details of benching are illustrated on Plates D-2, D-4, and D-5.
- Cut/fill transition lots should have the cut portion overexcavated to a depth of at least 3 feet and rebuilt with fill (see Plate D-1), as determined by the Geotechnical Engineer.
- All cut lots should be inspected by the Geotechnical Engineer for fracturing and other bedrock conditions. If necessary, the pads should be overexcavated to a depth of 3 feet and rebuilt with a uniform, more cohesive soil type to impede moisture penetration.
- Cut portions of pad areas above buttresses or stabilizations should be overexcavated to a depth of 3 feet and rebuilt with uniform, more cohesive compacted fill to impede moisture penetration.
- Non-structural fill adjacent to structural fill should typically be placed in unison to provide lateral support. Backfill along walls must be placed and compacted with care to ensure that excessive unbalanced lateral pressures do not develop. The type of fill material placed adjacent to below grade walls must be properly tested and approved by the Geotechnical Engineer with consideration of the lateral earth pressure used in the design.

Foundations

- The foundation influence zone is defined as extending one foot horizontally from the outside edge of a footing, and proceeding downward at a ½ horizontal to 1 vertical (0.5:1) inclination.
- Where overexcavation beneath a footing subgrade is necessary, it should be conducted so as to encompass the entire foundation influence zone, as described above.
- Compacted fill adjacent to exterior footings should extend at least 12 inches above foundation bearing grade. Compacted fill within the interior of structures should extend to the floor subgrade elevation.

Fill Slopes

- The placement and compaction of fill described above applies to all fill slopes. Slope compaction should be accomplished by overfilling the slope, adequately compacting the fill in even layers, including the overfilled zone and cutting the slope back to expose the compacted core
- Slope compaction may also be achieved by backrolling the slope adequately every 2 to 4 vertical feet during the filling process as well as requiring the earth moving and compaction equipment to work close to the top of the slope. Upon completion of slope construction, the slope face should be compacted with a sheepsfoot connected to a sideboom and then grid rolled. This method of slope compaction should only be used if approved by the Geotechnical Engineer.
- Sandy soils lacking in adequate cohesion may be unstable for a finished slope condition and therefore should not be placed within 15 horizontal feet of the slope face.
- All fill slopes should be keyed into bedrock or other suitable material. Fill keys should be at least 15 feet wide and inclined at 2 percent into the slope. For slopes higher than 30 feet, the fill key width should be equal to one-half the height of the slope (see Plate D-5).
- All fill keys should be cleared of loose slough material prior to geotechnical inspection and should be approved by the Geotechnical Engineer and governmental agencies prior to filling.
- The cut portion of fill over cut slopes should be made first and inspected by the Geotechnical Engineer for possible stabilization requirements. The fill portion should be adequately keyed through all surficial soils and into bedrock or suitable material. Soils should be removed from the transition zone between the cut and fill portions (see Plate D-2).

Cut Slopes


- All cut slopes should be inspected by the Geotechnical Engineer to determine the need for stabilization. The Earthwork Contractor should notify the Geotechnical Engineer when slope cutting is in progress at intervals of 10 vertical feet. Failure to notify may result in a delay in recommendations.
- Cut slopes exposing loose, cohesionless sands should be reported to the Geotechnical Engineer for possible stabilization recommendations.
- All stabilization excavations should be cleared of loose slough material prior to geotechnical inspection. Stakes should be provided by the Civil Engineer to verify the location and dimensions of the key. A typical stabilization fill detail is shown on Plate D-5.

- Stabilization key excavations should be provided with subdrains. Typical subdrain details are shown on Plates D-6.


Subdrains

- Subdrains may be required in canyons and swales where fill placement is proposed. Typical subdrain details for canyons are shown on Plate D-3. Subdrains should be installed after approval of removals and before filling, as determined by the Soils Engineer.
- Plastic pipe may be used for subdrains provided it is Schedule 40 or SDR 35 or equivalent. Pipe should be protected against breakage, typically by placement in a square-cut (backhoe) trench or as recommended by the manufacturer.
- Filter material for subdrains should conform to CALTRANS Specification 68-1.025 or as approved by the Geotechnical Engineer for the specific site conditions. Clean $\frac{3}{4}$ -inch crushed rock may be used provided it is wrapped in an acceptable filter cloth and approved by the Geotechnical Engineer. Pipe diameters should be 6 inches for runs up to 500 feet and 8 inches for the downstream continuations of longer runs. Four-inch diameter pipe may be used in buttress and stabilization fills.

CUT LOT

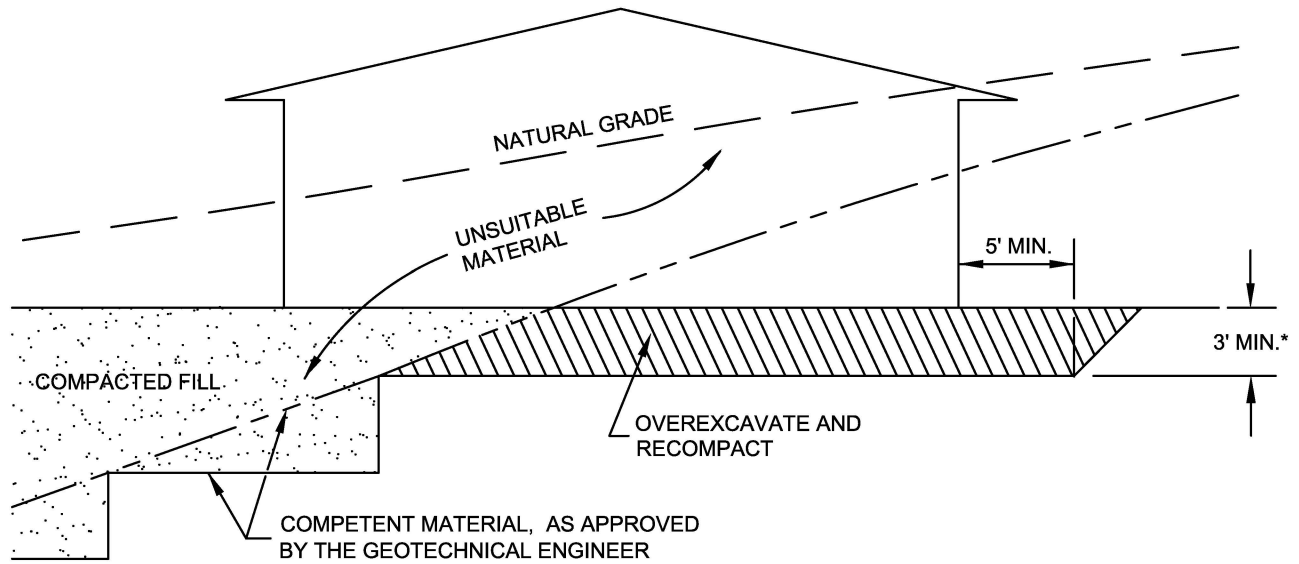

CUT/FILL LOT (TRANSITION)

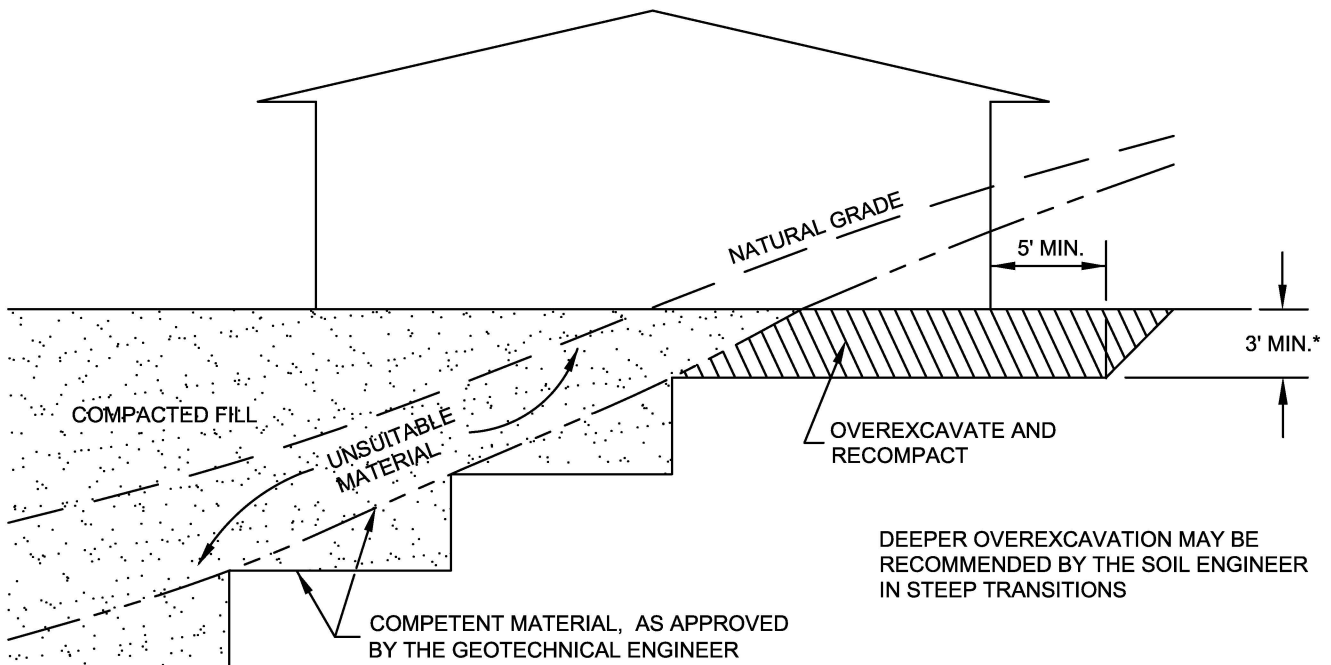

*SEE TEXT OF REPORT FOR SPECIFIC RECOMMENDATION.
ACTUAL DEPTH OF OVEREXCAVATION MAY BE GREATER.

TRANSITION LOT DETAIL

GRADING GUIDE SPECIFICATIONS


NOT TO SCALE

DRAWN: JAS
CHKD: GKM

PLATE D-1



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**

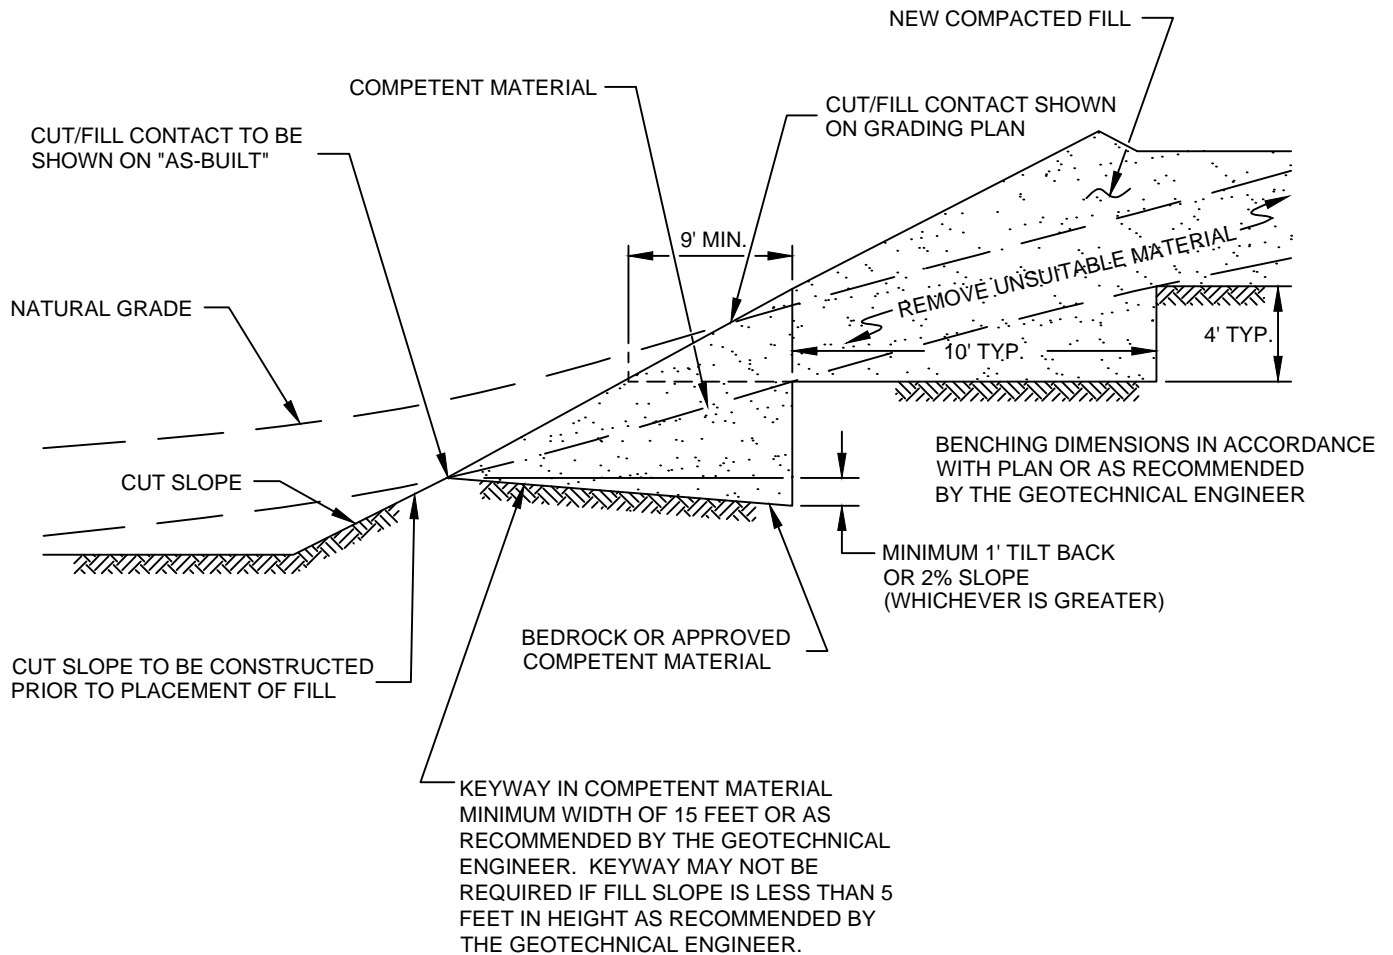

FILL ABOVE CUT SLOPE DETAIL
GRADING GUIDE SPECIFICATIONS


NOT TO SCALE

DRAWN: JAS
 CHKD: GKM

PLATE D-2




**SOUTHERN
 CALIFORNIA
 GEOTECHNICAL**



CANYON SUBDRAIN DETAIL

GRADING GUIDE SPECIFICATIONS

NOT TO SCALE		SOUTHERN CALIFORNIA GEOTECHNICAL
DRAWN: JAS CHKD: GKM		
PLATE D-3		

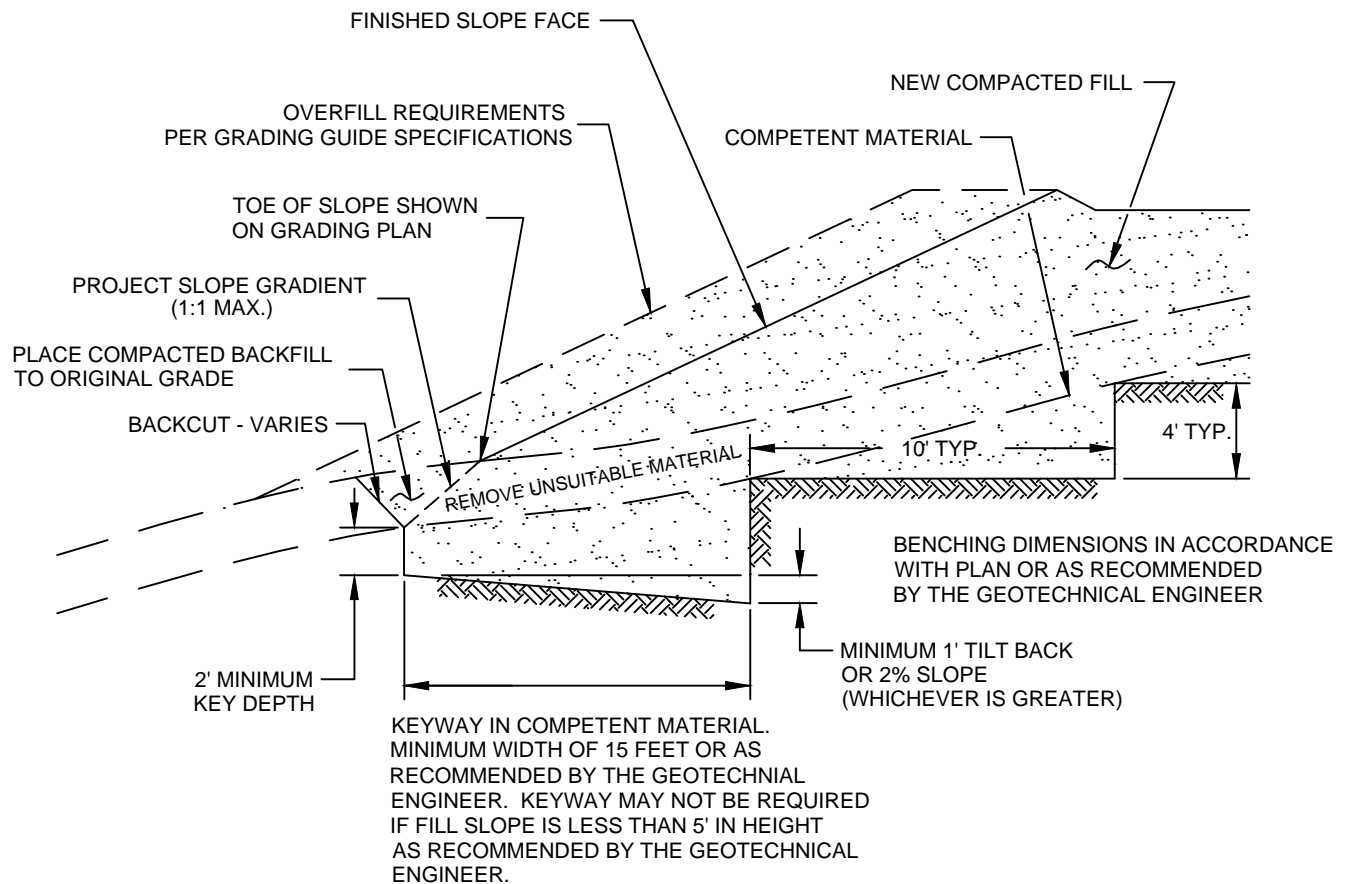

NOTE:
BENCHING SHALL BE REQUIRED
WHEN NATURAL SLOPES ARE
EQUAL TO OR STEEPER THAN 5:1
OR WHEN RECOMMENDED BY
THE GEOTECHNICAL ENGINEER.

FILL ABOVE NATURAL SLOPE DETAIL GRADING GUIDE SPECIFICATIONS


NOT TO SCALE


DRAWN: JAS
CHKD: GKM


PLATE D-4



SOUTHERN
CALIFORNIA
GEOTECHNICAL

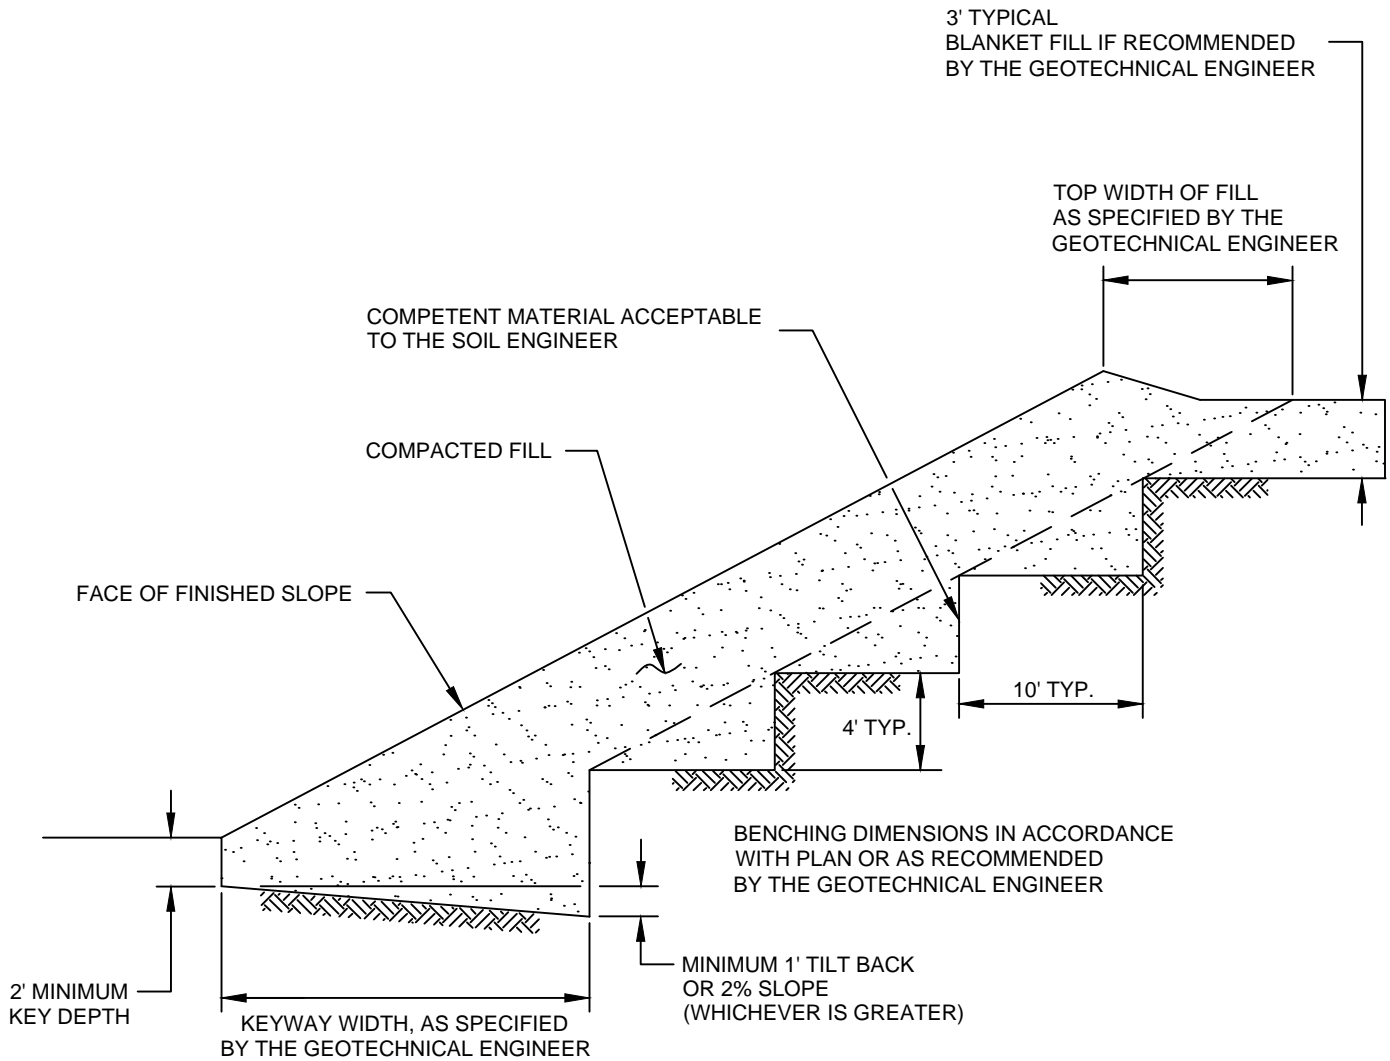

STABILIZATION FILL DETAIL	
GRADING GUIDE SPECIFICATIONS	
NOT TO SCALE	 SOUTHERN CALIFORNIA GEOTECHNICAL
DRAWN: JAS CHKD: GKM	
PLATE D-5	

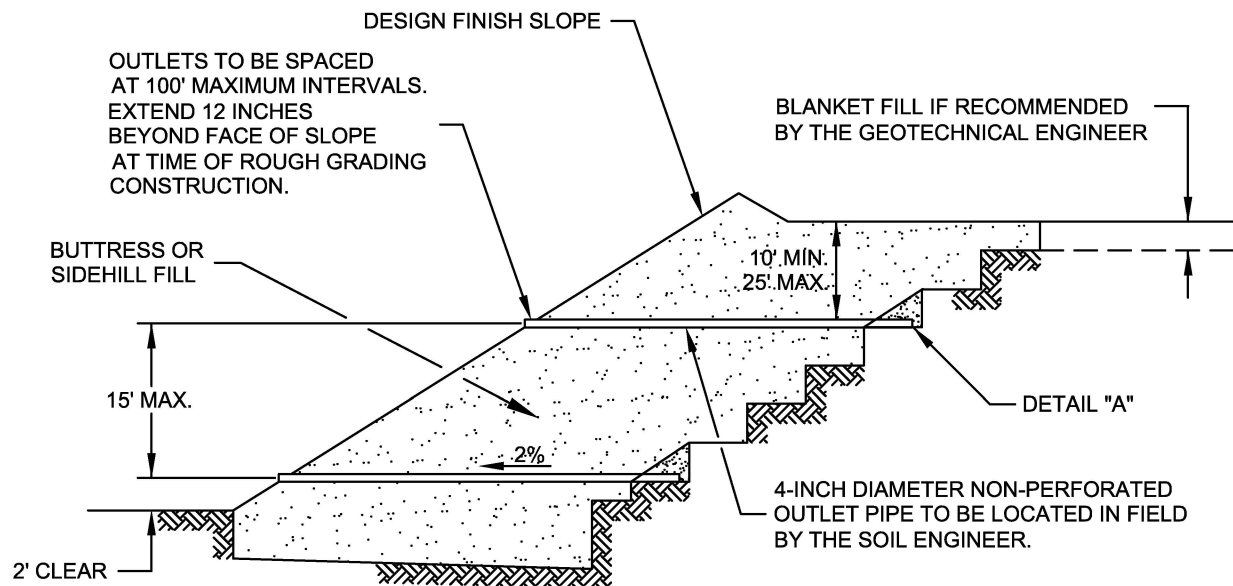


"FILTER MATERIAL" TO MEET FOLLOWING SPECIFICATION OR APPROVED EQUIVALENT: (CONFORMS TO EMA STD. PLAN 323)

SIEVE SIZE	PERCENTAGE PASSING
1"	100
3/4"	90-100
3/8"	40-100
NO. 4	25-40
NO. 8	18-33
NO. 30	5-15
NO. 50	0-7
NO. 200	0-3

"GRAVEL" TO MEET FOLLOWING SPECIFICATION OR APPROVED EQUIVALENT:

SIEVE SIZE	MAXIMUM PERCENTAGE PASSING
1 1/2"	100
NO. 4	50
NO. 200	8
SAND EQUIVALENT = MINIMUM OF 50	

OUTLET PIPE TO BE CONNECTED TO SUBDRAIN PIPE WITH TEE OR ELBOW



DETAIL "A"

FILTER MATERIAL - MINIMUM OF FIVE CUBIC FEET PER FOOT OF PIPE. SEE ABOVE FOR FILTER MATERIAL SPECIFICATION.


ALTERNATIVE: IN LIEU OF FILTER MATERIAL FIVE CUBIC FEET OF GRAVEL PER FOOT OF PIPE MAY BE ENCASED IN FILTER FABRIC. SEE ABOVE FOR GRAVEL SPECIFICATION.

FILTER FABRIC SHALL BE MIRAFI 140 OR EQUIVALENT. FILTER FABRIC SHALL BE LAPPED A MINIMUM OF 12 INCHES ON ALL JOINTS.

MINIMUM 4-INCH DIAMETER PVC SCH 40 OR ABS CLASS SDR 35 WITH A CRUSHING STRENGTH OF AT LEAST 1,000 POUNDS, WITH A MINIMUM OF 8 UNIFORMLY SPACED PERFORATIONS PER FOOT OF PIPE INSTALLED WITH PERFORATIONS ON BOTTOM OF PIPE. PROVIDE CAP AT UPSTREAM END OF PIPE. SLOPE AT 2 PERCENT TO OUTLET PIPE.

NOTES:

1. TRENCH FOR OUTLET PIPES TO BE BACKFILLED WITH ON-SITE SOIL.

SLOPE FILL SUBDRAINS	
GRADING GUIDE SPECIFICATIONS	
NOT TO SCALE	 SOUTHERN CALIFORNIA GEOTECHNICAL
DRAWN: JAS CHKD: GKM	
PLATE D-6	

MINIMUM ONE FOOT THICK LAYER OF
LOW PERMEABILITY SOIL IF NOT
COVERED WITH AN IMPERMEABLE SURFACE

MINIMUM ONE FOOT WIDE LAYER OF
FREE DRAINING MATERIAL
(LESS THAN 5% PASSING THE #200 SIEVE)

OR
PROPERLY INSTALLED PREFABRICATED DRAINAGE COMPOSITE
(MiraDRAIN 6000 OR APPROVED EQUIVALENT).

FILTER MATERIAL - MINIMUM OF TWO
CUBIC FEET PER FOOT OF PIPE. SEE
BELOW FOR FILTER MATERIAL SPECIFICATION.

ALTERNATIVE: IN LIEU OF FILTER MATERIAL
TWO CUBIC FEET OF GRAVEL
PER FOOT OF PIPE MAY BE ENCASED
IN FILTER FABRIC. SEE BELOW FOR
GRAVEL SPECIFICATION.

FILTER FABRIC SHALL BE MIRAFL 140
OR EQUIVALENT. FILTER FABRIC SHALL
BE LAPPED A MINIMUM OF 6 INCHES
ON ALL JOINTS.

MINIMUM 4-INCH DIAMETER PVC SCH 40 OR ABS CLASS SDR 35 WITH
A CRUSHING STRENGTH OF AT LEAST 1,000 POUNDS, WITH A MINIMUM
OF 8 UNIFORMLY SPACED PERFORATIONS PER FOOT OF PIPE INSTALLED
WITH PERFORATIONS ON BOTTOM OF PIPE. PROVIDE CAP AT UPSTREAM
END OF PIPE. SLOPE AT 2 PERCENT TO OUTLET PIPE.

"FILTER MATERIAL" TO MEET FOLLOWING SPECIFICATION
OR APPROVED EQUIVALENT: (CONFORMS TO EMA STD. PLAN 323)

SIEVE SIZE	PERCENTAGE PASSING
1"	100
3/4"	90-100
3/8"	40-100
NO. 4	25-40
NO. 8	18-33
NO. 30	5-15
NO. 50	0-7
NO. 200	0-3

"GRAVEL" TO MEET FOLLOWING SPECIFICATION OR
APPROVED EQUIVALENT:

SIEVE SIZE	MAXIMUM PERCENTAGE PASSING
1 1/2"	100
NO. 4	50
NO. 200	8
SAND EQUIVALENT = MINIMUM OF 50	

RETAINING WALL BACKDRAINS GRADING GUIDE SPECIFICATIONS


NOT TO SCALE

DRAWN: JAS
CHKD: GKM


PLATE D-7



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**

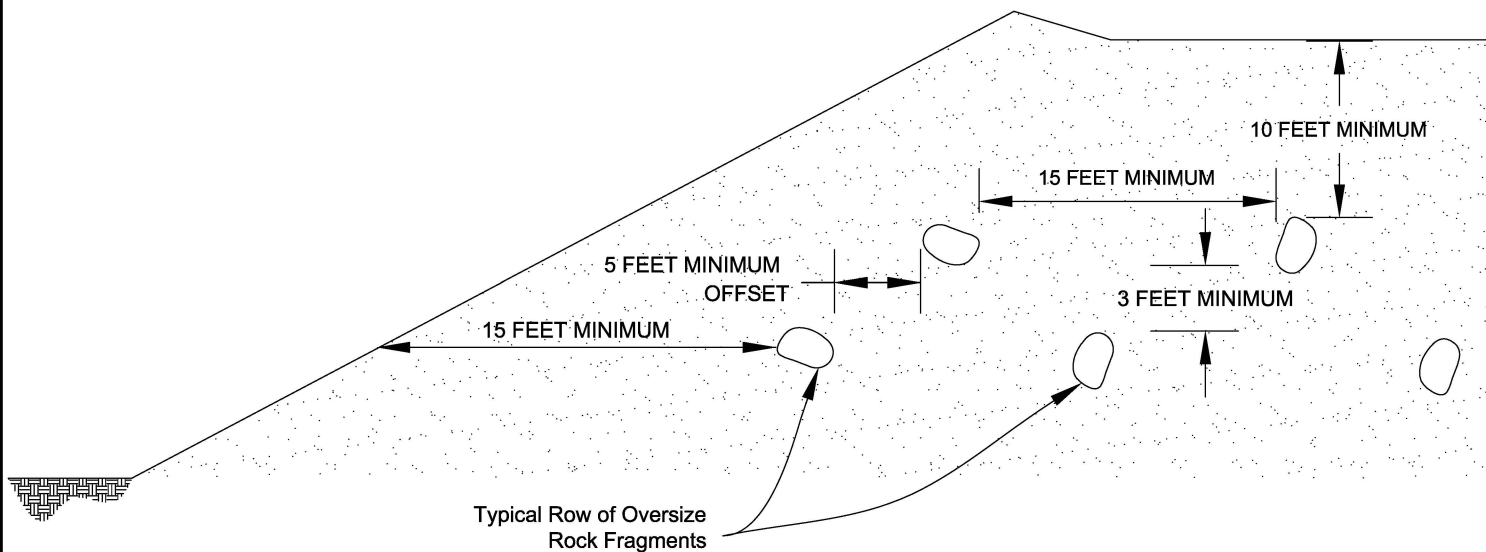

Section View

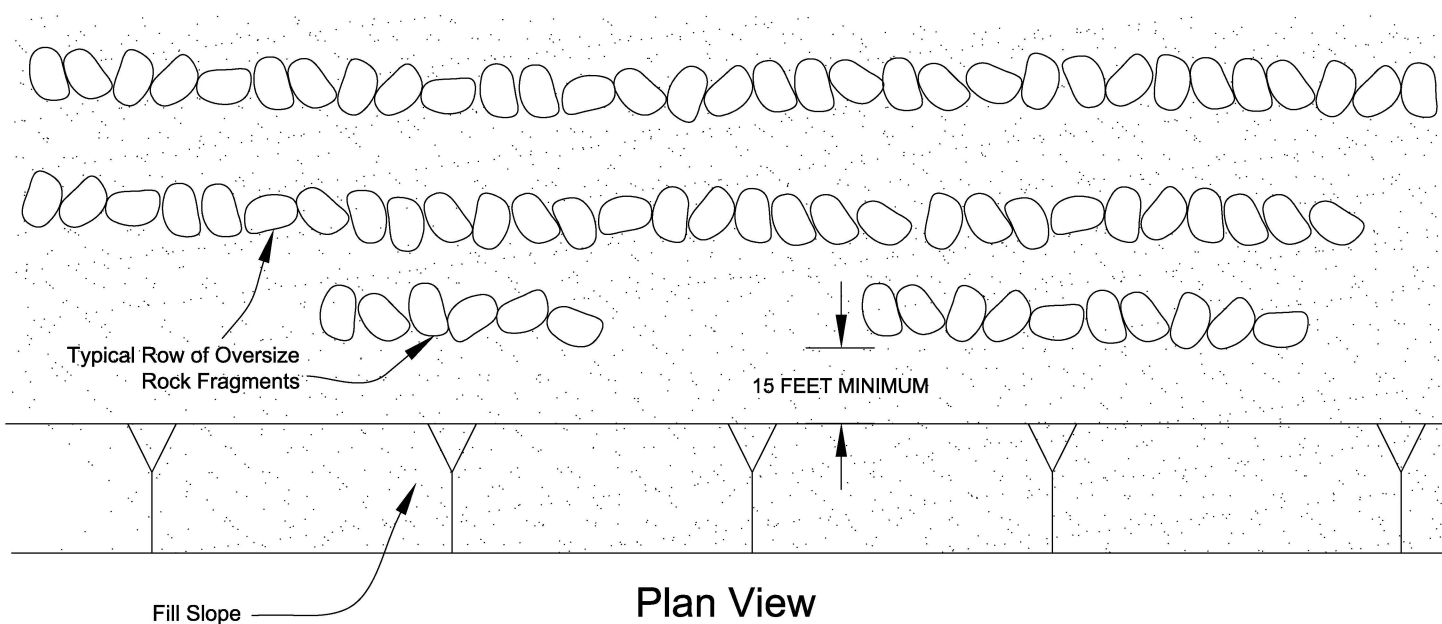

Plan View

**PLACEMENT OF OVERSIZED MATERIAL
GRADING GUIDE SPECIFICATIONS**

NOT TO SCALE

DRAWN: PM
CHKD: GKM

PLATE D-8




**SOUTHERN
CALIFORNIA
GEOTECHNICAL**

APPENDIX



Latitude, Longitude: 33.855287, -117.247518

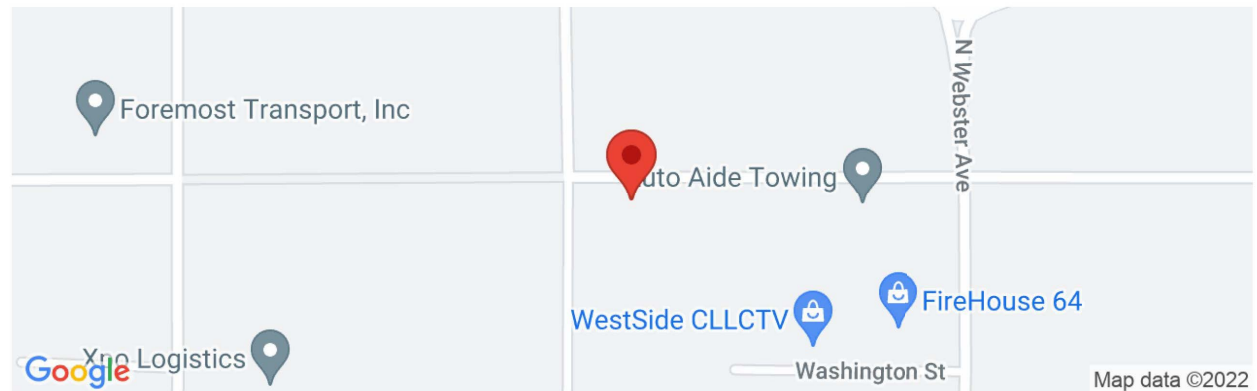


Date	11/15/2022, 5:03:53 PM
Design Code Reference Document	ASCE7-16
Risk Category	II
Site Class	D - Stiff Soil

Type	Value	Description
S_S	1.5	MCE_R ground motion. (for 0.2 second period)
S_1	0.576	MCE_R ground motion. (for 1.0s period)
S_{MS}	1.5	Site-modified spectral acceleration value
S_{M1}	null -See Section 11.4.8	Site-modified spectral acceleration value
S_{DS}	1	Numeric seismic design value at 0.2 second SA
S_{D1}	null -See Section 11.4.8	Numeric seismic design value at 1.0 second SA

Type	Value	Description
SDC	null -See Section 11.4.8	Seismic design category
F_a	1	Site amplification factor at 0.2 second
F_v	null -See Section 11.4.8	Site amplification factor at 1.0 second
PGA	0.5	MCE_G peak ground acceleration
F_{PGA}	1.1	Site amplification factor at PGA
PGA_M	0.55	Site modified peak ground acceleration
T_L	8	Long-period transition period in seconds
S_{sRT}	1.546	Probabilistic risk-targeted ground motion. (0.2 second)
S_{sUH}	1.654	Factored uniform-hazard (2% probability of exceedance in 50 years) spectral acceleration
S_{sD}	1.5	Factored deterministic acceleration value. (0.2 second)
S_{1RT}	0.576	Probabilistic risk-targeted ground motion. (1.0 second)
S_{1UH}	0.632	Factored uniform-hazard (2% probability of exceedance in 50 years) spectral acceleration.
S_{1D}	0.6	Factored deterministic acceleration value. (1.0 second)
PGAd	0.5	Factored deterministic acceleration value. (Peak Ground Acceleration)
PGA_{UH}	0.655	Uniform-hazard (2% probability of exceedance in 50 years) Peak Ground Acceleration
C_{RS}	0.935	Mapped value of the risk coefficient at short periods
C_{R1}	0.912	Mapped value of the risk coefficient at a period of 1 s
C_v	1.4	Vertical coefficient

SOURCE: SEAOC/OSHDP Seismic Design Maps Tool
<<https://seismicmaps.org/>>



SEISMIC DESIGN PARAMETERS - 2019 CBC	
PROPOSED INDUSTRIAL BUILDING AND TRAILER STORAGE	
PERRIS, CALIFORNIA	
DRAWN: JLL CHKD: RGT	 SOUTHERN CALIFORNIA GEOTECHNICAL
SCG PROJECT 22G250-1	
PLATE E-1	

November 23, 2022

Lake Creek Industrial, LLC
1302 Brittany Cross Road
Santa Ana, California 92705



**SOUTHERN
CALIFORNIA
GEOTECHNICAL**
A California Corporation

Attention: Mr. Mike Tonkonogy
Manager

Project No.: **22G250-2**

Subject: **Results of Infiltration Testing**
Proposed Industrial Building and Trailer Storage
South Side of West Nance Street, 550± feet West of North Webster Avenue
Perris, California

Reference: Geotechnical Investigation, Proposed Industrial Building and Trailer Storage, South Side of West Nance Street, 550± feet West of North Webster Avenue, Perris, California, prepared for Lake Creek Industrial, LLC by Southern California Geotechnical, Inc. (SCG), SCG Project No. 22G250-1, dated November 21, 2022.

Mr. Tonkonogy:

In accordance with your request, we have conducted infiltration testing at the subject site. We are pleased to present this report summarizing the results of the infiltration testing and our design recommendations.

Scope of Services

The scope of services performed for this project was in general accordance with our Proposal No. 22P298R, dated October 19, 2022. The scope of services included site reconnaissance, subsurface exploration, field testing, and engineering analysis to determine the infiltration rates of the on-site soils. The infiltration testing was performed in general accordance with ASTM Test Method D-3385-03, Standard Test Method for Infiltration Rate of Soils in Field Using Double Ring Infiltrometer.

Site and Project Description

The subject site is located 530± feet west of the intersection of North Webster Avenue and West Nance Street in Perris, California. The site is bounded to the north by West Nance Street, to the east by Nevada Avenue and to the south and east by existing commercial/industrial developments. The site is also centrally sub-divided by a single-family residence that is not included in the development. The general location of the site is illustrated on the Site Location Map, enclosed as Plate 1 of this report.

The subject site consists of five (5) non-contiguous rectangular-shaped parcels, which total 4.53± acres in size. Two (2) parcels are located on the west side of the single-family residence and three (3) parcels are located on the east side. Based on aerial photographs obtained from Google Earth and observations made during the subsurface exploration, the site is currently vacant and

undeveloped. Ground surface cover appears to consist of exposed soil with sparse to moderate native grass and weed growth.

Detailed topographic information was not available at the time of this report. Based on elevations obtained from Google Earth, and visual observations made at the time of the subsurface investigation, the overall site topography is generally flat.

Proposed Development

Based on the conceptual site plan, the western portion of the site will be developed with one (1) new industrial building. The building will be $11,756 \pm \text{ft}^2$ in size, located in the north-central area of the site. Dock-high doors will be constructed along a portion of the south building wall. The building is expected to be surrounded by asphaltic concrete pavements in the parking and drive areas, Portland cement concrete pavements in the truck court areas, and limited areas of concrete flatwork and landscape planters throughout. The eastern portion of the site will be developed as a truck and trailer parking lot with a guard shack.

Although not depicted on the site plan, we assume the site will utilize on-site stormwater disposal. Based on our experience with nearby projects, we assume that the systems will consist of belowgrade chambers extending to depths of 8 to $10 \pm$ feet below ground surface. It is recommended that the project civil engineer be contacted to confirm the depth and location of the proposed infiltration systems prior to infiltration testing.

Concurrent Study

SCG concurrently conducted a geotechnical investigation at the subject site, which is referenced above. As part of this study, nine (9) borings were advanced to depths of 5 to $20 \pm$ feet below existing site grades. Artificial fill soils were encountered at the ground surface at all of the boring locations, with the exception of Boring Nos. B-2 and B-7, extending to depths of $2\frac{1}{2}$ to $4\frac{1}{2} \pm$ feet below the existing site grades. The fill soils generally consist of medium dense to dense silty sands with varying clay content. Boring No. B-6 encountered a stratum consisting of hard sandy clays at the ground surface, extending to a depth of $2\frac{1}{2} \pm$ feet. The fill soils possess a mottled and disturbed appearance resulting in their classification as artificial fill. Native younger alluvium was encountered beneath the artificial fill soils at Boring No. B-9, extending to a depth of $8 \pm$ feet below the existing site grades. The younger alluvium generally consists of medium dense clayey sands. Native older alluvium was encountered at the ground surface at Boring Nos. B-2 and B-7, beneath the younger alluvium at Boring Nos. B-9, and beneath the artificial fill soils at the remaining boring locations, extending to at least the maximum depth explored of $20 \pm$ feet below the existing site grades. The older alluvium generally consists of medium dense to very dense clayey sands with varying silt content, medium dense to very dense silty sands and sandy silts with varying clay content, and very stiff to hard sandy clays with varying silt content. Boring Nos. B-4 and B-9 encountered a stratum consisting of hard clayey silts at a depth of 17 to $20 \pm$ feet.

Groundwater

Free water was not encountered during the drilling of any of the borings. Based on the moisture content of the recovered soil samples and the lack of free water in the borings, the static

groundwater table is at a depth greater than the maximum explored depth of 12± feet below existing site grades for this project.

Recent water level data was obtained from the California Department of Water Resources website, <http://www.water.ca.gov/waterdatalibrary/>. Two (2) monitoring wells on record (identified as Local Well Names: EMWD12471 and EMWD12474) are located within 650± feet from the center of the proposed building. Water level readings within these monitoring wells indicate a high groundwater level of 65± feet below the ground surface in March 2022.

Subsurface Exploration

Scope of Exploration

The subsurface exploration for the infiltration testing consisted of four (4) backhoe-excavated trenches, extending to depths of 8 to 12± feet below existing site grades. The trenches were logged during excavation by a member of our staff. The approximate locations of the infiltration trenches (identified as I-1 through I-4) are indicated on the Infiltration Test Location Plans, enclosed as Plate 2 of this report.

Geotechnical Conditions

Artificial fill soils were encountered at the ground surface at all of the infiltration trenches, extending 1 to 2± feet below existing site grades. The fill soils extend to depths of 1 to 2± feet below the existing site grades. The fill soils generally consist of loose to medium dense fine sandy silts to silty fine sands with trace fine root fibers and trace clays. These materials possess a disturbed appearance, resulting in their classification as artificial fill. Native alluvium was encountered below the fill soils at all of the boring locations, extending to at least the maximum depth explored of 12± feet below existing site grades. The alluvium generally consists of dense to very dense silty fine to medium sands with trace clay content, trace calcareous veins, and slightly cemented. The Trench Logs, which illustrate the conditions encountered at the infiltration test locations, are presented in this report.

Infiltration Testing

We understand that the results of the testing will be used to prepare a preliminary design for the storm water infiltration system that will be used at the subject site. As previously mentioned, the infiltration testing was performed in general accordance with ASTM Test Method D-3385-03, Standard Test Method for Infiltration Rate of Soils in Field Using Double Ring Infiltrometer.

Two stainless steel infiltration rings were used for the infiltration testing. The outer infiltration ring is 2 feet in diameter and 20 inches in height. The inner infiltration ring is 1 foot in diameter and 20 inches in height. At the test locations, the outer ring was driven 3± inches into the soil at the base of each trench. The inner ring was centered inside the outer ring and subsequently driven 3± inches into the soil at the base of the trench. The rings were driven into the soil using a ten-pound sledge hammer. The soil surrounding the wall of the infiltration rings was only slightly disturbed during the driving process.

Infiltration Testing Procedure

Infiltration testing was performed at all of the trench locations. The infiltration testing consisted of filling the inner ring and the annular space (the space between the inner and outer rings) with water, approximately 3 to 4 inches above the soil. To prevent the flow of water from one ring to the other, the water level in both the inner ring and the annular space between the rings was maintained using constant-head float valves. The volume of water that was added to maintain a constant head in the inner ring and the annular space during each time interval was determined and recorded. A cap was placed over the rings to minimize the evaporation of water during the tests.

The schedule for readings was determined based on the observed soil type at the base of each backhoe-excavated trench. Based on the existing soils at the trench locations, the volumetric measurements were made at 15-minute increments. The water volume measurements are presented on the spreadsheets enclosed with this report. The infiltration rates for each of the timed intervals are also tabulated on these spreadsheets.

The infiltration rates for the infiltration tests are calculated in centimeters per hour and then converted to inches per hour. The rates are summarized below:

<u>Infiltration Test No.</u>	<u>Depth Test (feet)</u>	<u>Soil Description</u>	<u>Measured Infiltration Rate (inches/hour)</u>
I-1	8	Silty fine to medium Sand, trace coarse Sand, trace to little Clay	0.7
I-2	12	Silty fine to medium Sand, little coarse Sand, trace Clay	0.1
I-3	8	Silty fine to medium Sand, trace coarse Sand, trace Clay	0.0
I-4	11	Silty fine to medium Sand, little Clay	0.0

Design Recommendations

Four (4) infiltration tests were performed at the subject site. As noted above, the calculated infiltration rates at the infiltration test locations range from 0.0 to 0.7 inches per hour. The major factors affecting the lack of infiltration at these locations is the presence of very dense alluvium and higher fines content. **Due to the poor infiltration characteristics of the on-site native soils at the tested depths, infiltration is not recommended.**

Although infiltration is not considered feasible at the site, the client may desire to use storm water disposal systems that do not rely on infiltration at this site. The design of storm water disposal systems should be performed by the project civil engineer, in accordance with the City of Perris and/or County of Riverside guidelines. It is recommended any such systems be designed and constructed to facilitate removal of silt and clay, or other deleterious materials from any water that may enter the system. The presence of such materials would decrease the flow rates through the system. It should be noted that the recommended infiltration rates are based on infiltration

testing at four (4) discrete locations and that the overall infiltration rates of the proposed infiltration systems could vary considerably.

Infiltration Rate Considerations

The infiltration rates presented herein was determined in accordance with the Riverside County guidelines and are considered valid only for the time and place of the actual test. Varying subsurface conditions will exist in other areas of the site, which could alter the recommended infiltration rates presented above. The infiltration rates will decline over time between maintenance cycles as silt or clay particles accumulate on the BMP surface. The infiltration rate is highly dependent upon a number of factors, including density, silt and clay content, grain size distribution throughout the range of particle sizes, and particle shape. Small changes in these factors can cause large changes in the infiltration rates.

Infiltration rates are based on unsaturated flow. As water is introduced into soils by infiltration, the soils become saturated and the wetting front advances from the unsaturated zone to the saturated zone. Once the soils become saturated, infiltration rates become zero, and water can only move through soils by hydraulic conductivity at a rate determined by pressure head and soil permeability. Changes in soil moisture content will affect the infiltration rate. Infiltration rates should be expected to decrease until the soils become saturated. Soil permeability values will then govern groundwater movement. Permeability values may be on the order of 10 to 20 times less than infiltration rates. The system designer should incorporate adequate factors of safety and allow for overflow design into appropriate traditional storm drain systems, which would transport storm water off-site.

Construction Considerations

The infiltration rates presented in this report are specific to the tested locations and tested depths. Infiltration rates can be significantly reduced if the soils are exposed to excessive disturbance or compaction during construction. Compaction of the soils at the bottom of the infiltration system can significantly reduce the infiltration ability of the basins. Therefore, the subgrade soils within proposed infiltration system areas should not be over-excavated, undercut or compacted in any significant manner. **It is recommended that a note to this effect be added to the project plans and/or specifications.**

We recommend that a representative from the geotechnical engineer be on-site during the construction of the proposed infiltration systems to identify the soil classification at the base of each system. The infiltration rate of the system will likely vary significantly if the composition of the soil located beneath the system is not consistent with the tested soils.

We recommend that scrapers and other rubber-tired heavy equipment not be operated on the basin bottom, or at levels lower than 2 feet above the bottom of the system, particularly within basins. As such, the bottom 24 inches of the infiltration systems should be excavated with non-rubber-tired equipment, such as excavators.

Chamber Maintenance

The proposed project may include below-grade infiltration chambers. Water flowing into these chambers will carry some level of sediment. This layer has the potential to significantly reduce

the infiltration rate of the basin subgrade soils. Therefore, a formal chamber maintenance program should be established to ensure that these silt and clay deposits are removed from the chamber on a regular basis.

Location of Infiltration Systems

The use of on-site storm water infiltration systems carries a risk of creating adverse geotechnical conditions. Increasing the moisture content of the soil can cause the soil to lose internal shear strength and increase its compressibility, resulting in a change in the designed engineering properties. Overlying structures and pavements in the infiltration area could potentially be damaged due to saturation of the subgrade soils. **The proposed infiltration systems for this site should be located at least 25 feet away from any structures, including retaining walls.** Even with this provision of locating the infiltration system at least 25 feet from the building(s), it is possible that infiltrating water into the subsurface soils could have an adverse effect on the proposed or existing structures. It should also be noted that utility trenches which happen to collect storm water can also serve as conduits to transmit storm water toward the structure, depending on the slope of the utility trench. Therefore, consideration should also be given to the proposed locations of underground utilities which may pass near the proposed infiltration system.

The infiltration system designer should also give special consideration to the effect that the proposed infiltration systems may have on nearby subterranean structures, open excavations, or descending slopes. In particular, infiltration systems should not be located near the crest of descending slopes, particularly where the slopes are comprised of granular soils. Such systems will require specialized design and analysis to evaluate the potential for slope instability, piping failures and other phenomena that typically apply to earthen dam design. This type of analysis is beyond the scope of this infiltration test report, but these factors should be considered by the infiltration system designer when locating the infiltration systems.

General Comments

This report has been prepared as an instrument of service for use by the client in order to aid in the evaluation of this property and to assist the architects and engineers in the design and preparation of the project plans and specifications. This report may be provided to the contractor(s) and other design consultants to disclose information relative to the project. However, this report is not intended to be utilized as a specification in and of itself, without appropriate interpretation by the project architect, structural engineer, and/or civil engineer. The design of the proposed storm water infiltration system is the responsibility of the civil engineer. The role of the geotechnical engineer is limited to determination of infiltration rate only. By using the design infiltration rate contained herein, the civil engineer agrees to indemnify, defend, and hold harmless the geotechnical engineer for all aspects of the design and performance of the proposed storm water infiltration system. The reproduction and distribution of this report must be authorized by the client and Southern California Geotechnical, Inc. Furthermore, any reliance on this report by an unauthorized third party is at such party's sole risk, and we accept no responsibility for damage or loss which may occur.

The analysis of this site was based on a subsurface profile interpolated from limited discrete soil samples. While the materials encountered in the project area are considered to be representative

of the total area, some variations should be expected between boring locations and testing depths. If the conditions encountered during construction vary significantly from those detailed herein, we should be contacted immediately to determine if the conditions alter the recommendations contained herein.

This report has been based on assumed or provided characteristics of the proposed development. It is recommended that the owner, client, architect, structural engineer, and civil engineer carefully review these assumptions to ensure that they are consistent with the characteristics of the proposed development. If discrepancies exist, they should be brought to our attention to verify that they do not affect the conclusions and recommendations contained herein. We also recommend that the project plans and specifications be submitted to our office for review to verify that our recommendations have been correctly interpreted. The analysis, conclusions, and recommendations contained within this report have been promulgated in accordance with generally accepted professional geotechnical engineering practice. No other warranty is implied or expressed.

Closure

We sincerely appreciate the opportunity to be of service on this project. We look forward to providing additional consulting services during the course of the project. If we may be of further assistance in any manner, please contact our office.

Respectfully Submitted,
SOUTHERN CALIFORNIA GEOTECHNICAL, INC.



Joseph Hernandez
Staff Geologist




Robert G. Trazo, GE 2655
Principal Engineer



Distribution: (1) Addressee

Enclosures: Plate 1 - Site Location Map
Plate 2 - Infiltration Test Location Plan
Trench Log Legend and Logs (6 pages)
Infiltration Test Results Spreadsheets (4 pages)
Grain Size Distribution Graphs (4 pages)

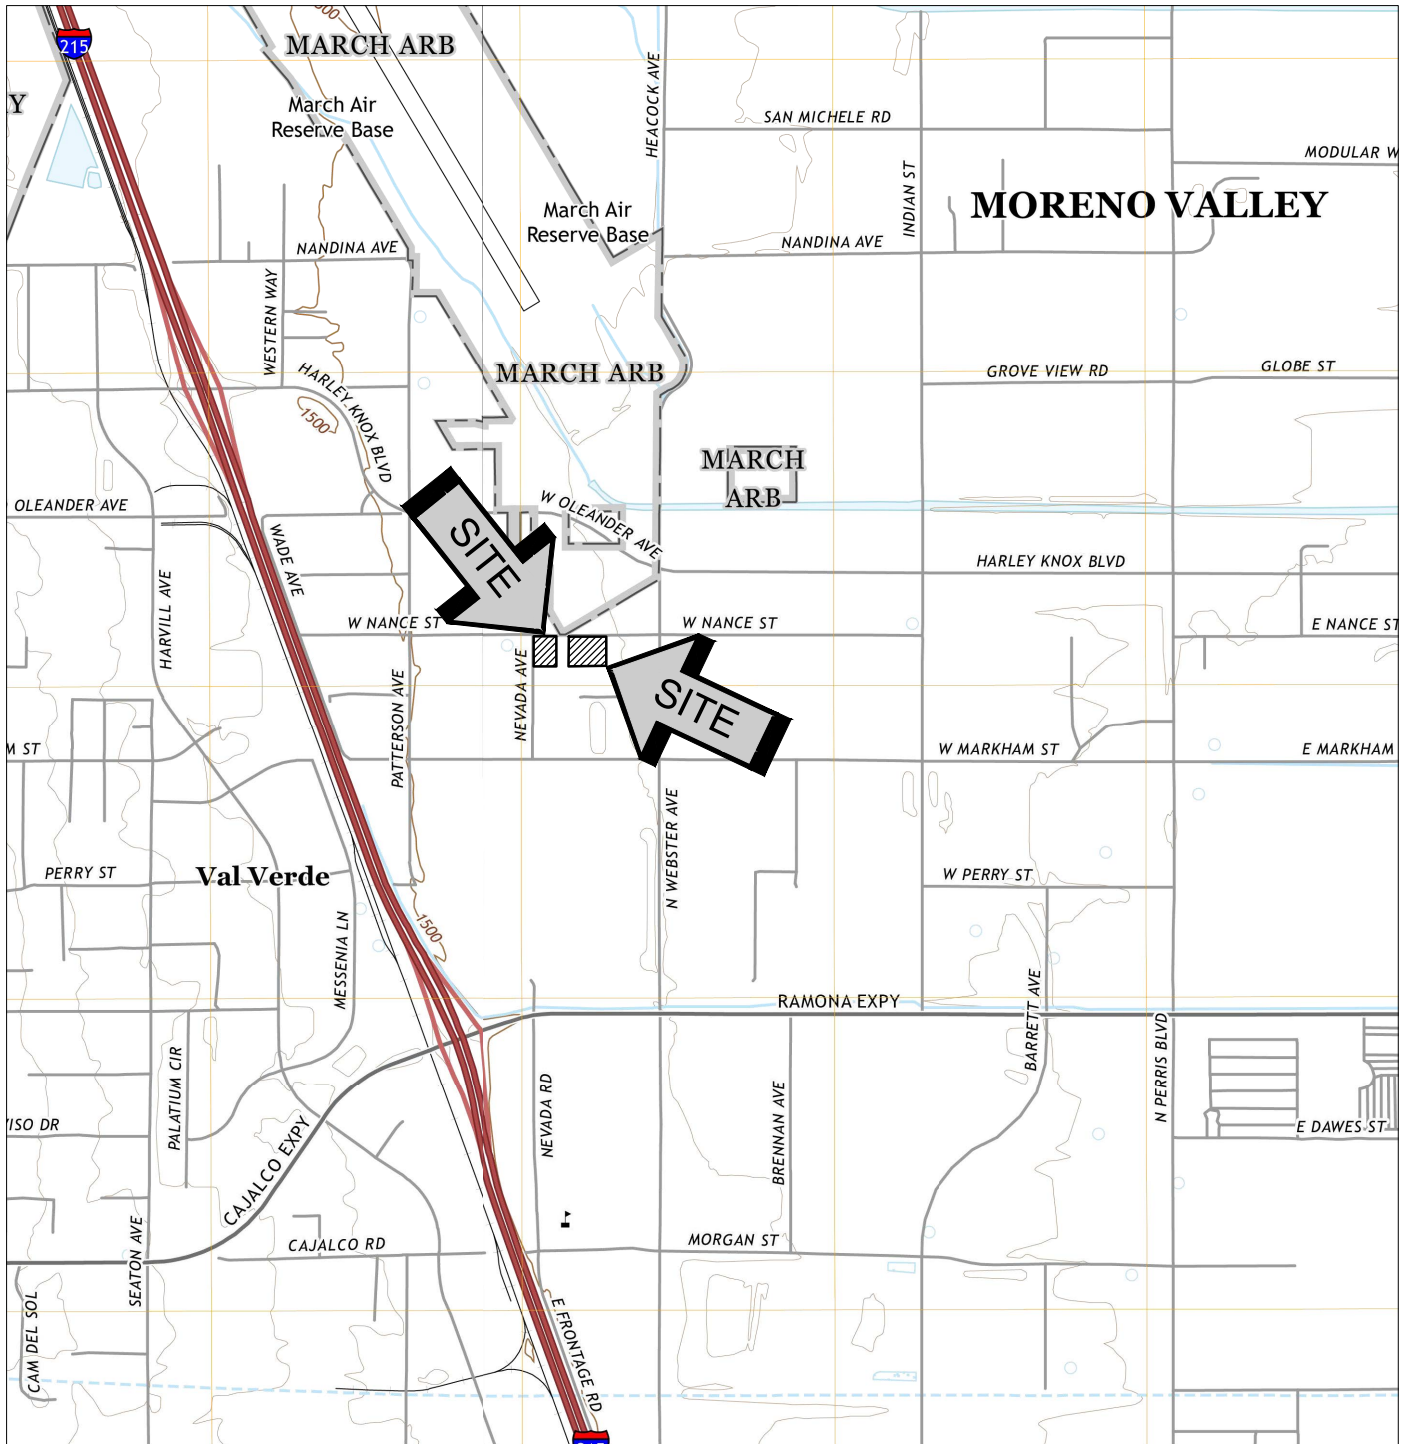

SOURCE: USGS TOPOGRAPHIC MAPS OF THE STEELE
PEAK QUADRANGLE AND THE PERRIS QUADRANGLE,
RIVERSIDE COUNTY, CALIFORNIA, 2021.



SITE LOCATION MAP

PROPOSED INDUSTRIAL BUILDING AND TRAILER STORAGE

PERRIS, CALIFORNIA

SCALE: 1" = 2000'

DRAWN: JLL

CHKD: RGT


SCG PROJECT

22G250-2



PLATE 1




**SOUTHERN
CALIFORNIA
GEOTECHNICAL**

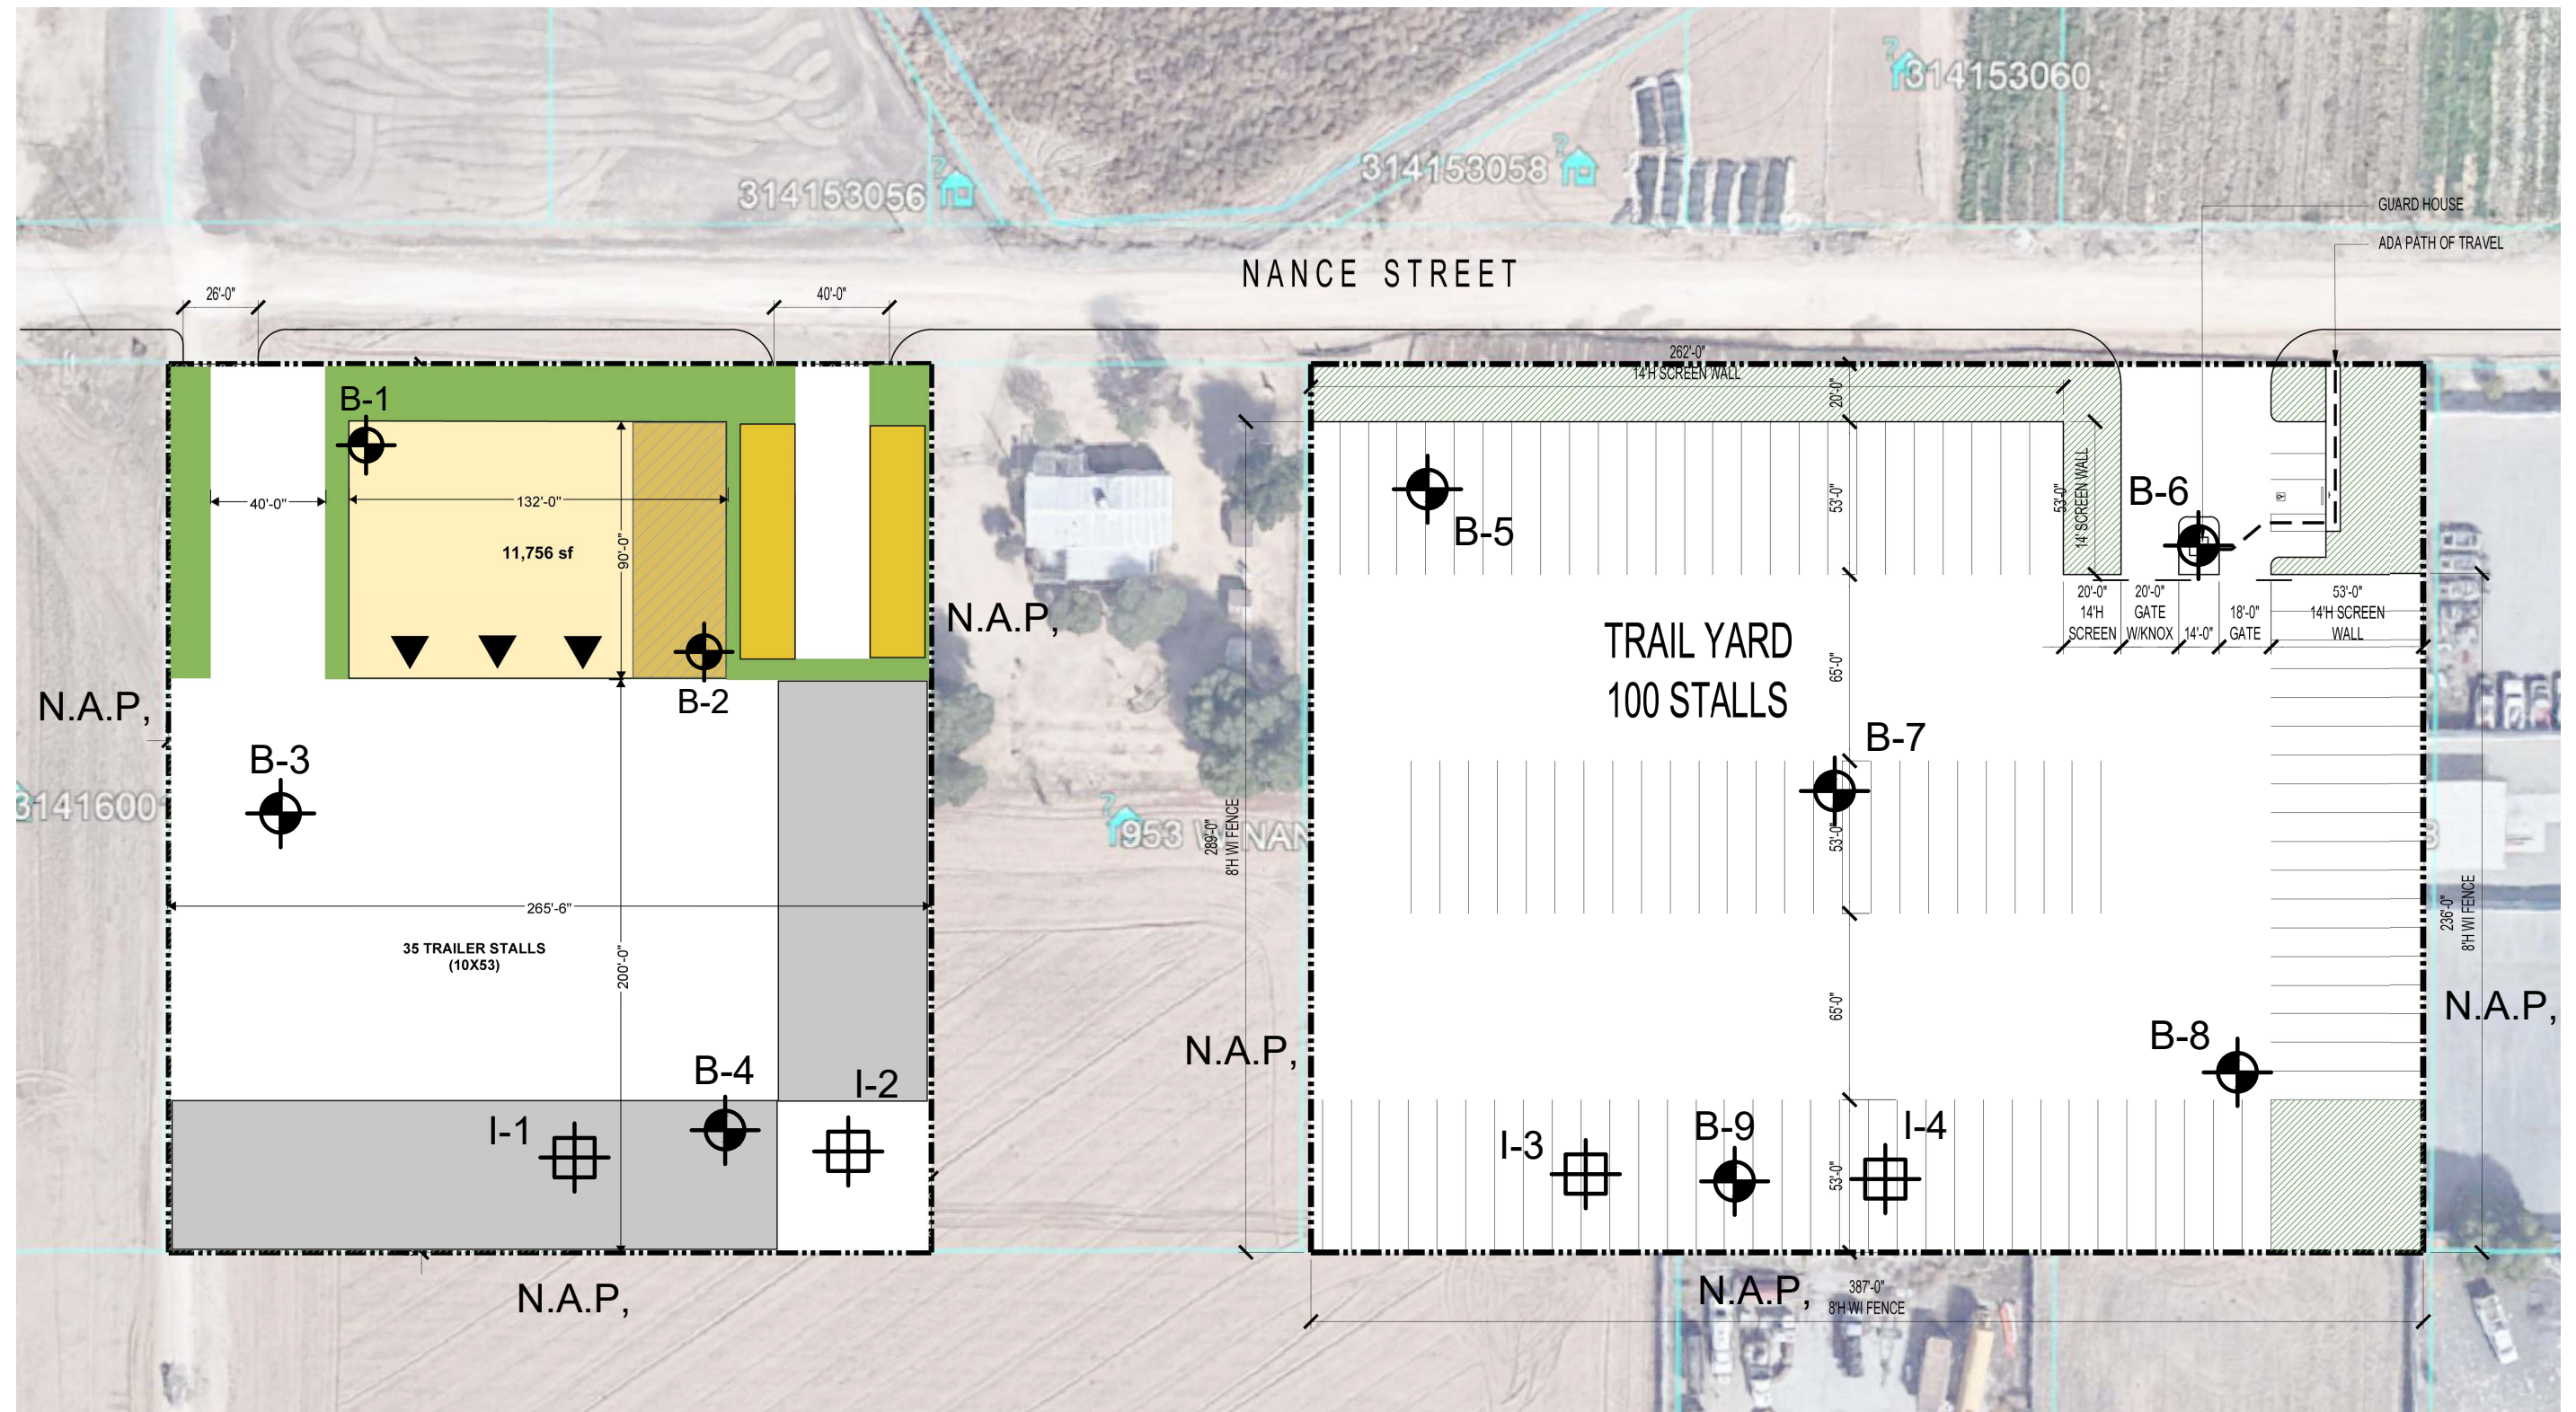


GEOTECHNICAL LEGEND









-  APPROXIMATE INFILTRATION TEST LOCATION
-  APPROXIMATE BORING LOCATION FROM CONCURRENT STUDY (SCG PROJECT NO. 22G250-1)



NOTE: CONCEPTUAL SITE PLAN (VERSION 3) PROVIDED BY THE CLIENT.

INFILTRATION TEST LOCATION PLAN	
PROPOSED INDUSTRIAL BUILDING AND TRAILER STORAGE	
PERRIS, CALIFORNIA	
SCALE: 1" = 60'	 SOUTHERN CALIFORNIA GEOTECHNICAL
DRAWN: JLL	
CHKD: RGT	
SCG PROJECT 22G250-2	
PLATE 2	

TRENCH LOG LEGEND

SAMPLE TYPE	GRAPHICAL SYMBOL	SAMPLE DESCRIPTION
AUGER		SAMPLE COLLECTED FROM AUGER CUTTINGS, NO FIELD MEASUREMENT OF SOIL STRENGTH. (DISTURBED)
CORE		ROCK CORE SAMPLE: TYPICALLY TAKEN WITH A DIAMOND-TIPPED CORE BARREL. TYPICALLY USED ONLY IN HIGHLY CONSOLIDATED BEDROCK.
GRAB		SOIL SAMPLE TAKEN WITH NO SPECIALIZED EQUIPMENT, SUCH AS FROM A STOCKPILE OR THE GROUND SURFACE. (DISTURBED)
CS		CALIFORNIA SAMPLER: 2-1/2 INCH I.D. SPLIT BARREL SAMPLER, LINED WITH 1-INCH HIGH BRASS RINGS. DRIVEN WITH SPT HAMMER. (RELATIVELY UNDISTURBED)
NSR		NO RECOVERY: THE SAMPLING ATTEMPT DID NOT RESULT IN RECOVERY OF ANY SIGNIFICANT SOIL OR ROCK MATERIAL.
SPT		STANDARD PENETRATION TEST: SAMPLER IS A 1.4 INCH INSIDE DIAMETER SPLIT BARREL, DRIVEN 18 INCHES WITH THE SPT HAMMER. (DISTURBED)
SH		SHELBY TUBE: TAKEN WITH A THIN WALL SAMPLE TUBE, PUSHED INTO THE SOIL AND THEN EXTRACTED. (UNDISTURBED)
VANE		VANE SHEAR TEST: SOIL STRENGTH OBTAINED USING A 4 BLADED SHEAR DEVICE. TYPICALLY USED IN SOFT CLAYS-NO SAMPLE RECOVERED.

COLUMN DESCRIPTIONS

DEPTH:

Distance in feet below the ground surface.

SAMPLE:

Sample Type as depicted above.

BLOW COUNT:

Number of blows required to advance the sampler 12 inches using a 140 lb hammer with a 30-inch drop. 50/3" indicates penetration refusal (>50 blows) at 3 inches. WH indicates that the weight of the hammer was sufficient to push the sampler 6 inches or more.

POCKET PEN.:

Approximate shear strength of a cohesive soil sample as measured by pocket penetrometer.

GRAPHIC LOG:

Graphic Soil Symbol as depicted on the following page.

DRY DENSITY:

Dry density of an undisturbed or relatively undisturbed sample in lbs/ft³.

MOISTURE CONTENT:

Moisture content of a soil sample, expressed as a percentage of the dry weight.

LIQUID LIMIT:

The moisture content above which a soil behaves as a liquid.

PLASTIC LIMIT:

The moisture content above which a soil behaves as a plastic.

PASSING #200 SIEVE:

The percentage of the sample finer than the #200 standard sieve.

UNCONFINED SHEAR:

The shear strength of a cohesive soil sample, as measured in the unconfined state.

SOIL CLASSIFICATION CHART

MAJOR DIVISIONS			SYMBOLS		TYPICAL DESCRIPTIONS
			GRAPH	LETTER	
COARSE GRAINED SOILS MORE THAN 50% OF MATERIAL IS LARGER THAN NO. 200 SIEVE SIZE	GRAVEL AND GRAVELLY SOILS MORE THAN 50% OF COARSE FRACTION RETAINED ON NO. 4 SIEVE	CLEAN GRAVELS (LITTLE OR NO FINES)		GW	WELL-GRADED GRAVELS, GRAVEL - SAND MIXTURES, LITTLE OR NO FINES
				GP	POORLY-GRADED GRAVELS, GRAVEL - SAND MIXTURES, LITTLE OR NO FINES
		GRAVELS WITH FINES (APPRECIABLE AMOUNT OF FINES)		GM	SILTY GRAVELS, GRAVEL - SAND - SILT MIXTURES
				GC	CLAYEY GRAVELS, GRAVEL - SAND - CLAY MIXTURES
	SAND AND SANDY SOILS MORE THAN 50% OF COARSE FRACTION PASSING ON NO. 4 SIEVE	CLEAN SANDS (LITTLE OR NO FINES)		SW	WELL-GRADED SANDS, GRAVELLY SANDS, LITTLE OR NO FINES
				SP	POORLY-GRADED SANDS, GRAVELLY SAND, LITTLE OR NO FINES
		SANDS WITH FINES (APPRECIABLE AMOUNT OF FINES)		SM	SILTY SANDS, SAND - SILT MIXTURES
				SC	CLAYEY SANDS, SAND - CLAY MIXTURES
FINE GRAINED SOILS MORE THAN 50% OF MATERIAL IS SMALLER THAN NO. 200 SIEVE SIZE	SILTS AND CLAYS LIQUID LIMIT LESS THAN 50			ML	INORGANIC SILTS AND VERY FINE SANDS, ROCK FLOUR, SILTY OR CLAYEY FINE SANDS OR CLAYEY SILTS WITH SLIGHT PLASTICITY
				CL	INORGANIC CLAYS OF LOW TO MEDIUM PLASTICITY, GRAVELLY CLAYS, SANDY CLAYS, SILTY CLAYS, LEAN CLAYS
				OL	ORGANIC SILTS AND ORGANIC SILTY CLAYS OF LOW PLASTICITY
	SILTS AND CLAYS LIQUID LIMIT GREATER THAN 50			MH	INORGANIC SILTS, MICACEOUS OR DIATOMACEOUS FINE SAND OR SILTY SOILS
				CH	INORGANIC CLAYS OF HIGH PLASTICITY
				OH	ORGANIC CLAYS OF MEDIUM TO HIGH PLASTICITY, ORGANIC SILTS
HIGHLY ORGANIC SOILS				PT	PEAT, HUMUS, SWAMP SOILS WITH HIGH ORGANIC CONTENTS

NOTE: DUAL SYMBOLS ARE USED TO INDICATE BORDERLINE SOIL CLASSIFICATIONS



JOB NO.: 22G250-2					EXCAVATION DATE: 11/3/22					WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Trailer Storage					EXCAVATION METHOD: Backhoe					CAVE DEPTH: ---				
LOCATION: Perris, California					LOGGED BY: Caleb Brackett					READING TAKEN: At Completion				
FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS		
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)			
5					<p><u>FILL</u>: Light Brown fine Sandy Silt, trace fine root fibers, loose-dry</p> <p><u>ALLUVIUM</u>: Brown Silty fine to medium Sand, trace coarse Sand, trace to little Clay, trace to little Calcareous nodules and veining, slightly cemented, slightly porous, dense to very dense-damp</p>		5			41				
					Trench Terminated at 8'									

TBL 22G250-2.GPJ SOCALGEO.GDT 11/23/22



JOB NO.: 22G250-2				EXCAVATION DATE: 11/3/22				WATER DEPTH: Dry				
PROJECT: Prop. Industrial Building & Trailer Storage				EXCAVATION METHOD: Backhoe				CAVE DEPTH: ---				
LOCATION: Perris, California				LOGGED BY: Caleb Brackett				READING TAKEN: At Completion				
FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
					FILL: Light Brown fine Sandy Silt, trace fine root fibers, loose-dry							
					OLDER ALLUVIUM: Brown Silty fine to medium Sand, little coarse Sand, trace Clay, trace Calcareous nodules and veining, slightly cemented, slightly porous, dense to very dense-damp to moist							
5												
10												
							7			34		
					Boring Terminated at 12'							

TBL 22G250-2.GPJ SOCALGEO.GDT 11/23/22




JOB NO.: 22G250-2	EXCAVATION DATE: 11/1/22	WATER DEPTH: Dry
PROJECT: Prop. Industrial Building & Trailer Storage	EXCAVATION METHOD: Backhoe	CAVE DEPTH: ---
LOCATION: Perris, California	LOGGED BY: Caleb Brackett	READING TAKEN: At Completion

FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
5					SURFACE ELEVATION: --- MSL							
					<u>FILL</u> : Brown fine Sandy Silt, trace fine root fibers, trash trash debris, loose-dry							
					<u>FILL</u> : Brown Silty fine Sand, trace medium Sand, trace Clay, medium dense-damp							
					<u>OLDER ALLUVIUM</u> : Brown Silty fine to coarse Sand, trace Clay, dense-damp							
					<u>OLDER ALLUVIUM</u> : Brown Silty fine to medium Sand, trace coarse Sand, trace Clay, slightly cemented, slightly porous, very dense-damp							
						6				40		
					Boring Terminated at 8'							

TBL 22G250-2.GPJ SOCALGEO.GDT 11/23/22



JOB NO.: 22G250-2	EXCAVATION DATE: 11/1/22	WATER DEPTH: Dry
PROJECT: Prop. Industrial Building & Trailer Storage	EXCAVATION METHOD: Backhoe	CAVE DEPTH: ---
LOCATION: Perris, California	LOGGED BY: Caleb Brackett	READING TAKEN: At Completion

FIELD RESULTS					DESCRIPTION	LABORATORY RESULTS						COMMENTS
DEPTH (FEET)	SAMPLE	BLOW COUNT	POCKET PEN. (TSF)	GRAPHIC LOG		DRY DENSITY (PCF)	MOISTURE CONTENT (%)	LIQUID LIMIT	PLASTIC LIMIT	PASSING #200 SIEVE (%)	ORGANIC CONTENT (%)	
					SURFACE ELEVATION: --- MSL							
5					<div><div>FILL: Brown fine Sandy Silt, trace fine root fibers, trace trash debris, loose to medium dense-dry</div><div>OLDER ALLUVIUM: Brown Silty fine to medium Sand, little Clay, slightly cemented, slightly porous, trace Calcarous nodules and veining, very dense-damp to moist</div></div>							
10							7			42		
					Boring Terminated at 11'							

TBL 22G250-2.GPJ SOCALGEO.GDT 11/23/22

INFILTRATION CALCULATIONS

Project Name	Proposed Industrial Building and Trailer Storage
Project Location	Perris, California
Project Number	22G250-2
Engineer	OS

Infiltration Test No **I-1**

Constants			
	Diameter (ft)	Area (ft ²)	Area (cm ²)
Inner	1	0.79	730
Anlr. Space	2	2.36	2189

*Note: The infiltration rate was calculated based on current time interval

Test Interval		Time (hr)	Interval Elapsed (min)	Flow Readings				Infiltration Rates			
				Inner Ring (ml)	Ring Flow (cm ³)	Annular Ring (ml)	Space Flow (cm ³)	Inner Ring* (cm/hr)	Annular Space* (cm/hr)	Inner Ring* (in/hr)	Annular Space* (in/hr)
1	Initial	11:15 AM	30	0	1400	0	4400	3.84	4.02	1.51	1.58
	Final	11:45 AM	30	1400		4400					
2	Initial	11:45 AM	30	0	900	0	1800	2.47	1.64	0.97	0.65
	Final	12:15 PM	60	900		1800					
3	Initial	12:15 PM	30	0	800	0	2000	2.19	1.83	0.86	0.72
	Final	12:45 PM	90	800		2000					
4	Initial	12:45 PM	30	0	700	0	2200	1.92	2.01	0.76	0.79
	Final	1:15 PM	120	700		2200					
5	Initial	1:15 PM	30	0	600	0	2000	1.64	1.83	0.65	0.72
	Final	1:45 PM	150	600		2000					
6	Initial	1:45 PM	30	0	600	0	2200	1.64	2.01	0.65	0.79
	Final	2:15 PM	180	600		2200					

INFILTRATION CALCULATIONS

Project Name	Proposed Industrial Building and Trailer Storage
Project Location	Perris, California
Project Number	22G250-2
Engineer	OS

Infiltration Test No I-2

Constants			
	Diameter (ft)	Area (ft ²)	Area (cm ²)
Inner	1	0.79	730
Anlr. Space	2	2.36	2189

*Note: The infiltration rate was calculated based on current time interval

Test Interval		Time (hr)	Interval Elapsed (min)	Flow Readings				Infiltration Rates			
				Inner Ring (ml)	Ring Flow (cm ³)	Annular Ring (ml)	Space Flow (cm ³)	Inner Ring* (cm/hr)	Annular Space* (cm/hr)	Inner Ring* (in/hr)	Annular Space* (in/hr)
1	Initial	9:35 AM	30	0	200	0	1800	0.55	1.64	0.22	0.65
	Final	10:05 AM	30	200		1800					
2	Initial	10:05 AM	30	0	200	0	800	0.55	0.73	0.22	0.29
	Final	10:35 AM	60	200		800					
3	Initial	10:35 AM	30	0	100	0	600	0.27	0.55	0.11	0.22
	Final	11:05 AM	90	100		600					
4	Initial	11:05 AM	30	0	100	0	600	0.27	0.55	0.11	0.22
	Final	11:35 AM	120	100		600					
5	Initial	11:35 AM	30	0	100	0	600	0.27	0.55	0.11	0.22
	Final	12:05 PM	150	100		600					
6	Initial	12:05 PM	30	0	100	0	600	0.27	0.55	0.11	0.22
	Final	12:35 PM	180	100		600					

INFILTRATION CALCULATIONS

Project Name	Proposed Industrial Building and Trailer Storage
Project Location	Perris, California
Project Number	22G250-2
Engineer	OS

Infiltration Test No I-3

Constants			
	Diameter (ft)	Area (ft ²)	Area (cm ²)
Inner	1	0.79	730
Anlr. Spac	2	2.36	2189

*Note: The infiltration rate was calculated based on current time interval

Test Interval		Time (hr)	Interval Elapsed (min)	Flow Readings				Infiltration Rates			
				Inner Ring (ml)	Ring Flow (cm ³)	Annular Ring (ml)	Space Flow (cm ³)	Inner Ring* (cm/hr)	Annular Space* (cm/hr)	Inner Ring* (in/hr)	Annular Space* (in/hr)
1	Initial	7:00 AM	30	0	100	0	5000	0.27	4.57	0.11	1.80
	Final	7:30 AM	30	100		5000					
2	Initial	7:30 AM	30	0	40	0	800	0.11	0.73	0.04	0.29
	Final	8:00 AM	60	40		800					
3	Initial	8:00 AM	30	0	20	0	600	0.05	0.55	0.02	0.22
	Final	8:30 AM	90	20		600					
4	Initial	8:30 AM	30	0	0	0	0	0.00	0.00	0.00	0.00
	Final	9:00 AM	120	0		0					
5	Initial	9:00 AM	30	0	0	0	0	0.00	0.00	0.00	0.00
	Final	9:30 AM	150	0		0					
6	Initial	9:30 AM	30	0	0	0	0	0.00	0.00	0.00	0.00
	Final	10:00 AM	180	0		0					

INFILTRATION CALCULATIONS

Project Name	Proposed Industrial Building and Trailer Storage
Project Location	Perris, California
Project Number	22G250-2
Engineer	OS


Infiltration Test No I-4


Constants			
	Diameter (ft)	Area (ft ²)	Area (cm ²)
Inner	1	0.79	730
Anlr. Spac	2	2.36	2189

*Note: The infiltration rate was calculated based on current time interval


Test Interval		Time (hr)	Interval Elapsed (min)	Flow Readings				Infiltration Rates			
				Inner Ring (ml)	Ring Flow (cm ³)	Annular Ring (ml)	Space Flow (cm ³)	Inner Ring* (cm/hr)	Annular Space* (cm/hr)	Inner Ring* (in/hr)	Annular Space* (in/hr)
1	Initial	10:00 AM	30	0	100	0	2800	0.27	2.56	0.11	1.01
	Final	10:30 AM	30	100		2800					
2	Initial	10:30 AM	30	0	20	0	600	0.05	0.55	0.02	0.22
	Final	11:00 AM	60	20		600					
3	Initial	11:00 AM	30	0	0	0	200	0.00	0.18	0.00	0.07
	Final	11:30 AM	90	0		200					
4	Initial	11:30 AM	30	0	0	0	0	0.00	0.00	0.00	0.00
	Final	12:00 PM	120	0		0					
5	Initial	12:00 PM	30	0	0	0	0	0.00	0.00	0.00	0.00
	Final	12:30 PM	150	0		0					
6	Initial	12:30 PM	30	0	0	0	0	0.00	0.00	0.00	0.00
	Final	1:00 PM	180	0		0					


Grain Size Distribution

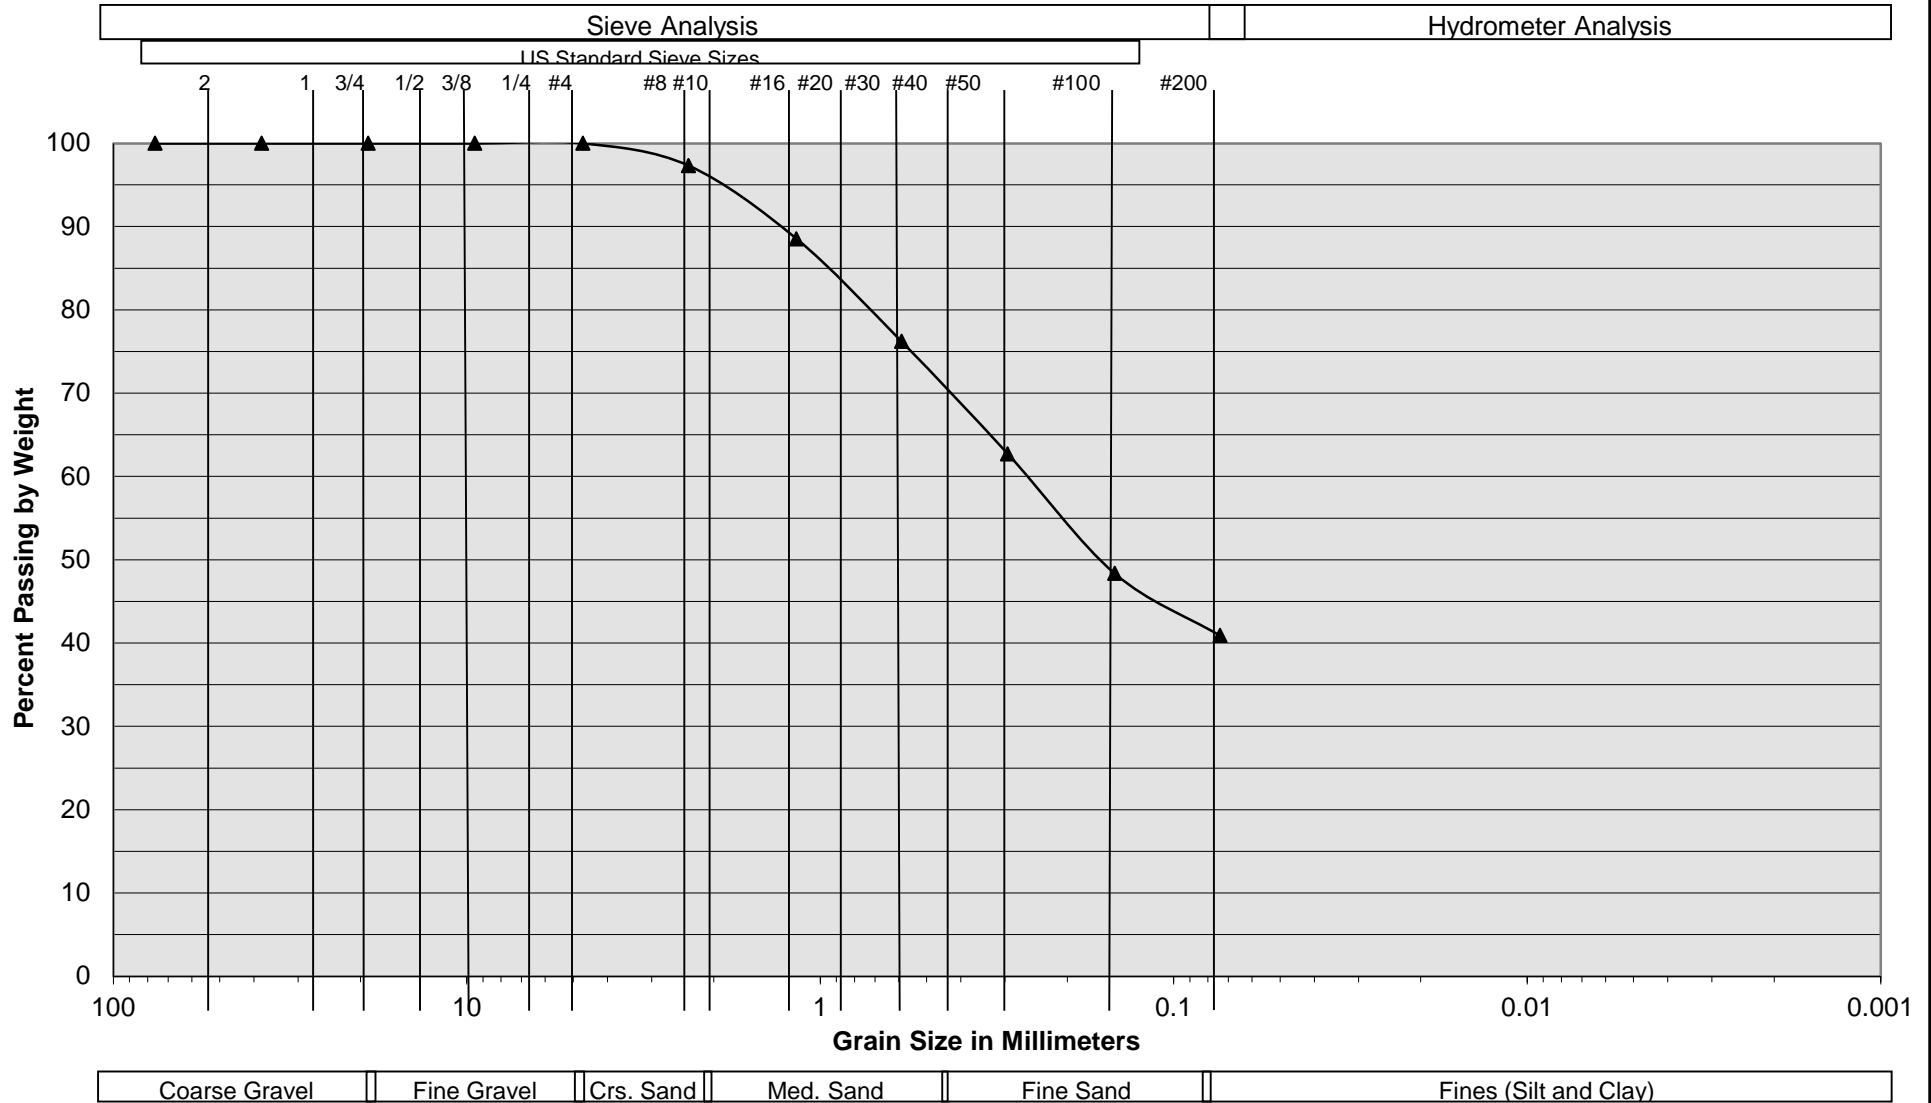


Sample Description	I-1 @ 7'		
Soil Classification	Brown Silty fine to medium Sand, trace coarse Sand, trace to little Clay		
Proposed Industrial Building and Trailer Storage Perris, California Project No. 22G250-2 PLATE C- 1			 SOUTHERN CALIFORNIA GEOTECHNICAL <i>A California Corporation</i>


Grain Size Distribution

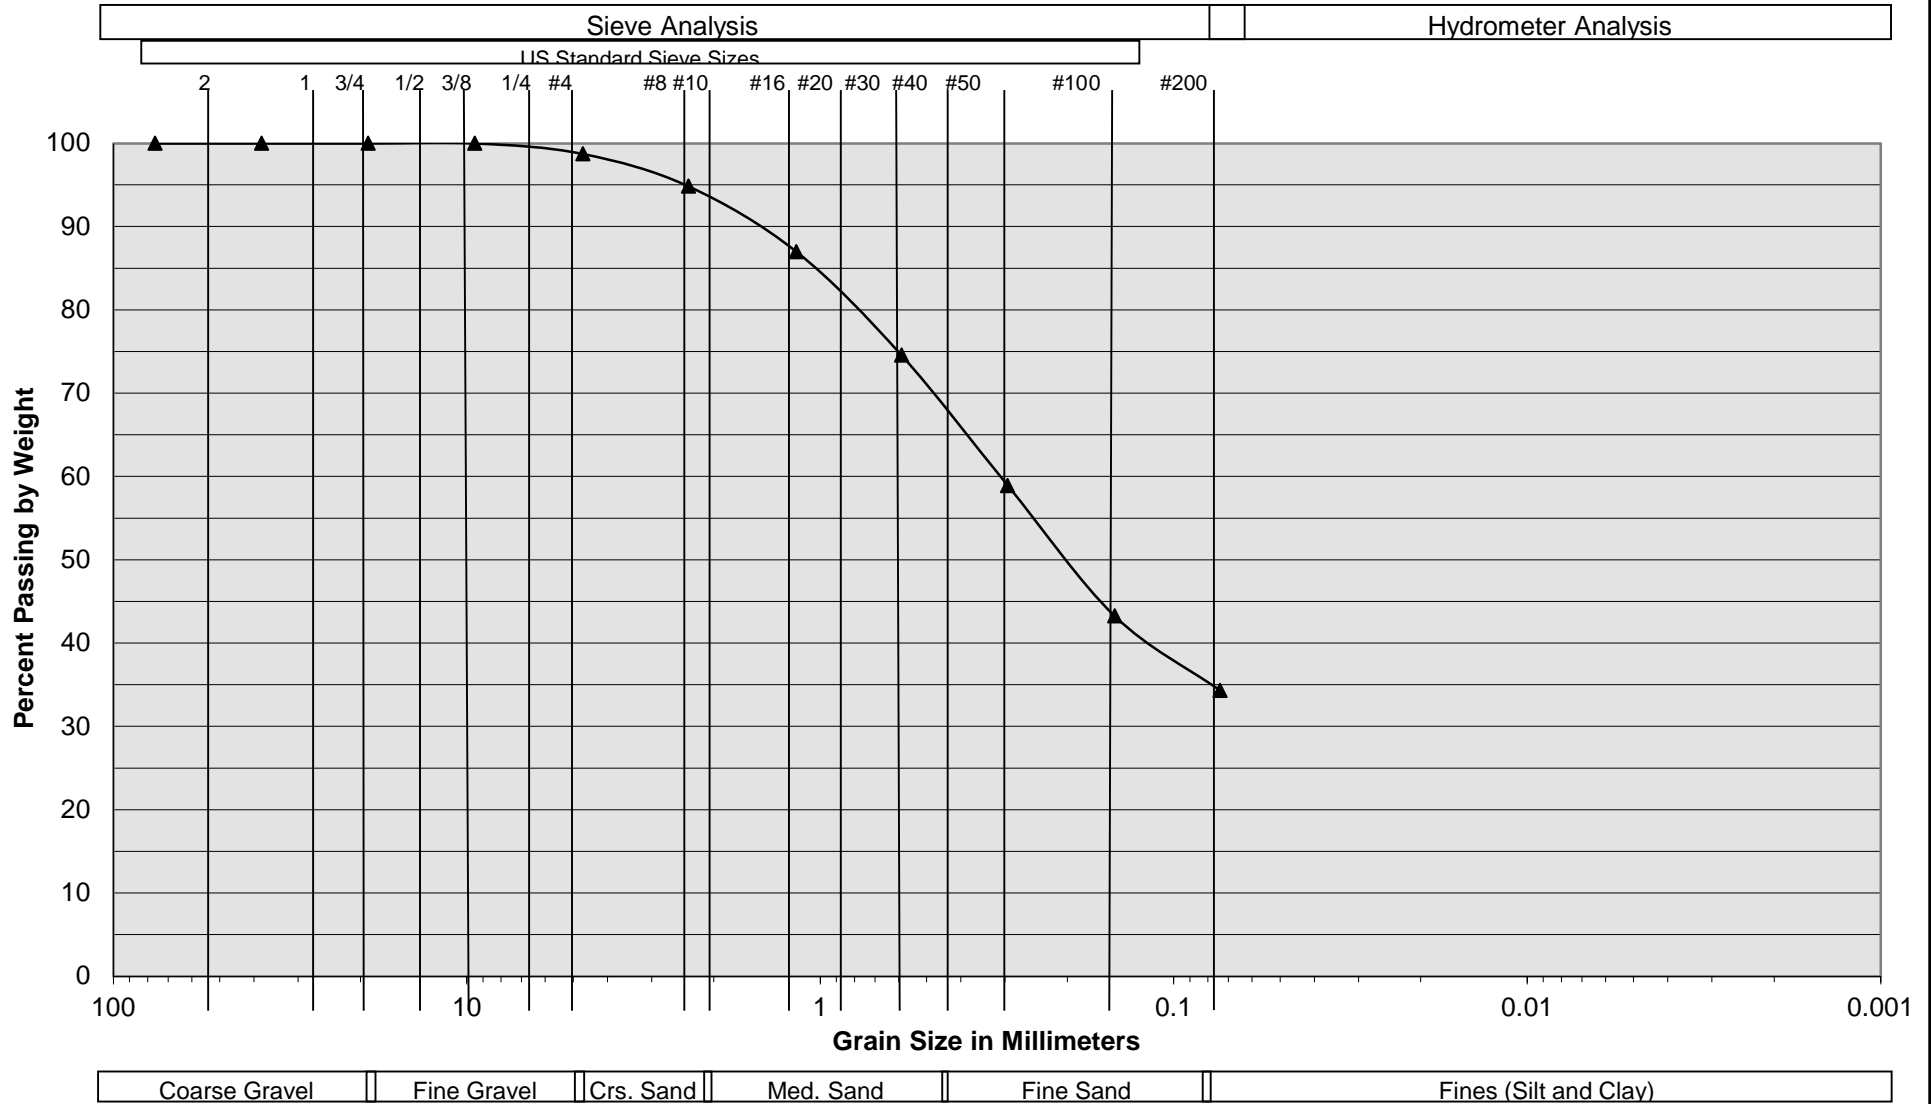


Sample Description	I-2 @ 11'
Soil Classification	Brown Silty fine to medium Sand, little coarse Sand, trace Clay
Proposed Industrial Building and Trailer Storage Perris, California Project No. 22G250-2 PLATE C- 2	 <div> SOUTHERN CALIFORNIA GEOTECHNICAL <small>A California Corporation</small> </div>


Grain Size Distribution

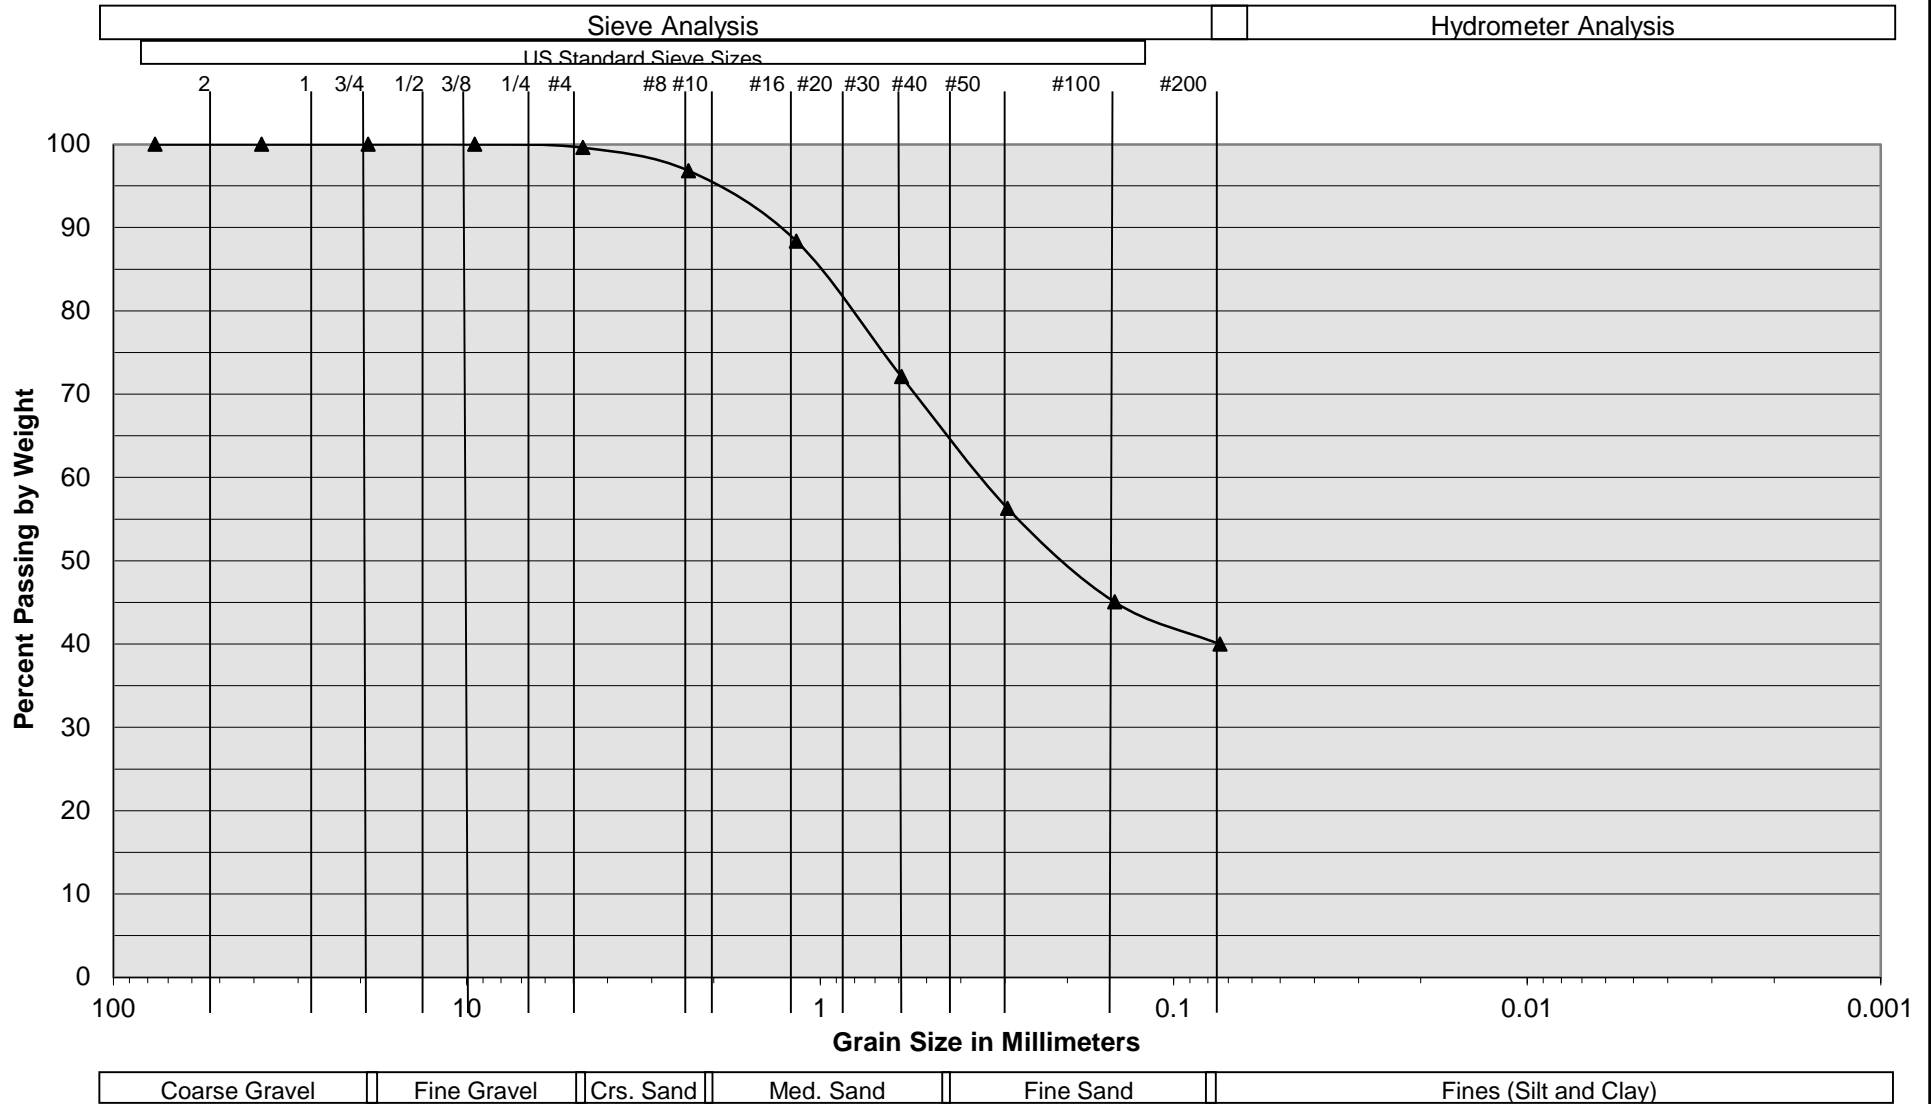

Sample Description	I-3 @ 7'
Soil Classification	Brown Silty fine to medium Sand, trace coarse Sand, trace Clay
Proposed Industrial Building and Trailer Storage Perris, California Project No. 22G250-2 PLATE C- 3	 <div> SOUTHERN CALIFORNIA GEOTECHNICAL <small>A California Corporation</small> </div>

Grain Size Distribution

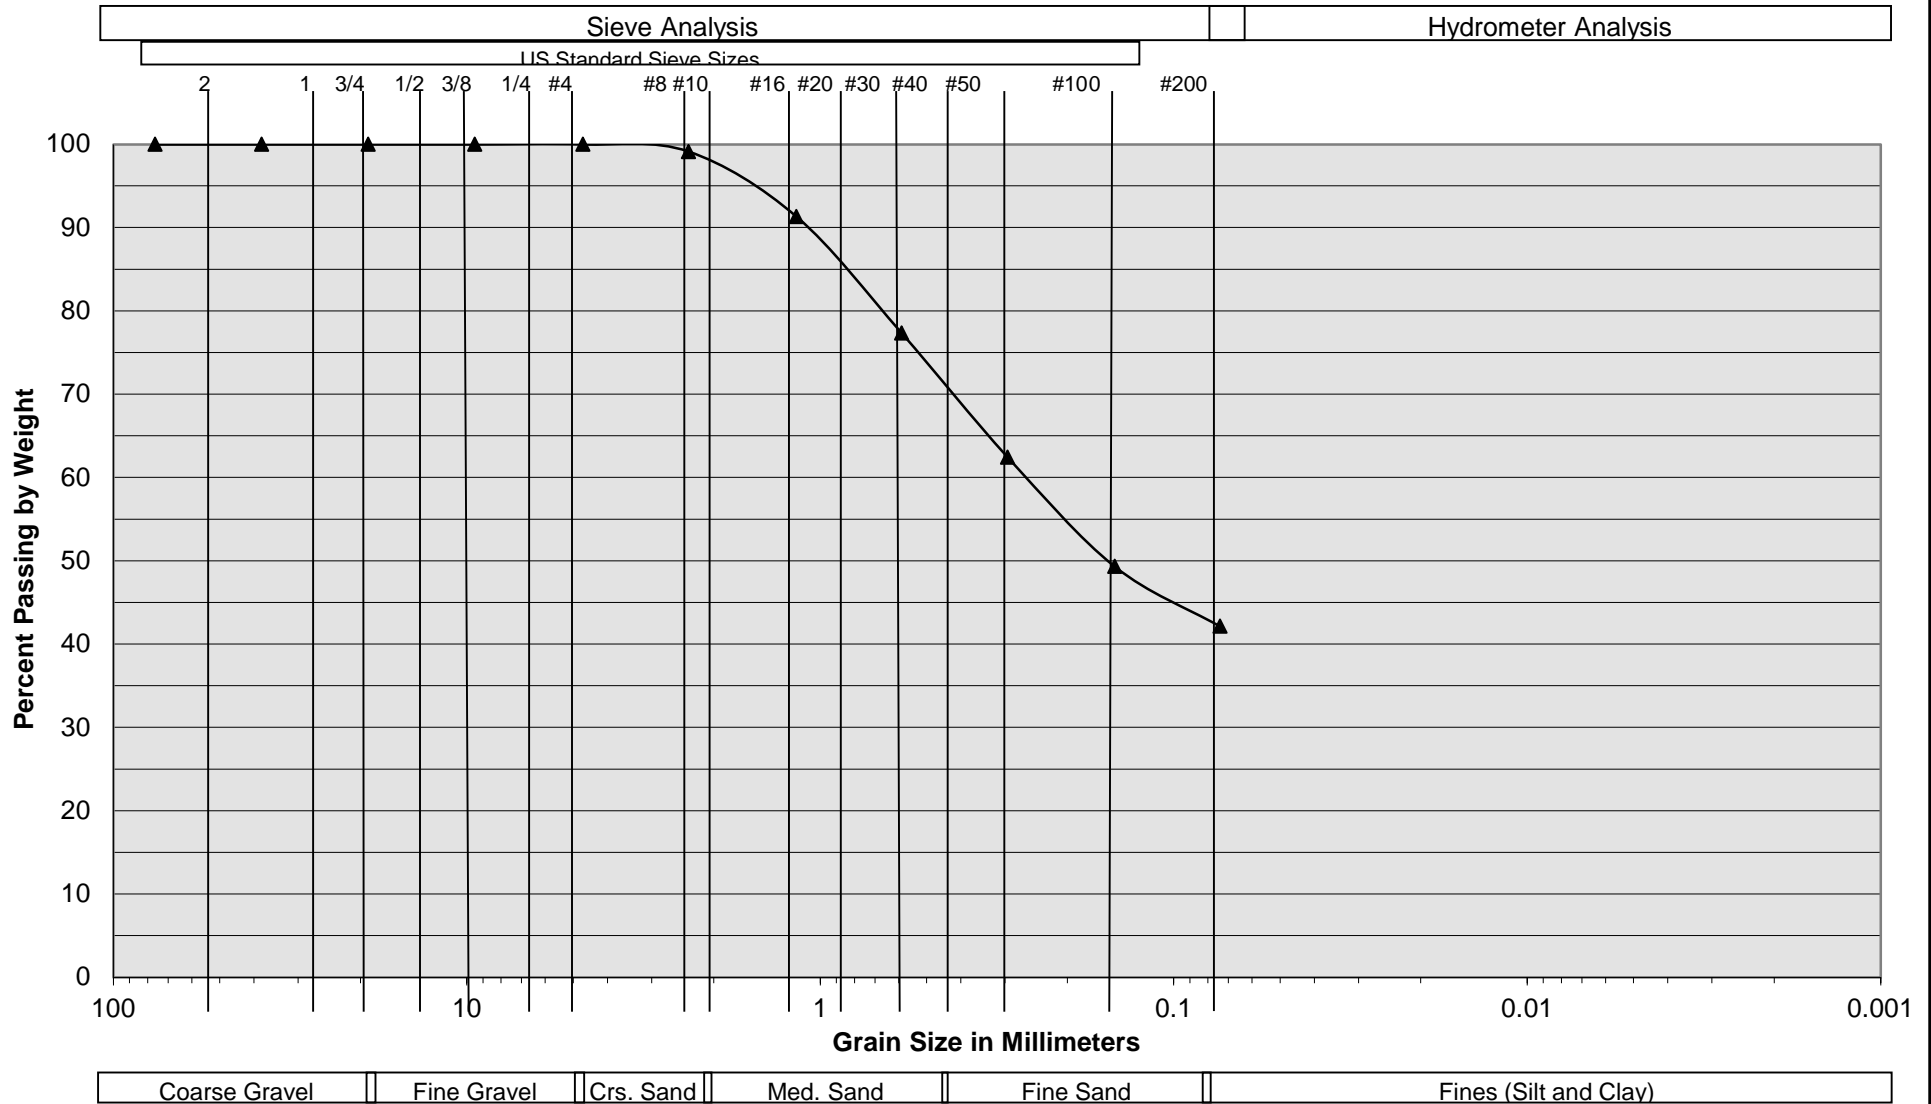

Sample Description	I-4 @ 10'
Soil Classification	Brown Silty fine to medium Sand, little Clay
Proposed Industrial Building and Trailer Storage Perris, California Project No. 22G250-2 PLATE C- 4	 <div> SOUTHERN CALIFORNIA GEOTECHNICAL <small>A California Corporation</small> </div>