Antelope Valley Commerce Center

AIR QUALITY IMPACT ANALYSIS

CITY OF PALMDALE

PREPARED BY:

Haseeb Qureshi
hqureshi@urbanxroads.com

Ali Dadabhoy
adadabhoy@urbanxroads.com

NOVEMBER 14, 2023

TABLE OF CONTENTS

TABLE OF CONTENTS ..... **I**
APPENDICES ..... **II**
LIST OF EXHIBITS ..... **II**
LIST OF TABLES ..... **II**
LIST OF ABBREVIATED TERMS ..... **IV**
EXECUTIVE SUMMARY ..... **A**

ES.1 Summary of Findings ..... A
ES.2 Standard Regulatory Requirements/Best Available Control Measures ..... A
ES.3 Mitigation Measures ..... B
ES.4 Project Design Features ..... D

1 INTRODUCTION **6**

1.1 Site Location 6
1.2 Project Description 6

2 AIR QUALITY SETTING **11**

2.1 Mojave Desert Air Basin 11
2.2 Regional Climate 11
2.3 Criteria Pollutants 12
2.4 Existing Air Quality 19
2.5 Regional Air Quality 22
2.6 Local Air Quality 22
2.7 Regulatory Background 23
2.8 Regional Air Quality Improvement 27

3 PROJECT AIR QUALITY IMPACT **35**

3.1 Introduction 35
3.2 Standards of Significance 35
3.3 Models Employed To Analyze Air Quality Emissions 36
3.4 Construction Emissions 36
3.5 Operational Emissions 42
3.6 CO “Hot Spot” Analysis 60
3.7 AQMP 62
3.8 Potential Impacts to Sensitive Receptors 64
3.9 Odors 67
3.10 Cumulative Impacts 68

4 REFERENCES **71**
5 CERTIFICATIONS **74**

APPENDICES

APPENDIX 2.1: STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS
APPENDIX 3.1: CALEEMOD PHASE 1 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS
APPENDIX 3.2: CALEEMOD PHASE 2 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS
APPENDIX 3.3: CALEEMOD PHASE 3 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS
APPENDIX 3.4: CALEEMOD PHASE 4 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP 8
EXHIBIT 1-B: SITE PLAN 9
EXHIBIT 2-A: DPM AND DIESEL VEHICLE MILES TREND 33
EXHIBIT 3-A: SENSITIVE RECEPTOR LOCATIONS 66

LIST OF TABLES

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS ..... A
TABLE 2-1: CRITERIA POLLUTANTS 12
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2) 20
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2) 21
TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE MDAB 22
TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2020-2022 23
TABLE 2-5: MDAB O_3 TREND 28
TABLE 2-6: MDAB AVERAGE 24-HOUR CONCENTRATION PM_{10} TREND (BASED ON FEDERAL STANDARD)[1] 29
TABLE 2-7: MDAB ANNUAL AVERAGE CONCENTRATION PM_{10} TREND (BASED ON STATE STANDARD)[1] 29
TABLE 2-8: MDAB 24-HOUR AVERAGE CONCENTRATION $PM_{2.5}$ TREND (BASED ON FEDERAL STANDARD)[1] 30
TABLE 2-9: MDAB ANNUAL AVERAGE CONCENTRATION $PM_{2.5}$ TREND (BASED ON STATE STANDARD)[1] 30
TABLE 2-11: MDAB 1-HOUR AVERAGE CONCENTRATION NO_2 TREND (BASED ON FEDERAL STANDARD) 31
TABLE 2-12: MDAB 1-HOUR AVERAGE CONCENTRATION NO_2 TREND (BASED ON STATE STANDARD) .. 31
TABLE 3-1: MAXIMUM REGIONAL DAILY EMISSIONS THRESHOLDS 35
TABLE 3-2: CONSTRUCTION ACTIVITY 36
TABLE 3-3: CONSTRUCTION DURATION 37
TABLE 3-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS 38
TABLE 3-5: EMISSIONS SUMMARY OF CONSTRUCTION – WITHOUT MITIGATION 40
TABLE 3-6: EMISSIONS SUMMARY OF CONSTRUCTION – WITH MITIGATION 41
TABLE 3-7: PASSENGER CAR FLEET MIX 44
TABLE 3-8: TRUCK FLEET MIX 45
TABLE 3-9: SUMMARY OF PEAK OPERATIONAL EMISSIONS – WITHOUT MITIGATION 47
TABLE 3-10: SUMMARY OF PEAK OPERATIONAL EMISSIONS - WITH MITIGATION 53
TABLE 3-11: AIR QUALITY THRESHOLDS FOR NEIGHBORING AIR DISTRICTS 55
TABLE 3-12: ACTIVITY BY AIR DISTRICT 55

TABLE 3-13: OPERATIONAL EMISSIONS – EKAPCD 56
TABLE 3-14: OPERATIONAL EMISSIONS – SJVAPCD 57
TABLE 3-15: OPERATIONAL EMISSIONS – MDAQMD 58
TABLE 3-16: OPERATIONAL EMISSIONS – SCAQMD 59
TABLE 3-17: CO MODEL RESULTS 61
TABLE 3-18: TRAFFIC VOLUMES 62
TABLE 3-19: PEAK HOUR TRAFFIC VOLUMES 62

LIST OF ABBREVIATED TERMS

(1)	Reference
%	Percent
1992 CO Plan	1992 Federal Attainment Plan for Carbon Monoxide
µg/m^3	Microgram per Cubic Meter
AB 2595	California Clean Air Act
AQIA	Air Quality Impact Analysis
AQMIS	Air Quality and Meteorological Information System
AQMP	Air Quality Management Plan
AVAQMD	Antelope Valley Air Quality Management District
BAAQMD	Bay Area Air Quality Management District
BACM	Best Available Control Measures
BMPs	Best Management Practices
BSC	Building Standards Commission
CAA	Federal Clean Air Act
CAAQS	California Ambient Air Quality Standards
CalEEMod	California Emissions Estimator Model™
CALGreen	California Green Building Standards Code
CalEPA	California Environmental Protection Agency
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CEC	California Energy Commission
CEQA	California Environmental Quality Act
City	City of Palmdale
CO	Carbon Monoxide
COHb	Carboxyhemoglobin
DPM	Diesel Particulate Matter
EKAPCD	Eastern Kern Air Pollution Control District
EPA	Environmental Protection Agency
g/L	Grams Per Liter
GHG	Greenhouse Gas
HRA	Health Risk Assessment
I-15	Interstate 15
SJVAPCD	San Joaquin Valley Air Pollution Control District
lbs/day	Pounds per Day
MDAB	Mojave Desert Air Basin
MDAQMD	Mojave Desert Air Quality Management District

MEIR	Maximally Exposed Individual Receptor
MWELO	Model Water Efficient Landscape Ordinance
NAAQS	National Ambient Air Quality Standards
N_2	Nitrogen
NO	Nitric Oxide
N_2O	Nitrous Oxide
NO_2	Nitrogen Dioxide
NO_X	Nitrogen Oxides
O_2	Oxygen
O_3	Ozone
Pb	Lead
PM_{10}	Particulate Matter 10 microns in diameter or less
$PM_{2.5}$	Particulate Matter 2.5 microns in diameter or less
ppm	Parts Per Million
Project	Antelope Valley Commerce Center
ROG	Reactive Organic Gases
RECLAIM	Regional Clean Air Incentives Market
SDAB	Southeast Desert Air Basin
SCAQMD	South Coast Air Quality Management District
sf	Square Feet
SIP	State Implementation Plan
SO_2	Sulfur Dioxide
SO_4	Sulfates
SO_X	Oxides of Sulfur
TAC	Toxic Air Contaminant
TRU	Transport Refrigeration Units
VOC	Volatile Organic Compound
VPH	Vehicles Per Hour

This page intentionally left blank

EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this *Antelope Valley Commerce Center Air Quality Impact Analysis* (AQIA) are summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the *California Environmental Quality Act (CEQA) Guidelines* (1). Table ES-1 shows the findings of significance for each potential air quality impact under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Report Section	Significance Findings	
		Unmitigated	Mitigated
Regional Construction Emissions	3.4	*Potentially Significant*	*Less Than Significant*
Regional Operational Emissions	3.5	*Potentially Significant*	*Significant and Unavoidable*
CO "Hot Spot" Analysis	3.6	*Less Than Significant*	*n/a*
Air Quality Management Plan	3.7	*Potentially Significant*	*Significant and Unavoidable*
Sensitive Receptors	3.8	*Less Than Significant*	*n/a*
Odors	3.9	*Less Than Significant*	*n/a*
Cumulative Impacts	3.10	*Potentially Significant*	*Significant and Unavoidable*

ES.2 STANDARD REGULATORY REQUIREMENTS/BEST AVAILABLE CONTROL MEASURES

Measures listed below (or equivalent language) shall appear on all Project grading plans, construction specifications and bid documents, and the City shall ensure such language is incorporated prior to issuance of any development permits. Antelope Valley Air Quality Management District (AVAQMD) Rules that are currently applicable during construction activity for this Project include but are not limited to Rule 1113 (Architectural Coatings) (2). It should be noted that mandatory adherence to AVAQMD Rules are considered Best Available Control Measures (BACMs) and are not mitigation as they are standard regulatory requirements. As such, compliance with Rule 1113 was assumed in the analysis.

AVAQMD RULE 1113

The purpose of this rule is to limit the quantity of Volatile Organic Compounds (VOC) in Architectural Coatings. This rule is applicable to any person who supplies, sells, offers for sale, manufactures, blends, or repackages any Architectural Coating for use within the AVAQMD as

well as any person who applies or solicits the application of any Architectural Coating within the District (2)[1].

ES.3 MITIGATION MEASURES

Unmitigated Project construction-source emissions would exceed AVAQMD daily regional thresholds for volatile organic compounds (VOC) emissions. Mitigation Measures (MM) AQ-1 and AQ-2 are designed to reduce Project construction-source VOC emissions. With implementation of (MM) AQ-1 and AQ-2, Project construction-source emissions would not exceed AVAQMD regional thresholds for VOC emissions.

Unmitigated Project operational-source VOC and NOx emissions would exceed applicable AVAQMD regional significance thresholds. The majority of the Project's VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions are from the vehicles, and the predominance (approximately 33% of VOC emissions, 86% of NO_X emissions, 98% of CO emissions, 99% of PM_{10} emissions and 97% of $PM_{2.5}$ emissions) from Project Buildout are emissions generated by passenger cars and trucks accessing the Project. The majority of on-site operational VOC emissions are derived from consumer products which includes cleaning supplies, aerosols, and other consumer products. Neither the Project Applicant nor the City have regulatory authority to control tailpipe or consumer product emissions, and no feasible MMs beyond the measures identified herein exist that would reduce Project operational-source VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions to levels that are less-than-significant. Project operational-source VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions impacts are therefore considered significant and unavoidable, before the implementation of mitigation measures.

The mitigation measure MM AQ-1 through MM AQ-2, listed below would reduce emissions attributable to the proposed Project for construction and operations. These mitigation measures apply to all phases (Phase 1, 2, 3, and 4) of the Project.

MM AQ-1

The Construction Contractor shall ensure that off-road diesel construction equipment used during grading activities complies with EPA/CARB Tier 4 emissions standards or equivalent and shall ensure that all construction equipment is tuned and maintained in accordance with the manufacturer's specifications.

MM AQ-2

"Super-Compliant" low VOC paints shall be used during architectural coatings, which have been reformulated to exceed the regulatory VOC limits put forth by AVAQMD's Rule 1113. Super-Compliant low VOC paints shall be no more than 10 grams per liter (g/L) of VOC. Alternatively, the applicant may utilize pre-coated tilt-up concrete buildings that do not require the use of architectural coatings (painting).

[1] Building envelope coatings are limited to no more than 50 g/L of VOC, pursuant to the requirements of AVAQMD Rule 1113.

MM AQ-3

The Project shall implement the following measures in order to reduce operational mobile source air pollutant emissions to the extent feasible:

- Only haul trucks meeting model year 2010 engine emission standards shall be used for the on-road transport of materials to and from the Project site.
- Legible, durable, weather-proof signs shall be placed at truck access gates, loading docks, and truck parking areas that identify applicable California Air Resources Board (CARB) anti-idling regulations. At a minimum, each sign shall include: (1) instructions for truck drivers to shut off engines when not in use; (2) instructions for drivers of diesel trucks to restrict idling to no more than 5 minutes once the vehicle is stopped, the transmission is set to "neutral" or "park," and the parking brake is engaged; and (3) telephone numbers of the building facilities manager(s) and or CARB to report violations. Prior to the issuance of each occupancy permit, the City of Palmdale shall conduct a site inspection to ensure that the signs are in place.
- Prior to tenant occupancy, the Project Applicant or successor in interest shall provide documentation to the City demonstrating that occupants/tenants of the Project site have been provided documentation on funding opportunities, such as the Carl Moyer Program, that provide incentives for using cleaner-than-required engines and equipment.
- The minimum number of automobile electric vehicle (EV) charging stations required by the California Code of Regulations Title 24 shall be provided. In addition, the buildings shall include electrical infrastructure sufficiently sized to accommodate the potential installation of additional auto and truck EV charging stations in the future.
- Conduit shall be installed to tractor trailer parking areas in logical locations determined by the Project Applicant during construction document plan check, for the purpose of accommodating the future installation of EV truck charging stations at such time this technology becomes commercially available.

MM AQ-4

The Project shall implement the following in order to reduce operational energy source air pollutant emissions to the extent feasible:

- The Project shall include rooftop solar panels to the extent feasible, with a capacity that matches the maximum allowed for distributed solar connections to the grid.
- Install Energy Star-rated heating, cooling, lighting, and appliances.
- Provide information on energy efficiency, energy-efficient lighting and lighting control systems, energy management, and existing energy incentive programs to future tenants of the Project.
- Structures shall be equipped with outdoor electric outlets in the front and rear of the structures to facilitate use of electrical lawn and garden equipment.

MM AQ-5

The Project shall include the following language within tenant lease agreements in order to reduce operational air pollutant emissions to the extent feasible:

- Require tenants to use the cleanest technologies available and to provide the necessary infrastructure to support zero-emission vehicles, equipment, and appliances that would be

operating on site. This requirement shall apply to equipment such as forklifts, handheld landscaping equipment, yard trucks, office appliances.

- Require future tenants to exclusively use zero-emission light and medium-duty delivery trucks and vans, when economically feasible.
- Tenants shall be in, and monitor compliance with, all current air quality regulations for on-road trucks including the CARB's Heavy-Duty (Tractor-Trailer) Greenhouse Gas Regulation, Periodic Smoke Inspection Program, and the Statewide Truck and Bus Regulation.

ES.4 PROJECT DESIGN FEATURES

Sustainable design features and operational programs would be incorporated into facilities developed pursuant to the currently proposed Project. The Project also incorporates and expresses the following project design features and attributes promoting sustainability. The following measures are not considered to be mitigation as they are measures that are either part of the Project description or could be regulatory requirements that must be implemented.

WATER CONVERSATION

To reduce water demands and associated energy use, the Project would implement a Water Conservation Strategy and demonstrate a minimum 20 percent (%) reduction in indoor and outdoor water usage when compared to baseline water demand (total expected water demand without implementation of the Water Conservation Strategy). Prior to the issuance of building permits for the Project, the Project applicant shall provide building plans that include the following water conservation measures:

- Install low-water use appliances and fixtures
- Restrict the use of water for cleaning outdoor surfaces and prohibit systems that apply water to non-vegetated surfaces
- Implement water-sensitive urban design practices in new construction
- Install rainwater collection systems where feasible.

SOLID WASTE REDUCTION

In order to reduce the amount of waste disposed at landfills, the Project would implement a 75% waste diversion program. Prior to the issuance of building permits for the Project, the Project applicant shall provide building plans that include the following solid waste reduction measures:

- Provide storage areas for recyclables and green waste in new construction, and food waste storage, if a pick-up service is available.
- Evaluate the potential for onsite composting.

This page intentionally left blank

1 INTRODUCTION

This AQIA report presents the results of the air quality emissions modeling and analyses prepared by Urban Crossroads, Inc., for the proposed Antelope Valley Commerce Center (Project). The purpose of this AQIA is to evaluate the potential impacts to air quality associated with construction and operation of the proposed Project and recommend measures to mitigate impacts considered potentially significant in comparison to thresholds established by the AVAQMD.

1.1 SITE LOCATION

The Project site is located near the southeast corner of Avenue M/Columbia Way and Sierra Highway in the City of Palmdale as shown on Exhibit 1-A. The Project site is vacant with nearby sensitive land uses located to the north across Avenue M. The Project site is located approximately 0.25 miles northwest of Runway 7 at Palmdale Airport/USAF Plant 42.


1.2 PROJECT DESCRIPTION

Six buildings are proposed in the first phase of the Project's development. Site-specific detail for subsequent phases of development would be determined in the future based on the proposed Specific Plan, but reasonable assumptions are made herein about the future phases of development to enable a complete and comprehensive analysis of the whole of the Project (see Exhibit 1-B):

- Phase 1:
    - Building 1 is 136,670 square feet
    - Building 2 is 144,306 square feet
    - Building 3 is 132,695 square feet
        - Buildings 1 through 3 will assume 25% general light industrial and 75% general warehousing use
    - Building 4 is 680,469 square feet of high-cube fulfillment center (sort) warehouse use
    - Building 5 is 1,004,228 square feet with 25% high-cube cold storage warehouse use and high-cube fulfillment center (non-sort) warehouse use
    - Building 6 is 274,858 square feet with 25% manufacturing and 75% general warehousing use
- Phase 2:
    - 1,630,362 square feet of high-cube parcel hub warehousing use
    - 549,790 square feet with 25% manufacturing and 75% general warehousing use
- Phase 3:
    - 1,156,576 square feet with 25% high-cube cold storage warehouse use and 75% high-cube fulfillment (non-sort) warehousing use
    - 2,500 square feet of fast-food restaurant without drive-through window use, 2,500 square feet of fast-food restaurant with drive-through window use, 2,000 square feet of coffee shop with drive-through window use, and 53,984 square feet of commercial retail use (for a total of 60,984 square feet)
- Phase 4:
    - 2,555,556 square feet with 25% high-cube cold storage warehouse use and 75% high-cube fulfillment (non-sort) warehousing use

The proposed Project is anticipated to have an opening year of 2025 for Phase 1 and 2032 for Project Buildout. At the time this analysis was prepared, the future tenants of the proposed Project were unknown, and therefore, this study includes a conservative analysis of the proposed Project uses.

EXHIBIT 1-A: LOCATION MAP

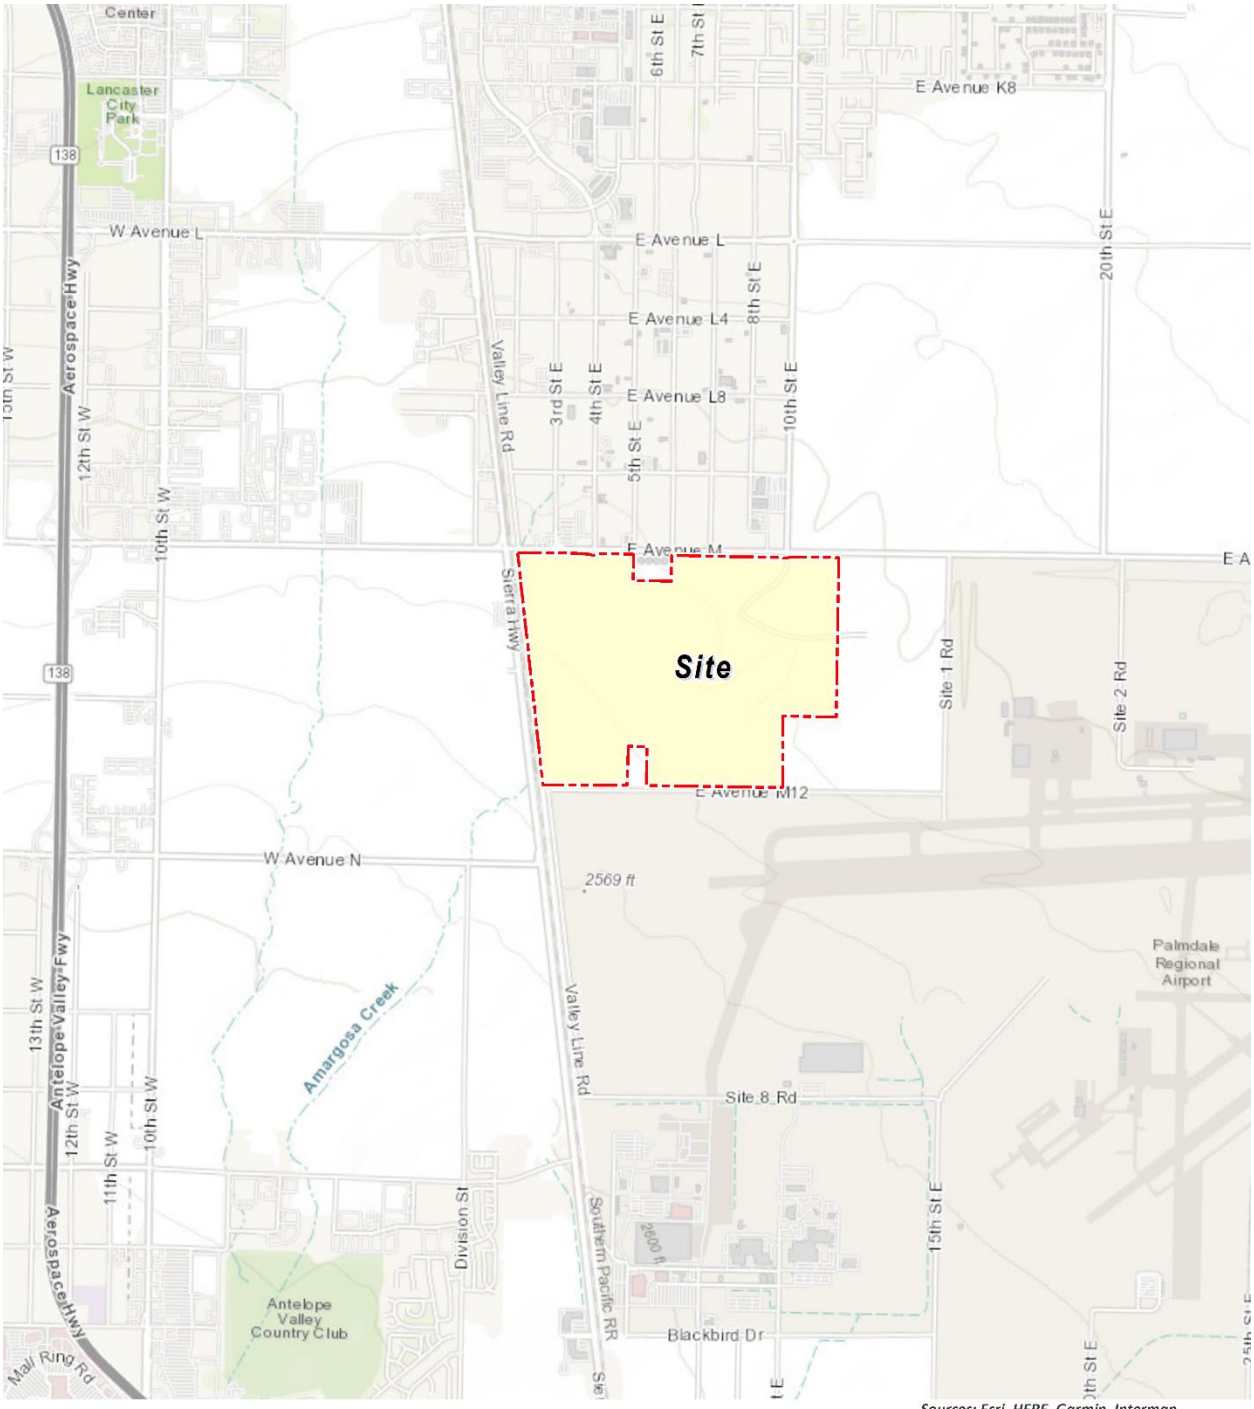


LEGEND:

Site Boundary

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS

EXHIBIT 1-B: SITE PLAN

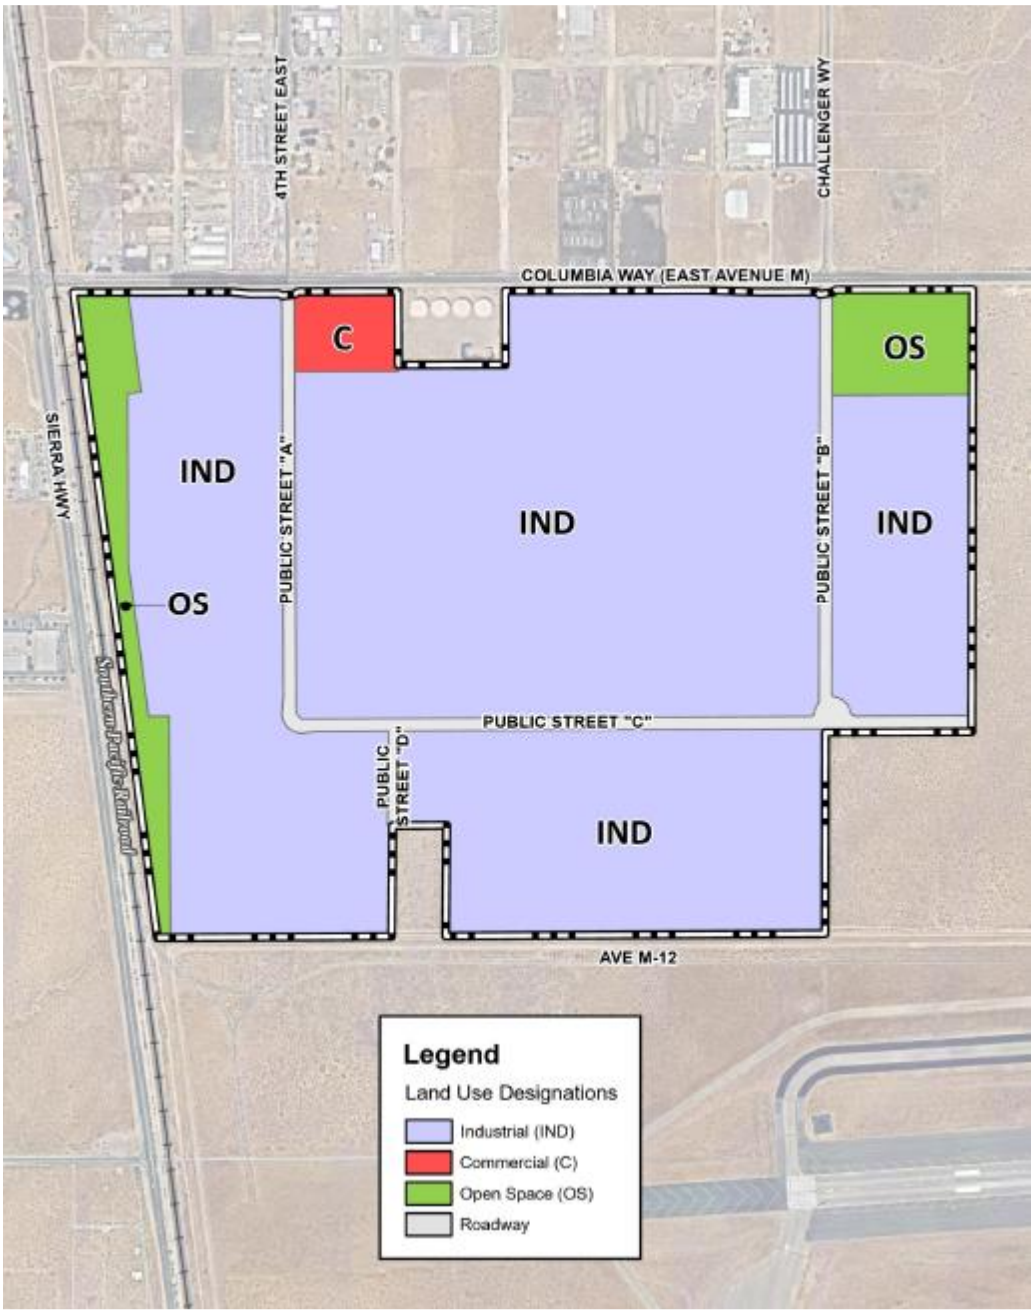

This page intentionally left blank

2 AIR QUALITY SETTING

This section provides an overview of the existing air quality conditions in the Project area and region.

2.1 MOJAVE DESERT AIR BASIN

The Project site is located in the portion of the County of Los Angeles, California, that is part of the Mojave Desert Air Basin (MDAB) and is under the jurisdiction of the AVAQMD. The air quality assessment for the proposed Project includes estimating emissions associated with short-term construction and long-term operation of the proposed Project. A number of air quality modeling tools are available to assess the air quality impacts of projects. In addition, certain air districts, such as the AVAQMD, have created guidelines and requirements to conduct air quality analyses. The AVAQMD's current guidelines, included in its *California Environmental Quality Act and Federal Conformity Guidelines* (August 2016), were adhered to in the assessment of air quality impacts for the proposed Project.

2.2 REGIONAL CLIMATE

Air quality in the Project area is not only affected by various emissions sources (mobile, industry, etc.) but is also affected by atmospheric conditions such as wind speed, wind direction, temperature, and rainfall.

The MDAB is an assemblage of mountain ranges interspersed with long broad valleys that often contain dry lakes. Many of the lower mountains within the vast terrain rise from 1,000 to 4,000 feet above the valley floor. Prevailing winds in the MDAB are out of the west and southwest. These prevailing winds are due to the proximity of the MDAB to coastal and central regions and the blocking nature of the Sierra Nevada Mountains to the north; air masses pushed onshore in Southern California by differential heating are channeled through the MDAB. The MDAB is separated from the Southern California coastal and Central California valley regions by mountains (highest elevation is approximately 10,000 feet), whose passes form the main channels for these air masses. The Mojave Desert is bordered on the southwest by the San Bernardino Mountains, separated from the San Gabriel Mountains by the Cajon Pass (4,200 feet). A lesser pass lies between the San Bernardino Mountains and the Little San Bernardino Mountains in the Morongo Valley. The Palo Verde Valley portion of the Mojave Desert lies in the low desert, at the eastern end of a series of valleys (notably the Coachella Valley), whose primary channel is the San Gorgonio Pass (2,300 feet) between the San Bernardino and San Jacinto Mountains.

During the summer, the MDAB is generally influenced by a Pacific subtropical high cell that sits off the coast, inhibiting cloud formation and encouraging daytime solar heating. The MDAB is rarely influenced by cold air masses moving south from Canada and Alaska, as these frontal systems are weak and diffuse by the time they reach the desert. Most desert moisture arrives from infrequent warm, moist, and unstable air masses from the south. The MDAB averages between three and seven inches of precipitation per year (from 16 to 30 days with at least 0.01 inch of precipitation). The MDAB is classified as a dry-hot desert climate, with portions classified

as dry-very hot desert, to indicate that at least three months have maximum average temperatures over 100.4° F.

Snow is common above 5,000 feet in elevation, resulting in moderate snowpack and limited spring runoff. Below 5,000 feet, any precipitation normally occurs as rainfall. Pacific storm fronts normally move into the area from the west, driven by prevailing winds from the west and southwest. During late summer, moist high-pressure systems from the Pacific collide with rising heated air from desert areas, resulting in brief, high-intensity thunderstorms that can cause high winds and localized flash flooding.

2.3 CRITERIA POLLUTANTS

Criteria pollutants are pollutants that are regulated through the development of human health based and/or environmentally based criteria for setting permissible levels. Criteria pollutants, their typical sources, and health effects are identified below (3):

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
Carbon Monoxide (CO)	CO is a colorless, odorless gas produced by the incomplete combustion of carbon-containing fuels, such as gasoline or wood. CO concentrations tend to be the highest during the winter morning, when little to no wind and surface-based inversions trap the pollutant at ground levels. Because CO is emitted directly from internal combustion engines, unlike ozone (O_3), motor vehicles operating at slow speeds are the primary source of CO in the MDAB. The highest ambient CO concentrations are generally found near congested transportation corridors and intersections.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Individuals with a deficient blood supply to the heart are the most susceptible to the adverse effects of CO exposure. The effects observed include earlier onset of chest pain with exercise, and electrocardiograph changes indicative of decreased oxygen supply to the heart. Inhaled CO has no direct toxic effect on the lungs but exerts its effect on tissues by interfering with oxygen transport and competing with oxygen to combine with hemoglobin present in the blood to form carboxyhemoglobin (COHb). Hence, conditions with an increased demand for oxygen supply can be adversely affected by exposure to CO. Individuals most at risk include fetuses, patients with diseases involving heart and blood vessels, and patients with chronic hypoxemia

Criteria Pollutant	Description	Sources	Health Effects
			(oxygen deficiency) as seen at high altitudes.
Sulfur Dioxide (SO_2)	SO_2 is a colorless, extremely irritating gas or liquid. It enters the atmosphere as a pollutant mainly as a result of burning high sulfur-content fuel oils and coal and from chemical processes occurring at chemical plants and refineries. When SO_2 oxidizes in the atmosphere, it forms sulfates (SO_4). Collectively, these pollutants are referred to as sulfur oxides (SO_X)	Coal or oil burning power plants and industries, refineries, diesel engines	A few minutes of exposure to low levels of SO_2 can result in airway constriction in some asthmatics, all of whom are sensitive to its effects. In asthmatics, increase in resistance to air flow, as well as reduction in breathing capacity leading to severe breathing difficulties, are observed after acute exposure to SO_2. In contrast, healthy individuals do not exhibit similar acute responses even after exposure to higher concentrations of SO_2. Animal studies suggest that despite SO_2 being a respiratory irritant, it does not cause substantial lung injury at ambient concentrations. However, very high levels of exposure can cause lung edema (fluid accumulation), lung tissue damage, and sloughing off of cells lining the respiratory tract. Some population-based studies indicate that the mortality and morbidity effects associated with fine particles show a similar association with ambient SO_2 levels. In these studies, efforts to separate the effects of SO_2 from those of fine particles have not been successful. It is not clear whether the two pollutants act synergistically, or one pollutant alone is the predominant factor.

Criteria Pollutant	Description	Sources	Health Effects
NO_X	NO_X consist of nitric oxide (NO), nitrogen dioxide (NO_2) and nitrous oxide (N_2O) and are formed when nitrogen (N_2) combines with oxygen (O_2). Their lifespan in the atmosphere ranges from one to seven days for nitric oxide and nitrogen dioxide, to 170 years for nitrous oxide. Nitrogen oxides are typically created during combustion processes and are major contributors to smog formation and acid deposition. NO_2 is a criteria air pollutant and may result in numerous adverse health effects; it absorbs blue light, resulting in a brownish-red cast to the atmosphere and reduced visibility. Of the seven types of nitrogen oxide compounds, NO_2 is the most abundant in the atmosphere. As ambient concentrations of NO_2 are related to traffic density, commuters in heavy traffic may be exposed to higher concentrations of NO_2 than those indicated by regional monitoring stations.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Population-based studies suggest that an increase in acute respiratory illness, including infections and respiratory symptoms in children (not infants) is associated with long-term exposure to NO_2 at levels found in homes with gas stoves, which can result in concentrations that are higher than ambient levels found in Southern California. Increase in resistance to air flow and airway contraction is observed after short-term exposure to NO_2 in healthy subjects. Larger decreases in lung functions are observed in individuals with asthma or chronic obstructive pulmonary disease (e.g., chronic bronchitis, emphysema) than in healthy individuals, indicating a greater susceptibility of these sub-groups. In animals, exposure to levels of NO_2 considerably higher than ambient concentrations result in increased susceptibility to infections, possibly due to the observed changes in cells involved in maintaining immune functions. The severity of lung tissue damage associated with high levels of O_3 exposure increases when animals are exposed to a combination of O_3 and NO_2.
O_3	Ozone (O_3) is a highly reactive and unstable gas that is formed when volatile organic compounds (VOCs) and NO_X, both byproducts of internal combustion engine exhaust, undergo slow photochemical reactions in the presence of sunlight. O_3	Formed when reactive organic gases (ROG) and nitrogen oxides react in the presence of sunlight. ROG sources	Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be the most susceptible sub-groups for O_3 effects. Short-

Criteria Pollutant	Description	Sources	Health Effects
	concentrations are generally highest during the summer months when direct sunlight, light wind, and warm temperature conditions are favorable to the formation of this pollutant.	include any source that burns fuels, (e.g., gasoline, natural gas, wood, or oil) as well as the use of solvents, petroleum processing and storage, and pesticides.	term exposure (lasting for a few hours) to O_3 at levels typically observed in Southern California can result in breathing pattern changes, reduction of breathing capacity, increased susceptibility to infections, inflammation of the lung tissue, and some immunological changes. Elevated O_3 levels are associated with increased school absences. In recent years, a correlation between elevated ambient O_3 levels and increases in daily hospital admission rates, as well as mortality, has also been reported. An increased risk for asthma has been found in children who participate in multiple outdoor sports and live in communities with high O_3 levels. O_3 exposure under exercising conditions is known to increase the severity of the responses described above. Animal studies suggest that exposure to a combination of pollutants that includes O_3 may be more toxic than exposure to O_3 alone. Although lung volume and resistance changes observed after a single exposure diminish with repeated exposures, biochemical and cellular changes appear to persist, which can lead to subsequent lung structural changes.
Particulate Matter	PM_{10} (Particulate Matter less than 10 microns): A major air pollutant consisting of tiny solid or liquid particles of soot, dust, smoke, fumes, and aerosols. Particulate matter pollution is a	Sources of PM_{10} include road dust, windblown dust and construction. Also formed from other pollutants (acid	A consistent correlation between elevated ambient fine particulate matter (PM_{10} and $PM_{2.5}$) levels and an increase in mortality rates, respiratory infections,

Criteria Pollutant	Description	Sources	Health Effects
	major cause of reduced visibility (haze) which is caused by the scattering of light and consequently the significant reduction air clarity. The size of the particles (10 microns or smaller, about 0.0004 inches or less) allows them to easily enter the lungs where they may be deposited, resulting in adverse health effects. Additionally, it should be noted that PM_{10} is considered a criteria air pollutant. $PM_{2.5}$ (Particulate Matter less than 2.5 microns): A similar air pollutant to PM_{10} consisting of tiny solid or liquid particles which are 2.5 microns or smaller (which is often referred to as fine particles). These particles are formed in the atmosphere from primary gaseous emissions that include sulfates formed from SO_2 released from power plants and industrial facilities and nitrates that are formed from NO_X released from power plants, automobiles and other types of combustion sources. The chemical composition of fine particles highly depends on location, time of year, and weather conditions. $PM_{2.5}$ is a criteria air pollutant.	rain, NO_X, SO_X, organics). Incomplete combustion of any fuel. $PM_{2.5}$ comes from fuel combustion in motor vehicles, equipment and industrial sources, residential and agricultural burning. Also formed from reaction of other pollutants (acid rain, NO_X, SO_X, organics).	number and severity of asthma attacks and the number of hospital admissions has been observed in different parts of the United States and various areas around the world. In recent years, some studies have reported an association between long-term exposure to air pollution dominated by fine particles and increased mortality, reduction in lifespan, and an increased mortality from lung cancer. Daily fluctuations in $PM_{2.5}$ concentration levels have also been related to hospital admissions for acute respiratory conditions in children, to school and kindergarten absences, to a decrease in respiratory lung volumes in healthy children, and to increased medication use in children and adults with asthma. Recent studies show lung function growth in children is reduced with long term exposure to particulate matter. The elderly, people with pre-existing respiratory or cardiovascular disease, and children appear to be more susceptible to the effects of high levels of PM_{10} and $PM_{2.5}$.
Volatile Organic Compounds (VOC)	VOCs are hydrocarbon compounds (any compound containing various combinations of hydrogen and carbon atoms) that exist in the ambient air. VOCs contribute to the formation of smog through atmospheric photochemical reactions and/or may be toxic. Compounds of carbon (also known as organic compounds) have different levels of reactivity; that is, they do not	Organic chemicals are widely used as ingredients in household products. Paints, varnishes and wax all contain organic solvents, as do many cleaning, disinfecting, cosmetic, degreasing and	Breathing VOCs can irritate the eyes, nose and throat, can cause difficulty breathing and nausea, and can damage the central nervous system as well as other organs. Some VOCs can cause cancer. Not all VOCs have all these health effects, though many have several.

Criteria Pollutant	Description	Sources	Health Effects
	react at the same speed or do not form O_3 to the same extent when exposed to photochemical processes. VOCs often have an odor, and some examples include gasoline, alcohol, and the solvents used in paints. VOCs are a criteria pollutant since they are a precursor to O_3, which is a criteria pollutant. The terms VOC and ROG interchangeable.	hobby products. Fuels are made up of organic chemicals. All of these products can release organic compounds while you are using them, and, to some degree, when they are stored.	
Lead (Pb)	Lead is a heavy metal that is highly persistent in the environment and is considered a criteria pollutant. In the past, the primary source of lead in the air was emissions from vehicles burning leaded gasoline. The major sources of lead emissions are ore and metals processing, particularly lead smelters, and piston-engine aircraft operating on leaded aviation gasoline. Other stationary sources include waste incinerators, utilities, and lead-acid battery manufacturers. It should be noted that the Project does not include operational activities such as metal processing or lead acid battery manufacturing. As such, the Project is not anticipated to generate a quantifiable amount of lead emissions.	Metal smelters, resource recovery, leaded gasoline, deterioration of lead paint.	Fetuses, infants, and children are more sensitive than others to the adverse effects of Pb exposure. Exposure to low levels of Pb can adversely affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased Pb levels are associated with increased blood pressure. Pb poisoning can cause anemia, lethargy, seizures, and death; although it appears that there are no direct effects of Pb on the respiratory system. Pb can be stored in the bone from early age environmental exposure, and elevated blood Pb levels can occur due to breakdown of bone tissue during pregnancy, hyperthyroidism (increased secretion of hormones from the thyroid gland) and osteoporosis (breakdown of bony tissue). Fetuses and breast-fed babies can be exposed to higher levels of Pb because of previous environmental Pb exposure of their mothers.

Criteria Pollutant	Description	Sources	Health Effects
Odor	Odor means the perception experienced by a person when one or more chemical substance in the air come into contact with the human olfactory nerves.	Odors can come from many sources including animals, human activities, industry, nature, and vehicles.	Offensive odors can potentially affect human health in several ways. First, odorant compounds can irritate the eye, nose, and throat, which can reduce respiratory volume. Second, studies have shown that the VOCs that cause odors can stimulate sensory nerves to cause neurochemical changes that might influence health, for instance, by compromising the immune system. Finally, unpleasant odors can trigger memories or attitudes linked to unpleasant odors, causing cognitive and emotional effects such as stress.

2.4 EXISTING AIR QUALITY

Existing air quality is measured at established AVAQMD air quality monitoring stations. Monitored air quality is evaluated in the context of ambient air quality standards. These standards are the levels of air quality that are considered safe, with an adequate margin of safety, to protect the public health and welfare. National Ambient Air Quality Standards (NAAQS) and California Ambient Air Quality Standards (CAAQS) currently in effect are shown in Table 2-2 (4).

The determination of whether a region's air quality is healthful or unhealthful is determined by comparing contaminant levels in ambient air samples to the State and federal standards. At the time of this AQIA, the most recent State and federal standards were updated by CARB on May ,4 2016 and are presented in Table 2-2. The air quality in a region is considered to be in attainment by the State if the measured ambient air pollutant levels for O_3, CO (except 8-hour Lake Tahoe), SO_2 (1 and 24 hour), NO_2, PM_{10}, and $PM_{2.5}$ are not to be exceeded. All others are not to be equaled or exceeded. It should be noted that the three-year period is presented for informational purposes and is not the basis for how the State assigns attainment status. Attainment status for a pollutant means that the Air District meets the standards set by the United States EPA or the California EPA (CalEPA). Conversely, nonattainment means that an area has monitored air quality that does not meet the NAAQS or CAAQS standards. In order to improve air quality in nonattainment areas, a State Implementation Plan (SIP) is drafted by CARB. The SIP outlines the measures that the State will take to improve air quality. Once nonattainment areas meet the standards and additional redesignation requirements, the EPA will designate the area as a maintenance area (5).

TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2)

Ambient Air Quality Standards						
Pollutant	**Averaging Time**	**California Standards [1]**		**National Standards [2]**		
		Concentration [3]	**Method [4]**	**Primary [3,5]**	**Secondary [3,6]**	**Method [7]**
Ozone (O_3)[8]	1 Hour	0.09 ppm (180 µg/m^3)	Ultraviolet Photometry	—	Same as Primary Standard	Ultraviolet Photometry
	8 Hour	0.070 ppm (137 µg/m^3)		0.070 ppm (137 µg/m^3)		
Respirable Particulate Matter (PM10)[9]	24 Hour	50 µg/m^3	Gravimetric or Beta Attenuation	150 µg/m^3	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	20 µg/m^3		—		
Fine Particulate Matter (PM2.5)[9]	24 Hour	—	—	35 µg/m^3	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	12 µg/m^3	Gravimetric or Beta Attenuation	12.0 µg/m^3	15 µg/m^3	
Carbon Monoxide (CO)	1 Hour	20 ppm (23 mg/m^3)	Non-Dispersive Infrared Photometry (NDIR)	35 ppm (40 mg/m^3)	—	Non-Dispersive Infrared Photometry (NDIR)
	8 Hour	9.0 ppm (10 mg/m^3)		9 ppm (10 mg/m^3)	—	
	8 Hour (Lake Tahoe)	6 ppm (7 mg/m^3)		—	—	
Nitrogen Dioxide (NO_2)[10]	1 Hour	0.18 ppm (339 µg/m^3)	Gas Phase Chemiluminescence	100 ppb (188 µg/m^3)	—	Gas Phase Chemiluminescence
	Annual Arithmetic Mean	0.030 ppm (57 µg/m^3)		0.053 ppm (100 µg/m^3)	Same as Primary Standard	
Sulfur Dioxide (SO_2)[11]	1 Hour	0.25 ppm (655 µg/m^3)	Ultraviolet Fluorescence	75 ppb (196 µg/m^3)	—	Ultraviolet Flourescence; Spectrophotometry (Pararosaniline Method)
	3 Hour	—		—	0.5 ppm (1300 µg/m^3)	
	24 Hour	0.04 ppm (105 µg/m^3)		0.14 ppm (for certain areas)[11]	—	
	Annual Arithmetic Mean	—		0.030 ppm (for certain areas)[11]	—	
Lead[12,13]	30 Day Average	1.5 µg/m^3	Atomic Absorption	—	—	High Volume Sampler and Atomic Absorption
	Calendar Quarter	—		1.5 µg/m^3 (for certain areas)[12]	Same as Primary Standard	
	Rolling 3-Month Average	—		0.15 µg/m^3		
Visibility Reducing Particles[14]	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape	**No National Standards**		
Sulfates	24 Hour	25 µg/m^3	Ion Chromatography			
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m^3)	Ultraviolet Fluorescence			
Vinyl Chloride[12]	24 Hour	0.01 ppm (26 µg/m^3)	Gas Chromatography			

See footnotes on next page …

For more information please call ARB-PIO at (916) 322-2990 **California Air Resources Board (5/4/16)**

TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2)

1. California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1 and 24 hour), nitrogen dioxide, and particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the California Code of Regulations.

2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24 hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 $\mu g/m^3$ is equal to or less than one. For PM2.5, the 24 hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.

3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.

4. Any equivalent measurement method which can be shown to the satisfaction of the ARB to give equivalent results at or near the level of the air quality standard may be used.

5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.

6. National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.

7. Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.

8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.

9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 $\mu g/m^3$ to 12.0 $\mu g/m^3$. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 $\mu g/m^3$, as was the annual secondary standard of 15 $\mu g/m^3$. The existing 24-hour PM10 standards (primary and secondary) of 150 $\mu g/m^3$ also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.

10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.

11. On June 2, 2010, a new 1-hour SO_2 standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO_2 national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.

    Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.

12. The ARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.

13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard (1.5 $\mu g/m^3$ as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.

14. In 1989, the ARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

For more information please call ARB-PIO at (916) 322-2990 **California Air Resources Board (5/4/16)**

2.5 REGIONAL AIR QUALITY

Air pollution contributes to a wide variety of adverse health effects. The EPA has established NAAQS for six of the most common air pollutants: O_3, PM_{10}, $PM_{2.5}$, CO, NO_2, SO_2 and Pb which are known as criteria pollutants. The AVAQMD monitors levels of various criteria pollutants at an air monitoring station in Lancaster (6). On January 25, 2024, California Air Resources Board (CARB) adopted the 2023 amendments to the State and national area designations. See Table 2-3 for attainment designations for the MDAB (7). Appendix 2.1 provides geographic representation of the State and federal attainment status for applicable criteria pollutants within the MDAB.

TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE MDAB

Criteria Pollutant	State Designation	Federal Designation
O_3 – 1-hour standard	Nonattainment	No 1-hour standard
O_3 – 8-hour standard	Nonattainment	Nonattainment
PM_{10}	Nonattainment	Unclassified
$PM_{2.5}$	Attainment	Unclassified/Attainment
CO	Attainment	Unclassified/Attainment
NO_2	Attainment	Unclassified/Attainment
SO_2	Attainment	Unclassified/Attainment
Pb	Attainment	Unclassified/Attainment

Note: See Appendix 2.1 for a detailed map of State/National Area Designations within the MDAB
.
Source Date: Adopted January 25, 2024.

2.6 LOCAL AIR QUALITY

Relative to the Project site, the nearest long-term air quality monitoring site for O_3, CO, NO_2, PM_{10}, and $PM_{2.5}$ was obtained from the AVAQMD Lancaster-43301 Division Street monitoring station, located approximately 1.7 miles northeast of the Project site.

The most recent three (3) years of data available is shown on Table 2-4 and identifies the number of days ambient air quality standards were exceeded for the study area, which is considered to be representative of the local air quality at the Project site. Data for O_3, CO, NO_2, PM_{10}, and $PM_{2.5}$ was obtained using the CARB iADAM: Air Quality and Data Statistics and the Air Quality and Meteorological Information System (AQMIS) (8) (9). Data for SO_2 has been omitted as attainment is regularly met and few monitoring stations measure SO_2 concentrations.

TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2020-2022

Pollutant	Standard	Year		
		2020	2021	2022
O_3				
Maximum Federal 1-Hour Concentration (ppm)		0.099	0.086	0.098
Maximum Federal 8-Hour Concentration (ppm)		0.083	0.079	0.082
Number of Days Exceeding State 1-Hour Standard	> 0.09 ppm	4	0	3
Number of Days Exceeding State/Federal 8-Hour Standard	> 0.070 ppm	8	3	33
CO				
Maximum Federal 1-Hour Concentration	> 35 ppm	1.62	1.42	-
Maximum Federal 8-Hour Concentration	> 20 ppm	0.71	0.75	-
NO_2				
Maximum Federal 1-Hour Concentration	> 0.100 ppm	0.052	0.046	0.044
Annual Federal Standard Design Value		0.008	0.008	0.008
PM_{10}				
Maximum Federal 24-Hour Concentration ($\mu g/m^3$)	> 150 $\mu g/m^3$	192.3	411.2	76.2
Annual Federal Arithmetic Mean ($\mu g/m^3$)		30.6	29.6	26.0
Number of Days Exceeding Federal 24-Hour Standard	> 150 $\mu g/m^3$	1	1	1
$PM_{2.5}$				
Maximum Federal 24-Hour Concentration ($\mu g/m^3$)	> 35 $\mu g/m^3$	74.7	35.7	15.1
Annual Federal Arithmetic Mean ($\mu g/m^3$)	> 12 $\mu g/m^3$	9.3	8.1	-
Number of Days Exceeding Federal 24-Hour Standard	> 35 $\mu g/m^3$	9	1	0

Source: California Air Resource Board iADAM: Air Quality Data Statistics and AQMIS
ppm = Parts Per Million
$\mu g/m^3$ – microgram per cubic meter
-- = data not available

2.7 REGULATORY BACKGROUND

2.7.1 FEDERAL REGULATIONS

The EPA is responsible for setting and enforcing the NAAQS for O_3, CO, NO_X, SO_2, PM_{10}, and Pb (10). The EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside State waters (Outer Continental Shelf). The EPA also establishes emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of CARB.

The Federal Clean Air Act (CAA) was first enacted in 1955 and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance (11). The CAA also mandates that states submit and implement SIPs for local areas not meeting these

standards. These plans must include pollution control measures that demonstrate how the standards will be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions) (12) (13). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O_3, NO_2, SO_2, PM_{10}, CO, $PM_{2.5}$, and Pb. The NAAQS were amended in July 1997 to include an additional standard for O_3 and to adopt a NAAQS for $PM_{2.5}$. Table 2-3 (previously presented) provides the NAAQS within the MDAB. Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and NO_X. NO_X is a collective term that includes all forms of NO_X which are emitted as byproducts of the combustion process.

2.7.2 CALIFORNIA REGULATIONS

CARB

CARB, which became part of the CalEPA in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. AB 2595 mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the State ambient air quality standards by the earliest practical date. CARB established the CAAQS for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for SO_4, visibility, hydrogen sulfide (H_2S), and vinyl chloride (C_2H_3Cl). However, at this time, H_2S and C_2H_3Cl are not measured at any monitoring stations in the MDAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (14) (10).

Local air quality management districts, such as the AVAQMD, regulate air emissions from stationary sources such as commercial and industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare Air Quality Management Plans (AQMP) that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

- Application of Best Available Retrofit Control Technology to existing sources;
- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g. motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;

- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;
- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a 5% or more annual reduction in emissions or 15% or more in a period of three years for ROGs, NO_X, CO and PM_{10}. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than 5% per year under certain circumstances.

TITLE 24 ENERGY EFFICIENCY STANDARDS AND CALIFORNIA GREEN BUILDING STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on August 1, 2009, and is administered by the California Building Standards Commission (BSC).

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards, effective as of January 1, 2023. The California Energy Commission (CEC) anticipates that the 2022 California Green Building Code will provide $1.5 billion in consumer benefits and reduce GHG emissions by 10 million metric tons (15). The Project would be required to comply with the applicable California Green Building Code Standards in place at the time plan check submittals for the Project are made. These require, among other items (16):

NONRESIDENTIAL MANDATORY MEASURES

- Short-term bicycle parking. If the new project or an additional alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack (5.106.4.1.1).
- Long-term bicycle parking. For new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5% of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility (5.106.4.1.2).
- Designated parking for clean air vehicles. For new projects or additions to alterations to existing Projects that add 10 or more vehicular parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient and carpool/van pool vehicles as shown in Table 5.106.5.2 (5.106.5.2).
- EV charging stations. New construction shall facilitate the future installation of EV supply equipment. The compliance requires empty raceways for future conduit and documentation that the electrical system has adequate capacity for the future load. The number of spaces to be provided for is contained in Table 5.106. 5.3.3 (5.106.5.3). Additionally, Table 5.106.5.4.1 specifies requirements for the installation of raceway conduit and panel power requirements for medium- and heavy-duty EV supply equipment for warehouses, grocery stores, and retail stores.

- Outdoor light pollution reduction. Outdoor lighting systems shall be designed to meet the backlight, uplight and glare ratings per Table 5.106.8 (5.106.8).
- Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with Section 5.408.1.1. 5.405.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent (5.408.1). It should be noted that pursuant to PDF Solid Waste Reduction, the project would exceed this measure by implementing a 75% waste diversion program.
- Excavated soil and land clearing debris. 100% of trees, stumps, rocks and associated vegetation and soils resulting primarily from land clearing shall be reuse or recycled. For a phased project, such material may be stockpiled on site until the storage site is developed (5.408.3).
- Recycling by Occupants. Provide readily accessible areas that serve the entire building and are identified for the depositing, storage, and collection of non-hazardous materials for recycling, including (at a minimum) paper, corrugated cardboard, glass, plastics, organic waste, and metals or meet a lawfully enacted local recycling ordinance, if more restrictive (5.410.1).
- Water conserving plumbing fixtures and fittings. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:
    - Water Closets. The effective flush volume of all water closets shall not exceed 1.28 gallons per flush (5.303.3.1)
    - Urinals. The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush (5.303.3.2.1). The effective flush volume of floor- mounted or other urinals shall not exceed 0.5 gallons per flush (5.303.3.2.2).
    - Showerheads. Single showerheads shall have a minimum flow rate of not more than 1.8 gallons per minute and 80 psi (5.303.3.3.1). When a shower is served by more than one showerhead, the combine flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi (5.303.3.3.2).
    - Faucets and fountains. Nonresidential lavatory faucets shall have a maximum flow rate of not more than 0.5 gallons per minute at 60 psi (5.303.3.4.1). Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute of 60 psi (5.303.3.4.2). Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute (5.303.3.4.3). Metering faucets shall not deliver more than 0.20 gallons per cycle (5.303.3.4.4). Metering faucets for wash fountains shall have a maximum flow rate not more than 0.20 gallons per cycle (5.303.3.4.5).
- Outdoor potable water uses in landscaped areas. Nonresidential developments shall comply with a local water efficient landscape ordinance or the current California Department of Water Resources' Model Water Efficient Landscape Ordinance (MWELO), whichever is more stringent (5.304.1).
- Water meters. Separate submeters or metering devices shall be installed for new buildings or additions in excess of 50,000 square feet (sf) or for excess consumption where any tenant within a new building or within an addition that is project to consume more than 1,000 gallons per day (GPD) (5.303.1.1 and 5.303.1.2).

- Outdoor water uses in rehabilitated landscape projects equal or greater than 2,500 sf. Rehabilitated landscape projects with an aggregate landscape area equal to or greater than 2,500 sf requiring a building or landscape permit (5.304.3).
- Commissioning. For new buildings 10,000 sf and over, building commissioning shall be included in the design and construction processes of the building project to verify that the building systems and components meet the owner's or owner representative's project requirements (5.410.2).

2.7.3 AIR QUALITY MANAGEMENT PLANNING

Currently, the NAAQS and CAAQS are exceeded in most parts of the MDAB. The NAAQS, the Project region within the MDAB is in nonattainment for O_3 (8-hour) and PM_{10}. For the CAAQS, the Project region within the MDAB is in nonattainment for O_3 (1-hour and 8-hour) and PM_{10}. In response, the AVAQMD has adopted a series of AQMPs to meet the state and federal ambient air quality standards (17). AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy. A detailed discussion on the AQMP and Project consistency with the AQMP is provided in Section 3.7.


2.8 REGIONAL AIR QUALITY IMPROVEMENT

The Project is within the jurisdiction of the AVAQMD and is located in the Mojave Desert Air Basin (MDAB). AVAQMD rule development has resulted in improvement in air quality for the MDAB. Nearly all control programs developed through the early 2000s relied on (i) the development and application of cleaner technology; (ii) add-on emission controls, and (iii) uniform CEQA review throughout the MDAB. Industrial emission sources have been significantly reduced by this approach and vehicular emissions have been reduced by technologies implemented at the State level by CARB.

The single threshold of significance used to assess Project direct and cumulative impacts has in fact "worked" as evidenced by the track record of the air quality in the MDAB improving over the course of the past decades.

Emissions of O_3, NO_X, and VOCs have been decreasing in the MDAB since 1975 (18). These decreases result primarily from motor vehicle controls and reductions in evaporative emissions. Although vehicle miles traveled (VMT) in the MDAB continue to increase, NO_X and VOC levels are decreasing because of the mandated controls on motor vehicles and the replacement of older polluting vehicles with lower-emitting vehicles. NO_X emissions from electric utilities have also decreased due to use of cleaner fuels and renewable energy. O_3 contour maps show that the number of days exceeding the 8-hour NAAQS has generally decreased between 1975 and 2021. For 2021, there was an overall increase in exceedance days compared with the 1973 period. However, as shown on Table 2-5, O_3 levels have increased in the past two years due to higher temperatures and stagnant weather conditions. Notwithstanding, O_3 levels in the MDAB have generally decreased over the last 30 years (19).


TABLE 2-5: MDAB O_3 TREND

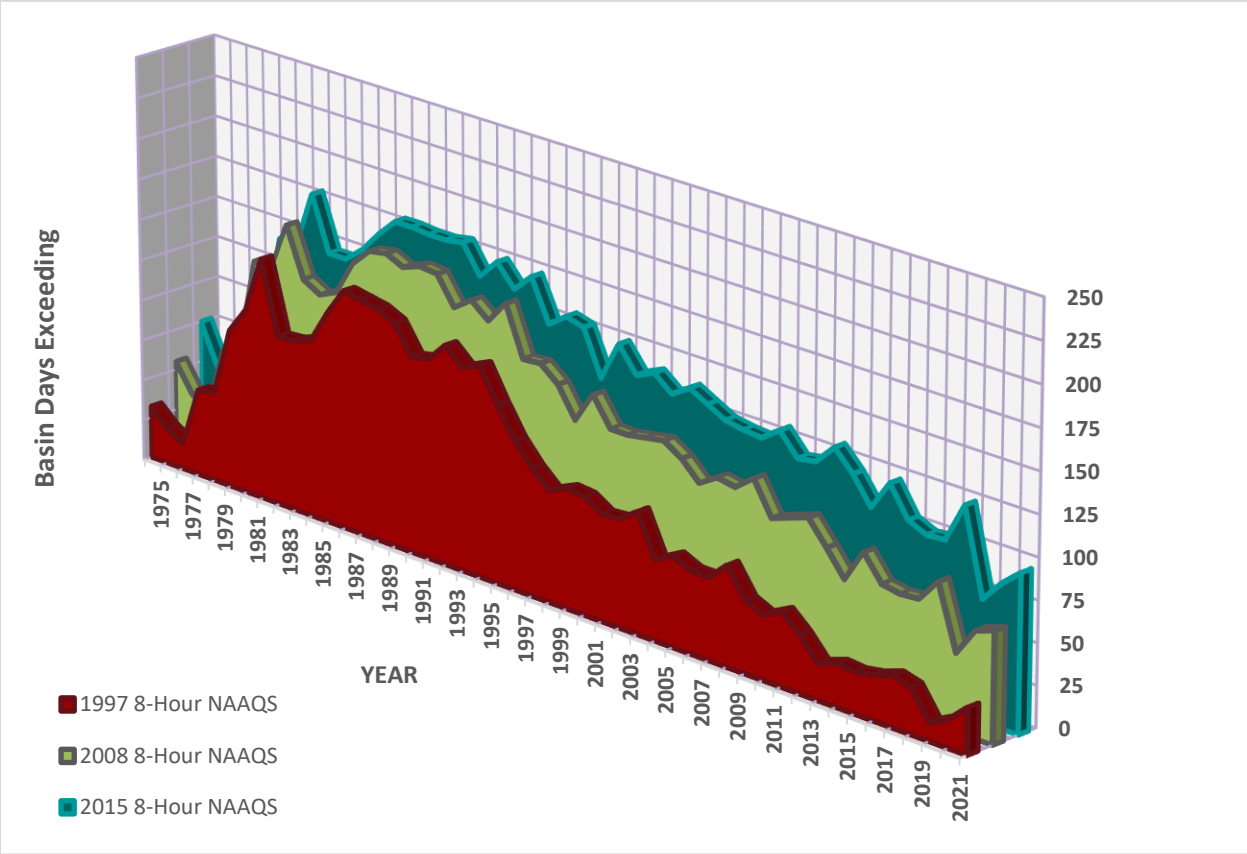

Source: 2020 CARB, iADAM: Top Four Summary: PM_{10} 24-Hour Averages (1973-2021)
[1] Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.


The most recent PM_{10} statistics show a slight improvement as illustrated in Tables 2-6 and 2-7. During the period for which data is available, the 24-hour national annual average concentration for PM_{10} decreased by approximately 2%, from 34.7 microgram per cubic meter (µg/m³) in 1988 to 33.9 µg/m³ in 2021 (19). The 24-hour State annual average concentration for PM_{10}, have decreased by approximately 35%, from 42.4 µg/m³ in 1989 to 27.8 µg/m³ in 2021 (19).

TABLE 2-6: MDAB AVERAGE 24-HOUR CONCENTRATION PM_{10} TREND (BASED ON FEDERAL STANDARD)[1]

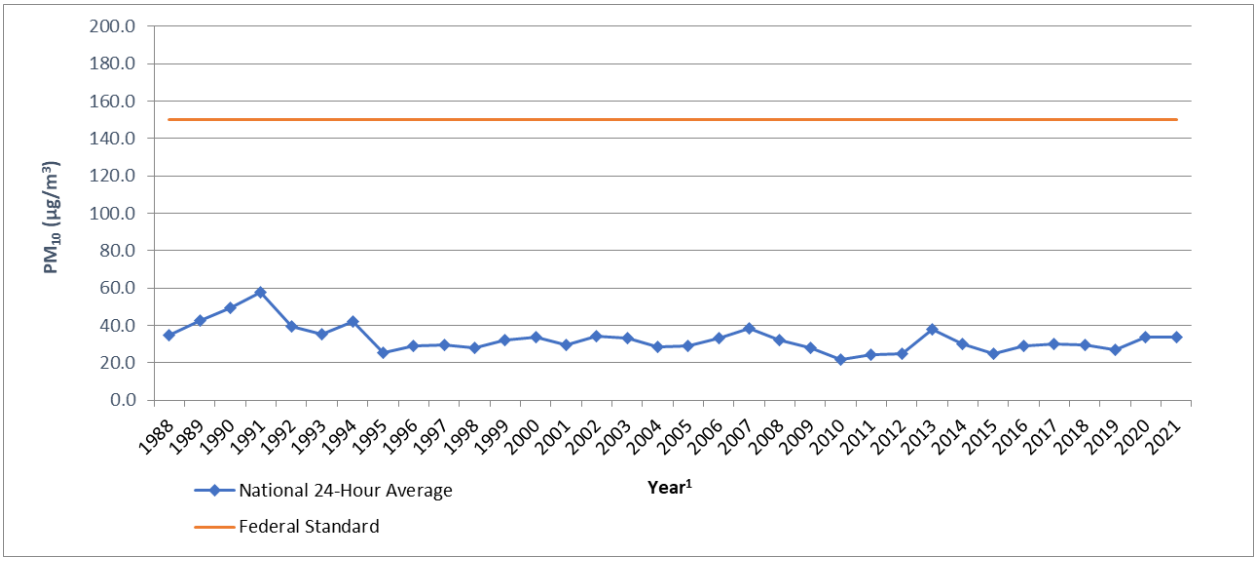

Source: 2020 CARB, iADAM: Top Four Summary: PM_{10} 24-Hour Averages (1988-2021)
[1] Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.


TABLE 2-7: MDAB ANNUAL AVERAGE CONCENTRATION PM_{10} TREND (BASED ON STATE STANDARD)[1]

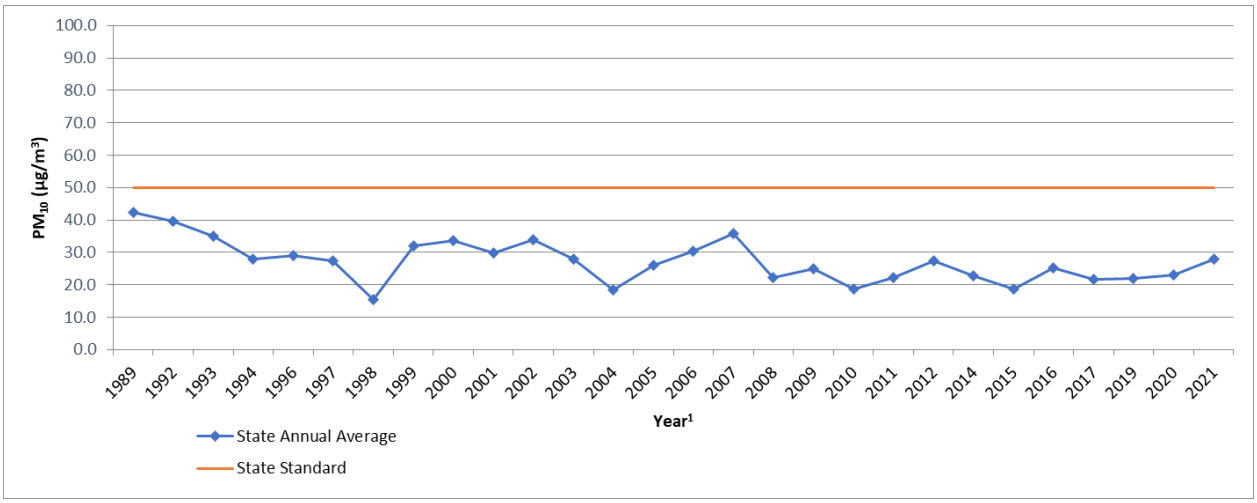

Source: 2020 CARB, iADAM: Top Four Summary: PM_{10} 24-Hour Averages (1988-2021)
[1] Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.


Tables 2-8 and 2-9 shows the most recent 24-hour average $PM_{2.5}$ concentrations in the MDAB from 1999 through 2021. Overall, the national and state annual average concentrations have decreased by almost 13% and 8% respectively (19).

TABLE 2-8: MDAB 24-HOUR AVERAGE CONCENTRATION $PM_{2.5}$ TREND (BASED ON FEDERAL STANDARD)[1]

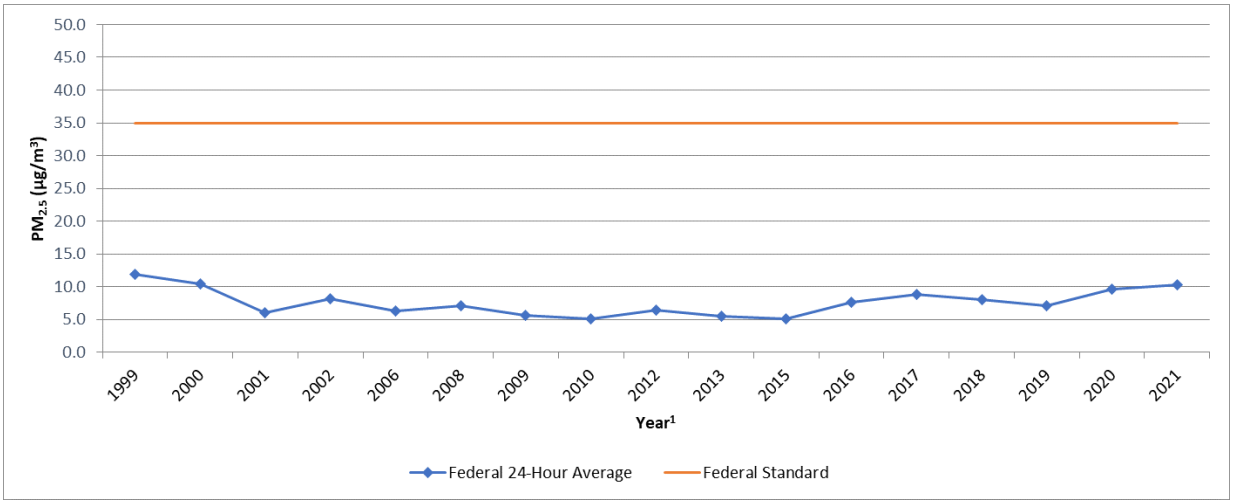

Source: 2020 CARB, iADAM: Top Four Summary: $PM_{2.5}$ 24-Hour Averages (1989-2021)
[1] Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.


TABLE 2-9: MDAB ANNUAL AVERAGE CONCENTRATION $PM_{2.5}$ TREND (BASED ON STATE STANDARD)[1]

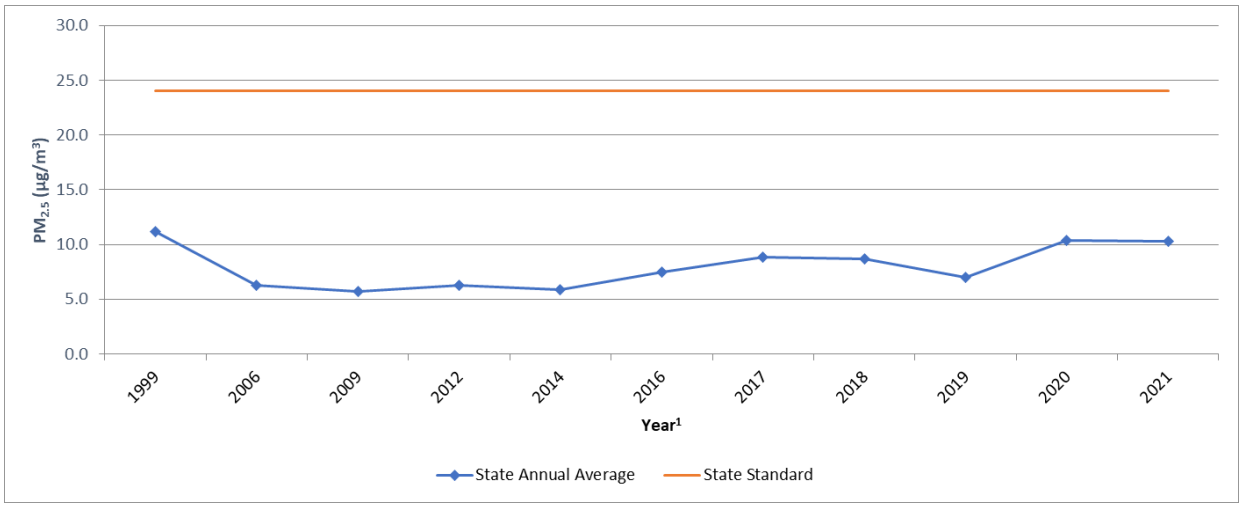

Source: 2020 CARB, iADAM: Top Four Summary: $PM_{2.5}$ 24-Hour Averages (1999-2020)
[1] Some years have been omitted from the table as insufficient data (or no) data has been reported. Years with reported value of "0" have also been omitted.


The most recent NO_2 data for the MDAB is shown in Tables 2-11 and 2-12 (19). Over the last 50 years, NO_2 values have decreased significantly; the peak 1-hour national and State averages for 2021 is approximately 43% lower than what it was during 1970. NO_2 is formed from NO_X emissions, which also contribute to O_3. As a result, the majority of the future emission control measures would be implemented as part of the overall O_3 control strategy. Many of these control measures would target mobile sources, which account for more than three-quarters of California's NO_X emissions.

TABLE 2-11: MDAB 1-HOUR AVERAGE CONCENTRATION NO_2 TREND (BASED ON FEDERAL STANDARD)

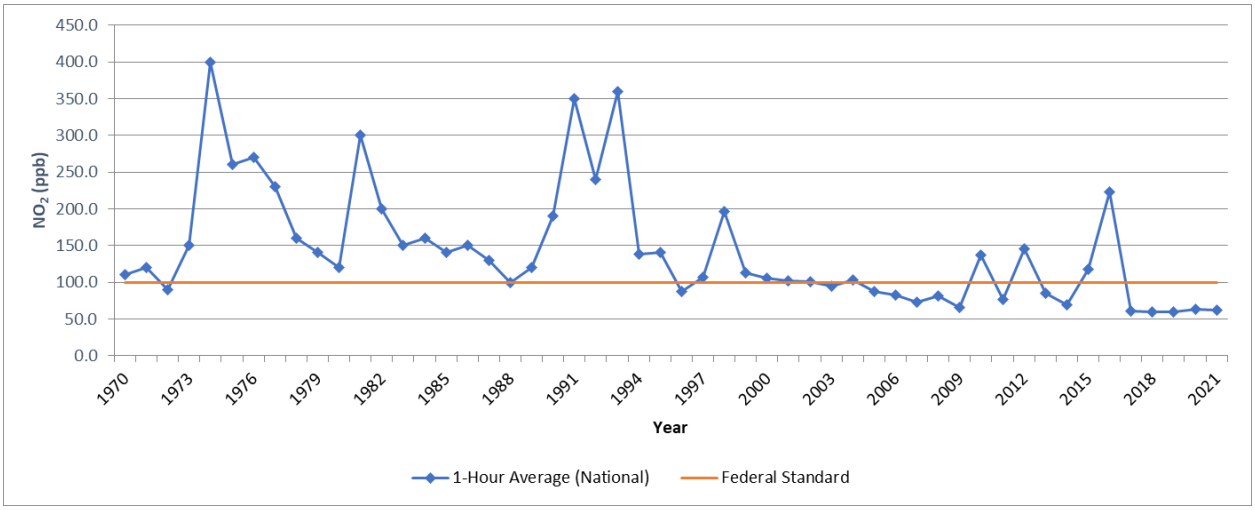

Source: 2020 CARB, iADAM: Top Four Summary: CO 1-Hour Averages (1970-2020)

TABLE 2-12: MDAB 1-HOUR AVERAGE CONCENTRATION NO_2 TREND (BASED ON STATE STANDARD)

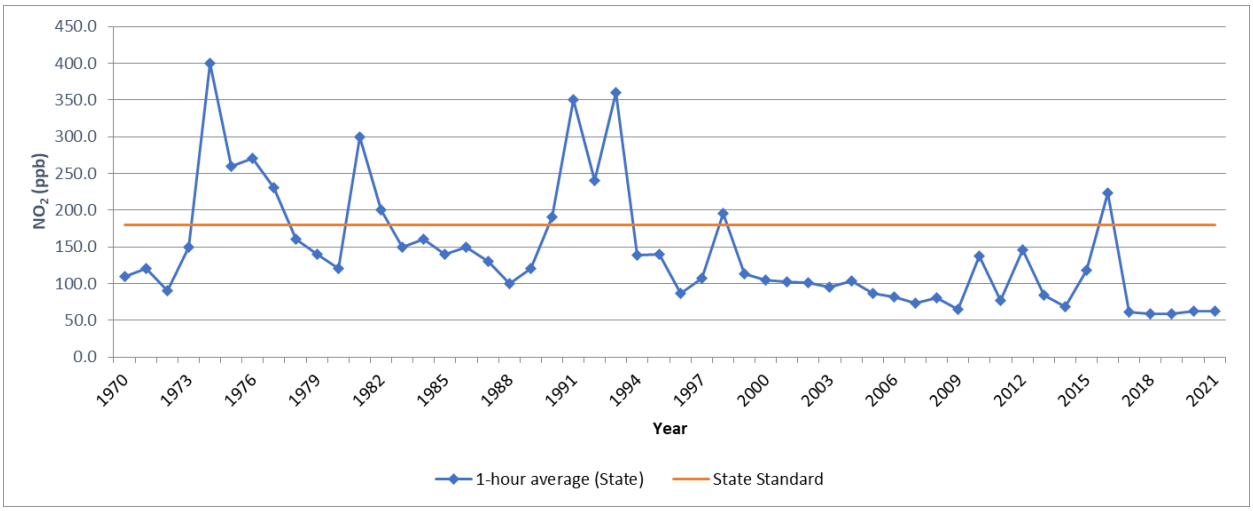

Source: 2020 CARB, iADAM: Top Four Summary: CO 1-Hour Averages (1970-2020)

2.8.1 TOXIC AIR CONTAMINANTS (TAC) TRENDS

In 1984, as a result of public concern for potential exposure to airborne carcinogens, CARB adopted regulations to reduce the amount of TAC emissions resulting from mobile and area sources, such as cars, trucks, stationary sources, and consumer products. According to the *Ambient and Emission Trends of Toxic Air Contaminants in California* journal article (20) which was prepared for CARB, results show that between 1990-2012, ambient concentration and emission trends for the seven TACs responsible for most of the known cancer risk associated with airborne exposure in California have declined significantly (between 1990 and 2012). The seven TACs studied include those that are derived from mobile sources: diesel particulate matter (DPM), benzene (C_6H_6), and 1,3-butadiene (C_4H_6); those that are derived from stationary sources: perchloroethylene (C_2Cl_4) and hexavalent chromium (Cr(VI)); and those derived from photochemical reactions of emitted VOCs: formaldehyde (CH_2O) and acetaldehyde (C_2H_4O)[2]. The decline in ambient concentration and emission trends of these TACs are a result of various regulations CARB has implemented to address cancer risk.


MOBILE SOURCE TACS

CARB introduced two programs that aimed at reducing mobile emissions for light and medium duty vehicles through vehicle emissions controls and cleaner fuel. In California, light-duty vehicles sold after 1996 are equipped with California's second-generation On-Board Diagnostic (OBD-II) system. The OBD-II system monitors virtually every component that can affect the emission performance of the vehicle to ensure that the vehicle remains as clean as possible over its entire life and assists repair technicians in diagnosing and fixing problems with the computerized engine controls. If a problem is detected, the OBD-II system illuminates a warning lamp on the vehicle instrument panel to alert the driver. This warning lamp typically contains the phrase "Check Engine" or "Service Engine Soon." The system would also store important information about the detected malfunction so that a repair technician can accurately find and fix the problem. CARB has recently developed similar OBD requirements for heavy-duty vehicles over 14,000 pounds (lbs). CARB's phase II Reformulated Gasoline Regulation (RFG-2), adopted in 1996, also led to a reduction of mobile source emissions. Through such regulations, benzene levels declined 88% from 1990-2012. 1,3-Butadiene concentrations also declined 85% from 1990-2012 as a result of the use of reformulated gasoline and motor vehicle regulations (20).

In 2000, CARB's Diesel Risk Reduction Plan (DRRP) recommended the replacement and retrofit of diesel-fueled engines and the use of ultra-low-sulfur (<15 ppm) diesel fuel. As a result of these measures, DPM concentrations have declined 68% since 2000, even though the State's population increased 31% and the amount of diesel vehicles miles traveled increased 81%, as shown on Exhibit 2-B. With the implementation of these diesel-related control regulations, CARB estimates a decline of approximately 71% in DPM emissions between 2000 and 2020.

[2] It should be noted that ambient DPM concentrations are not measured directly. Rather, a surrogate method using the coefficient of haze (COH) and elemental carbon (EC) is used to estimate DPM concentrations.

EXHIBIT 2-A: DPM AND DIESEL VEHICLE MILES TREND

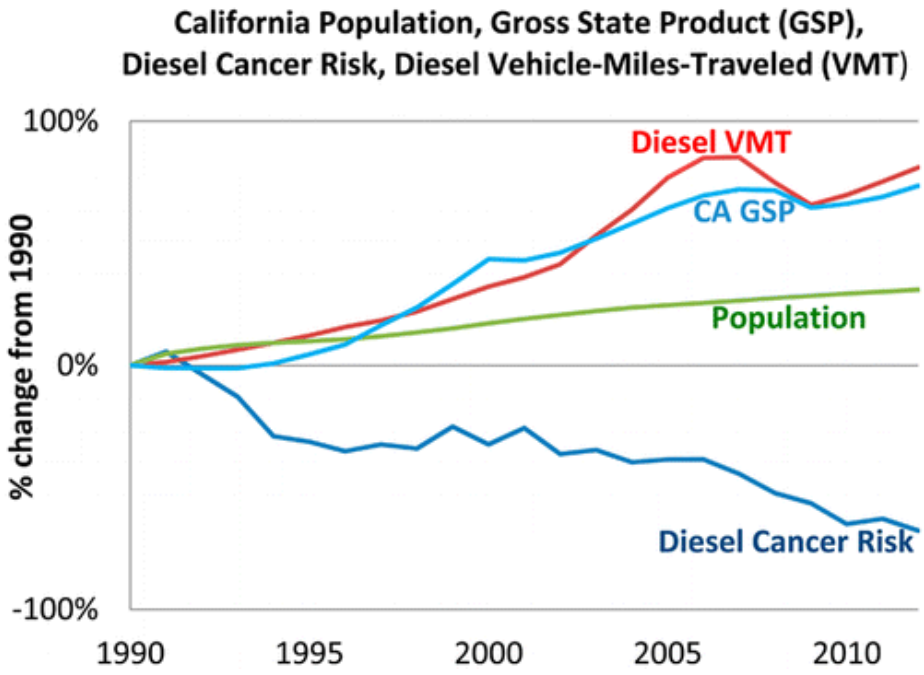

Source: 2020 CARB

DIESEL REGULATIONS

CARB and the Ports of Los Angeles and Long Beach (POLA and POLB) have adopted several iterations of regulations for diesel trucks that are aimed at reducing DPM. More specifically, CARB Drayage Truck Regulation (21), CARB statewide On-road Truck and Bus Regulation (22), and the Ports of Los Angeles and Long Beach Clean Truck Program (CTP) require accelerated implementation of "clean trucks" into the statewide truck fleet (23). In other words, older more polluting trucks would be replaced with newer, cleaner trucks as a function of these regulatory requirements.

Moreover, the average statewide DPM emissions for Heavy Duty Trucks (HDT), in terms of grams of DPM generated per mile traveled, would dramatically be reduced due to the aforementioned regulatory requirements.

Diesel emissions identified in this analysis would therefore overstate future DPM emissions since not all the regulatory requirements are reflected in the modeling.

This page intentionally left blank

3 PROJECT AIR QUALITY IMPACT

3.1 INTRODUCTION

The Project has been evaluated to determine if it will violate an air quality standard or contribute to an existing or projected air quality violation. Additionally, the Project has been evaluated to determine if it would result in a cumulatively considerable net increase of a criteria pollutant for which the MDAB is non-attainment under an applicable federal or State ambient air quality standard. The significance of these potential impacts is described in the following section.

3.2 STANDARDS OF SIGNIFICANCE

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the Initial Study Checklist in Appendix G of the *State CEQA Guidelines* (14 CCR §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (1):

- Conflict with or obstruct implementation of the applicable air quality plan.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.
- Expose sensitive receptors to substantial pollutant concentrations.
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

The AVAQMD has developed regional significance thresholds for regulated pollutants, shown below in Table 3-1. The AVAQMD's *Guidelines* indicate that any projects in the MDAB with daily regional emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact (24).

TABLE 3-1: MAXIMUM REGIONAL DAILY EMISSIONS THRESHOLDS

Pollutant	Daily Threshold (lbs/day)
CO	548 lbs/day
NO_X	137 lbs/day
VOC	137 lbs/day
SO_X	137 lbs/day
PM_{10}	82 lbs/day
$PM_{2.5}$	65 lbs/day

Note: lbs/day – pounds per day

3.3 MODELS EMPLOYED TO ANALYZE AIR QUALITY EMISSIONS

3.3.1 CALEEMOD

Land uses such as the proposed Project affect air quality through construction-source and operational-source emissions.

In May 2022 the California Air Pollution Control Officers Association (CAPCOA) in conjunction with other California air districts, including AVAQMD, released the latest version of CalEEMod version 2022.1. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NO_X, SO_X, CO, PM_{10}, and $PM_{2.5}$) and GHG emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from mitigation measures (25). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions. Output from the model runs for both construction and operational activity are provided in Appendices 3.1 through 3.4.

3.4 CONSTRUCTION EMISSIONS

Construction activities associated with the Project would result in emissions of VOCs, NO_X, CO, SO_X, PM_{10}, and $PM_{2.5}$. Construction-related emissions are expected from the following construction activities and are presented below in Table 3-2.

TABLE 3-2: CONSTRUCTION ACTIVITY

Phase	Construction Activity
Phase 1	Site Preparation
	Grading
	Building Construction
	Paving
	Architectural Coating
Phases 2 - 4	Site Preparation
	Grading
	Building Construction
	Paving
	Architectural Coating

GRADING ACTIVITIES

Dust is typically a major concern during grading activities. Because such emissions are not amenable to collection and discharge through a controlled source, they are called “fugitive emissions”. Fugitive dust emissions rates vary as a function of many parameters (soil silt, soil moisture, wind speed, area disturbed, number of vehicles, depth of disturbance or excavation, etc.). CalEEMod was utilized to calculate fugitive dust emissions resulting from this phase of

activity. Based on information provided by the Project Applicant, the Project site is expected to balance.

OFF-SITE UTILITY AND INFRASTRUCTURE IMPROVEMENTS

In addition, to support the Project development, there will be off-site construction associated with roadway and utility improvements. Construction emissions from this off-site work would, therefore, be relatively short term, and not concentrated in one area. The physical constraints would limit the amount of construction equipment that could be used, and any off-site and utility infrastructure construction would not use equipment totals that would exceed the equipment totals on Table 3-4. As such, no impacts beyond what has already been identified in this report are expected to occur.

CONSTRUCTION WORKER VEHICLE TRIPS

Construction emissions for construction worker vehicles traveling to and from the Project site, as well as vendor trips (construction materials delivered to the Project site), were estimated based on information from CalEEMod defaults.

3.4.1 CONSTRUCTION DURATION

The analysis in this AQIA considers construction to commence in June 2024 and last through January 2032. Construction duration by phase is shown on Table 3-3. The construction schedule utilized in the analysis represents a "worst-case" analysis scenario should construction occur any time after the respective dates since emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent.[3] The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines*.

TABLE 3-3: CONSTRUCTION DURATION

Construction Activity	Start Date	End Date	Days
Phase 1			
Site Preparation	6/3/2024	7/12/2024	30
Grading	7/15/2024	11/1/2024	80
Building Construction	11/4/2024	10/31/2025	260
Paving	7/1/2025	7/28/2025	20
Architectural Coating	7/1/2025	8/25/2025	40

[3] As shown in the CalEEMod User's Guide Version 2022.1, Section 4.3 "Off-Road Equipment" as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.

Construction Activity	Start Date	End Date	Days
Phase 2			
Site Preparation	6/1/2026	7/10/2026	30
Grading	7/13/2026	9/11/2026	45
Building Construction	9/14/2026	9/10/2027	260
Paving	7/1/2027	7/28/2027	20
Architectural Coating	7/1/2027	8/25/2027	40
Phase 3			
Site Preparation	6/1/2028	7/12/2028	30
Grading	7/13/2028	9/13/2028	45
Building Construction	9/14/2028	9/12/2029	260
Paving	7/2/2029	7/27/2029	20
Architectural Coating	7/2/2029	8/24/2029	40
Phase 4			
Site Preparation	10/1/2030	11/11/2030	30
Grading	11/12/2030	1/13/2031	45
Building Construction	1/14/2031	1/12/2032	260
Paving	11/3/2031	11/28/2031	20
Architectural Coating	11/3/2031	12/26/2031	40

3.4.2 CONSTRUCTION EQUIPMENT

Site specific construction fleet may vary due to specific project needs at the time of construction. The associated construction equipment was generally based on CalEEMod defaults. A detailed summary of construction equipment assumptions by phase is provided in Table 3-4. Please refer to specific detailed modeling inputs/outputs contained in Appendices 3.1 through 3.4 of this analysis.

TABLE 3-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Phase Name	Equipment[1]	Number	Hours Per Day
Phase 1			
Site Preparation	Rubber Tired Dozers	5	8
	Crawler Tractors	7	8
Grading	Excavators	1	8
	Graders	3	8
	Rubber Tired Dozers	2	8
	Scrapers	6	8

Phase Name	Equipment[1]	Number	Hours Per Day
	Crawler Tractors	2	8
Building Construction	Cranes	1	8
	Forklifts	3	8
	Generator Sets	3	8
	Welders	2	8
	Crawler Tractors	3	8
Paving	Pavers	2	8
	Paving Equipment	4	8
	Rollers	4	8
Architectural Coating	Air Compressors	2	8
Phases 2 - 4			
Site Preparation	Rubber Tired Dozers	5	8
	Crawler Tractors	7	8
Grading	Excavators	1	8
	Graders	3	8
	Rubber Tired Dozers	2	8
	Scrapers	6	8
	Crawler Tractors	2	8
Building Construction	Cranes	1	8
	Forklifts	3	8
	Generator Sets	3	8
	Welders	2	8
	Crawler Tractors	3	8
Paving	Pavers	2	8
	Paving Equipment	4	8
	Rollers	4	8
Architectural Coating	Air Compressors	2	8

[1] In order to account for fugitive dust emissions, Crawler Tractors were used in lieu of Tractors/Loaders/Backhoes.

3.4.3 CONSTRUCTION EMISSIONS SUMMARY

IMPACTS WITHOUT MITIGATION

The estimated maximum daily construction emissions without mitigation for both summer and winter periods are summarized on Table 3-5. Detailed construction model outputs are presented in Appendices 3.1 through 3.4. Under the assumed scenarios, without mitigation, emissions

resulting from the Project construction would exceed the criteria pollutant threshold established by the AVAQMD for emissions of VOCs during construction in Years 2025, 2027, 2029, and 2031.

TABLE 3-5: EMISSIONS SUMMARY OF CONSTRUCTION – WITHOUT MITIGATION

Year	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Summer						
2024	9.24	89.63	75.32	0.17	13.99	8.18
2025	381.40	48.00	161.79	0.13	20.02	5.98
2026	7.91	69.41	106.69	0.16	15.36	7.41
2027	350.58	43.04	138.95	0.12	18.42	5.35
2028	7.37	60.26	66.04	0.16	12.62	7.00
2029	198.70	33.93	87.29	0.09	10.66	3.29
2031[1]	6.39	25.88	94.06	0.11	17.46	4.66
Winter						
2024	9.21	89.80	93.91	0.17	16.63	5.89
2025	7.59	33.60	88.76	0.10	16.48	4.74
2026	6.41	31.46	79.13	0.10	15.36	4.35
2027	6.17	29.72	75.69	0.10	15.19	4.25
2028	4.08	22.52	48.14	0.07	8.67	2.60
2029	3.94	21.53	46.11	0.07	8.61	2.54
2030	6.94	53.68	64.17	0.17	12.56	6.83
2031	402.85	50.86	99.91	0.17	20.93	5.71
2032	5.32	25.57	67.02	0.11	17.42	4.62
Maximum Daily Emissions	**402.85**	**89.80**	**161.79**	**0.17**	**20.93**	**8.18**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**NO**	**NO**	**NO**	**NO**	**NO**

[1] It should be noted that the construction schedule for Phase 4 spans over only one summer season, as such there are emissions for 2030 and 2032 for the summer season.

Source: CalEEMod construction-source (unmitigated) emissions are presented in Appendices 3.1 through 3.4.

RECOMMENDED CONSTRUCTION MITIGATION MEASURES

The Project construction-source emissions have the potential to exceed AVAQMD regional thresholds for VOC emissions prior to mitigation. MM AQ-1 and MM AQ-2 would reduce Project construction-source emissions to the extent feasible.

MM AQ-1

The Construction Contractor shall ensure that off-road diesel construction equipment used during grading activities, complies with EPA/CARB Tier 4 emissions standards or equivalent and shall ensure that all construction equipment is tuned and maintained in accordance with the manufacturer's specifications.

MM AQ-2

"Super-Compliant" low VOC paints which have been reformulated to exceed the regulatory VOC limits put forth by AVAQMD's Rule 1113. Super-Compliant low VOC paints shall be no more than 10 grams per liter (g/L) of VOC. Alternatively, the applicant may utilize tilt-up concrete buildings that do not require the use of architectural coatings.

IMPACTS AFTER IMPLEMENTATION OF MITIGATION

The estimated maximum daily construction emissions with mitigation for both summer and winter periods are summarized on Table 3-6. Detailed construction model outputs are presented in Appendices 3.1 through 3.4. After implementation of MM AQ-1 and MM AQ-2, emissions resulting from the Project construction would not exceed the criteria pollutant thresholds established by the AVAQMD. Therefore, impacts would be less than significant.

TABLE 3-6: EMISSIONS SUMMARY OF CONSTRUCTION – WITH MITIGATION

Year	Emissions (lbs/day)					
	VOC	NO_X	CO	SO_X	PM_{10}	$PM_{2.5}$
Summer						
2024	7.81	73.01	91.83	0.17	13.99	8.18
2025	92.57	48.00	161.79	0.13	20.02	5.98
2026	7.27	59.59	106.69	0.16	15.36	7.41
2027	85.24	43.04	138.95	0.12	18.42	5.35
2028	6.16	54.12	90.25	0.16	12.62	7.00
2029	50.52	33.93	87.29	0.09	10.66	3.29
2031[1]	6.39	25.88	94.06	0.11	17.46	4.66
Winter						
2024	7.96	48.31	93.91	0.17	16.63	4.87
2025	7.59	33.60	88.76	0.10	16.48	4.74
2026	6.41	31.46	79.13	0.10	15.36	4.35
2027	6.17	29.72	75.69	0.10	15.19	4.25
2028	4.08	22.52	48.14	0.07	8.67	2.60
2029	3.94	21.53	46.11	0.07	8.61	2.54
2030	5.82	50.02	89.36	0.17	12.56	6.83

Year	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
2031	91.83	46.81	99.91	0.17	20.93	5.71
2032	5.32	25.57	67.02	0.11	17.42	4.62
Maximum Daily Emissions	**92.57**	**73.01**	**161.79**	**0.17**	**20.93**	**8.18**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**

[1] It should be noted that the construction schedule for Phase 4 spans over only one summer season, as such there are emissions for 2030 and 2032 for the summer season.
Source: CalEEMod construction-source (mitigated) emissions are presented in Appendices 3.1 through 3.4.

3.5 OPERATIONAL EMISSIONS

Operational activities associated with the proposed Project would result in emissions of VOCs, NO_X, CO, SO_X, PM_{10}, and $PM_{2.5}$. Operational emissions would be expected from the following primary sources:

- Area Source Emissions
- Energy Source Emissions
- Mobile Source Emissions
- On-Site Cargo Handling Equipment Emissions
- TRU Emissions
- Stationary Source Emissions

3.5.1 AREA SOURCE EMISSIONS

ARCHITECTURAL COATINGS

Over a period of time the buildings that are part of this Project would require maintenance and would therefore produce emissions resulting from the evaporation of solvents contained in paints, varnishes, primers, and other surface coatings. The emissions associated with architectural coatings were calculated using CalEEMod.

CONSUMER PRODUCTS

Consumer products include, but are not limited to detergents, cleaning compounds, polishes, personal care products, and lawn and garden products. Many of these products contain organic compounds which when released in the atmosphere can react to form ozone and other photochemically reactive pollutants. The emissions associated with use of such consumer products were calculated based on defaults provided within CalEEMod.

LANDSCAPE MAINTENANCE EQUIPMENT

Landscape maintenance equipment would generate emissions from fuel combustion and evaporation of unburned fuel. Equipment in this category would include lawnmowers, shedders/grinders, blowers, trimmers, chain saws, and hedge trimmers used to maintain the

landscaping of the Project. It should be noted that as October 9, 2021, Governor Gavin Newsom signed AB 1346. The bill aims to ban the sale of new gasoline-powered equipment under 25 gross horsepower (known as small off-road engines [SOREs]) by January 1, 2024, which is now in effect. For purposes of analysis, the emissions associated with landscape maintenance equipment were calculated based on assumptions provided in CalEEMod.

3.5.2 ENERGY SOURCE EMISSIONS

COMBUSTION EMISSIONS ASSOCIATED WITH NATURAL GAS AND ELECTRICITY

Electricity and natural gas are used by every project. Criteria pollutant emissions are emitted through the generation of electricity and consumption of natural gas. However, because electrical generating facilities for the Project area are located either outside the region (state) or offset through the use of pollution credits (RECLAIM) a program which allows for buying and selling of emission credits, for generation within the MDAB, criteria pollutant emissions from offsite generation of electricity are excluded from the evaluation of significance and only natural gas use is considered. Electricity usage associated with the Project was calculated by CalEEMod using default parameters. Based on information provided by the Project applicant, the industrial portion of the proposed Project would not utilize natural gas. Natural gas emissions associated with the commercial portion of the Project were calculated using CalEEMod.

3.5.3 MOBILE SOURCE EMISSIONS

The Project related operational air quality emissions derive primarily from vehicle trips generated by the Project, including employee trips to and from the site and truck trips associated with the proposed uses. Trip generation rates and vehicle fleet mix available from the *Antelope Valley Commerce Center Traffic Analysis* were utilized in this analysis (26). Trip lengths for passenger vehicles were obtained from the SCAG Travel Demand Model and trucks were obtained from available StreetLight™ Data.

PASSENGER VEHICLES

For the proposed commercial uses, the CalEEMod default fleet mix was utilized in this analysis along with the trip lengths from the SCAG Travel Demand Model.

For the proposed industrial uses, the *Antelope Valley Commerce Center Traffic Analysis* does not provide a specific breakdown for passenger cars, as this is not available from the travel demand model. For the industrial uses, this analysis assumes that passenger cars include Light-Duty-Auto vehicles (LDA), Light-Duty-Trucks (LDT1[4] & LDT2[5]), Medium-Duty-Vehicles (MDV), and Motorcycles (MCY) vehicle types. In order to account for emissions generated by passenger cars for industrial uses, the fleet mix and trip lengths shown in Table 3-7 were utilized.

[4] Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

[5] Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

TABLE 3-7: PASSENGER CAR FLEET MIX

Land Use	Trip Length (miles)	% Vehicle Type				
		LDA	LDT1	LDT2	MDV	MCY
Phase 1						
General Light Industrial	15.70	59.13%	4.53%	18.29%	15.17%	2.87%
Manufacturing	15.70					
Warehousing	15.70					
High-Cube Fulfillment (Non-Sort)	15.70					
High-Cube Fulfillment (Sort)	15.70					
High-Cube Cold Storage Warehouse	15.70					
Phase 2						
Manufacturing	15.70	59.61%	4.27%	18.66%	14.64%	2.83%
Warehousing	15.70					
High-Cube Parcel Hub	15.70					
Phase 3						
High-Cube Fulfillment (Non-Sort)	15.70	59.86%	4.04%	19.11%	14.21%	2.79%
High-Cube Cold Storage Warehouse	15.70					
Phase 4						
High-Cube Cold Storage Warehouse	15.70	59.96%	3.74%	19.80%	13.77%	2.74%
High-Cube Fulfillment (Non-Sort)	15.70					

Note: The Project-specific passenger car fleet mix used in this analysis is based on a proportional split utilizing the default CalEEMod percentages assigned to LDA, LDT1, LDT2, and MDV vehicle types.

TRUCKS

To determine emissions from trucks for the proposed industrial uses, the analysis incorporated trip lengths of 29.10 miles for 2-axle (LHDT1, LHDT2) and 3-axle (MHDT) trucks, and 91.00 miles for 4+-axle (HHDT) trucks taken from the StreetLight™ data and weighting the average trip lengths using traffic trip percentages taken from the *Antelope Valley Commerce Center Traffic Analysis* with an assumption of 100% primary trips, as shown on Table 3-8. The truck fleet mix is estimated by rationing the trip rates for each truck type based on information provided by the SCAQMD recommended truck mix, by axle type. Heavy trucks are broken down by truck type (or axle type) and are categorized as either Light-Heavy-Duty Trucks (LHDT1[6] & LHDT2 [7])/2-axle, Medium-Heavy-Duty Trucks (MHDT)/3-axle, and Heavy-Heavy-Duty Trucks (HHDT)/4+-axle. To account for emissions generated by trucks, the fleet mix in Table 3-8 was utilized.

[6] Vehicles under the LHDT1 category have a GVWR of 8,501 to 10,000 lbs.

[7] Vehicles under the LHDT2 category have a GVWR of 10,001 to 14,000 lbs.

TABLE 3-8: TRUCK FLEET MIX

Land Use	Trip Length (miles)	% Vehicle Type			
		LHDT1	LHDT2	MHDT	HHDT
Phase 1					
General Light Industrial	67.19	11.99%	3.39%	23.08%	61.54%
Manufacturing	67.79	14.62%	4.13%	18.75%	62.50%
Warehousing	67.49	13.32%	3.77%	20.89%	62.03%
High-Cube Fulfillment (Non-Sort)	67.52	13.44%	3.80%	20.69%	62.07%
High-Cube Fulfillment (Sort)	67.55	12.99%	3.67%	21.21%	62.12%
High-Cube Cold Storage Warehouse	62.33	27.08%	7.66%	11.58%	53.68%
Phase 2					
Manufacturing	67.79	12.11%	3.51%	21.88%	62.50%
Warehousing	67.73	13.02%	3.78%	20.80%	62.40%
High-Cube Parcel Hub	67.84	12.95%	3.75%	20.72%	62.58%
Phase 3					
High-Cube Fulfillment (Non-Sort)	67.71	12.98%	3.85%	20.79%	62.38%
High-Cube Cold Storage Warehouse	62.61	26.89%	7.97%	11.01%	54.13%
Phase 4					
High-Cube Cold Storage Warehouse	62.63	26.54%	8.04%	11.25%	54.17%
High-Cube Fulfillment (Non-Sort)	67.75	12.85%	3.89%	20.81%	62.44%

Note: Project-specific truck fleet mix is based on the number of trips generated by each truck type (LHDT1, LHDT2, MHDT, and HHDT) relative to the total number of truck trips.

FUGITIVE DUST RELATED TO VEHICULAR TRAVEL

Vehicles traveling on paved roads would be a source of fugitive emissions due to the generation of road dust inclusive of brake and tire wear particulates. The emissions estimate for travel on paved roads were calculated using CalEEMod.

3.5.4 ON-SITE EQUIPMENT EMISSIONS

It is common for warehouse buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. For this particular Project, the following on-site operational equipment was assumed with the assumption of 75 horsepower (hp), diesel-powered tractors/loaders/backhoes operating at 4 hours a day[8] for 365 days of the year:

- Phase 1 includes eleven (11) pieces of on-site cargo handling equipment

[8] Based on Table II-3, Port and Rail Cargo Handling Equipment Demographics by Type, from CARB's Technology Assessment: Mobile Cargo Handling Equipment document, a single piece of equipment could operate up to 2 hours per day (Total Average Annual Activity divided by Total Number Pieces of Equipment). As such, the analysis conservatively assumes that the tractor/loader/backhoe would operate up to 4 hours per day.

- Phase 2 includes nine (9) pieces of on-site cargo handling equipment
- Phase 3 includes six (6) pieces of on-site cargo handling equipment
- Phase 4 includes ten (10) pieces of on-site cargo handling equipment

3.5.5 TRU EMISSIONS

In order to account for the possibility of refrigerated uses, trucks associated with the cold-storage land use are assumed to also have Transport Refrigeration Units (TRU) For modeling purposes, 190 two-way truck trips during Phase 1, 218 two-way truck trips during Phase 3 and 480 two-way truck trips during Phase 4 have been estimated to include TRUs (e.g., all truck trips that would be associated with up to 251,057-sf of high-cube cold storage use identified for Phase 1, up to 289,144-sf of high-cube cold storage use identified for Phase 3 and up to 638,889-sf of high-cube cold storage use identified for Phase 4 as summarized in the *Antelope Valley Commerce Center Traffic Analysis*). TRUs are accounted for during on-site and off-site travel. The TRU calculations are based on the OFFROAD Model version 2021 (OFFROAD 2021), developed by CARB. OFFROAD 2021 does not provide emission rates per hour or mile as with the on-road emission model and only provides emission inventories. Emission results are produced in tons per day, while all activity, fuel consumption, and horsepower hours were reported at annual levels. The emission inventory is based on specific assumptions including the average horsepower rating of specific types of equipment and the hours of operation annually. These assumptions are not always consistent with assumptions used in the modeling of Project level emissions. Therefore, the emissions inventory was converted into emission rates to accurately calculate emissions from TRU operation associated with Project level details. This was accomplished by converting the annual horsepower hours to daily operational characteristics and converting the daily emission levels into hourly emission rates based on the total emission of each criteria pollutant by equipment type and the average daily hours of operations.

3.5.8 STATIONARY SOURCES

The proposed Project was conservatively assumed to include installation of a 300 horsepower diesel-powered fire pump at each industrial building, for a total of six emergency fire pumps in Phase 1, three emergency fire pumps in Phase 2, two emergency fire pumps in Phase 3 and two emergency fire pumps in Phase 4. Each fire pump was estimated to operate for up to 1 hour per day, 1 day per week for up to 50 hours per year for maintenance and testing purposes. Emissions associated with the stationary diesel-powered emergency fire pumps were calculated using CalEEMod.

3.5.9 OPERATIONAL EMISSIONS SUMMARY

IMPACTS WITHOUT MITIGATION

The estimated unmitigated operational-source emissions are summarized on Tables 3-9. Detailed operation model outputs for the Project are presented in Appendices 3.1 through 3.4. As shown on Table 3-9, with buildout of Phase 1, the Project would exceed the numerical thresholds of significance established by the AVAQMD for emissions of NO_X, CO and PM_{10} during the summer season and for emissions of NO_X and PM_{10} during the winter season. With buildout of Phases 2

through 4, the Project would exceed the numerical thresholds of significance for emissions of VOC, NO_X, CO, PM_{10} and $PM_{2.5}$ during both the summer and winter seasons. With Project Buildout of Phases 1 through 4, the Project would exceed the numerical thresholds of significance for emissions of VOC, NO_X, CO, PM_{10} and $PM_{2.5}$ during both the summer and winter seasons.

TABLE 3-9: SUMMARY OF PEAK OPERATIONAL EMISSIONS – WITHOUT MITIGATION

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Phase 1						
Summer						
Mobile	41.29	166.04	518.78	2.29	131.24	35.81
Area	71.90	0.87	103.20	0.01	0.18	0.14
Energy Source	0.00	0.00	0.00	0.00	0.00	0.00
Stationary Source	5.91	16.51	15.06	0.03	0.87	0.87
On-Site Equipment Source	1.37	10.25	12.65	0.02	0.89	0.82
TRU Source	8.19	9.11	0.89	0.00	0.36	0.33
Total Maximum Daily Emissions (Phase 1)	**128.66**	**202.79**	**650.58**	**2.34**	**133.54**	**37.96**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**YES**	**YES**	**NO**	**YES**	**NO**
Winter						
Mobile	38.32	176.40	399.58	2.20	131.25	35.81
Area	54.97	0.00	0.00	0.00	0.00	0.00
Energy Source	0.00	0.00	0.00	0.00	0.00	0.00
Stationary Source	5.91	16.51	15.06	0.03	0.87	0.87
On-Site Equipment Source	1.37	10.25	12.65	0.02	0.89	0.82
TRU Source	8.19	9.11	0.89	0.00	0.36	0.33
Total Maximum Daily Emissions (Phase 1)	**108.75**	**212.27**	**428.18**	**2.25**	**133.36**	**37.82**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**YES**	**NO**

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Phases 2-4						
Summer						
Mobile	84.62	403.70	1001.69	5.74	336.26	92.16
Area	180.41	2.18	258.92	0.02	0.46	0.35
Energy Source	0.02	0.30	0.25	0.00	0.02	0.02
Stationary Source	6.89	19.26	17.57	0.03	1.01	1.01
On-Site Equipment Source	3.12	22.69	28.80	0.04	1.28	1.18
TRU Source	47.72	55.10	5.19	0.00	2.27	2.09
Total Maximum Daily Emissions (Phases 2-4)	**322.78**	**503.23**	**1312.42**	**5.83**	**341.30**	**96.81**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Winter						
Mobile	78.55	427.48	779.99	5.56	336.26	92.16
Area	137.87	0.00	0.00	0.00	0.00	0.00
Energy Source	0.02	0.30	0.25	0.00	0.02	0.02
Stationary Source	6.89	19.26	17.57	0.03	1.01	1.01
On-Site Equipment Source	3.12	22.69	28.80	0.04	1.28	1.18
TRU Source	47.72	55.10	5.19	0.00	2.27	2.09
Total Maximum Daily Emissions (Phases 2-4)	**274.17**	**524.83**	**831.81**	**5.64**	**340.85**	**96.47**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Project Buildout (Phases 1-4)						
Summer						
Total Maximum Daily Emissions (Buildout)	**451.44**	**706.02**	**1963.01**	**8.17**	**474.84**	**134.77**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Winter						
Total Maximum Daily Emissions (Buildout)	**382.93**	**737.10**	**1259.99**	**7.88**	**474.20**	**134.29**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**

RECOMMENDED OPERATIONAL MITIGATION MEASURES

MM AQ-2

"Super-Compliant" low VOC paints which have been reformulated to exceed the regulatory VOC limits put forth by AVAQMD's Rule 1113 shall be used during the application of architectural coatings. Super-Compliant low VOC paints shall be no more than 10 grams per liter (g/L) of VOC. Alternatively, the applicant may utilize pre-coated tilt-up concrete buildings that do not require the use of architectural coatings (painting).

MM AQ-3

The Project shall implement the following measures in order to reduce operational mobile source air pollutant emissions to the extent feasible:

- Only haul trucks meeting model year 2010 engine emission standards shall be used for the on-road transport of materials to and from the Project site.
- Legible, durable, weather-proof signs shall be placed at truck access gates, loading docks, and truck parking areas that identify applicable California Air Resources Board (CARB) anti-idling regulations. At a minimum, each sign shall include: (1) instructions for truck drivers to shut off engines when not in use; (2) instructions for drivers of diesel trucks to restrict idling to no more than 5 minutes once the vehicle is stopped, the transmission is set to "neutral" or "park," and the parking brake is engaged; and (3) telephone numbers of the building facilities manager and CARB to report violations. Prior to the issuance of each occupancy permit, the City of Palmdale shall conduct a site inspection to ensure that the signs are in place.
- Prior to tenant occupancy, the Project Applicant or successor in interest shall provide documentation to the City demonstrating that occupants/tenants of the Project site have been provided documentation on funding opportunities, such as the Carl Moyer Program, that provide incentives for using cleaner-than-required engines and equipment.
- The minimum number of automobile electric vehicle (EV) charging stations required by the California Code of Regulations Title 24 shall be provided. In addition, the buildings shall include electrical infrastructure sufficiently sized to accommodate the potential installation of additional auto and truck EV charging stations in the future.
- Conduit shall be installed to tractor trailer parking areas in logical locations determined by the Project Applicant during construction document plan check, for the purpose of accommodating the future installation of EV truck charging stations at such time this technology becomes commercially available.

MM AQ-4

The Project shall implement the following measure in order to reduce operational energy source air pollutant emissions to the extent feasible:

- The Project shall include rooftop solar panels to the extent feasible, with a capacity that matches the maximum allowed for distributed solar connections to the grid.
- Install Energy Star-rated heating, cooling, lighting, and appliances.
- Provide information on energy efficiency, energy-efficient lighting and lighting control systems, energy management, and existing energy incentive programs to future tenants of the Project.

- Structures shall be equipped with outdoor electric outlets in the front and rear of the structures to facilitate use of electrical lawn and garden equipment.

MM AQ-5

The Project shall include the following language within tenant lease agreements in order to reduce operational air pollutant emissions to the extent feasible:

- Require tenants to use the cleanest technologies available and to provide the necessary infrastructure to support zero-emission vehicles, equipment, and appliances that would be operating on site. This requirement shall apply to equipment such as forklifts, handheld landscaping equipment, yard trucks, office appliances.
- Require future tenants to exclusively use zero-emission light and medium-duty delivery trucks and vans, when economically feasible.
- Tenants shall be in, and monitor compliance with, all current air quality regulations for on-road trucks including the CARB's Heavy-Duty (Tractor-Trailer) Greenhouse Gas Regulation, Periodic Smoke Inspection Program, and the Statewide Truck and Bus Regulation.

IMPACTS WITH MITIGATION

The following measures set forth are the only mitigation measures that can be modeled in CalEEMod, as any other mitigation measures cannot be modeled and no additional emission reductions can be quantified..

- MM AQ-2: 10 g/L applied.
- MM AQ-3: No measures are applicable.
- MM AQ-4 & MM AQ-5: electric landscaping and yard trucks/on-site cargo handling equipment was assumed.

After implementation of MM AQ-2 through MM AQ-5, emissions resulting from Phase 1 of Project operations would not exceed the CO thresholds established by the AVAQMD, however; an exceedance for NO_X and PM_{10}, is still expected. For Phases 2-4 and Project Buildout (Phases 1-4), even with the Project's compliance with applicable AVAQMD Rules, and the implementation of all feasible mitigation measures identified above (see MM AQ-2 through MM AQ-5), the Project's operational VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions would exceed the applicable AVAQMD thresholds. As such, Project operational-source VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions are considered significant and unavoidable.

It should be noted that a majority of NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions are derived from vehicle usage which cannot be directly regulated by the City. Neither the Project Applicant nor the City can substantively or materially affect reductions in project-related vehicular source emissions beyond the regulatory requirements, and mitigation measures identified herein. While there are no feasible mitigation measures that would reduce vehicular emissions, as discussed in the mitigation measures section above, the Project would install EV supply equipment in accordance with current California Building Code which will allow charging stations to be supplied based on demand. Charging stations could lead to less use of gasoline-burning automobiles and thus, less air pollutant emissions, Hence, overall, there are no feasible mitigations that would reduce emissions and this impact is considered significant and unavoidable.

The majority of the Project's VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions are from the transportation sector, and the predominance (approximately 33% of VOC emissions, 86% of NO_X emissions, 98% of CO emissions, 99% of PM_{10} emissions and 97% of $PM_{2.5}$ emissions) from Project Buildout are emissions generated by passenger cars and trucks accessing the Project. In general, the State strategy for the transportation sector for medium and heavy-duty trucks is focused on making trucks more efficient and expediting truck turnover rather than reducing VMT from trucks. This is in contrast to the passenger vehicle component of the transportation sector where both per-capita VMT reductions and an increase in vehicle efficiency are forecasted to be needed to achieve the overall state emissions reductions goals. Regulating tailpipe emissions is beyond the scope of the Project Applicant or the City and no feasible mitigation measures exist that would reduce these emissions to levels that are less-than-significant.

The Project would also be required to be consistent with the provisions of interior and exterior bicycle storage as a sustainable design strategy consistent with CALGreen. Furthermore, the proposed Project would install EV charging stations and clean air/vanpool parking stalls at the Project site, which would contribute to and support the use of more EVs and ridesharing and consequently reduce air quality emissions associated with passenger vehicle travel.

Emissions associated with heavy duty trucks involved in goods movements are generally controlled on the technology side and through fleet turnover of older trucks and engines to newer and cleaner trucks and engines. The following State strategies reduce air quality emissions and GHG emissions from the medium and heavy-duty trucks:

- CARB's Mobile Source Strategy focuses on reducing emissions through the transition to zero and low emission vehicles and from medium-duty and heavy-duty trucks (27).
- CARB's Sustainable Freight Action Plan establishes a goal to improve freight efficiency by 25% by 2030, deploy over 100,000 freight vehicles and equipment capable of zero emission operation and maximize both zero and near-zero emission freight vehicles and equipment powered by renewable energy by 2030 (27).
- CARB's Emissions Reduction Plan for Ports and Goods Movement (Goods Movement Plan) in California focuses on reducing heavy-duty truck-related emissions focus on establishment of emissions standards for trucks, fleet turnover, truck retrofits, and restriction on truck idling. While the focus of Goods Movement Plan is to reduce criteria air pollutant and air toxic emissions, the strategies to reduce these pollutants would also generally have a beneficial effect in reducing GHG emissions.

In addition, the EPA and CARB are currently in the rule development processes for the follow strategies:

- **US EPA Cleaner Truck Initiative:** In response to a petition from SCQMD, the EPA has committed to updating its truck engine standard to reduce NO_X emissions.
- **CARB's Transport Refrigeration Unit Regulation:** Measure to reduce residual risk from TRUs by transitioning to zero-emission technologies.
- **CARB's Advanced Clean Truck Rule:** Requires truck manufacturers to sell an increasing percentage of zero-emission trucks by 2030 (up to 15% or 50%, depending on truck type). Also, this proposed rule would require one-time fleet reporting for large businesses.
- **CARB's Zero-Emission Fleet Rule:** Would require some fleets to transition to zero-emissions

- **CARB's Heavy-Duty Low NO_X Program:** Would set new statewide engine standards, test cycles, and warranty and durability requirements to reduce NO_X from trucks.
- **CARB's Heavy-Duty Inspection/Maintenance Program:** Would set new inspection and maintenance requirements to ensure emissions controls are functioning properly.

These strategies would contribute to reducing heavy duty truck emissions associated with the proposed Project. The proposed Project would not conflict with these strategies. Trucks onsite are required to comply with CARB's Heavy-Duty (Tractor-Trailer) GHG Regulation, which requires SmartWay tractor trailers that include idle-reduction technologies, aerodynamic technologies, and low-rolling resistant tires that would reduce fuel consumption and associated emissions.

Despite the mitigation measures provided by Project and the anticipated regulations implemented by the EPA and CARB to improve truck efficiency, the estimated long-term emissions generated under full buildout of the proposed Project would exceed the AVAQMD's regional operational significance thresholds (see Table 3-10). In addition, regarding VOC, it is important to note that the majority of on-site operational VOC emissions are derived from consumer products. For analytical purposes, consumer products include cleaning supplies, aerosols, and other consumer products (28). As such, the Project Applicant cannot meaningfully control the use of consumer products by future building users via mitigation. On this basis, it is concluded that Project operational-source VOC emissions cannot be definitively reduced below applicable AVAQMD thresholds and therefore are considered significant and unavoidable. Therefore, the proposed Project would result in a significant and unavoidable impact in this regard.

As shown on Table 3-10, after implementation of MM AQ-2 through MM AQ-5, emissions resulting from Phase 1 of Project operations would not exceed the CO thresholds established by the AVAQMD, however; an exceedance for NO_X and PM_{10}, is still expected. For Phases 2-4 and Project Buildout (Phases 1-4), even with the Project's compliance with applicable AVAQMD Rules, and the imposition of all feasible mitigation measures identified above (see MM AQ-2 through MM AQ-5), the Project's operational VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions would exceed the applicable AVAQMD thresholds. As such, Project operational-source VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emissions are considered significant and unavoidable.

TABLE 3-10: SUMMARY OF PEAK OPERATIONAL EMISSIONS - WITH MITIGATION

Source	Emissions (lbs/day)					
	VOC	NO_X	CO	SO_X	PM_{10}	$PM_{2.5}$
Phase 1						
Summer						
Mobile	41.29	166.04	518.78	2.29	131.24	35.81
Area	51.80	0.00	0.00	0.00	0.00	0.00
Energy Source	0.00	0.00	0.00	0.00	0.00	0.00
Stationary Source	5.91	16.51	15.06	0.03	0.87	0.87
On-Site Equipment Source	0.00	0.00	0.00	0.00	0.00	0.00
TRU Source	8.19	9.11	0.89	0.00	0.36	0.33
Total Maximum Daily Emissions (Phase 1)	**107.18**	**191.67**	**534.73**	**2.32**	**132.47**	**37.00**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**YES**	**NO**
Winter						
Mobile	38.32	176.40	399.58	2.20	131.25	35.81
Area	51.80	0.00	0.00	0.00	0.00	0.00
Energy Source	0.00	0.00	0.00	0.00	0.00	0.00
Stationary Source	5.91	16.51	15.06	0.03	0.87	0.87
On-Site Equipment Source	0.00	0.00	0.00	0.00	0.00	0.00
TRU Source	8.19	9.11	0.89	0.00	0.36	0.33
Total Maximum Daily Emissions (Phase 1)	**104.22**	**202.02**	**415.54**	**2.23**	**132.47**	**37.00**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**YES**	**NO**
Phases 2-4						
Summer						
Mobile	84.62	403.70	1001.69	5.74	336.26	92.16
Area	129.93	0.00	0.00	0.00	0.00	0.00
Energy Source	0.02	0.30	0.25	0.00	0.02	0.02
Stationary Source	6.89	19.26	17.57	0.03	1.01	1.01
On-Site Equipment Source	0.00	0.00	0.00	0.00	0.00	0.00
TRU Source	47.72	55.10	5.19	0.00	2.27	2.09
Total Maximum Daily Emissions (Phases 2-4)	**269.19**	**478.36**	**1024.71**	**5.78**	**339.57**	**95.29**
AVAQMD Daily Threshold	137	137	548	137	82	65

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Winter						
Mobile	78.55	427.48	779.99	5.56	336.26	92.16
Area	129.93	0.00	0.00	0.00	0.00	0.00
Energy Source	0.02	0.30	0.25	0.00	0.02	0.02
Stationary Source	6.89	19.26	17.57	0.03	1.01	1.01
On-Site Equipment Source	0.00	0.00	0.00	0.00	0.00	0.00
TRU Source	47.72	55.10	5.19	0.00	2.27	2.09
Total Maximum Daily Emissions (Phases 2-4)	**263.11**	**502.14**	**803.01**	**5.60**	**339.57**	**95.29**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Project Buildout (Phases 1-4)						
Summer						
Total Maximum Daily Emissions (Buildout)	**376.37**	**670.03**	**1559.44**	**8.10**	**472.03**	**132.29**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Winter						
Total Maximum Daily Emissions (Buildout)	**367.33**	**704.16**	**1218.55**	**7.83**	**472.04**	**132.29**
AVAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**

3.5.10 POTENTIAL EMISSIONS IN OTHER AIR DISTRICTS

The proposed Project's truck and TRU trip related emissions that could occur outside of the air district in which the Project is located (AVAQMD) are presented for informational purposes. More specifically, travel within the Eastern Kern Air Pollution Control District (EKAPCD), San Joaquin Valley Air Pollution Control District (SJVAPCD), Mojave Desert Air Quality Management District (MDAQMD) and South Coast Air Quality Management District (SCAQMD) were evaluated. Table 3-11 summarizes the thresholds of significance of the neighboring air districts. Table 3-12 below provides a summary of the percentage breakdown of truck travel by air district based on the Streetlight™ data as presented in Section 3.5.3 above.

TABLE 3-11: AIR QUALITY THRESHOLDS FOR NEIGHBORING AIR DISTRICTS

Pollutant	Threshold			
	EKAPCD (tons per year)	**SJVAPCD (tons per year)**	**MDAQMD (pounds per day)**	**SCAQMD (pounds per day)**
VOC	25	10	137	55
NO_X	25	10	137	55
CO	N/A	100	548	550
SO_X	N/A	27	137	150
PM_{10}	15	15	82	150
$PM_{2.5}$	N/A	15	65	55

Source: EKAPCD, SJVAPCD, MDAQMD, SCAQMD

TABLE 3-12: ACTIVITY BY AIR DISTRICT

Air District	Truck Activity
EKAPCD	13%
SJVAPCD	12%
MDAQMD	25%
SCAQMD	68%

Note: The total percentage exceeds 100% since the travel between air districts include pass-through truck travel for trucks to reach their final origins/destinations.

The percentages on Table 3-12 were then applied to the truck and TRUs emissions that are a subset to the emissions totals presented on Table 3-10.

Tables 3-13 through 3-16 summarize the emissions that could occur due to off-site truck and TRU travel within the aforementioned air districts. The emissions are presented in tons per year for the EKAPCD and SJVAPCD (as there is no seasonal variation), and pounds per day for MDAQMD and SCAQMD (for summer and winter) consistent with the applicable thresholds in each air district.

TABLE 3-13: OPERATIONAL EMISSIONS – EKAPCD

Source	Emissions (tons/year)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Phase 1						
Mobile	0.08	2.98	0.77	0.03	1.03	0.31
TRU Source	0.19	0.22	0.02	0.00	0.01	0.01
Total Maximum Daily Emissions (Phase 1)	**0.27**	**3.20**	**0.80**	**0.03**	**1.04**	**0.32**
EKAPCD Annual Threshold	10	10	100	27	15	15
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Phases 2-4						
Mobile	0.20	7.89	1.91	0.08	3.25	0.96
TRU Source	1.13	1.31	0.12	0.00	0.05	0.05
Total Maximum Daily Emissions (Phases 2-4)	**1.33**	**9.20**	**2.03**	**0.08**	**3.31**	**1.01**
EKAPCD Annual Threshold	10	10	100	27	15	15
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Project Buildout (Phases 1-4)						
Mobile	0.28	10.87	2.68	0.11	4.28	1.27
TRU Source	1.33	1.52	0.14	0.00	0.06	0.06
Total Maximum Daily Emissions (Buildout)	**1.60**	**12.40**	**2.82**	**0.11**	**4.35**	**1.33**
EKAPCD Annual Threshold	25	25	N/A	N/A	15	N/A
Threshold Exceeded?	**NO**	**NO**	**N/A**	**N/A**	**NO**	**N/A**

TABLE 3-14: OPERATIONAL EMISSIONS – SJVAPCD

Source	Emissions (tons/year)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Phase 1						
Mobile	0.07	2.75	0.71	0.03	0.95	0.28
TRU Source	0.18	0.20	0.02	0.00	0.01	0.01
Total Maximum Daily Emissions (Phase 1)	**0.25**	**2.95**	**0.73**	**0.03**	**0.96**	**0.29**
SJVAPCD Annual Threshold	10	10	100	27	15	15
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Phases 2-4						
Mobile	0.18	7.29	1.76	0.08	3.00	0.89
TRU Source	1.05	1.21	0.11	0.00	0.05	0.05
Total Maximum Daily Emissions (Phases 2-4)	**1.23**	**8.49**	**1.87**	**0.08**	**3.05**	**0.93**
SJVAPCD Annual Threshold	10	10	100	27	15	15
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Project Buildout (Phases 1-4)						
Mobile	0.25	10.04	2.47	0.10	3.95	1.17
TRU Source	1.22	1.41	0.13	0.00	0.06	0.05
Total Maximum Daily Emissions (Buildout)	**1.48**	**11.44**	**2.61**	**0.10**	**4.01**	**1.22**
SJVAPCD Annual Threshold	10	10	100	27	15	15
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**NO**	**NO**

TABLE 3-15: OPERATIONAL EMISSIONS – MDAQMD

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Phase 1						
Summer						
Mobile	1.01	35.66	9.93	0.37	13.19	3.94
TRU Source	2.05	2.28	0.22	0.00	0.09	0.08
Total Maximum Daily Emissions (Phase 1)	**3.06**	**37.94**	**10.16**	**0.37**	**13.28**	**4.02**
MDAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Winter						
Mobile	0.99	37.49	9.86	0.37	13.19	3.94
TRU Source	2.05	2.28	0.22	0.00	0.09	0.08
Total Maximum Daily Emissions (Phase 1)	**3.03**	**39.77**	**10.08**	**0.37**	**13.28**	**4.02**
MDAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Phases 2-4						
Summer						
Mobile	2.40	89.16	23.04	0.99	39.32	11.60
TRU Source	11.93	13.77	1.30	0.00	0.57	0.52
Total Maximum Daily Emissions (Phases 2-4)	**14.33**	**102.94**	**24.34**	**0.99**	**39.89**	**12.12**
MDAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Winter						
Mobile	20.86	101.96	255.40	1.42	81.42	22.35
TRU Source	11.93	13.77	1.30	0.00	0.57	0.52
Total Maximum Daily Emissions (Phases 2-4)	**32.79**	**115.73**	**256.70**	**1.42**	**81.99**	**22.87**
MDAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**NO**	**NO**	**NO**	**NO**	**NO**
Project Buildout (Phases 1-4)						
Summer						
Mobile	3.41	124.82	32.98	1.36	52.52	15.53
TRU Source	13.98	16.05	1.52	0.00	0.66	0.60
Total Maximum Daily Emissions (Buildout)	**17.39**	**140.87**	**34.50**	**1.36**	**53.17**	**16.14**

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
MDAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**NO**	**NO**
Winter						
Mobile	21.85	139.45	265.26	1.78	94.61	26.29
TRU Source	13.98	16.05	1.52	0.00	0.66	0.60
Total Maximum Daily Emissions (Buildout)	**35.83**	**155.50**	**266.78**	**1.78**	**95.27**	**26.89**
MDAQMD Daily Threshold	137	137	548	137	82	65
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**YES**	**NO**

TABLE 3-16: OPERATIONAL EMISSIONS – SCAQMD

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Phase 1						
Summer						
Mobile	2.76	97.00	27.02	1.00	35.88	10.71
TRU Source	5.57	6.19	0.61	0.00	0.24	0.22
Total Maximum Daily Emissions (Phase 1)	**8.32**	**103.19**	**27.63**	**1.00**	**36.13**	**10.94**
SCAQMD Daily Threshold	55	55	550	150	150	55
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**NO**	**NO**
Winter						
Mobile	2.69	101.98	26.82	1.00	35.89	10.71
TRU Source	5.57	6.19	0.61	0.00	0.24	0.22
Total Maximum Daily Emissions (Phase 1)	**8.25**	**108.18**	**27.43**	**1.00**	**36.13**	**10.94**
SCAQMD Daily Threshold	55	55	550	150	150	55
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**NO**	**NO**
Phases 2-4						
Summer						
Mobile	6.52	242.52	62.68	2.70	106.96	31.54
TRU Source	32.45	37.46	3.53	0.00	1.54	1.42
Total Maximum Daily Emissions (Phases 2-4)	**38.97**	**279.98**	**66.21**	**2.70**	**108.50**	**32.96**
SCAQMD Daily Threshold	55	55	550	150	150	55
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**NO**	**NO**

Source	Emissions (lbs/day)					
	VOC	**NO_X**	**CO**	**SO_X**	**PM_{10}**	**$PM_{2.5}$**
Winter						
Mobile	56.75	277.32	694.69	3.85	221.46	60.78
TRU Source	32.45	37.46	3.53	0.00	1.54	1.42
Total Maximum Daily Emissions (Phases 2-4)	**89.20**	**314.78**	**698.22**	**3.85**	**223.00**	**62.20**
SCAQMD Daily Threshold	55	55	550	150	150	55
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**
Project Buildout (Phases 1-4)						
Summer						
Mobile	9.28	339.51	89.70	3.70	142.84	42.25
TRU Source	38.02	43.66	4.14	0.00	1.79	1.64
Total Maximum Daily Emissions (Buildout)	**47.29**	**383.17**	**93.84**	**3.70**	**144.63**	**43.90**
SCAQMD Daily Threshold	55	55	550	150	150	55
Threshold Exceeded?	**NO**	**YES**	**NO**	**NO**	**NO**	**NO**
Winter						
Mobile	59.44	379.30	721.51	4.85	257.34	71.50
TRU Source	38.02	43.66	4.14	0.00	1.79	1.64
Total Maximum Daily Emissions (Buildout)	**97.45**	**422.96**	**725.65**	**4.85**	**259.13**	**73.14**
SCAQMD Daily Threshold	55	55	550	150	150	55
Threshold Exceeded?	**YES**	**YES**	**YES**	**NO**	**YES**	**YES**

3.6 CO "HOT SPOT" ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or "hot spots." Further, detailed modeling of Project-specific CO "hot spots" is not needed to reach this conclusion. An adverse CO concentration, known as a "hot spot", would occur if an exceedance of the State one-hour standard of 20 ppm or the eight-hour standard of 9 ppm were to occur. At the time of the 1993 Handbook, the MDAB was designated nonattainment under the CAAQS and NAAQS for CO (29).

It has long been recognized that CO hotspots are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentration in the MDAB is now designated as attainment. To establish a more accurate record of baseline CO concentrations affecting the MDAB, a CO "hot spot" analysis

was conducted in 2003 for four busy intersections in Los Angeles at the peak morning and afternoon time periods. This "hot spot" analysis did not predict any violation of CO standards, as shown on Table 3-17.

TABLE 3-17: CO MODEL RESULTS

Intersection Location	CO Concentrations (ppm)		
	Morning 1-hour	Afternoon 1-hour	8-hour
Wilshire Boulevard/Veteran Avenue	4.6	3.5	3.7
Sunset Boulevard/Highland Avenue	4	4.5	3.5
La Cienega Boulevard/Century Boulevard	3.7	3.1	5.2
Long Beach Boulevard/Imperial Highway	3	3.1	8.4

Source: 2003 AQMP, Appendix V: Modeling and Attainment Demonstrations
Notes: Federal 1-hour standard is 35 ppm and the deferral 8-hour standard is 9.0 ppm.

It should be noted that AVAQMD has not established its own guidelines for CO hotspots analysis. Since the AVAQMD guidelines are based on SCAQMD methodology, it is appropriate to apply the SCAQMD criteria when analyzing CO hotspots within the AVAQMD. Based on the SCAQMD's 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (*1992 CO Plan*)[9], peak carbon monoxide concentrations in the MDAB were a result of unusual meteorological and topographical conditions and not a result of traffic volumes and congestion at a particular intersection. As evidence of this, for example, 8.4 ppm 8-hr CO concentration measured at the Long Beach Blvd. and Imperial Hwy. intersection (highest CO generating intersection within the "hot spot" analysis), only 0.7 ppm was attributable to the traffic volumes and congestion at this intersection; the remaining 7.7 ppm were due to the ambient air measurements at the time the 2003 AQMP was prepared (30). In contrast, an adverse CO concentration, known as a "hot spot", would occur if an exceedance of the state one-hour standard of 20 parts per million (ppm) or the eight-hour standard of 9 ppm were to occur.

Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour (vph)—or 24,000 vph where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (31). Traffic volumes generating the CO concentrations for the "hot spot" analysis is shown on Table 3-18. The busiest intersection evaluated was that at Wilshire Boulevard and Veteran Avenue, which has a daily traffic volume of approximately 100,000 vph and AM/PM traffic volumes of 8,062 vph and 7,719 vph respectively (30). The *2003 AQMP* estimated that the 1-hour concentration for this intersection was 4.6 ppm; this indicates that, should the daily traffic volume increase four times to 400,000 vehicles per day, CO concentrations

[9] The 1992 and 2003 analyses from SCAQMD are the most current CO hotspot evaluations they have conducted.

(4.6 ppm x 4= 18.4 ppm) would still not likely exceed the most stringent 1-hour CO standard (20.0 ppm)[10].

TABLE 3-18: TRAFFIC VOLUMES

Intersection Location	Peak Traffic Volumes (vph)				
	Eastbound (AM/PM)	Westbound (AM/PM)	Southbound (AM/PM)	Northbound (AM/PM)	Total (AM/PM)
Wilshire Boulevard/Veteran Avenue	4,954/2,069	1,830/3,317	721/1,400	560/933	8,062/7,719
Sunset Boulevard/Highland Avenue	1,417/1,764	1,342/1,540	2,304/1,832	1,551/2,238	6,614/5,374
La Cienega Boulevard/Century Boulevard	2,540/2,243	1,890/2,728	1,384/2,029	821/1,674	6,634/8,674
Long Beach Boulevard/Imperial Highway	1,217/2,020	1,760/1,400	479/944	756/1,150	4,212/5,514

Source: 2003 AQMP

As summarized on Table 3-19 below, the intersection of Sierra Highway and Avenue M would have the highest AM of 7,165 vph and the intersection of 10th St. West & Avenue M would have the highest PM of 8,631 vph. As such, total traffic volumes at the intersections considered are less than the traffic volumes identified in the *2003 AQMP*. As such, the Project considered herein along with background and cumulative development would not produce the volume of traffic required to generate a CO "hot spot" either in the context of the 2003 AQMP which includes analysis for CO hot spots or based on representative Bay Area Air Quality Management District (BAAQMD) CO threshold considerations. Therefore, CO "hot spots" are not an environmental impact of concern for the Project. Localized air quality impacts related to mobile-source emissions would therefore be less than significant.

TABLE 3-19: PEAK HOUR TRAFFIC VOLUMES

Intersection Location	Peak Traffic Volumes (vph)				
	Northbound (AM/PM)	Southbound (AM/PM)	Eastbound (AM/PM)	Westbound (AM/PM)	Total (AM/PM)
SR-14 NB Ramps & Avenue M	756/657	0/0	2919/1743	1506/3394	5181/5794
10th St. West & Avenue M	761/1846	1181/1520	3416/2215	1505/3050	6863/8631
Sierra Hwy. & Avenue M	1945/1938	1393/1475	1847/1944	1980/2569	7165/7926
4th St. & Avenue M/Columbia Wy.	631/1096	151/196	2705/2380	1301/1547	4788/5219

SR-14 = State Route 14
Source: *Antelope Valley Commerce Center Traffic Analysis* (Urban Crossroads, Inc., 2023)

3.7 AQMP

The Federal Particulate Matter Attainment Plan and Ozone Attainment Plan for the Antelope Valley sets forth a comprehensive set of programs that will lead the MDAB into compliance with

[10] Based on the ratio of the CO standard (20.0 ppm) and the modeled value (4.6 ppm)

federal and State air quality standards. The control measures and related emission reduction estimates within the Federal Particulate Matter Attainment Plan and Ozone Attainment Plan are based upon emissions projections for a future development scenario derived from land use, population, and employment characteristics defined in consultation with local governments. Accordingly, conformance with these attainment plans for development projects is determined by demonstrating compliance the indicators discussed below:

3.7.1 CONSISTENCY CRITERION NO. 1

Local land use plans and/or population projections

As previously stated, the City of Palmdale General Plan designates the Project site for Employment Flex (EMPFX) uses. The Employment Flex designation permits mixed-use development of lighter industrial uses and more intensive service, retail, and commercial uses. It is a transition zone that allows a mix of businesses that provide a wide variety of employment-generating activities, including office, industrial and light manufacturing, research and development, and supportive commercial. EMPFX areas are typically situated close to major arterials or freeways. The uses allowed in this designation will support job generation, focusing on fabrication, research, distribution, and similar operations conducted primarily indoors. Secondary land uses allowed under this designation include production, distribution, repair, retail/services, auto services, breweries, and self-storage (indoor only) land uses (32).

The Project Applicant proposes a General Plan Amendment to change the site's General Plan land use designation from Employment Flex (EMPFX) to Specific Plan (SP). Additionally, a Zone Change is proposed to change the site's zoning classification from Office Flex (OFX) to Specific Plan (SP). The Antelope Valley Commerce Center Specific Plan sets forth standards and guidance for the development and phasing of industrial, commercial, and open space uses with supporting infrastructure on the Project site. Because a General Plan Amendment is proposed, the Project would therefore not conform to local land use plans.

3.7.4 CONSISTENCY CRITERION NO. 2

All AVAQMD Rules and Regulations

The Project would be required to comply with all applicable AVAQMD Rules and Regulations, including, but not limited to Rules 401 (Visibile Emissions), 402 (Nuisance), and 403 (Fugitive Dust). As previously stated in Section ES.2 of this AQIA, the Project would implement BCAM AQ-1 (AVAQMD Rule 1113 for flat coatings).

3.7.3 CONSISTENCY CRITERION NO. 3

Demonstrating that the project will not increase the frequency or severity of a violation in the federal or state ambient air quality standards

As substantiated herein, Project construction emissions would not exceed applicable AVAQMD regional thresholds. However, for operational-source emissions, buildout of Phase 1 would exceed the numerical thresholds of significance established by the AVAQMD for emissions of NO_X, CO and PM_{10} during the summer season and for emissions of NO_X and PM_{10} during the

winter season. With buildout of Phases 2 through 4, the Project would exceed the numerical thresholds of significance for emissions of VOC, NO_X, CO, PM_{10} and $PM_{2.5}$ during both the summer and winter seasons. With Project Buildout of the whole of the Project, Phases 1 through 4, the Project would exceed the numerical thresholds of significance for emissions of VOC, NO_X, CO, PM_{10} and $PM_{2.5}$ during both the summer and winter seasons. As such, the Project operational-source emissions exceedances would have the potential to increase the frequency or severity of a violation in the federal or State ambient air quality standards for on-going project operations.

On the basis of the preceding discussion, the Project is determined to be inconsistent with the third criterion.

AQMP CONSISTENCY CONCLUSION

The Project would not conform to local land use plans as stated previously, and a General Plan Amendment and Zoning Change would be requried. The Project would comply with all applicable AVAQMD Rules and Regulations, but would exceed the applicable regional thresholds. The Project would implement development-specific air quality mitigation measures identified in this analysis, acting to generally reduce the Project's construction-source and operational-source air pollutant emissions. Additionally, incorporation of contemporary energy-efficient technologies and operational programs, and compliance with AVAQMD emissions reductions and control requirements act to reduce Project air pollutant emissions generally.

Notwithstanding, based on the analysis presented here, the Project is considered to be inconsistent with applicable AQMP Consistency Criteria.

3.8 POTENTIAL IMPACTS TO SENSITIVE RECEPTORS

As per the AVAQMD's *Guidelines*, the following project types located within a specified distance to an existing or planned sensitive receptor land use must be evaluated to determine exposure of substantial pollutant concentrations to sensitive receptors (24):

- Any industrial project within 1,000 feet;
- A distribution center (40 or more trucks per day) within 1,000 feet;
- A major transportation project (50,000 or more vehicles per day) within 1,000 feet;
- A dry cleaner using perchloroethylene within 500 feet;
- A gasoline dispensing facility within 300 feet.

The proposed Project is analyzed herein based on the following uses. Six buildings are proposed in the first phase of the Project's development. Site-specific detail for subsequent phases of development would be determined in the future based on the proposed Specific Plan, but reasonable assumptions are made herein about the future phases of development to enable a complete and comprehensive analysis of the whole of the Project.

- Phase 1:
    - Building 1 is 136,670 square feet
    - Building 2 is 144,306 square feet
    - Building 3 is 132,695 square feet

        - Buildings 1 through 3 will assume 25% general light industrial and 75% general warehousing use
    - Building 4 is 680,469 square feet of high-cube fulfillment center (sort) warehouse use
    - Building 5 is 1,004,228 square feet with 25% high-cube cold storage warehouse use and high-cube fulfillment center (non-sort) warehouse use
    - Building 6 is 274,858 square feet with 25% manufacturing and 75% general warehousing use
- Phase 2:
    - 1,630,362 square feet of high-cube parcel hub warehousing use
    - 549,790 square feet with 25% manufacturing and 75% general warehousing use
- Phase 3:
    - 1,156,576 square feet with 25% high-cube cold storage warehouse use and 75% high-cube fulfillment (non-sort) warehousing use
    - 2,500 square feet of fast-food restaurant without drive-through window use, 2,500 square feet of fast-food restaurant with drive-through window use, 2,000 square feet of coffee shop with drive-through window use, and 53,984 square feet of commercial retail use (for a total of 60,984 square feet)
- Phase 4:
    - 2,555,556 square feet with 25% high-cube cold storage warehouse use and 75% high-cube fulfillment (non-sort) warehousing use

As such, the potential impact of Project-generated air pollutant emissions at sensitive receptors has also been considered. Sensitive receptors can include uses such as long-term health care facilities, rehabilitation centers, and retirement homes. Residences, schools, playgrounds, childcare centers, and athletic facilities can also be considered as sensitive receptors.

Receptors in the Project study area are described below and shown on Exhibit 3-A. All distances are measured from the Project site boundary to the outdoor living areas (e.g., backyards) or at the building façade, whichever is closer to the Project site. Distance is measured in a straight line from the project boundary to each receptor location.

R1: Location R1 represents the vacant commercial retail site at 42020 4th Street E., approximately 127 feet north the Project site and north of Columbia Way/Avenue M.

R2: Location R2 represents the existing residence at 42057 5th Street E., approximately 607 feet north of the Project site. R2 is placed in the private outdoor living areas (backyard) facing the Project site.

R3: Location R3 represents the existing residence at 42104 6th Street E., approximately 746 feet north of the Project site. R3 is placed in the private outdoor living areas (backyard) facing the Project site.


R4: Location R4 represents the gas station at 42011 Sierra Highway, approximately 612 feet northwest of the Project site.

R5: Location R5 represents the commercial retail land use within the Sierra Highway Plaza at 190 Sierra Court, approximately 379 feet west of the Project site.

R6: Location R6 represents the self-storage facility at 42034 3rd Street E., approximately 127 feet north of the Project site and north of Columbia Way/Avenue M.

The Project would have a significant impact if it results in a maximum incremental cancer risk from emission of diesel particulate matter of greater than or equal to (≥ 10) in one million and/or a chronic & acute hazard index that is ≥1.0.

EXHIBIT 3-A: SENSITIVE RECEPTOR LOCATIONS

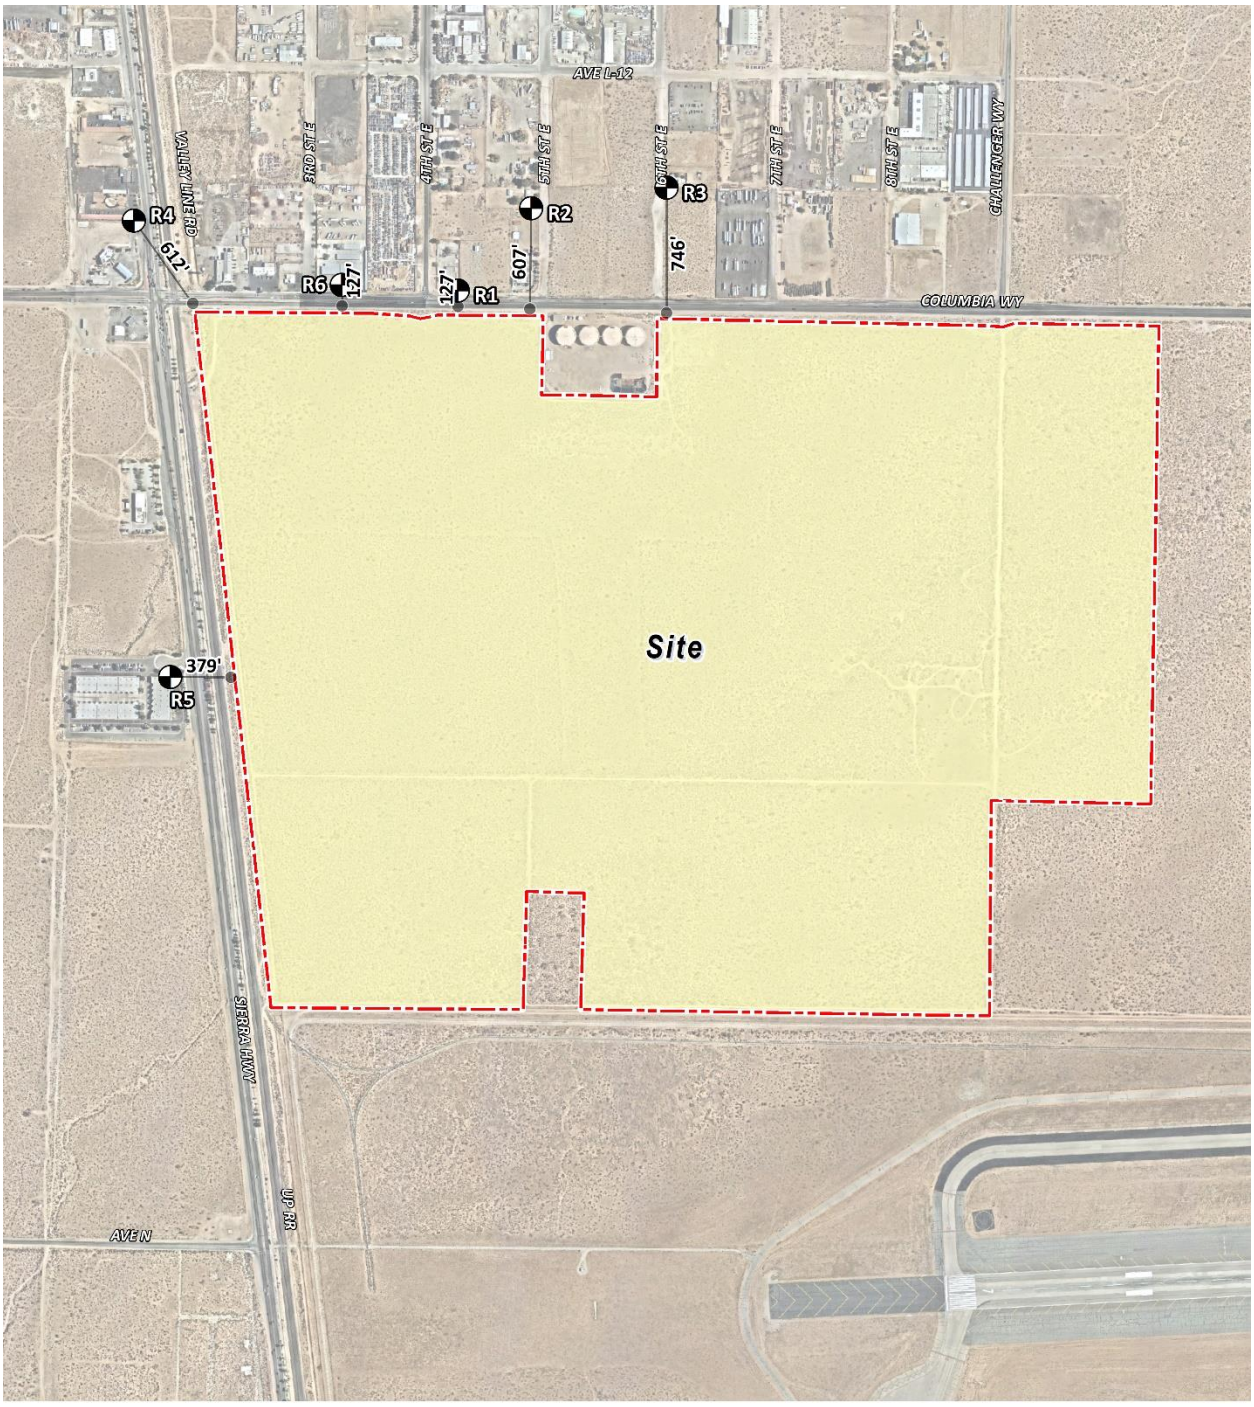

LEGEND:

Site Boundary | Receptor Locations | Distance from receptor to Project site boundary (in feet)

For purposes of this evaluation, a health risk assessment (HRA) has been prepared by Urban Crossroads, Inc. under a separate cover. The results of the *Antelope Valley Commerce Center Mobile Source Health Risk Assessment* indicate that the Project would not result in any significant health risk impacts from exposure to toxic air contaminants (TACs) resulting from the Project (33). Per the *Antelope Valley Commerce Center Mobile Source Health Risk Assessment*, the land use with the greatest potential exposure to Project construction and operational diesel particulate matter (DPM) source emissions is Location R2. At the maximally exposed individual receptor (MEIR), the maximum incremental cancer risk attributable to Project construction and operational DPM source emissions is estimated at 4.85 in one million without mitigation and 3.73 in one million with mitigation, which is less than the threshold of 10 in one million. At this same location, non-cancer risks were estimated to be ≤0.01, which would not exceed the applicable threshold of 1.0. As such, the Project would not cause a significant human health or cancer risk to adjacent land uses as a result of Project construction and operational activity. All other receptors during construction and operational activity would experience less risk than what is identified for Location R2.

3.8.1 FRIANT RANCH CASE

In December 2018, in the case of *Sierra Club v. County of Fresno* (2018) 6 Cal.5th 502, the California Supreme Court held that an Environmental Impact Report's (EIR) air quality analysis must meaningfully connect the identified air quality impacts to the human health consequences of those impacts, or meaningfully explain why that analysis cannot be provided.

Most local agencies, including the City of Palmdale, lack the data to do their own assessment of potential health impacts from criteria air pollutant emissions, as would be required to establish customized, locally specific thresholds of significance based on potential health impacts from an individual development project. The use of national or "generic" data to fill the gap of missing local data would not yield accurate results because such data does not capture local air patterns, local background conditions, or local population characteristics, all of which play a role in how a population experiences air pollution. Because it is impracticable to accurately isolate the exact cause of a human disease (for example, the role a particular air pollutant plays compared to the role of other allergens and genetics in causing asthma), existing scientific tools cannot accurately estimate health impacts of the Project's air emissions without undue speculation. Instead, readers are directed to the Project's air quality impact analysis above, which provides extensive information concerning the quantifiable and non-quantifiable health risks related to the Project's construction and long-term operation.

Notwithstanding, and as previously stated, per the health risk assessment, the Project will not cause a significant human health or cancer risk to adjacent land uses as a result of Project construction and operational activity.

3.9 ODORS

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- Agricultural uses (livestock and farming)
- Wastewater treatment plants
- Food processing plants
- Chemical plants
- Composting operations
- Refineries
- Landfills
- Dairies
- Fiberglass molding facilities

The Project does not propose or require land uses that would use substantive sources of objectionable odors. Potential temporary and intermittent odors may result from construction equipment exhaust andapplication of asphalt and architectural coatings. Temporary and intermittent construction-source emissions are controlled through existing requirements and industry Best Management Practices (BMPs) addressing proper storage of and application construction materials.

Over the life of the Project, odors may result from storage of municipal solid waste pending its transport to area landfills. . Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the City of Palmdale's solid waste regulations.

The proposed Project would also be required to comply with AVAQMD Rule 402. Rule 402 provides that "[a] person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property." (34). Based on the preceding, the potential for the Project to create objectionable odors affecting a substantial number of people is considered less-than-significant.

3.10 CUMULATIVE IMPACTS

The AVAQMD relies on the SCAQMD guidance for determining cumulative impacts. The SCAQMD has recognized that there is typically insufficient information to quantitatively evaluate the cumulative contributions of multiple projects because each project applicant has no control over nearby projects.

The SCAQMD published a report on how to address cumulative impacts from air pollution: *White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution* (35). In this report the SCAQMD clearly states (Page D-3):

> *"…the AQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or EIR. The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance*

> *threshold for toxic air contaminant (TAC) emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility-wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts.*
>
> *Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant."*

Individual projects that do not generate operational or construction emissions that exceed the AVAQMD's recommended daily thresholds for project-specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which the Basin is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Conversely, individual project-related construction and operational emissions that exceed AVAQMD thresholds for project-specific impacts would be considered cumulatively considerable.

CONSTRUCTION-SOURCE EMISSION IMPACTS

As substantiated in this analysis, after mitigation, Project-level construction-source emissions would not exceed the applicable AVAQMD regional thresholds. Therefore, the proposed Project construction-source emissions would be considered less than significant on a Project-specific and cumulative basis.

OPERATIONAL-SOURCE EMISSION IMPACTS

As substantiated in this analysis, even after mitigation, Project-level operational-source VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emission impacts would exceed the applicable AVAQMD regional thresholds during both the summer and winter seasons and will be significant and unavoidable. As such, Project operational-source VOC, NO_X, CO, PM_{10}, and $PM_{2.5}$ emission impacts would be cumulatively significant.

This page intentionally left blank

4 REFERENCES

1. **Association of Environmental Professionals.** *2020 CEQA California Environmental Quality Act.* 2020.
2. **Mojave Air Quality Management District.** Rule 1113 Architectural Coatings. [Online] http://mdaqmd.ca.gov/home/showdocument?id=418.
3. **South Coast Air Quality Management District.** *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning.* 2005.
4. **California Air Resources Board.** Ambient Air Quality Standards (AAQS). [Online] 2016. http://www.arb.ca.gov/research/aaqs/aaqs2.pdf.
5. **United State Environmental Protection Agency.** Frequent Questions about General Conformity . *EPA.* [Online] https://www.epa.gov/general-conformity/frequent-questions-about-general-conformity#8.
6. **Antelope Valley Air Quality Management District.** Ambient Air Monitoring. *Antelope Valley Air Quality Management District.* [Online] https://avaqmd.ca.gov/ambient-air-monitoring.
7. **Air Resources Board.** *Appendix C Maps and Tables of Area Designations for State and National Ambient Air Quality Standards.* 2024.
8. —. iAdam: Air Quality Data Statistics. *California Air Resources Board.* [Online] https://arb.ca.gov/adam.
9. **California Air Resources Board.** iAir Quality Data (PST) Query Tool. *AQMIS.* [Online] https://www.arb.ca.gov/aqmis2/aqdselect.php?tab=specialrpt.
10. **Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. https://www.epa.gov/environmental-topics/air-topics.
11. —. Air Pollution and the Clean Air Act. [Online] http://www.epa.gov/air/caa/.
12. **United States Environmental Protection Agency.** 1990 Clean Air Act Amendment Summary: Title I. [Online] https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-i.
13. —. 1990 Clean Air Act Amendment Summary: Title II. [Online] https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-ii.
14. **Air Resources Board.** California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: April 16, 2018.] http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm.
15. **California Energy Commission.** Energy Commission Adopts Updated Building Standards to Improve Efficiency, Reduce Emissions from Homes and Businesses. [Online] August 11, 2021. https://www.energy.ca.gov/news/2021-08/energy-commission-adopts-updated-building-standards-improve-efficiency-reduce-0.
16. **California Department of General Services.** 2022 CALGreen Code. *CALGreen.* [Online] https://codes.iccsafe.org/content/CAGBC2022P1.
17. **California Air Resources Board.** Western Mojave Desert Air Quality Management Plans. [Online] https://www.arb.ca.gov/planning/sip/planarea/mojavesedsip.htm.
18. —. *The California Almanac of Emissions and Air Quality.* 2013.
19. —. iADAM: Air Quality Data Statistics. *California Air Resources Board.* [Online] https://arb.ca.gov/adam/topfour/topfour1.php.

20. **Ralph Propper, Patrick Wong, Son Bui, Jeff Austin, William Vance, Alvaro Alvarado, Bart Croes, and Dongmin Luo.** Ambient and Emission Trends of Toxic Air Contaminants in California. *American Chemical Society: Environmental Science & Technology.* 2015.
21. **California Air Resources Board.** ARB's Drayage Truck Regulatory Activities. [Online] http://www.arb.ca.gov/msprog/onroad/porttruck/porttruck.htm.
22. **Air Resources Board.** Truck and Bus Regulation. *On-Road Heavy-Duty Diesel Vehicles (In-Use) Regulation.* [Online] http://www.arb.ca.gov/msprog/onrdiesel/onrdiesel.htm.
23. **The Port of Los Angeles.** Clean Truck Program. [Online] http://www.portoflosangeles.org/ctp/idx_ctp.asp.
24. **Antelope Valley Air Quality Management District.** California Environmental Quality Act (CEQA) and Federal Conformity Guidelines. [Online] August 2016. https://avaqmd.ca.gov/files/e5b34d385/AV%20CEQA%20Guides%202016.pdf.
25. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] May 2022. www.caleemod.com.
26. **Urban Crossroads, Inc.** *Antelope Valley Commerce Center Traffic Analysis.* 2023.
27. **Air Resources Board.** California's 2017 Climate Change Scoping Plan: The Strategy for Achieving Carlifornia's 2030 Greenhouse Gas Target. [Online] https://ww2.arb.ca.gov/sites/default/files/classic/cc/scopingplan/2030sp_pp_final.pdf.
28. **Southern California Air Quality Management District.** California Emissions Estimator Model User's Guide Version 2016.3.2. [Online] http://www.aqmd.gov/docs/default-source/caleemod/01_user-39-s-guide2016-3-2_15november2017.pdf?sfvrsn=4.
29. **South Coast Air Quality Management District.** 2003 Air Quality Management Plan. [Online] 2003. http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2003-air-quality-management-plan/2003-aqmp-appendix-v.pdf.
30. —. 2003 Air Quality Management Plan. [Online] 2003. https://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2003-aqmp.
31. **Bay Area Air Quality Management District.** California Environmental Quality Act - Air Quality Guidelines. [Online] https://www.baaqmd.gov/~/media/files/planning-and-research/ceqa/ceqa_guidelines_may2017-pdf.pdf?la=en.
32. **City of Palmdale.** Chapter 5: Land Use and Community Design. [Online] chrome-extension://efaidnbmnnnibpcajpcglclefindmkaj/https://palmdale2045gp.org/wp-content/uploads/2023/05/PalmdaleGP_DetailedLandUseDesignations_Revised_041823.pdf.
33. **Urban Crossroads, Inc.** *Antelope Vallue Commerce Center Mobile Source Health Risk Assessment.* 2023.
34. **Antelope Valley Air Quality Management District.** Rule 402 Nuisance. [Online] https://avaqmd.ca.gov/files/3e8783db0/AV402.pdf.
35. **Goss, Tracy A and Kroeger, Amy.** White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. [Online] South Coast Air Quality Management District, 2003. http://www.aqmd.gov/rules/ciwg/final_white_paper.pdf.

This page intentionally left blank

5 CERTIFICATIONS

The contents of this air study report represent an accurate depiction of the environmental impacts associated with the proposed Antelope Valley Commerce Center Project. The information contained in this air quality impact assessment report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hqureshi@urbanxroads.com.

Haseeb Qureshi
Principal
URBAN CROSSROADS, INC.
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies
California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design
University of California, Irvine • June 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Professionals
AWMA – Air and Waste Management Association
ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Planned Communities and Urban Infill – Urban Land Institute • June 2011
Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008
Principles of Ambient Air Monitoring – CARB • August 2007
AB2588 Regulatory Standards – Trinity Consultants • November 2006
Air Dispersion Modeling – Lakes Environmental • June 2006

This page intentionally left blank

APPENDIX 2.1:

STATE/FEDERAL ATTAINMENT STATUS OF CRITERIA POLLUTANTS

This page intentionally left blank

APPENDIX C

MAPS AND TABLES OF AREA DESIGNATIONS FOR STATE AND NATIONAL AMBIENT AIR QUALITY STANDARDS

[This page intentionally left blank]

APPENDIX C

MAPS AND TABLES OF AREA DESIGNATIONS FOR STATE AND NATIONAL AMBIENT AIR QUALITY STANDARDS

This attachment fulfills the requirement of Health and Safety Code section 40718 for CARB to publish maps that identify areas where one or more violations of any State ambient air quality standard (State standard) or national ambient air quality standard (national standard) have been measured. The national standards are those promulgated under section 109 of the federal Clean Air Act (42 U.S.C. 7409).

This attachment is divided into three parts. The first part comprises a table showing the levels, averaging times, and measurement methods for each of the State and national standards. This is followed by a section containing maps and tables showing the area designations for each pollutant for which there is a State standard in the California Code of Regulations, title 17, section 70200. The last section contains maps and tables showing the most current area designations for the national standards.

Ambient Air Quality Standards

(Updated 5/4/16)

Pollutant	Averaging Time	California Standards [1]		National Standards [2]		
		Concentration [3]	Method [4]	Primary [3,5]	Secondary [3,6]	Method [7]
Ozone (O_3)[8]	1 Hour	0.09 ppm (180 µg/m³)	Ultraviolet Photometry	—	Same as Primary Standard	Ultraviolet Photometry
	8 Hour	0.070 ppm (137 µg/m³)		0.070 ppm (137 µg/m³)		
Respirable Particulate Matter (PM10)[9]	24 Hour	50 µg/m³	Gravimetric or Beta Attenuation	150 µg/m³	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	20 µg/m³		—		
Fine Particulate Matter (PM2.5)[9]	24 Hour	—	—	35 µg/m³	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	12 µg/m³	Gravimetric or Beta Attenuation	12.0 µg/m³	15 µg/m³	
Carbon Monoxide (CO)	1 Hour	20 ppm (23 mg/m³)	Non-Dispersive Infrared Photometry (NDIR)	35 ppm (40 mg/m³)	—	Non-Dispersive Infrared Photometry (NDIR)
	8 Hour	9.0 ppm (10 mg/m³)		9 ppm (10 mg/m³)	—	
	8 Hour (Lake Tahoe)	6 ppm (7 mg/m³)		—	—	
Nitrogen Dioxide (NO_2)[10]	1 Hour	0.18 ppm (339 µg/m³)	Gas Phase Chemiluminescence	100 ppb (188 µg/m³)	—	Gas Phase Chemiluminescence
	Annual Arithmetic Mean	0.030 ppm (57 µg/m³)		0.053 ppm (100 µg/m³)	Same as Primary Standard	
Sulfur Dioxide (SO_2)[11]	1 Hour	0.25 ppm (655 µg/m³)	Ultraviolet Fluorescence	75 ppb (196 µg/m³)	—	Ultraviolet Flourescence; Spectrophotometry (Pararosaniline Method)
	3 Hour	—		—	0.5 ppm (1300 µg/m³)	
	24 Hour	0.04 ppm (105 µg/m³)		0.14 ppm (for certain areas)[11]	—	
	Annual Arithmetic Mean	—		0.030 ppm (for certain areas)[11]	—	
Lead[12,13]	30 Day Average	1.5 µg/m³	Atomic Absorption	—	—	High Volume Sampler and Atomic Absorption
	Calendar Quarter	—		1.5 µg/m³ (for certain areas)[12]	Same as Primary Standard	
	Rolling 3-Month Average	—		0.15 µg/m³		
Visibility Reducing Particles[14]	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape	**No National Standards**		
Sulfates	24 Hour	25 µg/m³	Ion Chromatography			
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m³)	Ultraviolet Fluorescence			
Vinyl Chloride[12]	24 Hour	0.01 ppm (26 µg/m³)	Gas Chromatography			

See footnotes on next page ...

1. California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1- and 24-hour), nitrogen dioxide, and particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the California Code of Regulations.

2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24-hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 $\mu g/m^3$ is equal to or less than one. For PM2.5, the 24-hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.

3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.

4. Any equivalent measurement method which can be shown to the satisfaction of the CARB to give equivalent results at or near the level of the air quality standard may be used.

5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.

6. National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.

7. Reference method as described by the U.S. EPA. An “equivalent method” of measurement may be used but must have a “consistent relationship to the reference method” and must be approved by the U.S. EPA.

8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.

9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 $\mu g/m^3$ to 12.0 $\mu g/m^3$. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 $\mu g/m^3$, as was the annual secondary standard of 15 $\mu g/m^3$. The existing 24-hour PM10 standards (primary and secondary) of 150 $\mu g/m^3$ also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.

10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.

11. On June 2, 2010, a new 1-hour SO_2 standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO_2 national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.

    Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.

12. The CARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.

13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard (1.5 $\mu g/m^3$ as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.

14. In 1989, the CARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

[This page intentionally left blank]

Area Designations for the State Ambient Air Quality Standards

The following maps and tables show the area designations for each pollutant with a State standard set forth in the California Code of Regulations, title 17, section 60200. Each area is identified as attainment, nonattainment, nonattainment-transitional, or unclassified for each pollutant, as shown below:

Attainment	A
Nonattainment	N
Nonattainment-Transitional	NA-T
Unclassified	U

In general, CARB designates areas by air basin for pollutants with a regional impact and by county for pollutants with a more local impact. However, when there are areas within an air basin or county with distinctly different air quality deriving from sources and conditions not affecting the entire air basin or county, CARB may designate a smaller area. Generally, when boundaries of the designated area differ from the air basin or county boundaries, the description of the specific area is referenced at the bottom of the summary table.

FIGURE 1


2018
Area Designations for State
Ambient Air Quality Standards
OZONE
N
0
50
100
200
Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Shasta
Lassen
Humboldt
Trinity
Tehema
SACRAMENTO VALLEY
SUTTER BUTTES
Plumas
Mendocino
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
Nevada
LAKE COUNTY
Colusa
Yuba
Placer
Lake
Sutter
LAKE TAHOE
El Dorado
Yolo
Alpine
Sonoma
Napa
Sac
Amador
SAN FRANCISCO BAY AREA
Solano
Calaveras
Marin
San Joaquin
Contra Costa
Tuolumne
Mono
San Francisco
Alameda
Mariposa
GREAT BASIN VALLEYS
San Mateo
Stanislaus
Santa Clara
Merced
Santa Cruz
Madera
SAN JOAQUIN VALLEY
San Benito
Fresno
NORTH CENTRAL COAST
Inyo
Tulare
Monterey
Kings
San Luis Obispo
Kern
SOUTH CENTRAL COAST
Santa Barbara
San Bernardino
Ventura
Los Angeles
MOJAVE DESERT
Orange
Riverside
SOUTH COAST
San Diego
Imperial
SAN DIEGO COUNTY
SALTON SEA
Unclassified
Attainment
Nonattainment-Transitional
Nonattainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 1

California Ambient Air Quality Standards
Area Designations for Ozone [1]

	N	NA-T	U	A		N	NA-T	U	A
GREAT BASIN VALLEYS AIR BASIN					NORTHEAST PLATEAU AIR BASIN				X
Alpine County			X		SACRAMENTO VALLEY AIR BASIN				
Inyo County	X				Colusa and Glenn Counties				X
Mono County	X				Sutter/Yuba Counties				
LAKE COUNTY AIR BASIN				X	Sutter Buttes	X			
LAKE TAHOE AIR BASIN				X	Remainder of Sutter County				X
MOJAVE DESERT AIR BASIN	X				Yuba County				X
MOUNTAIN COUNTIES AIR BASIN					Yolo/Solano Counties		X		
Amador County	X				Remainder of Air Basin	X			
Calaveras County	X				SALTON SEA AIR BASIN	X			
El Dorado County (portion)	X				SAN DIEGO AIR BASIN	X			
Mariposa County	X				SAN FRANCISCO BAY AREA AIR BASIN	X			
Nevada County	X				SAN JOAQUIN VALLEY AIR BASIN	X			
Placer County (portion)	X				SOUTH CENTRAL COAST AIR BASIN				
Plumas County			X		San Luis Obispo County	X			
Sierra County			X		Santa Barbara County		X		
Tuolumne County	X				Ventura County	X			
NORTH CENTRAL COAST AIR BASIN		X			SOUTH COAST AIR BASIN	X			
NORTH COAST AIR BASIN				X					

(1) AB 3048 (Olberg) and AB 2525 (Miller) signed into law in 1996, made changes to Health and Safety Code, section 40925.5. One of the changes allows nonattainment districts to become nonattainment-transitional for ozone by operation of law.

FIGURE 2



2018
Area Designations for State
Ambient Air Quality Standards
PM10
N
0
50
100
200
Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Trinity
Shasta
Lassen
Humboldt
Tehema
SACRAMENTO VALLEY
Plumas
Mendocino
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
LAKE COUNTY
Colusa
Yuba
Nevada
Lake
Sutter
Placer
LAKE TAHOE
Yolo
El Dorado
Sonoma
Napa
Sac
Amador
Alpine
Yosemite NP
SAN FRANCISCO BAY AREA
Solano
Calaveras
Marin
Contra Costa
San Joaquin
Tuolumne
Mono
San Francisco
Alameda
Stanislaus
Mariposa
GREAT BASIN VALLEYS
San Mateo
Santa Clara
Merced
Madera
Santa Cruz
SAN JOAQUIN VALLEY
San Benito
Fresno
NORTH CENTRAL COAST
Monterey
Tulare
Inyo
Kings
San Luis Obispo
Kern
MOJAVE DESERT
Santa Barbara
Los Angeles
San Bernardino
SOUTH CENTRAL COAST
Ventura
Orange
Riverside
SOUTH COAST
San Diego
Imperial
SAN DIEGO COUNTY
SALTON SEA
Unclassified
Attainment
Nonattainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 2

California Ambient Air Quality Standards
Area Designation for Suspended Particulate Matter (PM10)

	N	U	A		N	U	A
GREAT BASIN VALLEYS AIR BASIN	X			NORTH CENTRAL COAST AIR BASIN	X		
LAKE COUNTY AIR BASIN			X	NORTH COAST AIR BASIN			
LAKE TAHOE AIR BASIN	X			Del Norte, Sonoma (portion) and Trinity Counties			X
MOJAVE DESERT AIR BASIN	X			Remainder of Air Basin	X		
MOUNTAIN COUNTIES AIR BASIN				NORTHEAST PLATEAU AIR BASIN			
Amador County		X		Siskiyou County			X
Calaveras County	X			Remainder of Air Basin		X	
El Dorado County (portion)	X			SACRAMENTO VALLEY AIR BASIN			
Mariposa County				Shasta County			X
- Yosemite National Park	X			Remainder of Air Basin	X		
- Remainder of County		X		SALTON SEA AIR BASIN	X		
Nevada County	X			SAN DIEGO AIR BASIN	X		
Placer County (portion)	X			SAN FRANCISCO BAY AREA AIR BASIN	X		
Plumas County	X			SAN JOAQUIN VALLEY AIR BASIN	X		
Sierra County	X			SOUTH CENTRAL COAST AIR BASIN	X		
Tuolumne County		X		SOUTH COAST AIR BASIN	X		

FIGURE 3

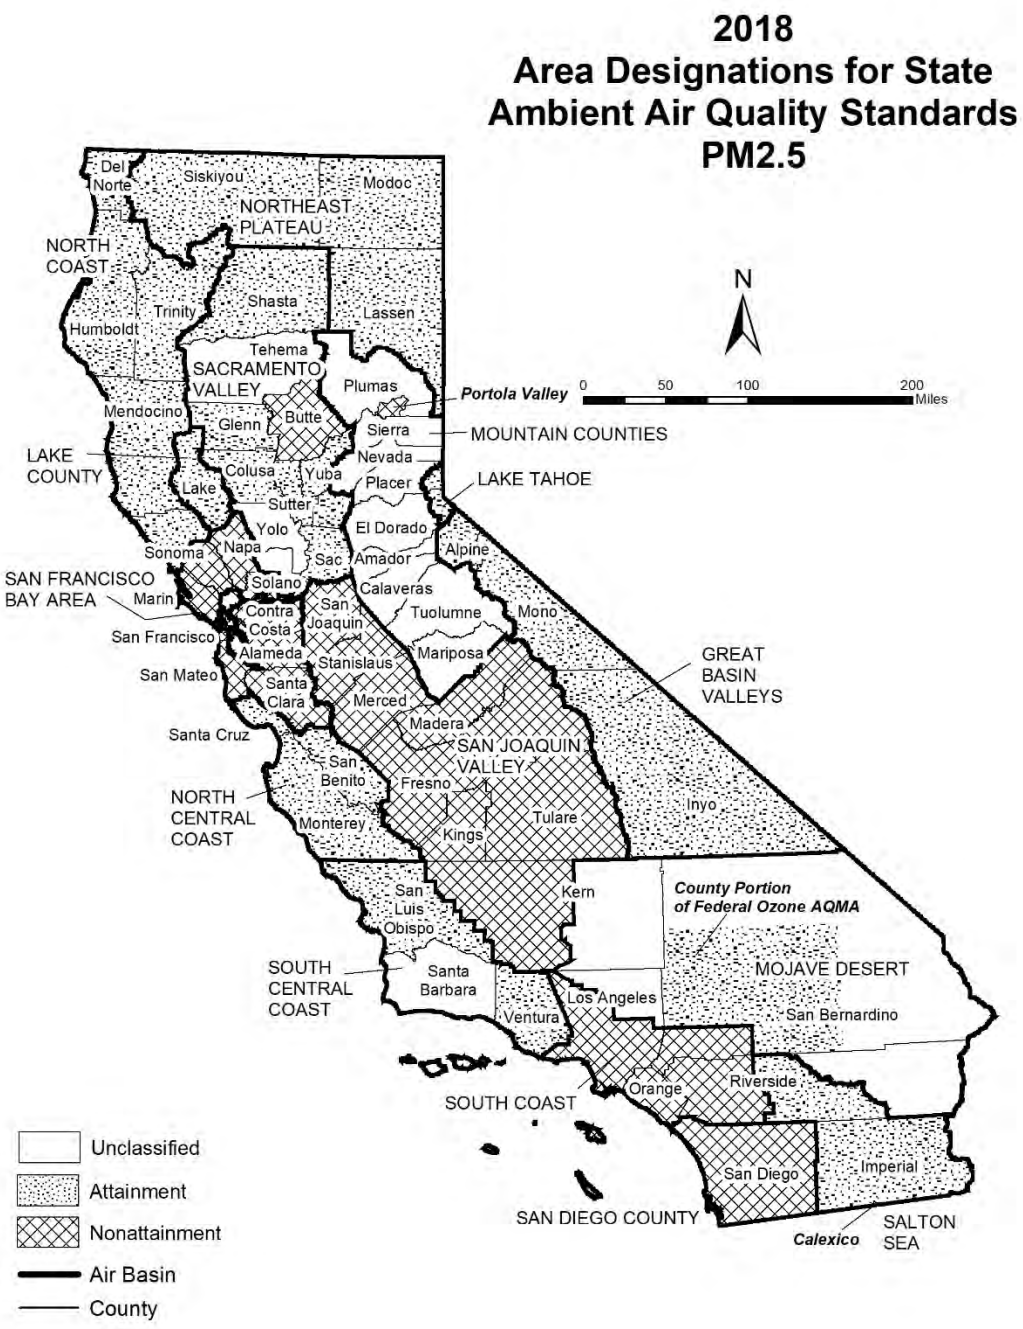

Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 3

California Ambient Air Quality Standards
Area Designations for Fine Particulate Matter (PM2.5)


	N	U	A		N	U	A
GREAT BASIN VALLEYS AIR BASIN			X	SALTON SEA AIR BASIN			
LAKE COUNTY AIR BASIN			X	Imperial County			
LAKE TAHOE AIR BASIN			X	- City of Calexico (3)	X		
MOJAVE DESERT AIR BASIN				Remainder of Air Basin			X
San Bernardino County				SAN DIEGO AIR BASIN	X		
- County portion of federal Southeast Desert Modified AQMA for Ozone (1)			X	SAN FRANCISCO BAY AREA AIR BASIN	X		
				SAN JOAQUIN VALLEY AIR BASIN	X		
Remainder of Air Basin		X		SOUTH CENTRAL COAST AIR BASIN			
MOUNTAIN COUNTIES AIR BASIN				San Luis Obispo County			X
Plumas County				Santa Barbara County		X	
- Portola Valley (2)	X			Ventura County			X
Remainder of Air Basin		X		SOUTH COAST AIR BASIN	X		
NORTH CENTRAL COAST AIR BASIN			X				
NORTH COAST AIR BASIN			X				
NORTHEAST PLATEAU AIR BASIN			X				
SACRAMENTO VALLEY AIR BASIN							
Butte County	X						
Colusa County			X				
Glenn County			X				
Placer County (portion)			X				
Sacramento County			X				
Shasta County			X				
Sutter and Yuba Counties			X				
Remainder of Air Basin		X					

(1) California Code of Regulations, title 17, section 60200(b)

(2) California Code of Regulations, title 17, section 60200(c)

(3) California Code of Regulations, title 17, section 60200(a)

FIGURE 4

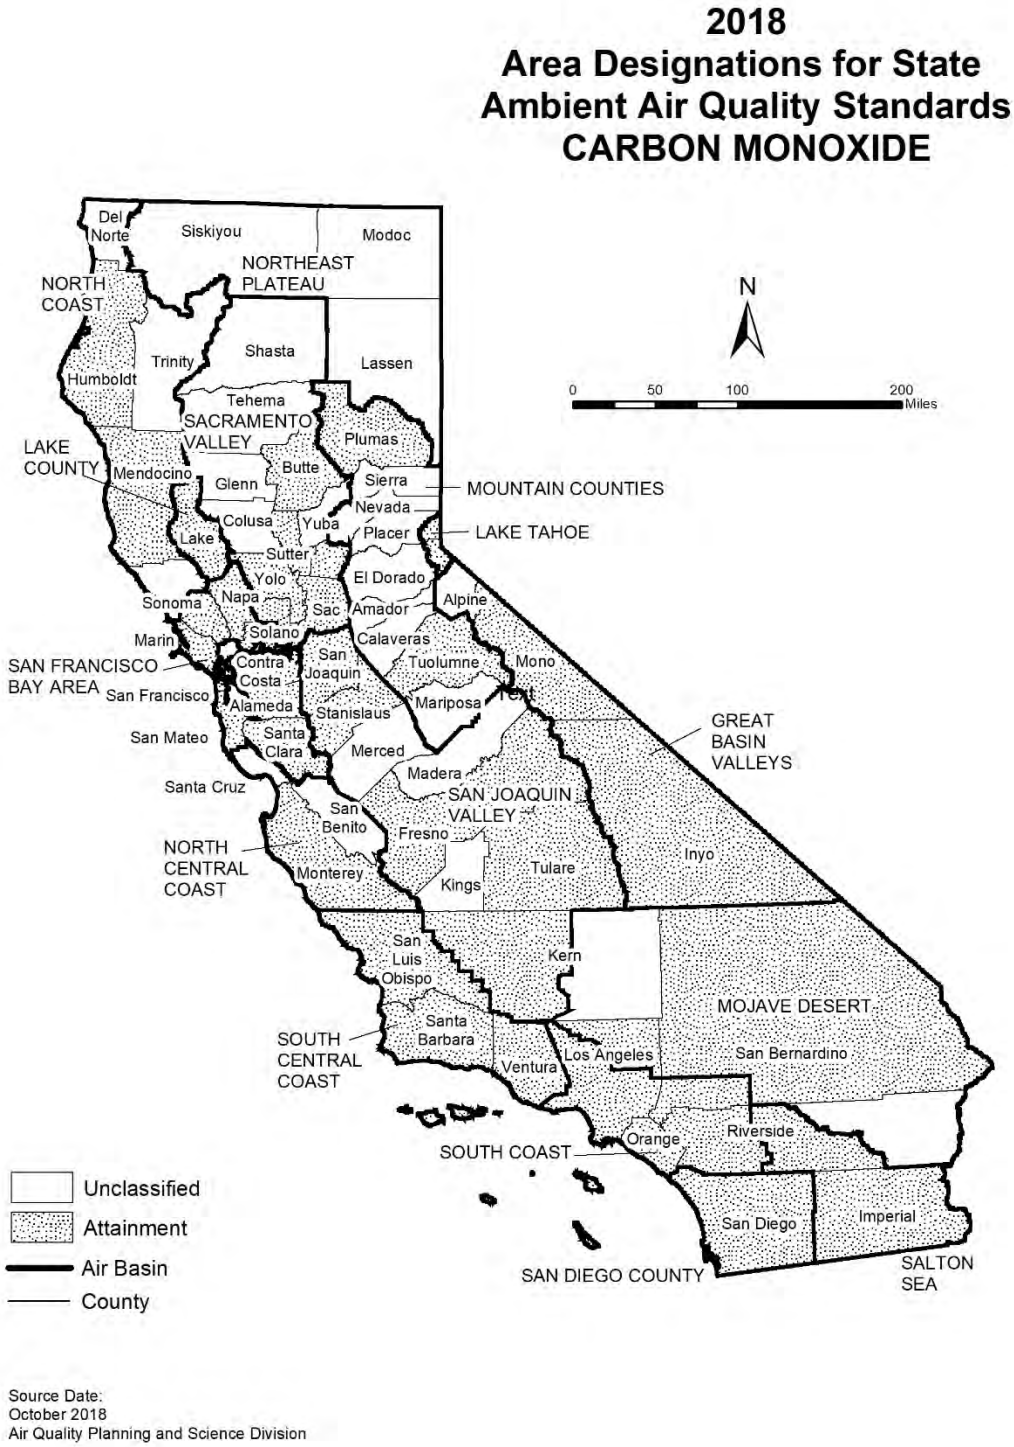

Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 4

California Ambient Air Quality Standards
Area Designation for Carbon Monoxide*

	N	NA-T	U	A		N	NA-T	U	A
GREAT BASIN VALLEYS AIR BASIN					SACRAMENTO VALLEY AIR BASIN				
Alpine County			X		Butte County				X
Inyo County				X	Colusa County			X	
Mono County				X	Glenn County			X	
LAKE COUNTY AIR BASIN				X	Placer County (portion)				X
LAKE TAHOE AIR BASIN				X	Sacramento County				X
MOJAVE DESERT AIR BASIN					Shasta County			X	
Kern County (portion)			X		Solano County (portion)				X
Los Angeles County (portion)				X	Sutter County				X
Riverside County (portion)			X		Tehama County			X	
San Bernardino County (portion)				X	Yolo County				X
MOUNTAIN COUNTIES AIR BASIN					Yuba County			X	
Amador County			X		SALTON SEA AIR BASIN				X
Calaveras County			X		SAN DIEGO AIR BASIN				X
El Dorado County (portion)			X		SAN FRANCISCO BAY AREA AIR BASIN				X
Mariposa County			X		SAN JOAQUIN VALLEY AIR BASIN				
Nevada County			X		Fresno County				X
Placer County (portion)			X		Kern County (portion)				X
Plumas County				X	Kings County			X	
Sierra County			X		Madera County			X	
Tuolumne County				X	Merced County			X	
NORTH CENTRAL COAST AIR BASIN					San Joaquin County				X
Monterey County				X	Stanislaus County				X
San Benito County			X		Tulare County				X
Santa Cruz County			X		SOUTH CENTRAL COAST AIR BASIN				X
NORTH COAST AIR BASIN					SOUTH COAST AIR BASIN				X
Del Norte County			X						
Humboldt County				X					
Mendocino County				X					
Sonoma County (portion)			X						
Trinity County			X						
NORTHEAST PLATEAU AIR BASIN			X						

* The area designated for carbon monoxide is a county or portion of a county

FIGURE 5



Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 5

California Ambient Air Quality Standards
Area Designation for Nitrogen Dioxide

	N	U	A		N	U	A
GREAT BASIN VALLEYS AIR BASIN			X	SACRAMENTO VALLEY AIR BASIN			X
LAKE COUNTY AIR BASIN			X	SALTON SEA AIR BASIN			X
LAKE TAHOE AIR BASIN			X	SAN DIEGO AIR BASIN			X
MOJAVE DESERT AIR BASIN			X	SAN FRANCISCO BAY AREA AIR BASIN			X
MOUNTAIN COUNTIES AIR BASIN			X	SAN JOAQUIN VALLEY AIR BASIN			X
NORTH CENTRAL COAST AIR BASIN			X	SOUTH CENTRAL COAST AIR BASIN			X
NORTH COAST AIR BASIN			X	SOUTH COAST AIR BASIN			
NORTHEAST PLATEAU AIR BASIN			X	CA 60 Near-road Portion of San Bernardino, Riverside, and Los Angeles Counties	X		
				Remainder of Air Basin			X

FIGURE 6



Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 6

California Ambient Air Quality Standards
Area Designation for Sulfur Dioxide*

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SACRAMENTO VALLEY AIR BASIN		X
LAKE COUNTY AIR BASIN		X	SALTON SEA AIR BASIN		X
LAKE TAHOE AIR BASIN		X	SAN DIEGO AIR BASIN		X
MOJAVE DESERT AIR BASIN		X	SAN FRANCISCO BAY AREA AIR BASIN		X
MOUNTAIN COUNTIES AIR BASIN		X	SAN JOAQUIN VALLEY AIR BASIN		X
NORTH CENTRAL COAST AIR BASIN		X	SOUTH CENTRAL COAST AIR BASIN		X
NORTH COAST AIR BASIN		X	SOUTH COAST AIR BASIN		X
NORTHEAST PLATEAU AIR BASIN		X			

* The area designated for sulfur dioxide is a county or portion of a county

FIGURE 7



Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 7

California Ambient Air Quality Standards
Area Designation for Sulfates

	N	U	A		N	U	A
GREAT BASIN VALLEYS AIR BASIN			X	SACRAMENTO VALLEY AIR BASIN			X
LAKE COUNTY AIR BASIN			X	SALTON SEA AIR BASIN			X
LAKE TAHOE AIR BASIN			X	SAN DIEGO AIR BASIN			X
MOJAVE DESERT AIR BASIN			X	SAN FRANCISCO BAY AREA AIR BASIN			X
MOUNTAIN COUNTIES AIR BASIN			X	SAN JOAQUIN VALLEY AIR BASIN			X
NORTH CENTRAL COAST AIR BASIN			X	SOUTH CENTRAL COAST AIR BASIN			X
NORTH COAST AIR BASIN			X	SOUTH COAST AIR BASIN			X
NORTHEAST PLATEAU AIR BASIN			X				

FIGURE 8



Source Date:
October 2018
Air Quality Planning and Science Division


TABLE 8

California Ambient Air Quality Standards
Area Designations for Lead (particulate)*

	N	U	A		N	U	A
GREAT BASIN VALLEYS AIR BASIN			X	SALTON SEA AIR BASIN			X
LAKE COUNTY AIR BASIN			X	SAN DIEGO AIR BASIN			X
LAKE TAHOE AIR BASIN			X	SAN FRANCISCO BAY AREA AIR BASIN			X
MOJAVE DESERT AIR BASIN			X	SAN JOAQUIN VALLEY AIR BASIN			X
MOUNTAIN COUNTIES AIR BASIN			X	SOUTH CENTRAL COAST AIR BASIN			X
NORTH CENTRAL COAST AIR BASIN			X	SOUTH COAST AIR BASIN			X
NORTH COAST AIR BASIN			X				
NORTHEAST PLATEAU AIR BASIN			X				
SACRAMENTO VALLEY AIR BASIN			X				

* The area designated for lead is a county or portion of a county. Since all areas in the State are in attainment for this standard, air basins are indicated here for simplicity.

FIGURE 9

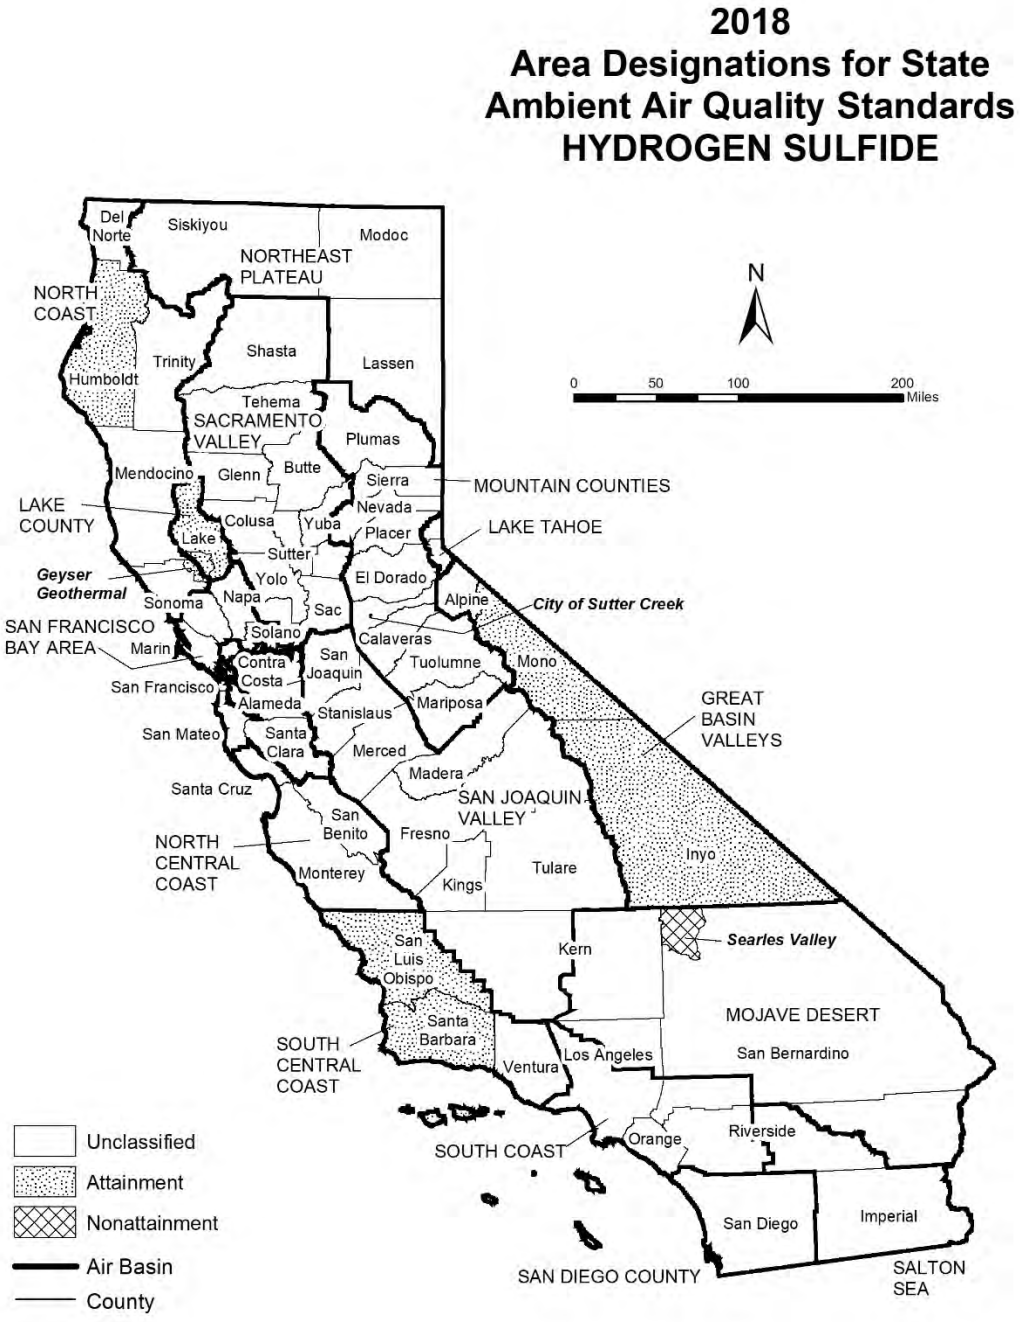

Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 9

California Ambient Air Quality Standards
Area Designation for Hydrogen Sulfide*

	N	NA-T	U	A		N	NA-T	U	A
GREAT BASIN VALLEYS AIR BASIN					NORTH CENTRAL COAST AIR BASIN			X	
Alpine County			X		NORTH COAST AIR BASIN				
Inyo County				X	Del Norte County			X	
Mono County				X	Humboldt County				X
LAKE COUNTY AIR BASIN				X	Mendocino County			X	
LAKE TAHOE AIR BASIN			X		Sonoma County (portion)				
MOJAVE DESERT AIR BASIN					- Geyser Geothermal Area (2)				X
Kern County (portion)			X		- Remainder of County			X	
Los Angeles County (portion)			X		Trinity County			X	
Riverside County (portion)			X		NORTHEAST PLATEAU AIR BASIN			X	
San Bernardino County (portion)					SACRAMENTO VALLEY AIR BASIN			X	
- Searles Valley Planning Area (1)	X				SALTON SEA AIR BASIN			X	
- Remainder of County			X		SAN DIEGO AIR BASIN			X	
MOUNTAIN COUNTIES AIR BASIN					SAN FRANCISCO BAY AREA AIR BASIN			X	
Amador County					SAN JOAQUIN VALLEY AIR BASIN			X	
- City of Sutter Creek	X				SOUTH CENTRAL COAST AIR BASIN				
- Remainder of County			X		San Luis Obispo County				X
Calaveras County			X		Santa Barbara County				X
El Dorado County (portion)			X		Ventura County			X	
Mariposa County			X		SOUTH COAST AIR BASIN			X	
Nevada County			X						
Placer County (portion)			X						
Plumas County			X						
Sierra County			X						
Tuolumne County			X						

* The area designated for hydrogen sulfide is a county or portion of a county

(1) 52 Federal Register 29384 (August 7, 1987)

(2) California Code of Regulations, title 17, section 60200(d)

FIGURE 10



Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 10

California Ambient Air Quality Standards
Area Designation for Visibility Reducing Particles

	N	NA-T	U	A		N	NA-T	U	A
GREAT BASIN VALLEYS AIR BASIN			X		SACRAMENTO VALLEY AIR BASIN			X	
LAKE COUNTY AIR BASIN				X	SALTON SEA AIR BASIN			X	
LAKE TAHOE AIR BASIN			X		SAN DIEGO AIR BASIN			X	
MOJAVE DESERT AIR BASIN			X		SAN FRANCISCO BAY AREA AIR BASIN			X	
MOUNTAIN COUNTIES AIR BASIN			X		SAN JOAQUIN VALLEY AIR BASIN			X	
NORTH CENTRAL COAST AIR BASIN			X		SOUTH CENTRAL COAST AIR BASIN			X	
NORTH COAST AIR BASIN			X		SOUTH COAST AIR BASIN			X	
NORTHEAST PLATEAU AIR BASIN			X						

Area Designations for the National Ambient Air Quality Standards

The following maps and tables show the area designations for each pollutant with a national ambient air quality standard. Additional information about the federal area designations is available on the U.S. EPA website:

https://www.epa.gov/green-book

Over the last several years, U.S. EPA has been reviewing the levels of the various national standards. The agency has already promulgated new standard levels for some pollutants and is considering revising the levels for others. Information about the status of these reviews is available on the U.S. EPA website:

https://www.epa.gov/criteria-air-pollutants

Designation Categories

Suspended Particulate Matter (PM_{10}). The U.S. EPA uses three categories to designate areas with respect to PM_{10}:

- Attainment
- Nonattainment
- Unclassifiable

Ozone, Fine Suspended Particulate Matter ($PM_{2.5}$), Carbon Monoxide (CO), and Nitrogen Dioxide (NO_2). The U.S. EPA uses two categories to designate areas with respect to these standards:

- Nonattainment
- Unclassifiable/Attainment

The national 1-hour ozone standard was revoked effective June 15, 2005, and the area designations map reflects the 2015 national 8-hour ozone standard of 0.070 ppm. Original designations were finalized on August 3, 2018.

On December 14, 2012, the U.S. EPA established a new national annual primary $PM_{2.5}$ standard of 12.0 $\mu g/m^3$. New area designations reflecting this revised standard became final in December 2014. The current designation map reflects the most recently revised (2012) annual average standard of 12.0 $\mu g/m^3$ as well as the 24-hour standard of 35 $\mu g/m^3$, revised in 2006.

On January 22, 2010, the U.S. EPA established a new national 1-hour NO_2 standard of 100 parts per billion (ppb) and retained the annual average standard of 53 ppb. Designations for the primary NO_2 standard became effective on February 29, 2012. All areas of California meet this standard.

Sulfur Dioxide (SO_2). The U.S. EPA uses three categories to designate areas with respect to the 24-hour and annual average sulfur dioxide standards. These designation categories are:

- Nonattainment,
- Unclassifiable, and
- Attainment/Unclassifiable.

On June 2, 2010, the U.S. EPA established a new primary 1-hour SO_2 standard of 75 parts per billion (ppb). At the same time, U.S. EPA revoked the 24-hour and annual

average standards. Area designations for the 1-hour SO_2 standard were finalized on December 21, 2017 and are reflected in the area designations map.

Lead (particulate). The U.S. EPA promulgated a new rolling 3-month average lead standard in October 2008 of 0.15 µg/m^3. Designations were made for this standard in November 2010.

Designation Areas

From time to time, the boundaries of the California air basins have been changed to facilitate the planning process. CARB generally initiates these changes, and they are not always reflected in the U.S. EPA's area designations. For purposes of consistency, the maps in this attachment reflect area designation boundaries and nomenclature as promulgated by the U.S. EPA. In some cases, these may not be the same as those adopted by CARB. For example, the national area designations reflect the former Southeast Desert Air Basin. In accordance with Health and Safety Code section 39606.1, CARB redefined this area in 1996 to be the Mojave Desert Air Basin and Salton Sea Air Basin. The definitions and boundaries for all areas designated for the national standards can be found in Title 40, Code of Federal Regulations (CFR), Chapter I, Subchapter C, Part 81.305. They are available on the web at:

https://ecfr.io/Title-40/se40.20.81_1305

FIGURE 11

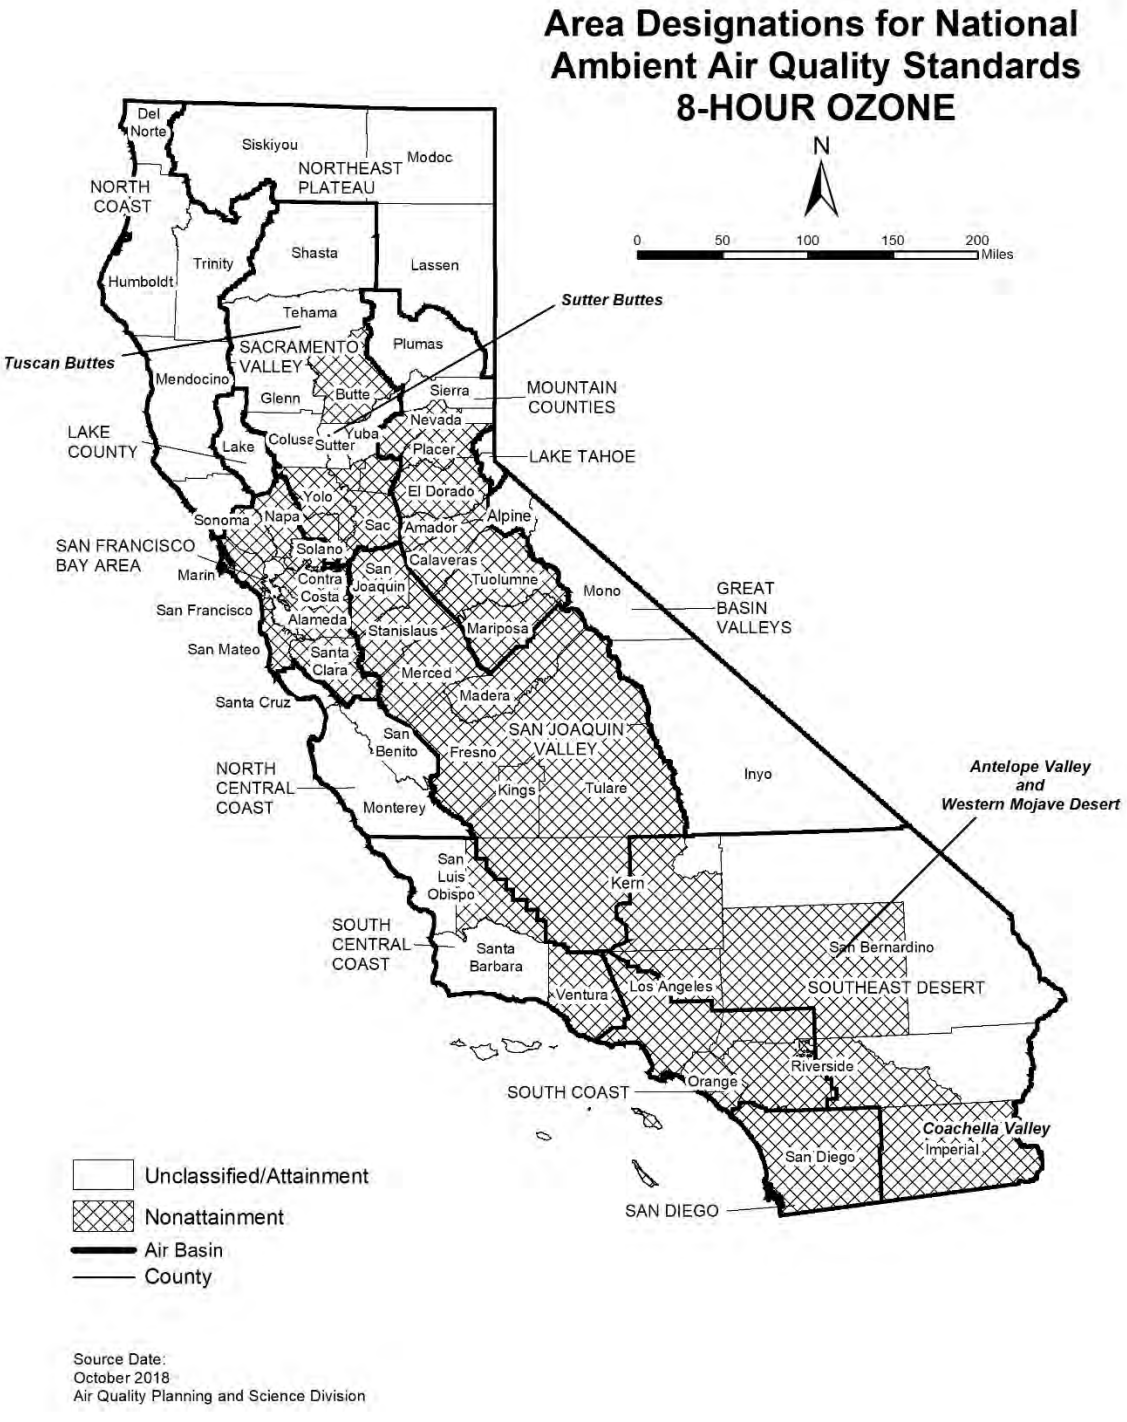

Area Designations for National Ambient Air Quality Standards
8-HOUR OZONE
N
0 50 100 150 200 Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Trinity
Shasta
Lassen
Humboldt
Tehama
Sutter Buttes
Tuscan Buttes
SACRAMENTO VALLEY
Plumas
Mendocino
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
Nevada
LAKE COUNTY
Lake
Colusa
Sutter
Yuba
Placer
LAKE TAHOE
Yolo
El Dorado
Sonoma
Napa
Sac
Amador
Alpine
SAN FRANCISCO BAY AREA
Solano
Marin
Contra Costa
San Joaquin
Calaveras
Tuolumne
Mono
GREAT BASIN VALLEYS
San Francisco
Alameda
Stanislaus
Mariposa
San Mateo
Santa Clara
Merced
Madera
Santa Cruz
San Benito
SAN JOAQUIN VALLEY
Fresno
Inyo
NORTH CENTRAL COAST
Kings
Tulare
Antelope Valley and Western Mojave Desert
Monterey
San Luis Obispo
Kern
SOUTH CENTRAL COAST
Santa Barbara
San Bernardino
Ventura
Los Angeles
SOUTHEAST DESERT
Riverside
Orange
SOUTH COAST
Coachella Valley
Imperial
San Diego
SAN DIEGO
Unclassified/Attainment
Nonattainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 11

National Ambient Air Quality Standards
Area Designations for 8-Hour Ozone*

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SACRAMENTO VALLEY AIR BASIN (cont.)		
LAKE COUNTY AIR BASIN		X	Yolo County (2)	X	
LAKE TAHOE AIR BASIN		X	Yuba County		X
MOUNTAIN COUNTIES AIR BASIN			SAN DIEGO COUNTY	X	
Amador County	X		SAN FRANCISCO BAY AREA AIR BASIN	X	
Calaveras County	X		SAN JOAQUIN VALLEY AIR BASIN	X	
El Dorado County (portion) (2)	X		SOUTH CENTRAL COAST AIR BASIN (1)		
Mariposa County	X		San Luis Obispo County		
Nevada County			- Eastern San Luis Obispo County	X	
- Western Nevada County	X		- Remainder of County		X
- Remainder of County		X	Santa Barbara County		X
Placer County (portion) (2)	X		Ventura County		
Plumas County		X	- Area excluding Anacapa and San Nicolas Islands	X	
Sierra County		X	- Channel Islands (1)		X
Tuolumne County	X		SOUTH COAST AIR BASIN (1)	X	
NORTH CENTRAL COAST AIR BASIN		X	SOUTHEAST DESERT AIR BASIN		
NORTH COAST AIR BASIN		X	Kern County (portion)	X	
NORTHEAST PLATEAU AIR BASIN		X	- Indian Wells Valley		X
SACRAMENTO VALLEY AIR BASIN			Imperial County	X	
Butte County	X		Los Angeles County (portion)	X	
Colusa County		X	Riverside County (portion)		
Glenn County		X	- Coachella Valley	X	
Sacramento Metro Area (2)	X		- Non-AQMA portion		X
Shasta County		X	San Bernardino County		
Sutter County			- Western portion (AQMA)	X	
- Sutter Buttes	X		- Eastern portion (non-AQMA)		X
- Southern portion of Sutter County (2)	X				
- Remainder of Sutter County		X			
Tehama County					
- Tuscan Buttes	X				
- Remainder of Tehama County		X			

* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

NOTE: This map and table reflect the 2015 8-hour ozone standard of 0.070 ppm.

(1) South Central Coast Air Basin Channel Islands:
Santa Barbara County includes Santa Cruz, San Miguel, Santa Rosa, and Santa Barbara Islands.
Ventura County includes Anacapa and San Nicolas Islands.

South Coast Air Basin:
Los Angeles County includes San Clemente and Santa Catalina Islands.

(2) For this purpose, the Sacramento Metro Area comprises all of Sacramento and Yolo Counties, the Sacramento Valley Air Basin portion of Solano County, the southern portion of Sutter County, and the Sacramento Valley and Mountain Counties Air Basins portions of Placer and El Dorado counties.

FIGURE 12


Area Designations for National Ambient Air Quality Standards PM10
N
0 50 100 150 200 Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Shasta
Lassen
Trinity
Humboldt
Tehema
SACRAMENTO VALLEY
Plumas
Mendocino
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
Nevada
LAKE COUNTY
Colusa
Yuba
Placer
LAKE TAHOE
Lake
Sutter
Yolo
El Dorado
Alpine
Sacramento County
Sonoma
Napa
Sac
Amador
Mono
Mono Basin
SAN FRANCISCO BAY AREA
Marin
Solano
Calaveras
Contra Costa
San Joaquin
Tuolumne
Mammoth Lake
GREAT BASIN VALLEYS
San Francisco
Alameda
Stanislaus
Mariposa
San Mateo
Santa Clara
Merced
Madera
Inyo
Santa Cruz
San Benito
Fresno
SAN JOAQUIN VALLEY
Owens Valley
Coso Junction
Trona
NORTH CENTRAL COAST
Monterey
Kings
Tulare
San Luis Obispo
Kern
Indian Wells Valley
San Bernardino
SOUTH CENTRAL COAST
Santa Barbara
Ventura
Los Angeles
SOUTHEAST DESERT
Riverside
Coachella Valley
Orange
SOUTH COAST
Imperial
San Diego
SAN DIEGO COUNTY
Unclassified
Attainment
Nonattainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 12

National Ambient Air Quality Standards
Area Designations for Suspended Particulate Matter (PM10)*

	N	U	A		N	U	A
GREAT BASIN VALLEYS AIR BASIN				SAN DIEGO COUNTY		X	
Alpine County		X		SAN FRANCISCO BAY AREA AIR BASIN		X	
Inyo County				SAN JOAQUIN VALLEY AIR BASIN			X
- Owens Valley Planning Area	X			SOUTH CENTRAL COAST AIR BASIN		X	
- Coso Junction			X	SOUTH COAST AIR BASIN			X
- Remainder of County		X		SOUTHEAST DESERT AIR BASIN			
Mono County				Eastern Kern County			
- Mammoth Lake Planning Area			X	- Indian Wells Valley			X
- Mono Lake Basin	X			- Portion within San Joaquin Valley Planning Area	X		
- Remainder of County		X		- Remainder of County		X	
LAKE COUNTY AIR BASIN		X		Imperial County			
LAKE TAHOE AIR BASIN		X		- Imperial Valley Planning Area	X		
MOUNTAIN COUNTIES AIR BASIN				- Remainder of County		X	
Placer County (portion) (2)		X		Los Angeles County (portion)		X	
Remainder of Air Basin		X		Riverside County (portion)			
NORTH CENTRAL COAST AIR BASIN		X		- Coachella Valley (3)	X		
NORTH COAST AIR BASIN		X		- Non-AQMA portion		X	
NORTHEAST PLATEAU AIR BASIN		X		San Bernardino County			
SACRAMENTO VALLEY AIR BASIN				- Trona	X		
Butte County		X		- Remainder of County	X		
Colusa County		X					
Glenn County		X					
Placer County (portion) (2)		X					
Sacramento County (1)			X				
Shasta County		X					
Solano County (portion)		X					
Sutter County		X					
Tehama County		X					
Yolo County		X					
Yuba County		X					

* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.
(1) Air quality in Sacramento County meets the national PM10 standards. The request for redesignation to attainment was approved by U.S. EPA in September 2013.
(2) U.S. EPA designation puts the Sacramento Valley Air Basin portion of Placer County in the Mountain Counties Air Basin.
(3) Air quality in Coachella Valley meets the national PM10 standards. A request for redesignation to attainment has been submitted to U.S. EPA.

FIGURE 13


Area Designations for National Ambient Air Quality Standards PM2.5
N
0 50 100 150 200 Miles
Del Norte
Siskiyou
Modoc
NORTH COAST
NORTHEAST PLATEAU
Humboldt
Trinity
Shasta
Lassen
Tehama
SACRAMENTO VALLEY
Plumas
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
Mendocino
Nevada
LAKE COUNTY
Colusa
Yuba
Placer
Lake
Sutter
LAKE TAHOE
El Dorado
Yolo
Sonoma
Napa
Sacramento
Alpine
Amador
Solano
Calaveras
SAN FRANCISCO BAY AREA
Marin
Tuolumne
GREAT BASIN VALLEYS
Contra Costa
San Joaquin
Mono
Alameda
Stanislaus
Mariposa
San Mateo
Santa Clara
Merced
Madera
Santa Cruz
Fresno
NORTH CENTRAL COAST
San Benito
SAN JOAQUIN VALLEY
Inyo
Tulare
Monterey
Kings
San Luis Obispo
Kern
SOUTH CENTRAL COAST
Santa Barbara
San Bernardino
SOUTHEAST DESERT
Ventura
Los Angeles
Orange
Riverside
SOUTH COAST
San Diego
Imperial
SAN DIEGO COUNTY
Unclassified/Attainment
Nonattainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 13

National Ambient Air Quality Standards
Area Designations for Fine Particulate Matter (PM2.5)*

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SAN DIEGO COUNTY		X
LAKE COUNTY AIR BASIN		X	SAN FRANCISCO BAY AREA AIR BASIN (2)	X	
LAKE TAHOE AIR BASIN		X	SAN JOAQUIN VALLEY AIR BASIN	X	
MOUNTAIN COUNTIES AIR BASIN			SOUTH CENTRAL COAST AIR BASIN		X
Plumas County			SOUTH COAST AIR BASIN (3)	X	
- Portola Valley Portion of Plumas	X		SOUTHEAST DESERT AIR BASIN		
- Remainder of Plumas County		X	Imperial County (portion) (4)	X	
Remainder of Air Basin		X	Remainder of Air Basin		X
NORTH CENTRAL COAST AIR BASIN		X			
NORTH COAST AIR BASIN		X			
NORTHEAST PLATEAU AIR BASIN		X			
SACRAMENTO VALLEY AIR BASIN					
Sacramento Metro Area (1)	X				
Sutter County		X			
Yuba County (portion)		X			
Remainder of Air Basin		X			

* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305. This map reflects the 2006 24-hour PM2.5 standard as well as the 1997 and 2012 PM2.5 annual standards.

(1) For this purpose, Sacramento Metro Area comprises all of Sacramento and portions of El Dorado, Placer, Solano, and Yolo Counties. Air quality in this area meets the national PM2.5 standards. A Determination of Attainment for the 2006 24-hour PM2.5 standard was made by U.S. EPA in June 2017.

(2) Air quality in this area meets the national PM2.5 standards. A Determination of Attainment for the 2006 24-hour PM2.5 standard was made by U.S. EPA in June 2017.

(3) Those lands of the Santa Rosa Band of Cahulla Mission Indians in Riverside County are designated Unclassifiable/Attainment.

(4) That portion of Imperial County encompassing the urban and surrounding areas of Brawley, Calexico, El Centro, Heber, Holtville, Imperial, Seeley, and Westmorland. Air quality in this area meets the national PM2.5 standards. A Determination of Attainment for the 2006 24-hour PM2.5 standard was made by U.S. EPA in June 2017.

FIGURE 14


Area Designations for National Ambient Air Quality Standards
CARBON MONOXIDE
N
0 50 100 150 200 Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Shasta
Trinity
Lassen
Humboldt
Tehama
SACRAMENTO VALLEY
Plumas
Mendocino
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
Nevada
Colusa
Lake
Sutter
Yuba
Placer
LAKE TAHOE
LAKE COUNTY
Yolo
El Dorado
Napa
Alpine
Sonoma
Sac
Amador
SAN FRANCISCO BAY AREA
Solano
Calaveras
Marin
San Joaquin
Contra Costa
Tuolumne
Mono
GREAT BASIN VALLEYS
San Francisco
Alameda
Stanislaus
Mariposa
San Mateo
Santa Clara
Merced
Santa Cruz
Madera
SAN JOAQUIN VALLEY
San Benito
Fresno
NORTH CENTRAL COAST
Inyo
Tulare
Monterey
Kings
San Luis Obispo
Kern
SOUTH CENTRAL COAST
SOUTHEAST DESERT
Santa Barbara
Ventura
Los Angeles
San Bernardino
Riverside
Orange
SOUTH COAST
San Diego
Imperial
SAN DIEGO COUNTY
Unclassified/Attainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 14

National Ambient Air Quality Standards
Area Designations for Carbon Monoxide*

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SACRAMENTO VALLEY AIR BASIN		X
LAKE COUNTY AIR BASIN		X	SAN DIEGO COUNTY		X
LAKE TAHOE AIR BASIN		X	SAN FRANCISCO BAY AREA AIR BASIN		X
MOUNTAIN COUNTIES AIR BASIN		X	SAN JOAQUIN VALLEY AIR BASIN		X
NORTH CENTRAL COAST AIR BASIN		X	SOUTH CENTRAL COAST AIR BASIN		X
NORTH COAST AIR BASIN		X	SOUTH COAST AIR BASIN		X
NORTHEAST PLATEAU AIR BASIN		X	SOUTHEAST DESERT AIR BASIN		X

* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

FIGURE 15


Area Designations for National Ambient Air Quality Standards
NITROGEN DIOXIDE
N
0 50 100 150 200 Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Trinity
Shasta
Lassen
Humboldt
Tehema
Plumas
SACRAMENTO VALLEY
Mendocino
Glenn
Butte
Sierra
Nevada
MOUNTAIN COUNTIES
Colusa
Yuba
Placer
LAKE COUNTY
Lake
Sutter
LAKE TAHOE
Yolo
El Dorado
Napa
Alpine
Sonoma
Sac
Amador
SAN FRANCISCO BAY AREA
Solano
Marin
Calaveras
Contra Costa
San Joaquin
Tuolumne
Mono
GREAT BASIN VALLEYS
San Francisco
Alameda
Stanislaus
Mariposa
San Mateo
Santa Clara
Merced
Santa Cruz
Madera
SAN JOAQUIN VALLEY
San Benito
Fresno
NORTH CENTRAL COAST
Tulare
Inyo
Monterey
Kings
San Luis Obispo
Kern
SOUTH CENTRAL COAST
Santa Barbara
SOUTHEAST DESERT
Los Angeles
San Bernardino
Ventura
Riverside
Orange
SOUTH COAST
San Diego
Imperial
SAN DIEGO COUNTY
Unclassified/Attainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 15

National Ambient Air Quality Standards
Area Designations for Nitrogen Dioxide*

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SACRAMENTO VALLEY AIR BASIN		X
LAKE COUNTY AIR BASIN		X	SAN DIEGO COUNTY		X
LAKE TAHOE AIR BASIN		X	SAN FRANCISCO BAY AREA AIR BASIN		X
MOUNTAIN COUNTIES AIR BASIN		X	SAN JOAQUIN VALLEY AIR BASIN		X
NORTH CENTRAL COAST AIR BASIN		X	SOUTH CENTRAL COAST AIR BASIN		X
NORTH COAST AIR BASIN		X	SOUTH COAST AIR BASIN		X
NORTHEAST PLATEAU AIR BASIN		X	SOUTHEAST DESERT AIR BASIN		X

* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

FIGURE 16



Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 16

National Ambient Air Quality Standards
Area Designations for Sulfur Dioxide*

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SOUTH CENTRAL COAST AIR BASIN		
LAKE COUNTY AIR BASIN		X	San Luis Obispo County		X
LAKE TAHOE AIR BASIN		X	Santa Barbara County		X
MOUNTAIN COUNTIES AIR BASIN		X	Ventura County		X
NORTH CENTRAL COAST AIR BASIN		X	Channel Islands (1)		X
NORTH COAST AIR BASIN		X	SOUTH COAST AIR BASIN		X
NORTHEAST PLATEAU AIR BASIN		X	SOUTHEAST DESERT AIR BASIN		
SACRAMENTO VALLEY AIR BASIN		X	Imperial County		X
SAN DIEGO COUNTY		X	Remainder of Air Basin		X
SAN FRANCISCO BAY AREA AIR BASIN		X			
SAN JOAQUIN VALLEY AIR BASIN					
Fresno County		X			
Kern County (portion)		X			
Kings County		X			
Madera County		X			
Merced County		X			
San Joaquin County		X			
Stanislaus County		X			
Tulare County		X			

* Definitions and references for all areas can be found in 40 CFR, Chapter I, Part 81.305.

NOTE: This map and table reflect the 2010 1-hour SO_2 standard of 75 ppb.

(1) South Central Coast Air Basin Channel Islands:

Santa Barbara County includes Santa Cruz, San Miguel, Santa Rosa, and Santa Barbara Islands.

Ventura County includes Anacapa and San Nicolas Islands.

Note that the San Clemente and Santa Catalina Islands are considered part of Los Angeles County, and therefore, are included as part of the South Coast Air Basin.

FIGURE 17


Area Designations for National Ambient Air Quality Standards
LEAD
N
0 50 100 150 200
Miles
Del Norte
Siskiyou
Modoc
NORTHEAST PLATEAU
NORTH COAST
Shasta
Lassen
Trinity
Humboldt
Tehama
SACRAMENTO VALLEY
Plumas
Mendocino
Glenn
Butte
Sierra
MOUNTAIN COUNTIES
Nevada
Colusa
Lake
Sutter
Yuba
Placer
LAKE TAHOE
LAKE COUNTY
Yolo
El Dorado
Napa
Alpine
Sonoma
Sac
Amador
SAN FRANCISCO BAY AREA
Solano
Calaveras
Marin
San Joaquin
Contra Costa
Tuolumne
Mono
GREAT BASIN VALLEYS
San Francisco
Alameda
Stanislaus
Mariposa
San Mateo
Santa Clara
Merced
Santa Cruz
Madera
SAN JOAQUIN VALLEY
San Benito
Fresno
NORTH CENTRAL COAST
Inyo
Tulare
Monterey
Kings
San Luis Obispo
Kern
SOUTH CENTRAL COAST
SOUTHEAST DESERT
Santa Barbara
Ventura
Los Angeles
San Bernardino
Riverside
Orange
SOUTH COAST
San Diego
Imperial
SAN DIEGO COUNTY
Unclassified/Attainment
Nonattainment
Air Basin
County
Source Date:
October 2018
Air Quality Planning and Science Division

TABLE 17

National Ambient Air Quality Standards
Area Designations for Lead (particulate)

	N	U/A		N	U/A
GREAT BASIN VALLEYS AIR BASIN		X	SAN DIEGO COUNTY		X
LAKE COUNTY AIR BASIN		X	SAN FRANCISCO BAY AREA AIR BASIN		X
LAKE TAHOE AIR BASIN		X	SAN JOAQUIN VALLEY AIR BASIN		X
MOUNTAIN COUNTIES AIR BASIN		X	SOUTH CENTRAL COAST AIR BASIN		X
NORTH CENTRAL COAST AIR BASIN		X	SOUTH COAST AIR BASIN		
NORTH COAST AIR BASIN		X	Los Angeles County (portion) (1)	X	
NORTHEAST PLATEAU AIR BASIN		X	Remainder of Air Basin		X
SACRAMENTO VALLEY AIR BASIN		X	SOUTHEAST DESERT AIR BASIN		X

(1) Portion of County in Air Basin, not including Channel Islands

APPENDIX 3.1:

CALEEMOD PHASE 1 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS

This page intentionally left blank

14267-Phase 1 Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

1.2. Land Use Types

1.3. User-Selected Emission Reduction Measures by Emissions Sector

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

2.2. Construction Emissions by Year, Unmitigated

2.3. Construction Emissions by Year, Mitigated

2.4. Operations Emissions Compared Against Thresholds

2.5. Operations Emissions by Sector, Unmitigated

2.6. Operations Emissions by Sector, Mitigated

3. Construction Emissions Details

3.1. Site Preparation (2024) - Unmitigated

3.2. Site Preparation (2024) - Mitigated

3.3. Grading (2024) - Unmitigated

3.4. Grading (2024) - Mitigated

3.5. Building Construction (2024) - Unmitigated

3.6. Building Construction (2024) - Mitigated

3.7. Building Construction (2025) - Unmitigated

3.8. Building Construction (2025) - Mitigated

3.9. Paving (2025) - Unmitigated

3.10. Paving (2025) - Mitigated

3.11. Architectural Coating (2025) - Unmitigated

3.12. Architectural Coating (2025) - Mitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.1.2. Mitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.2. Electricity Emissions By Land Use - Mitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.2.4. Natural Gas Emissions By Land Use - Mitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.3.2. Mitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.4.2. Mitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.5.2. Mitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.6.2. Mitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.7.2. Mitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.8.2. Mitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.9.2. Mitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.2.2. Mitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.3.2. Mitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.9.2. Mitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.10.4. Landscape Equipment - Mitigated

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.11.2. Mitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.12.2. Mitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

5.18.2.2. Mitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	14267-Phase 1
Construction Start Date	6/3/2024
Operational Year	2025
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.640323, -118.119931
County	Los Angeles-Mojave Desert
City	Palmdale
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3655
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.20

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description

General Heavy Industry	103	1000sqft	2.37	103,418	0.00	—	—	General Light Industrial
Manufacturing	68.7	1000sqft	1.58	68,715	0.00	—	—	Manufacturing
Unrefrigerated Warehouse-No Rail	516	1000sqft	11.9	516,396	0.00	—	—	Warehousing
Unrefrigerated Warehouse-No Rail	753	1000sqft	17.3	753,171	496,369	—	—	High-Cube Fulfillment (Non-Sort)
Unrefrigerated Warehouse-No Rail	680	1000sqft	15.6	680,469	0.00	—	—	High-Cube Fulfillment (Sort)
Refrigerated Warehouse-No Rail	251	1000sqft	5.76	251,057	0.00	—	—	High-Cube Cold Storage Warehouse
Parking Lot	2,339	Space	15.1	0.00	0.00	—	—	—
Other Asphalt Surfaces	45.9	Acre	45.9	0.00	0.00	—	—	—
User Defined Industrial	2,373	User Defined Unit	0.00	0.00	0.00	—	—	Passenger Vehicle Trips

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-5	Use Advanced Engine Tiers
Construction	C-13	Use Low-VOC Paints for Construction
Area Sources	LL-1	Replace Gas Powered Landscape Equipment with Zero-Emission Landscape Equipment
Area Sources	AS-2	Use Low-VOC Paints

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	12.5	381	89.6	162	0.17	3.89	18.3	20.0	3.58	4.65	8.18	—	31,816	31,816	0.99	1.81	94.9	32,474
Mit.	12.5	92.6	73.0	162	0.17	3.84	18.3	20.0	3.53	4.65	8.18	—	31,816	31,816	0.99	1.81	94.9	32,474
% Reduced	—	76%	19%	—	—	1%	—	—	1%	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	10.9	9.21	89.8	93.9	0.17	3.89	15.4	16.6	3.58	3.70	5.89	—	24,613	24,613	0.81	1.74	2.24	25,155
Mit.	8.98	7.96	48.3	93.9	0.17	1.26	15.4	16.6	1.17	3.70	4.87	—	24,613	24,613	0.81	1.74	2.24	25,155
% Reduced	18%	14%	46%	—	—	68%	—	—	67%	—	17%	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	5.40	44.9	29.8	60.5	0.06	1.31	9.37	10.1	1.21	2.25	2.90	—	15,108	15,108	0.49	1.01	21.6	15,443
Mit.	5.40	13.3	21.3	60.5	0.06	0.70	9.37	10.1	0.65	2.25	2.90	—	15,108	15,108	0.49	1.01	21.6	15,443
% Reduced	—	70%	29%	—	—	46%	—	—	46%	—	—	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.98	8.20	5.44	11.0	0.01	0.24	1.71	1.84	0.22	0.41	0.53	—	2,501	2,501	0.08	0.17	3.58	2,557
Mit.	0.98	2.42	3.88	11.0	0.01	0.13	1.71	1.84	0.12	0.41	0.53	—	2,501	2,501	0.08	0.17	3.58	2,557
% Reduced	—	70%	29%	—	—	46%	—	—	46%	—	—	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	11.0	9.24	89.6	75.3	0.17	3.89	10.1	14.0	3.58	4.65	8.18	—	19,742	19,742	0.70	0.53	9.53	19,926
2025	12.5	381	48.0	162	0.13	1.72	18.3	20.0	1.59	4.39	5.98	—	31,816	31,816	0.99	1.81	94.9	32,474
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	10.9	9.21	89.8	93.9	0.17	3.89	15.4	16.6	3.58	3.70	5.89	—	24,613	24,613	0.81	1.74	2.24	25,155
2025	8.55	7.59	33.6	88.8	0.10	1.12	15.4	16.5	1.04	3.70	4.74	—	24,229	24,229	0.79	1.68	2.12	24,751
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	4.18	3.57	29.8	33.1	0.06	1.31	4.08	5.39	1.21	1.30	2.51	—	8,034	8,034	0.28	0.33	5.29	8,145
2025	5.40	44.9	21.3	60.5	0.06	0.70	9.37	10.1	0.65	2.25	2.90	—	15,108	15,108	0.49	1.01	21.6	15,443
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	0.76	0.65	5.44	6.04	0.01	0.24	0.74	0.98	0.22	0.24	0.46	—	1,330	1,330	0.05	0.06	0.88	1,349
2025	0.98	8.20	3.88	11.0	0.01	0.13	1.71	1.84	0.12	0.41	0.53	—	2,501	2,501	0.08	0.17	3.58	2,557

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	9.29	7.81	73.0	91.8	0.17	3.84	10.1	14.0	3.53	4.65	8.18	—	19,742	19,742	0.70	0.53	9.53	19,926
2025	12.5	92.6	48.0	162	0.13	1.72	18.3	20.0	1.59	4.39	5.98	—	31,816	31,816	0.99	1.81	94.9	32,474
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

2024	8.98	7.96	48.3	93.9	0.17	1.26	15.4	16.6	1.17	3.70	4.87	—	24,613	24,613	0.81	1.74	2.24	25,155
2025	8.55	7.59	33.6	88.8	0.10	1.12	15.4	16.5	1.04	3.70	4.74	—	24,229	24,229	0.79	1.68	2.12	24,751
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	2.28	2.05	20.7	36.7	0.06	0.54	4.08	4.62	0.51	1.30	1.81	—	8,034	8,034	0.28	0.33	5.29	8,145
2025	5.40	13.3	21.3	60.5	0.06	0.70	9.37	10.1	0.65	2.25	2.90	—	15,108	15,108	0.49	1.01	21.6	15,443
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	0.42	0.37	3.78	6.70	0.01	0.10	0.74	0.84	0.09	0.24	0.33	—	1,330	1,330	0.05	0.06	0.88	1,349
2025	0.98	2.42	3.88	11.0	0.01	0.13	1.71	1.84	0.12	0.41	0.53	—	2,501	2,501	0.08	0.17	3.58	2,557

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	70.7	119	183	637	2.32	3.78	129	132	3.61	33.2	36.8	2,282	259,615	261,897	236	27.5	1,104	277,102
Mit.	52.4	99.0	183	534	2.32	3.60	129	132	3.47	33.2	36.7	2,282	259,254	261,536	236	27.5	1,104	276,740
% Reduced	26%	17%	< 0.5%	16%	< 0.5%	5%	—	< 0.5%	4%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	49.4	99.2	193	415	2.23	3.60	129	132	3.47	33.2	36.7	2,282	250,288	252,570	237	27.7	294	267,032
Mit.	49.4	96.0	193	415	2.23	3.60	129	132	3.47	33.2	36.7	2,282	250,288	252,570	237	27.7	294	267,032
% Reduced	—	3%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unmit.	48.5	98.6	153	440	1.90	2.50	111	114	2.37	28.7	31.1	2,282	215,814	218,096	236	23.6	580	231,619
Mit.	39.5	87.1	153	389	1.90	2.41	111	114	2.30	28.7	31.0	2,282	215,636	217,918	236	23.6	580	231,440
% Reduced	19%	12%	< 0.5%	12%	< 0.5%	4%	—	< 0.5%	3%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	8.85	18.0	27.9	80.2	0.35	0.46	20.3	20.8	0.43	5.24	5.68	378	35,730	36,108	39.1	3.91	96.1	38,347
Mit.	7.20	15.9	27.9	70.9	0.35	0.44	20.3	20.8	0.42	5.24	5.66	378	35,701	36,079	39.1	3.91	96.1	38,318
% Reduced	19%	12%	< 0.5%	12%	< 0.5%	4%	—	< 0.5%	3%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	45.9	41.3	166	519	2.29	2.73	129	131	2.60	33.2	35.8	—	237,636	237,636	3.76	24.7	832	245,918
Area	18.4	71.9	0.87	103	0.01	0.18	—	0.18	0.14	—	0.14	—	424	424	0.02	< 0.005	—	426
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,482	15,482	1.47	0.18	—	15,571
Water	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Waste	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Stationary	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	70.7	119	183	637	2.32	3.78	129	132	3.61	33.2	36.8	2,282	259,615	261,897	236	27.5	1,104	277,102
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	42.9	38.3	176	400	2.20	2.73	129	131	2.60	33.2	35.8	—	228,733	228,733	3.90	24.9	21.6	236,273

Area	—	55.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,482	15,482	1.47	0.18	—	15,571
Water	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Waste	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Stationary	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	49.4	99.2	193	415	2.23	3.60	129	132	3.47	33.2	36.7	2,282	250,288	252,570	237	27.7	294	267,032
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	38.6	34.5	150	387	1.89	2.29	111	114	2.18	28.7	30.9	—	196,658	196,658	3.53	20.8	308	203,267
Area	9.05	63.3	0.43	50.9	< 0.005	0.09	—	0.09	0.07	—	0.07	—	209	209	0.01	< 0.005	—	210
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,482	15,482	1.47	0.18	—	15,571
Water	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Waste	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Stationary	0.89	0.81	2.26	2.06	< 0.005	0.12	0.00	0.12	0.12	0.00	0.12	0.00	414	414	0.02	< 0.005	0.00	415
Total	48.5	98.6	153	440	1.90	2.50	111	114	2.37	28.7	31.1	2,282	215,814	218,096	236	23.6	580	231,619
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	7.04	6.30	27.4	70.6	0.35	0.42	20.3	20.7	0.40	5.24	5.64	—	32,559	32,559	0.58	3.45	51.0	33,653
Area	1.65	11.6	0.08	9.29	< 0.005	0.02	—	0.02	0.01	—	0.01	—	34.7	34.7	< 0.005	< 0.005	—	34.8
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	2,563	2,563	0.24	0.03	—	2,578
Water	—	—	—	—	—	—	—	—	—	—	—	174	505	679	17.9	0.43	—	1,255
Waste	—	—	—	—	—	—	—	—	—	—	—	204	0.00	204	20.4	0.00	—	713
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	45.0	45.0
Stationary	0.16	0.15	0.41	0.38	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	68.5	68.5	< 0.005	< 0.005	0.00	68.8
Total	8.85	18.0	27.9	80.2	0.35	0.46	20.3	20.8	0.43	5.24	5.68	378	35,730	36,108	39.1	3.91	96.1	38,347

2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	45.9	41.3	166	519	2.29	2.73	129	131	2.60	33.2	35.8	—	237,636	237,636	3.76	24.7	832	245,918
Area	—	51.8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,545	15,545	1.47	0.18	—	15,635
Water	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Waste	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Stationary	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	52.4	99.0	183	534	2.32	3.60	129	132	3.47	33.2	36.7	2,282	259,254	261,536	236	27.5	1,104	276,740
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	42.9	38.3	176	400	2.20	2.73	129	131	2.60	33.2	35.8	—	228,733	228,733	3.90	24.9	21.6	236,273
Area	—	51.8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,482	15,482	1.47	0.18	—	15,571
Water	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Waste	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Stationary	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	49.4	96.0	193	415	2.23	3.60	129	132	3.47	33.2	36.7	2,282	250,288	252,570	237	27.7	294	267,032
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Mobile	38.6	34.5	150	387	1.89	2.29	111	114	2.18	28.7	30.9	—	196,658	196,658	3.53	20.8	308	203,267
Area	—	51.8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,513	15,513	1.47	0.18	—	15,603
Water	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Waste	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Stationary	0.89	0.81	2.26	2.06	< 0.005	0.12	0.00	0.12	0.12	0.00	0.12	0.00	414	414	0.02	< 0.005	0.00	415
Total	39.5	87.1	153	389	1.90	2.41	111	114	2.30	28.7	31.0	2,282	215,636	217,918	236	23.6	580	231,440
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	7.04	6.30	27.4	70.6	0.35	0.42	20.3	20.7	0.40	5.24	5.64	—	32,559	32,559	0.58	3.45	51.0	33,653
Area	—	9.45	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	2,568	2,568	0.24	0.03	—	2,583
Water	—	—	—	—	—	—	—	—	—	—	—	174	505	679	17.9	0.43	—	1,255
Waste	—	—	—	—	—	—	—	—	—	—	—	204	0.00	204	20.4	0.00	—	713
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	45.0	45.0
Stationary	0.16	0.15	0.41	0.38	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	68.5	68.5	< 0.005	< 0.005	0.00	68.8
Total	7.20	15.9	27.9	70.9	0.35	0.44	20.3	20.8	0.42	5.24	5.66	378	35,701	36,079	39.1	3.91	96.1	38,318

3. Construction Emissions Details

3.1. Site Preparation (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	9.04	7.60	71.8	59.7	0.09	3.82	—	3.82	3.52	—	3.52	—	9,332	9,332	0.38	0.08	—	9,364
Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.74	0.62	5.90	4.91	0.01	0.31	—	0.31	0.29	—	0.29	—	767	767	0.03	0.01	—	770
Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.14	0.11	1.08	0.90	< 0.005	0.06	—	0.06	0.05	—	0.05	—	127	127	0.01	< 0.005	—	127
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.18	0.18	3.18	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	442	442	0.02	0.01	1.87	449

Vendor	0.04	0.03	1.02	0.40	0.01	0.01	0.27	0.29	0.01	0.08	0.09	—	976	976	< 0.005	0.14	2.80	1,022
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.02	0.20	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	33.2	33.2	< 0.005	< 0.005	0.07	33.7
Vendor	< 0.005	< 0.005	0.09	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	80.3	80.3	< 0.005	0.01	0.10	83.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.50	5.50	< 0.005	< 0.005	0.01	5.58
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	13.3	13.3	< 0.005	< 0.005	0.02	13.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.2. Site Preparation (2024) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	9.04	7.60	71.8	59.7	0.09	3.82	—	3.82	3.52	—	3.52	—	9,332	9,332	0.38	0.08	—	9,364
Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.74	0.62	5.90	4.91	0.01	0.31	—	0.31	0.29	—	0.29	—	767	767	0.03	0.01	—	770
Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.14	0.11	1.08	0.90	< 0.005	0.06	—	0.06	0.05	—	0.05	—	127	127	0.01	< 0.005	—	127
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.18	0.18	3.18	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	442	442	0.02	0.01	1.87	449
Vendor	0.04	0.03	1.02	0.40	0.01	0.01	0.27	0.29	0.01	0.08	0.09	—	976	976	< 0.005	0.14	2.80	1,022
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.01	0.01	0.02	0.20	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	33.2	33.2	< 0.005	< 0.005	0.07	33.7
Vendor	< 0.005	< 0.005	0.09	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	80.3	80.3	< 0.005	0.01	0.10	83.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.50	5.50	< 0.005	< 0.005	0.01	5.58
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	13.3	13.3	< 0.005	< 0.005	0.02	13.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	10.6	8.95	86.7	70.6	0.15	3.85	—	3.85	3.54	—	3.54	—	16,663	16,663	0.68	0.14	—	16,720
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	10.6	8.95	86.7	70.6	0.15	3.85	—	3.85	3.54	—	3.54	—	16,663	16,663	0.68	0.14	—	16,720
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.33	1.96	19.0	15.5	0.03	0.84	—	0.84	0.78	—	0.78	—	3,652	3,652	0.15	0.03	—	3,665
Dust From Material Movement	—	—	—	—	—	—	1.26	1.26	—	0.44	0.44	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.43	0.36	3.47	2.82	0.01	0.15	—	0.15	0.14	—	0.14	—	605	605	0.02	< 0.005	—	607
Dust From Material Movement	—	—	—	—	—	—	0.23	0.23	—	0.08	0.08	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.24	0.21	0.21	3.71	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	516	516	0.02	0.02	2.18	524
Vendor	0.10	0.09	2.69	1.05	0.02	0.04	0.72	0.76	0.04	0.20	0.24	—	2,563	2,563	< 0.005	0.38	7.35	2,683
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.23	2.52	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	458	458	0.02	0.02	0.06	464
Vendor	0.09	0.08	2.84	1.08	0.02	0.04	0.72	0.76	0.04	0.20	0.24	—	2,566	2,566	< 0.005	0.38	0.19	2,678

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.05	0.62	0.00	0.00	0.10	0.10	0.00	0.02	0.02	—	103	103	0.01	< 0.005	0.21	105
Vendor	0.02	0.02	0.62	0.23	< 0.005	0.01	0.16	0.16	0.01	0.04	0.05	—	562	562	< 0.005	0.08	0.69	587
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	17.1	17.1	< 0.005	< 0.005	0.03	17.4
Vendor	< 0.005	< 0.005	0.11	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	93.1	93.1	< 0.005	0.01	0.11	97.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.4. Grading (2024) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.98	1.98	45.2	87.1	0.15	0.34	—	0.34	0.34	—	0.34	—	16,663	16,663	0.68	0.14	—	16,720
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.98	1.98	45.2	87.1	0.15	0.34	—	0.34	0.34	—	0.34	—	16,663	16,663	0.68	0.14	—	16,720

Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.43	0.43	9.91	19.1	0.03	0.08	—	0.08	0.07	—	0.07	—	3,652	3,652	0.15	0.03	—	3,665
Dust From Material Movement	—	—	—	—	—	—	1.26	1.26	—	0.44	0.44	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.08	1.81	3.48	0.01	0.01	—	0.01	0.01	—	0.01	—	605	605	0.02	< 0.005	—	607
Dust From Material Movement	—	—	—	—	—	—	0.23	0.23	—	0.08	0.08	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.24	0.21	0.21	3.71	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	516	516	0.02	0.02	2.18	524
Vendor	0.10	0.09	2.69	1.05	0.02	0.04	0.72	0.76	0.04	0.20	0.24	—	2,563	2,563	< 0.005	0.38	7.35	2,683
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.21	0.19	0.23	2.52	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	458	458	0.02	0.02	0.06	464
Vendor	0.09	0.08	2.84	1.08	0.02	0.04	0.72	0.76	0.04	0.20	0.24	—	2,566	2,566	< 0.005	0.38	0.19	2,678
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.05	0.62	0.00	0.00	0.10	0.10	0.00	0.02	0.02	—	103	103	0.01	< 0.005	0.21	105
Vendor	0.02	0.02	0.62	0.23	< 0.005	0.01	0.16	0.16	0.01	0.04	0.05	—	562	562	< 0.005	0.08	0.69	587
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	17.1	17.1	< 0.005	< 0.005	0.03	17.4
Vendor	< 0.005	< 0.005	0.11	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	93.1	93.1	< 0.005	0.01	0.11	97.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Building Construction (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.78	2.33	20.1	18.7	0.03	1.14	—	1.14	1.05	—	1.05	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.32	0.26	2.28	2.13	< 0.005	0.13	—	0.13	0.12	—	0.12	—	366	366	0.01	< 0.005	—	367
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.42	0.39	< 0.005	0.02	—	0.02	0.02	—	0.02	—	60.5	60.5	< 0.005	< 0.005	—	60.7
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.91	5.37	6.59	71.7	0.00	0.00	13.0	13.0	0.00	3.05	3.05	—	13,054	13,054	0.67	0.49	1.62	13,220
Vendor	0.29	0.26	9.23	3.50	0.07	0.12	2.34	2.46	0.12	0.65	0.77	—	8,339	8,339	0.01	1.22	0.62	8,703
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.67	0.61	0.80	9.10	0.00	0.00	1.47	1.47	0.00	0.34	0.34	—	1,525	1,525	0.08	0.06	3.06	1,546
Vendor	0.03	0.03	1.05	0.39	0.01	0.01	0.26	0.28	0.01	0.07	0.09	—	946	946	< 0.005	0.14	1.17	988
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.12	0.11	0.15	1.66	0.00	0.00	0.27	0.27	0.00	0.06	0.06	—	252	252	0.01	0.01	0.51	256
Vendor	0.01	0.01	0.19	0.07	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	—	157	157	< 0.005	0.02	0.19	164
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.6. Building Construction (2024) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.78	2.33	20.1	18.7	0.03	1.14	—	1.14	1.05	—	1.05	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.32	0.26	2.28	2.13	< 0.005	0.13	—	0.13	0.12	—	0.12	—	366	366	0.01	< 0.005	—	367
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.42	0.39	< 0.005	0.02	—	0.02	0.02	—	0.02	—	60.5	60.5	< 0.005	< 0.005	—	60.7
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.91	5.37	6.59	71.7	0.00	0.00	13.0	13.0	0.00	3.05	3.05	—	13,054	13,054	0.67	0.49	1.62	13,220
Vendor	0.29	0.26	9.23	3.50	0.07	0.12	2.34	2.46	0.12	0.65	0.77	—	8,339	8,339	0.01	1.22	0.62	8,703

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.67	0.61	0.80	9.10	0.00	0.00	1.47	1.47	0.00	0.34	0.34	—	1,525	1,525	0.08	0.06	3.06	1,546
Vendor	0.03	0.03	1.05	0.39	0.01	0.01	0.26	0.28	0.01	0.07	0.09	—	946	946	< 0.005	0.14	1.17	988
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.12	0.11	0.15	1.66	0.00	0.00	0.27	0.27	0.00	0.06	0.06	—	252	252	0.01	0.01	0.51	256
Vendor	0.01	0.01	0.19	0.07	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	—	157	157	< 0.005	0.02	0.19	164
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.57	2.15	18.6	18.5	0.03	1.00	—	1.00	0.92	—	0.92	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.57	2.15	18.6	18.5	0.03	1.00	—	1.00	0.92	—	0.92	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	1.53	1.28	11.1	11.0	0.02	0.59	—	0.59	0.55	—	0.55	—	1,916	1,916	0.08	0.02	—	1,922
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.28	0.23	2.02	2.01	< 0.005	0.11	—	0.11	0.10	—	0.10	—	317	317	0.01	< 0.005	—	318
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	6.22	5.72	5.67	98.9	0.00	0.00	13.0	13.0	0.00	3.05	3.05	—	14,415	14,415	0.60	0.49	58.1	14,635
Vendor	0.31	0.29	8.35	3.20	0.07	0.12	2.34	2.46	0.12	0.65	0.77	—	8,189	8,189	0.01	1.15	23.8	8,557
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.69	5.18	6.14	66.9	0.00	0.00	13.0	13.0	0.00	3.05	3.05	—	12,811	12,811	0.65	0.49	1.51	12,976
Vendor	0.29	0.26	8.84	3.30	0.07	0.12	2.34	2.46	0.12	0.65	0.77	—	8,197	8,197	0.01	1.16	0.62	8,544
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	3.43	3.12	3.91	44.6	0.00	0.00	7.69	7.69	0.00	1.80	1.80	—	7,841	7,841	0.39	0.29	14.9	7,953
Vendor	0.18	0.16	5.24	1.94	0.04	0.07	1.38	1.45	0.07	0.38	0.45	—	4,874	4,874	0.01	0.69	6.11	5,086
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.63	0.57	0.71	8.15	0.00	0.00	1.40	1.40	0.00	0.33	0.33	—	1,298	1,298	0.06	0.05	2.47	1,317
Vendor	0.03	0.03	0.96	0.35	0.01	0.01	0.25	0.27	0.01	0.07	0.08	—	807	807	< 0.005	0.11	1.01	842
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.57	2.15	18.6	18.5	0.03	1.00	—	1.00	0.92	—	0.92	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.57	2.15	18.6	18.5	0.03	1.00	—	1.00	0.92	—	0.92	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.53	1.28	11.1	11.0	0.02	0.59	—	0.59	0.55	—	0.55	—	1,916	1,916	0.08	0.02	—	1,922
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.28	0.23	2.02	2.01	< 0.005	0.11	—	0.11	0.10	—	0.10	—	317	317	0.01	< 0.005	—	318
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	6.22	5.72	5.67	98.9	0.00	0.00	13.0	13.0	0.00	3.05	3.05	—	14,415	14,415	0.60	0.49	58.1	14,635
Vendor	0.31	0.29	8.35	3.20	0.07	0.12	2.34	2.46	0.12	0.65	0.77	—	8,189	8,189	0.01	1.15	23.8	8,557
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.69	5.18	6.14	66.9	0.00	0.00	13.0	13.0	0.00	3.05	3.05	—	12,811	12,811	0.65	0.49	1.51	12,976
Vendor	0.29	0.26	8.84	3.30	0.07	0.12	2.34	2.46	0.12	0.65	0.77	—	8,197	8,197	0.01	1.16	0.62	8,544
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	3.43	3.12	3.91	44.6	0.00	0.00	7.69	7.69	0.00	1.80	1.80	—	7,841	7,841	0.39	0.29	14.9	7,953
Vendor	0.18	0.16	5.24	1.94	0.04	0.07	1.38	1.45	0.07	0.38	0.45	—	4,874	4,874	0.01	0.69	6.11	5,086
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.63	0.57	0.71	8.15	0.00	0.00	1.40	1.40	0.00	0.33	0.33	—	1,298	1,298	0.06	0.05	2.47	1,317
Vendor	0.03	0.03	0.96	0.35	0.01	0.01	0.25	0.27	0.01	0.07	0.08	—	807	807	< 0.005	0.11	1.01	842
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	1.55	1.30	11.7	15.8	0.02	0.53	—	0.53	0.49	—	0.49	—	2,391	2,391	0.10	0.02	—	2,399
Paving	—	7.99	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.64	0.87	< 0.005	0.03	—	0.03	0.03	—	0.03	—	131	131	0.01	< 0.005	—	131
Paving	—	0.44	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.16	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.16	0.14	0.14	2.48	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	362	362	0.02	0.01	1.46	367
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.01	0.01	0.01	0.10	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	18.1	18.1	< 0.005	< 0.005	0.03	18.4
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.00	3.00	< 0.005	< 0.005	0.01	3.04
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Paving (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.55	1.30	11.7	15.8	0.02	0.53	—	0.53	0.49	—	0.49	—	2,391	2,391	0.10	0.02	—	2,399
Paving	—	7.99	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.64	0.87	< 0.005	0.03	—	0.03	0.03	—	0.03	—	131	131	0.01	< 0.005	—	131
Paving	—	0.44	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.01	0.12	0.16	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.16	0.14	0.14	2.48	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	362	362	0.02	0.01	1.46	367
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.10	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	18.1	18.1	< 0.005	< 0.005	0.03	18.4
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.00	3.00	< 0.005	< 0.005	0.01	3.04
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.41	0.34	2.35	3.04	< 0.005	0.07	—	0.07	0.07	—	0.07	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	362	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.26	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	39.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.05	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	7.25	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.24	1.14	1.13	19.8	0.00	0.00	2.61	2.61	0.00	0.61	0.61	—	2,883	2,883	0.12	0.10	11.6	2,927

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.11	0.14	1.64	0.00	0.00	0.28	0.28	0.00	0.07	0.07	—	289	289	0.01	0.01	0.55	293
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.03	0.30	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	47.8	47.8	< 0.005	< 0.005	0.09	48.5
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Architectural Coating (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.41	0.34	2.35	3.04	< 0.005	0.07	—	0.07	0.07	—	0.07	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	73.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.04	0.26	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	8.05	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.05	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	1.47	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.24	1.14	1.13	19.8	0.00	0.00	2.61	2.61	0.00	0.61	0.61	—	2,883	2,883	0.12	0.10	11.6	2,927
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.11	0.14	1.64	0.00	0.00	0.28	0.28	0.00	0.07	0.07	—	289	289	0.01	0.01	0.55	293

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.03	0.30	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	47.8	47.8	< 0.005	< 0.005	0.09	48.5
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.14	0.11	4.24	1.10	0.05	0.07	1.52	1.59	0.07	0.40	0.47	—	4,788	4,788	0.01	0.70	14.6	5,011
Manufacturing	0.18	0.15	5.37	1.43	0.06	0.09	1.90	1.99	0.09	0.51	0.59	—	5,885	5,885	0.02	0.86	18.4	6,161
Unrefrigerated Warehouse-No Rail	3.38	2.73	103	27.1	1.09	1.72	36.6	38.3	1.65	9.78	11.4	—	114,592	114,592	0.36	16.8	353	119,949
Refrigerated Warehouse-No Rail	1.30	1.07	30.0	10.1	0.28	0.49	10.4	10.9	0.47	2.79	3.26	—	29,088	29,088	0.11	4.11	109	30,425

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	40.9	37.2	23.4	479	0.82	0.35	78.1	78.5	0.33	19.7	20.1	—	83,283	83,283	3.26	2.25	337	84,371
Total	45.9	41.3	166	519	2.29	2.73	129	131	2.60	33.2	35.8	—	237,636	237,636	3.76	24.7	832	245,918
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.13	0.11	4.46	1.09	0.05	0.07	1.52	1.59	0.07	0.40	0.47	—	4,789	4,789	0.01	0.70	0.38	4,998
Manufacturing	0.18	0.14	5.65	1.42	0.06	0.09	1.90	1.99	0.09	0.51	0.59	—	5,887	5,887	0.02	0.86	0.48	6,144
Unrefrigerated Warehouse-No Rail	3.30	2.65	108	26.9	1.09	1.73	36.6	38.3	1.65	9.78	11.4	—	114,614	114,614	0.35	16.8	9.16	119,633
Refrigerated Warehouse-No Rail	1.27	1.05	31.6	10.0	0.28	0.49	10.4	10.9	0.47	2.79	3.26	—	29,093	29,093	0.11	4.12	2.82	30,327
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	38.0	34.4	26.4	360	0.73	0.35	78.1	78.5	0.33	19.7	20.1	—	74,351	74,351	3.41	2.44	8.74	75,171
Total	42.9	38.3	176	400	2.20	2.73	129	131	2.60	33.2	35.8	—	228,733	228,733	3.90	24.9	21.6	236,273

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.02	0.02	0.78	0.19	0.01	0.01	0.26	0.27	0.01	0.07	0.08	—	749	749	< 0.005	0.11	0.98	783
Manufacturing	0.03	0.02	0.82	0.20	0.01	0.01	0.27	0.28	0.01	0.07	0.08	—	768	768	< 0.005	0.11	1.04	803
Unrefrigerated Warehouse-No Rail	0.49	0.40	16.2	3.97	0.16	0.26	5.39	5.65	0.24	1.44	1.69	—	15,431	15,431	0.05	2.26	20.5	16,126
Refrigerated Warehouse-No Rail	0.20	0.17	5.09	1.59	0.04	0.08	1.65	1.73	0.08	0.44	0.52	—	4,207	4,207	0.02	0.60	6.78	4,392
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	6.30	5.69	4.51	64.6	0.12	0.06	12.7	12.8	0.05	3.22	3.27	—	11,404	11,404	0.52	0.37	21.7	11,550
Total	7.04	6.30	27.4	70.6	0.35	0.42	20.3	20.7	0.40	5.24	5.64	—	32,559	32,559	0.58	3.45	51.0	33,653

4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

General Heavy Industry	0.14	0.11	4.24	1.10	0.05	0.07	1.52	1.59	0.07	0.40	0.47	—	4,788	4,788	0.01	0.70	14.6	5,011
Manufacturing	0.18	0.15	5.37	1.43	0.06	0.09	1.90	1.99	0.09	0.51	0.59	—	5,885	5,885	0.02	0.86	18.4	6,161
Unrefrigerated Warehouse-No Rail	3.38	2.73	103	27.1	1.09	1.72	36.6	38.3	1.65	9.78	11.4	—	114,592	114,592	0.36	16.8	353	119,949
Refrigerated Warehouse-No Rail	1.30	1.07	30.0	10.1	0.28	0.49	10.4	10.9	0.47	2.79	3.26	—	29,088	29,088	0.11	4.11	109	30,425
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	40.9	37.2	23.4	479	0.82	0.35	78.1	78.5	0.33	19.7	20.1	—	83,283	83,283	3.26	2.25	337	84,371
Total	45.9	41.3	166	519	2.29	2.73	129	131	2.60	33.2	35.8	—	237,636	237,636	3.76	24.7	832	245,918
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.13	0.11	4.46	1.09	0.05	0.07	1.52	1.59	0.07	0.40	0.47	—	4,789	4,789	0.01	0.70	0.38	4,998
Manufacturing	0.18	0.14	5.65	1.42	0.06	0.09	1.90	1.99	0.09	0.51	0.59	—	5,887	5,887	0.02	0.86	0.48	6,144
Unrefrigerated Warehouse-No Rail	3.30	2.65	108	26.9	1.09	1.73	36.6	38.3	1.65	9.78	11.4	—	114,614	114,614	0.35	16.8	9.16	119,633

Refrigera Warehouse-No Rail	1.27	1.05	31.6	10.0	0.28	0.49	10.4	10.9	0.47	2.79	3.26	—	29,093	29,093	0.11	4.12	2.82	30,327
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	38.0	34.4	26.4	360	0.73	0.35	78.1	78.5	0.33	19.7	20.1	—	74,351	74,351	3.41	2.44	8.74	75,171
Total	42.9	38.3	176	400	2.20	2.73	129	131	2.60	33.2	35.8	—	228,733	228,733	3.90	24.9	21.6	236,273
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.02	0.02	0.78	0.19	0.01	0.01	0.26	0.27	0.01	0.07	0.08	—	749	749	< 0.005	0.11	0.98	783
Manufacturing	0.03	0.02	0.82	0.20	0.01	0.01	0.27	0.28	0.01	0.07	0.08	—	768	768	< 0.005	0.11	1.04	803
Unrefrigerated Warehouse-No Rail	0.49	0.40	16.2	3.97	0.16	0.26	5.39	5.65	0.24	1.44	1.69	—	15,431	15,431	0.05	2.26	20.5	16,126
Refrigerated Warehouse-No Rail	0.20	0.17	5.09	1.59	0.04	0.08	1.65	1.73	0.08	0.44	0.52	—	4,207	4,207	0.02	0.60	6.78	4,392
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	6.30	5.69	4.51	64.6	0.12	0.06	12.7	12.8	0.05	3.22	3.27	—	11,404	11,404	0.52	0.37	21.7	11,550

Total	7.04	6.30	27.4	70.6	0.35	0.42	20.3	20.7	0.40	5.24	5.64	—	32,559	32,559	0.58	3.45	51.0	33,653

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	948	948	0.09	0.01	—	953
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	630	630	0.06	0.01	—	633
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,718	8,718	0.83	0.10	—	8,768
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	4,637	4,637	0.44	0.05	—	4,664
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	549	549	0.05	0.01	—	552
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,482	15,482	1.47	0.18	—	15,571

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	948	948	0.09	0.01	—	953
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	630	630	0.06	0.01	—	633
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,718	8,718	0.83	0.10	—	8,768
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	4,637	4,637	0.44	0.05	—	4,664
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	549	549	0.05	0.01	—	552
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,482	15,482	1.47	0.18	—	15,571
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	157	157	0.01	< 0.005	—	158
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	104	104	0.01	< 0.005	—	105

Unrefrigerated Warehouse-No	—	—	—	—	—	—	—	—	—	—	—	—	1,443	1,443	0.14	0.02	—	1,452
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	768	768	0.07	0.01	—	772
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	90.9	90.9	0.01	< 0.005	—	91.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	2,563	2,563	0.24	0.03	—	2,578

4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	950	950	0.09	0.01	—	956
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	631	631	0.06	0.01	—	635

Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,770	8,770	0.83	0.10	—	8,821
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	4,644	4,644	0.44	0.05	—	4,671
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	549	549	0.05	0.01	—	552
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,545	15,545	1.47	0.18	—	15,635
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	948	948	0.09	0.01	—	953
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	630	630	0.06	0.01	—	633
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,718	8,718	0.83	0.10	—	8,768
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	4,637	4,637	0.44	0.05	—	4,664

Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	549	549	0.05	0.01	—	552
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,482	15,482	1.47	0.18	—	15,571
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	157	157	0.01	< 0.005	—	158
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	104	104	0.01	< 0.005	—	105
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	1,448	1,448	0.14	0.02	—	1,456
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	768	768	0.07	0.01	—	773
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	90.9	90.9	0.01	< 0.005	—	91.5
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	2,568	2,568	0.24	0.03	—	2,583

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Refrigerated	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Consum Products	—	51.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	3.97	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	18.4	16.9	0.87	103	0.01	0.18	—	0.18	0.14	—	0.14	—	424	424	0.02	< 0.005	—	426
Total	18.4	71.9	0.87	103	0.01	0.18	—	0.18	0.14	—	0.14	—	424	424	0.02	< 0.005	—	426
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	51.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	3.97	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	55.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	9.31	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.72	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	1.65	1.52	0.08	9.29	< 0.005	0.02	—	0.02	0.01	—	0.01	—	34.7	34.7	< 0.005	< 0.005	—	34.8
Total	1.65	11.6	0.08	9.29	< 0.005	0.02	—	0.02	0.01	—	0.01	—	34.7	34.7	< 0.005	< 0.005	—	34.8

4.3.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	51.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.81	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	51.8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	51.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.81	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	51.8	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	9.31	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	9.45	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	45.8	132	177	4.71	0.11	—	329
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	30.4	87.4	118	3.13	0.08	—	219
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	864	2,513	3,377	88.8	2.13	—	6,234
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	111	319	431	11.4	0.27	—	798
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	45.8	132	177	4.71	0.11	—	329
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	30.4	87.4	118	3.13	0.08	—	219
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	864	2,513	3,377	88.8	2.13	—	6,234
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	111	319	431	11.4	0.27	—	798
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	7.59	21.8	29.4	0.78	0.02	—	54.4
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	5.04	14.5	19.5	0.52	0.01	—	36.2
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	143	416	559	14.7	0.35	—	1,032

Refrigerated	—	—	—	—	—	—	—	—	—	—	—	18.4	52.9	71.3	1.89	0.05	—	132
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	174	505	679	17.9	0.43	—	1,255

4.4.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	45.8	132	177	4.71	0.11	—	329
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	30.4	87.4	118	3.13	0.08	—	219
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	864	2,513	3,377	88.8	2.13	—	6,234
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	111	319	431	11.4	0.27	—	798

Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	45.8	132	177	4.71	0.11	—	329
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	30.4	87.4	118	3.13	0.08	—	219
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	864	2,513	3,377	88.8	2.13	—	6,234
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	111	319	431	11.4	0.27	—	798
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,052	3,051	4,103	108	2.60	—	7,580

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	7.59	21.8	29.4	0.78	0.02	—	54.4
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	5.04	14.5	19.5	0.52	0.01	—	36.2
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	143	416	559	14.7	0.35	—	1,032
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	18.4	52.9	71.3	1.89	0.05	—	132
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	174	505	679	17.9	0.43	—	1,255

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	69.1	0.00	69.1	6.91	0.00	—	242
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	45.9	0.00	45.9	4.59	0.00	—	161
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	988	0.00	988	98.7	0.00	—	3,456
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	127	0.00	127	12.7	0.00	—	445
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	69.1	0.00	69.1	6.91	0.00	—	242
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	45.9	0.00	45.9	4.59	0.00	—	161
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	988	0.00	988	98.7	0.00	—	3,456

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	127	0.00	127	12.7	0.00	—	445
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	11.4	0.00	11.4	1.14	0.00	—	40.0
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	7.60	0.00	7.60	0.76	0.00	—	26.6
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	164	0.00	164	16.3	0.00	—	572
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	21.1	0.00	21.1	2.10	0.00	—	73.7
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

Total	—	—	—	—	—	—	—	—	—	—	—	204	0.00	204	20.4	0.00	—	713

4.5.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	69.1	0.00	69.1	6.91	0.00	—	242
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	45.9	0.00	45.9	4.59	0.00	—	161
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	988	0.00	988	98.7	0.00	—	3,456
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	127	0.00	127	12.7	0.00	—	445
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	69.1	0.00	69.1	6.91	0.00	—	242
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	45.9	0.00	45.9	4.59	0.00	—	161
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	988	0.00	988	98.7	0.00	—	3,456
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	127	0.00	127	12.7	0.00	—	445
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,230	0.00	1,230	123	0.00	—	4,304
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	11.4	0.00	11.4	1.14	0.00	—	40.0
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	7.60	0.00	7.60	0.76	0.00	—	26.6

Unrefrigerated Warehouse-No	—	—	—	—	—	—	—	—	—	—	—	164	0.00	164	16.3	0.00	—	572
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	21.1	0.00	21.1	2.10	0.00	—	73.7
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	204	0.00	204	20.4	0.00	—	713

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	9.67	9.67
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	6.42	6.42

Refrigerated Warehou Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	256	256
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	9.67	9.67
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	6.42	6.42
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	256	256
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.60	1.60
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.06	1.06
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	42.4	42.4
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	45.0	45.0

4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	9.67	9.67
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	6.42	6.42
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	256	256
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	9.67	9.67
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	6.42	6.42
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	256	256
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	272	272
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Heavy Industry	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.60	1.60
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.06	1.06

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	42.4	42.4
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	45.0	45.0

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.16	0.15	0.41	0.38	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	68.5	68.5	< 0.005	< 0.005	0.00	68.8
Total	0.16	0.15	0.41	0.38	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	68.5	68.5	< 0.005	< 0.005	0.00	68.8

4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Total	6.49	5.91	16.5	15.1	0.03	0.87	0.00	0.87	0.87	0.00	0.87	0.00	3,022	3,022	0.12	0.02	0.00	3,032
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.16	0.15	0.41	0.38	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	68.5	68.5	< 0.005	< 0.005	0.00	68.8
Total	0.16	0.15	0.41	0.38	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	68.5	68.5	< 0.005	< 0.005	0.00	68.8

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	6/3/2024	7/12/2024	5.00	30.0	—
Grading	Grading	7/15/2024	11/1/2024	5.00	80.0	—
Building Construction	Building Construction	11/4/2024	10/31/2025	5.00	260	—
Paving	Paving	7/1/2025	7/28/2025	5.00	20.0	—
Architectural Coating	Architectural Coating	7/1/2025	8/25/2025	5.00	40.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40

Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Average	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Average	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 4 Interim	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Tier 4 Interim	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20

Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	32.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	84.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	997	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	273	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT

Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	199	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	32.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	84.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	997	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	273	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT

Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	199	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	3,559,839	1,186,613	159,403

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	—	—	180	0.00	—
Grading	—	—	760	0.00	—

Paving	0.00	0.00	0.00	0.00	61.0

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
General Heavy Industry	0.00	0%
Manufacturing	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Refrigerated Warehouse-No Rail	0.00	0%
Parking Lot	15.1	100%
Other Asphalt Surfaces	45.9	100%
User Defined Industrial	0.00	0%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2024	0.00	349	0.03	< 0.005
2025	0.00	349	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
General Heavy Industry	26.0	21.1	20.8	8,952	1,744	1,418	1,397	601,456
Manufacturing	32.0	9.96	6.67	9,215	2,171	675	452	624,716
Unrefrigerated Warehouse-No Rail	316	27.4	10.8	84,387	21,329	1,847	732	5,695,294
Unrefrigerated Warehouse-No Rail	174	85.9	81.3	54,078	11,747	5,797	5,492	3,651,361
Unrefrigerated Warehouse-No Rail	132	113	112	46,162	8,917	7,630	7,584	3,118,213
Refrigerated Warehouse-No Rail	190	108	104	60,597	11,884	6,766	6,484	3,789,158
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	7,136	4,751	4,597	2,347,971	112,040	74,594	72,172	36,863,152

5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
General Heavy Industry	26.0	21.1	20.8	8,952	1,744	1,418	1,397	601,456
Manufacturing	32.0	9.96	6.67	9,215	2,171	675	452	624,716
Unrefrigerated Warehouse-No Rail	316	27.4	10.8	84,387	21,329	1,847	732	5,695,294
Unrefrigerated Warehouse-No Rail	174	85.9	81.3	54,078	11,747	5,797	5,492	3,651,361
Unrefrigerated Warehouse-No Rail	132	113	112	46,162	8,917	7,630	7,584	3,118,213

Refrigerated Warehouse-No Rail	190	108	104	60,597	11,884	6,766	6,484	3,789,158
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	7,136	4,751	4,597	2,347,971	112,040	74,594	72,172	36,863,152

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	3,559,839	1,186,613	159,403

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00

Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
General Heavy Industry	992,062	349	0.0330	0.0040	0.00
Manufacturing	659,165	349	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	2,416,921	349	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	3,525,114	349	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	3,184,842	349	0.0330	0.0040	0.00
Refrigerated Warehouse-No Rail	4,854,956	349	0.0330	0.0040	0.00
Parking Lot	575,049	349	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	349	0.0330	0.0040	0.00
User Defined Industrial	0.00	349	0.0330	0.0040	0.00

5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
General Heavy Industry	992,062	349	0.0330	0.0040	0.00
Manufacturing	659,165	349	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	2,416,921	349	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	3,525,114	349	0.0330	0.0040	0.00

Unrefrigerated Warehouse-No Rail	3,184,842	349	0.0330	0.0040	0.00
Refrigerated Warehouse-No Rail	4,854,956	349	0.0330	0.0040	0.00
Parking Lot	575,049	349	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	349	0.0330	0.0040	0.00
User Defined Industrial	0.00	349	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
General Heavy Industry	23,915,413	0.00
Manufacturing	15,890,344	0.00
Unrefrigerated Warehouse-No Rail	119,416,575	0.00
Unrefrigerated Warehouse-No Rail	174,170,794	8,033,382
Unrefrigerated Warehouse-No Rail	157,358,456	0.00
Refrigerated Warehouse-No Rail	58,056,931	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
General Heavy Industry	23,915,413	0.00
Manufacturing	15,890,344	0.00
Unrefrigerated Warehouse-No Rail	119,416,575	0.00
Unrefrigerated Warehouse-No Rail	174,170,794	8,033,382

Unrefrigerated Warehouse-No Rail	157,358,456	0.00
Refrigerated Warehouse-No Rail	58,056,931	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
General Heavy Industry	128	—
Manufacturing	85.2	—
Unrefrigerated Warehouse-No Rail	485	—
Unrefrigerated Warehouse-No Rail	708	—
Unrefrigerated Warehouse-No Rail	640	—
Refrigerated Warehouse-No Rail	236	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
General Heavy Industry	128	—
Manufacturing	85.2	—
Unrefrigerated Warehouse-No Rail	485	—
Unrefrigerated Warehouse-No Rail	708	—
Unrefrigerated Warehouse-No Rail	640	—

Refrigerated Warehouse-No Rail	236	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
General Heavy Industry	Other commercial A/C and heat pumps	User Defined	750	0.30	4.00	4.00	18.0
Manufacturing	Other commercial A/C and heat pumps	User Defined	750	0.30	4.00	4.00	18.0
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
General Heavy Industry	Other commercial A/C and heat pumps	User Defined	750	0.30	4.00	4.00	18.0
Manufacturing	Other commercial A/C and heat pumps	User Defined	750	0.30	4.00	4.00	18.0
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
Fire Pump	Diesel	6.00	1.00	50.0	300	0.73

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

5.17. User Defined

Equipment Type	Fuel Type

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	34.5	annual days of extreme heat
Extreme Precipitation	1.15	annual days with precipitation above 20 mm
Sea Level Rise	—	meters of inundation depth
Wildfire	0.35	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.0 meter, 1.41 meters
Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	1	1	4
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2

Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	88.7
AQ-PM	6.87
AQ-DPM	5.33
Drinking Water	—
Lead Risk Housing	—
Pesticides	70.6
Toxic Releases	99.9
Traffic	42.0
Effect Indicators	—
CleanUp Sites	0.00

Groundwater	31.5
Haz Waste Facilities/Generators	92.5
Impaired Water Bodies	0.00
Solid Waste	0.00
Sensitive Population	—
Asthma	78.5
Cardio-vascular	44.0
Low Birth Weights	—
Socioeconomic Factor Indicators	—
Education	—
Housing	—
Linguistic	—
Poverty	—
Unemployment	—

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	—
Employed	—
Median HI	—
Education	—
Bachelor's or higher	—
High school enrollment	—
Preschool enrollment	—
Transportation	—

Auto Access	—
Active commuting	—
Social	—
2-parent households	—
Voting	—
Neighborhood	—
Alcohol availability	—
Park access	—
Retail density	—
Supermarket access	—
Tree canopy	—
Housing	—
Homeownership	—
Housing habitability	—
Low-inc homeowner severe housing cost burden	—
Low-inc renter severe housing cost burden	—
Uncrowded housing	—
Health Outcomes	—
Insured adults	—
Arthritis	32.9
Asthma ER Admissions	69.8
High Blood Pressure	84.3
Cancer (excluding skin)	80.0
Asthma	1.3
Coronary Heart Disease	40.3
Chronic Obstructive Pulmonary Disease	2.1
Diagnosed Diabetes	29.7

Life Expectancy at Birth	0.0
Cognitively Disabled	99.8
Physically Disabled	99.8
Heart Attack ER Admissions	91.2
Mental Health Not Good	0.3
Chronic Kidney Disease	73.0
Obesity	0.4
Pedestrian Injuries	0.0
Physical Health Not Good	1.8
Stroke	11.3
Health Risk Behaviors	—
Binge Drinking	75.2
Current Smoker	0.4
No Leisure Time for Physical Activity	14.6
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	99.4
Elderly	99.8
English Speaking	0.0
Foreign-born	0.0
Outdoor Workers	0.0
Climate Change Adaptive Capacity	—
Impervious Surface Cover	99.9
Traffic Density	0.0
Traffic Access	23.0
Other Indices	—

Hardship	0.0
Other Decision Support	—
2016 Voting	0.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	—
Healthy Places Index Score for Project Location (b)	—
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Land uses provided by client Light industrial modeled as Heavy Industrial as CalEEMod does not allow light industrial uses to be modeled if the SF is larger than 50,000 SF
Construction: Construction Phases	Client provided schedule

Construction: Off-Road Equipment	Client provided construction equipment Standard 8-hour work day T/L/B swapped for Crawler Tractors to account for dust distruabance
Construction: Trips and VMT	Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, and Building Construction. Because Paving and Architectural Coating activities overlap with Building Construction, the analysis assumes that the vendor trips assigned to Building Construction cover Paving and Architectural Coating as well.
Operations: Vehicle Data	Trip Characteristics taken from Traffic Analysis Trip Length taken from VMT Truck Sup Memo Passenger vehicle trips modeled on User Defined Industrial land use
Operations: Fleet Mix	Passenger Car Mix estimated based on CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, MCY). Truck Fleet Mix based on 2, 3 and 4 axle trucks
Operations: Energy Use	Natural gas will not be used
Operations: Refrigerants	Beginning 1 January 2025, all new air conditioning equipment may not use refrigerants with a GWP of 750 or greater As of 1 January 2022, new commercial refrigeration equipment may not use refrigerants with a GWP of 150 or greater. Further, R-404A (the CalEEMod default) is unacceptable for new supermarket and cold storage systems as of 1 January 2019 and 2023, respectively

APPENDIX 3.2:

CALEEMOD PHASE 2 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS

This page intentionally left blank

14267-Phase 2 Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

1.2. Land Use Types

1.3. User-Selected Emission Reduction Measures by Emissions Sector

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

2.2. Construction Emissions by Year, Unmitigated

2.3. Construction Emissions by Year, Mitigated

2.4. Operations Emissions Compared Against Thresholds

2.5. Operations Emissions by Sector, Unmitigated

2.6. Operations Emissions by Sector, Mitigated

3. Construction Emissions Details

3.1. Site Preparation (2026) - Unmitigated

3.2. Site Preparation (2026) - Mitigated

3.3. Grading (2026) - Unmitigated

3.4. Grading (2026) - Mitigated

3.5. Building Construction (2026) - Unmitigated

3.6. Building Construction (2026) - Mitigated

3.7. Building Construction (2027) - Unmitigated

3.8. Building Construction (2027) - Mitigated

3.9. Paving (2027) - Unmitigated

3.10. Paving (2027) - Mitigated

3.11. Architectural Coating (2027) - Unmitigated

3.12. Architectural Coating (2027) - Mitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.1.2. Mitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.2. Electricity Emissions By Land Use - Mitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.2.4. Natural Gas Emissions By Land Use - Mitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.3.2. Mitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.4.2. Mitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.5.2. Mitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.6.2. Mitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.7.2. Mitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.8.2. Mitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.9.2. Mitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.2.2. Mitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.3.2. Mitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.9.2. Mitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.10.4. Landscape Equipment - Mitigated

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.11.2. Mitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.12.2. Mitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

5.18.2.2. Mitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	14267-Phase 2
Construction Start Date	6/1/2026
Operational Year	2027
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.640058, -118.120166
County	Los Angeles-Mojave Desert
City	Palmdale
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3655
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.20

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description

Manufacturing	137	1000sqft	3.16	137,448	0.00	—	—	Manufacturing
Unrefrigerated Warehouse-No Rail	412	1000sqft	9.47	412,342	0.00	—	—	Warehousing
Unrefrigerated Warehouse-No Rail	1,630	1000sqft	37.4	1,630,362	457,009	—	—	High-Cube Parcel Hub
Parking Lot	2,458	Space	16.8	0.00	0.00	—	—	—
Other Asphalt Surfaces	41.0	Acre	41.0	0.00	0.00	—	—	—
User Defined Industrial	2,180	User Defined Unit	0.00	0.00	0.00	—	—	Passenger Vehicles

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-5	Use Advanced Engine Tiers
Construction	C-13	Use Low-VOC Paints for Construction
Area Sources	LL-1	Replace Gas Powered Landscape Equipment with Zero-Emission Landscape Equipment
Area Sources	AS-2	Use Low-VOC Paints

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	10.9	351	69.4	139	0.16	3.02	17.1	18.4	2.77	4.65	7.41	—	29,659	29,659	0.91	1.78	74.3	30,285
Mit.	10.9	85.2	59.6	139	0.16	3.01	17.1	18.4	2.76	4.65	7.41	—	29,659	29,659	0.91	1.78	74.3	30,285

% Reduced	—	76%	14%	—	—	< 0.5%	—	—	< 0.5%	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	7.75	6.41	31.5	79.1	0.10	1.02	14.3	15.4	0.89	3.46	4.35	—	22,924	22,924	0.72	1.66	1.83	23,437
Mit.	7.75	6.41	31.5	79.1	0.10	1.02	14.3	15.4	0.89	3.46	4.35	—	22,924	22,924	0.72	1.66	1.83	23,437
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.76	40.2	20.3	43.4	0.05	0.84	7.32	7.77	0.76	1.76	2.18	—	11,790	11,790	0.38	0.83	14.1	12,060
Mit.	3.76	11.1	17.5	43.4	0.05	0.51	7.32	7.77	0.46	1.76	2.18	—	11,790	11,790	0.38	0.83	14.1	12,060
% Reduced	—	72%	14%	—	—	39%	—	—	39%	—	—	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.69	7.34	3.70	7.91	0.01	0.15	1.34	1.42	0.14	0.32	0.40	—	1,952	1,952	0.06	0.14	2.34	1,997
Mit.	0.69	2.03	3.19	7.91	0.01	0.09	1.34	1.42	0.08	0.32	0.40	—	1,952	1,952	0.06	0.14	2.34	1,997
% Reduced	—	72%	14%	—	—	39%	—	—	39%	—	—	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	9.41	7.91	69.4	107	0.16	3.02	14.3	15.4	2.77	4.65	7.41	—	24,355	24,355	0.70	1.65	70.4	24,935
2027	10.9	351	43.0	139	0.12	1.36	17.1	18.4	1.25	4.10	5.35	—	29,659	29,659	0.91	1.78	74.3	30,285

Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	7.75	6.41	31.5	79.1	0.10	1.02	14.3	15.4	0.89	3.46	4.35	—	22,924	22,924	0.72	1.66	1.83	23,437
2027	7.10	6.17	29.7	75.7	0.10	0.85	14.3	15.2	0.79	3.46	4.25	—	22,594	22,594	0.72	1.65	1.66	23,106
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	3.48	2.98	20.3	31.2	0.05	0.84	4.68	5.52	0.76	1.39	2.15	—	8,121	8,121	0.27	0.41	6.93	8,258
2027	3.76	40.2	15.8	43.4	0.05	0.45	7.32	7.77	0.42	1.76	2.18	—	11,790	11,790	0.38	0.83	14.1	12,060
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	0.63	0.54	3.70	5.69	0.01	0.15	0.85	1.01	0.14	0.25	0.39	—	1,345	1,345	0.05	0.07	1.15	1,367
2027	0.69	7.34	2.89	7.91	0.01	0.08	1.34	1.42	0.08	0.32	0.40	—	1,952	1,952	0.06	0.14	2.34	1,997

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	8.22	7.27	59.6	107	0.16	3.01	14.3	15.4	2.76	4.65	7.41	—	24,355	24,355	0.70	1.65	70.4	24,935
2027	10.9	85.2	43.0	139	0.12	1.36	17.1	18.4	1.25	4.10	5.35	—	29,659	29,659	0.91	1.78	74.3	30,285
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	7.75	6.41	31.5	79.1	0.10	1.02	14.3	15.4	0.89	3.46	4.35	—	22,924	22,924	0.72	1.66	1.83	23,437
2027	7.10	6.17	29.7	75.7	0.10	0.85	14.3	15.2	0.79	3.46	4.25	—	22,594	22,594	0.72	1.65	1.66	23,106
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	2.59	2.28	17.5	34.0	0.05	0.51	4.68	5.19	0.46	1.39	1.85	—	8,121	8,121	0.27	0.41	6.93	8,258
2027	3.76	11.1	15.8	43.4	0.05	0.45	7.32	7.77	0.42	1.76	2.18	—	11,790	11,790	0.38	0.83	14.1	12,060

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2026	0.47	0.42	3.19	6.20	0.01	0.09	0.85	0.95	0.08	0.25	0.34	—	1,345	1,345	0.05	0.07	1.15	1,367
2027	0.69	2.03	2.89	7.91	0.01	0.08	1.34	1.42	0.08	0.32	0.40	—	1,952	1,952	0.06	0.14	2.34	1,997

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	66.7	111	222	616	2.99	4.20	158	163	3.99	41.1	45.1	2,093	325,445	327,538	217	37.5	935	345,068
Mit.	49.8	92.5	221	521	2.99	4.03	158	162	3.86	41.1	45.0	2,093	325,114	327,206	217	37.5	935	344,735
% Reduced	25%	17%	< 0.5%	15%	< 0.5%	4%	—	< 0.5%	3%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	46.9	92.5	234	406	2.90	4.03	158	162	3.86	41.1	45.0	2,093	315,925	318,018	217	37.7	36.8	334,715
Mit.	46.9	89.6	234	406	2.90	4.03	158	162	3.86	41.1	45.0	2,093	315,925	318,018	217	37.7	36.8	334,715
% Reduced	—	3%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	48.8	94.4	206	439	2.61	3.36	142	145	3.19	36.9	40.1	2,093	286,071	288,164	217	34.0	371	304,090
Mit.	40.5	83.8	206	392	2.61	3.27	142	145	3.12	36.9	40.0	2,093	285,907	288,000	217	34.0	371	303,926
% Reduced	17%	11%	< 0.5%	11%	< 0.5%	2%	—	< 0.5%	2%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	8.90	17.2	37.6	80.1	0.48	0.61	25.9	26.6	0.58	6.73	7.32	346	47,362	47,709	35.9	5.63	61.4	50,346

Mit.	7.39	15.3	37.5	71.6	0.48	0.60	25.9	26.5	0.57	6.73	7.30	346	47,335	47,682	35.9	5.63	61.4	50,318
% Reduced	17%	11%	< 0.5%	11%	< 0.5%	2%	—	< 0.5%	2%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	46.6	41.9	213	513	2.97	3.59	158	162	3.42	41.1	44.6	—	309,834	309,834	3.81	35.0	922	321,272
Area	16.9	66.1	0.80	94.8	0.01	0.17	—	0.17	0.13	—	0.13	—	390	390	0.02	< 0.005	—	391
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	10,927	10,927	1.04	0.13	—	10,991
Water	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Waste	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Stationary	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	66.7	111	222	616	2.99	4.20	158	163	3.99	41.1	45.1	2,093	325,445	327,538	217	37.5	935	345,068
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	43.6	39.0	225	398	2.88	3.59	158	162	3.42	41.1	44.6	—	300,703	300,703	3.94	35.2	23.9	311,310
Area	—	50.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	10,927	10,927	1.04	0.13	—	10,991
Water	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Waste	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Stationary	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516

Total	46.9	92.5	234	406	2.90	4.03	158	162	3.86	41.1	45.0	2,093	315,925	318,018	217	37.7	36.8	334,715
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	40.0	35.8	204	391	2.61	3.21	142	145	3.06	36.9	40.0	—	271,961	271,961	3.63	31.5	358	281,801
Area	8.32	58.2	0.39	46.8	< 0.005	0.08	—	0.08	0.06	—	0.06	—	192	192	0.01	< 0.005	—	193
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	10,927	10,927	1.04	0.13	—	10,991
Water	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Waste	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Stationary	0.44	0.40	1.13	1.03	< 0.005	0.06	0.00	0.06	0.06	0.00	0.06	0.00	207	207	0.01	< 0.005	0.00	208
Total	48.8	94.4	206	439	2.61	3.36	142	145	3.19	36.9	40.1	2,093	286,071	288,164	217	34.0	371	304,090
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	7.30	6.53	37.3	71.4	0.48	0.59	25.9	26.5	0.56	6.73	7.29	—	45,026	45,026	0.60	5.22	59.3	46,655
Area	1.52	10.6	0.07	8.53	< 0.005	0.02	—	0.02	0.01	—	0.01	—	31.8	31.8	< 0.005	< 0.005	—	31.9
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	1,809	1,809	0.17	0.02	—	1,820
Water	—	—	—	—	—	—	—	—	—	—	—	160	461	621	16.4	0.40	—	1,150
Waste	—	—	—	—	—	—	—	—	—	—	—	187	0.00	187	18.6	0.00	—	653
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.13	2.13
Stationary	0.08	0.07	0.21	0.19	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	34.3	34.3	< 0.005	< 0.005	0.00	34.4
Total	8.90	17.2	37.6	80.1	0.48	0.61	25.9	26.6	0.58	6.73	7.32	346	47,362	47,709	35.9	5.63	61.4	50,346

2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Mobile	46.6	41.9	213	513	2.97	3.59	158	162	3.42	41.1	44.6	—	309,834	309,834	3.81	35.0	922	321,272
Area	—	47.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	10,985	10,985	1.05	0.13	—	11,049
Water	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Waste	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Stationary	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	49.8	92.5	221	521	2.99	4.03	158	162	3.86	41.1	45.0	2,093	325,114	327,206	217	37.5	935	344,735
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	43.6	39.0	225	398	2.88	3.59	158	162	3.42	41.1	44.6	—	300,703	300,703	3.94	35.2	23.9	311,310
Area	—	47.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	10,927	10,927	1.04	0.13	—	10,991
Water	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Waste	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Stationary	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	46.9	89.6	234	406	2.90	4.03	158	162	3.86	41.1	45.0	2,093	315,925	318,018	217	37.7	36.8	334,715
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	40.0	35.8	204	391	2.61	3.21	142	145	3.06	36.9	40.0	—	271,961	271,961	3.63	31.5	358	281,801
Area	—	47.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	10,956	10,956	1.04	0.13	—	11,020
Water	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Waste	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9

Stationar	0.44	0.40	1.13	1.03	< 0.005	0.06	0.00	0.06	0.06	0.00	0.06	0.00	207	207	0.01	< 0.005	0.00	208
Total	40.5	83.8	206	392	2.61	3.27	142	145	3.12	36.9	40.0	2,093	285,907	288,000	217	34.0	371	303,926
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	7.30	6.53	37.3	71.4	0.48	0.59	25.9	26.5	0.56	6.73	7.29	—	45,026	45,026	0.60	5.22	59.3	46,655
Area	—	8.69	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	1,814	1,814	0.17	0.02	—	1,824
Water	—	—	—	—	—	—	—	—	—	—	—	160	461	621	16.4	0.40	—	1,150
Waste	—	—	—	—	—	—	—	—	—	—	—	187	0.00	187	18.6	0.00	—	653
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.13	2.13
Stationary	0.08	0.07	0.21	0.19	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	34.3	34.3	< 0.005	< 0.005	0.00	34.4
Total	7.39	15.3	37.5	71.6	0.48	0.60	25.9	26.5	0.57	6.73	7.30	346	47,335	47,682	35.9	5.63	61.4	50,318

3. Construction Emissions Details

3.1. Site Preparation (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	7.71	6.48	58.5	52.5	0.09	3.00	—	3.00	2.76	—	2.76	—	9,336	9,336	0.38	0.08	—	9,368
Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.63	0.53	4.81	4.31	0.01	0.25	—	0.25	0.23	—	0.23	—	767	767	0.03	0.01	—	770
Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.12	0.10	0.88	0.79	< 0.005	0.04	—	0.04	0.04	—	0.04	—	127	127	0.01	< 0.005	—	127
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.18	0.16	0.16	2.79	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	425	425	0.02	0.01	1.62	432
Vendor	0.04	0.02	0.94	0.36	0.01	0.01	0.27	0.29	0.01	0.08	0.08	—	942	942	< 0.005	0.14	2.43	985
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.01	0.01	0.02	0.17	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	32.0	32.0	< 0.005	< 0.005	0.06	32.4
Vendor	< 0.005	< 0.005	0.08	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	77.5	77.5	< 0.005	0.01	0.09	80.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.29	5.29	< 0.005	< 0.005	0.01	5.37
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	12.8	12.8	< 0.005	< 0.005	0.01	13.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.2. Site Preparation (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	7.71	6.48	58.5	52.5	0.09	3.00	—	3.00	2.76	—	2.76	—	9,336	9,336	0.38	0.08	—	9,368
Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.63	0.53	4.81	4.31	0.01	0.25	—	0.25	0.23	—	0.23	—	767	767	0.03	0.01	—	770

Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.12	0.10	0.88	0.79	< 0.005	0.04	—	0.04	0.04	—	0.04	—	127	127	0.01	< 0.005	—	127
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.18	0.16	0.16	2.79	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	425	425	0.02	0.01	1.62	432
Vendor	0.04	0.02	0.94	0.36	0.01	0.01	0.27	0.29	0.01	0.08	0.08	—	942	942	< 0.005	0.14	2.43	985
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.02	0.17	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	32.0	32.0	< 0.005	< 0.005	0.06	32.4
Vendor	< 0.005	< 0.005	0.08	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	77.5	77.5	< 0.005	0.01	0.09	80.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.29	5.29	< 0.005	< 0.005	0.01	5.37
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	12.8	12.8	< 0.005	< 0.005	0.01	13.4

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	9.15	7.68	67.8	64.0	0.15	3.00	—	3.00	2.76	—	2.76	—	16,664	16,664	0.68	0.14	—	16,721
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.13	0.95	8.36	7.89	0.02	0.37	—	0.37	0.34	—	0.34	—	2,054	2,054	0.08	0.02	—	2,062
Dust From Material Movement	—	—	—	—	—	—	0.71	0.71	—	0.25	0.25	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.21	0.17	1.53	1.44	< 0.005	0.07	—	0.07	0.06	—	0.06	—	340	340	0.01	< 0.005	—	341

Dust From Material Movement	—	—	—	—	—	—	0.13	0.13	—	0.05	0.05	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.18	3.26	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	496	496	0.02	0.02	1.89	504
Vendor	0.05	0.04	1.41	0.54	0.01	0.02	0.41	0.43	0.01	0.11	0.12	—	1,413	1,413	< 0.005	0.20	3.64	1,477
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.03	0.30	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	55.9	55.9	< 0.005	< 0.005	0.10	56.8
Vendor	0.01	< 0.005	0.18	0.07	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	—	174	174	< 0.005	0.02	0.19	182
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.06	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	9.26	9.26	< 0.005	< 0.005	0.02	9.40
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	28.9	28.9	< 0.005	< 0.005	0.03	30.1
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.4. Grading (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.98	1.98	45.2	87.1	0.15	0.34	—	0.34	0.34	—	0.34	—	16,664	16,664	0.68	0.14	—	16,721
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.24	0.24	5.58	10.7	0.02	0.04	—	0.04	0.04	—	0.04	—	2,054	2,054	0.08	0.02	—	2,062
Dust From Material Movement	—	—	—	—	—	—	0.71	0.71	—	0.25	0.25	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	1.02	1.96	< 0.005	0.01	—	0.01	0.01	—	0.01	—	340	340	0.01	< 0.005	—	341
Dust From Material Movement	—	—	—	—	—	—	0.13	0.13	—	0.05	0.05	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.18	3.26	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	496	496	0.02	0.02	1.89	504
Vendor	0.05	0.04	1.41	0.54	0.01	0.02	0.41	0.43	0.01	0.11	0.12	—	1,413	1,413	< 0.005	0.20	3.64	1,477
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.03	0.30	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	55.9	55.9	< 0.005	< 0.005	0.10	56.8
Vendor	0.01	< 0.005	0.18	0.07	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	—	174	174	< 0.005	0.02	0.19	182
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.06	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	9.26	9.26	< 0.005	< 0.005	0.02	9.40
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	28.9	28.9	< 0.005	< 0.005	0.03	30.1
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.44	2.04	17.6	18.4	0.03	0.90	—	0.90	0.83	—	0.83	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.44	2.04	17.6	18.4	0.03	0.90	—	0.90	0.83	—	0.83	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.52	0.43	3.76	3.92	0.01	0.19	—	0.19	0.18	—	0.18	—	687	687	0.03	0.01	—	689
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.08	0.69	0.72	< 0.005	0.04	—	0.04	0.03	—	0.03	—	114	114	< 0.005	< 0.005	—	114
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.47	5.02	4.79	85.2	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	12,980	12,980	0.56	0.45	49.4	13,179
Vendor	0.31	0.21	8.15	3.11	0.06	0.12	2.37	2.49	0.06	0.65	0.72	—	8,155	8,155	0.01	1.17	21.0	8,525
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.03	4.18	5.23	57.5	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	11,540	11,540	0.58	0.45	1.28	11,691
Vendor	0.29	0.20	8.58	3.20	0.07	0.12	2.37	2.49	0.06	0.65	0.72	—	8,163	8,163	0.01	1.18	0.55	8,515
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	1.09	0.98	1.20	13.8	0.00	0.00	2.53	2.53	0.00	0.59	0.59	—	2,532	2,532	0.12	0.10	4.56	2,569
Vendor	0.06	0.04	1.83	0.67	0.01	0.03	0.50	0.53	0.01	0.14	0.15	—	1,740	1,740	< 0.005	0.25	1.94	1,817
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.20	0.18	0.22	2.51	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	419	419	0.02	0.02	0.75	425
Vendor	0.01	0.01	0.33	0.12	< 0.005	< 0.005	0.09	0.10	< 0.005	0.03	0.03	—	288	288	< 0.005	0.04	0.32	301
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.6. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.44	2.04	17.6	18.4	0.03	0.90	—	0.90	0.83	—	0.83	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.44	2.04	17.6	18.4	0.03	0.90	—	0.90	0.83	—	0.83	—	3,220	3,220	0.13	0.03	—	3,231
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.52	0.43	3.76	3.92	0.01	0.19	—	0.19	0.18	—	0.18	—	687	687	0.03	0.01	—	689

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.09	0.08	0.69	0.72	< 0.005	0.04	—	0.04	0.03	—	0.03	—	114	114	< 0.005	< 0.005	—	114
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.47	5.02	4.79	85.2	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	12,980	12,980	0.56	0.45	49.4	13,179
Vendor	0.31	0.21	8.15	3.11	0.06	0.12	2.37	2.49	0.06	0.65	0.72	—	8,155	8,155	0.01	1.17	21.0	8,525
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.03	4.18	5.23	57.5	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	11,540	11,540	0.58	0.45	1.28	11,691
Vendor	0.29	0.20	8.58	3.20	0.07	0.12	2.37	2.49	0.06	0.65	0.72	—	8,163	8,163	0.01	1.18	0.55	8,515
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.09	0.98	1.20	13.8	0.00	0.00	2.53	2.53	0.00	0.59	0.59	—	2,532	2,532	0.12	0.10	4.56	2,569
Vendor	0.06	0.04	1.83	0.67	0.01	0.03	0.50	0.53	0.01	0.14	0.15	—	1,740	1,740	< 0.005	0.25	1.94	1,817
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.20	0.18	0.22	2.51	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	419	419	0.02	0.02	0.75	425
Vendor	0.01	0.01	0.33	0.12	< 0.005	< 0.005	0.09	0.10	< 0.005	0.03	0.03	—	288	288	< 0.005	0.04	0.32	301
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.29	1.91	16.6	18.3	0.03	0.79	—	0.79	0.73	—	0.73	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.29	1.91	16.6	18.3	0.03	0.79	—	0.79	0.73	—	0.73	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.13	0.95	8.21	9.05	0.02	0.39	—	0.39	0.36	—	0.36	—	1,595	1,595	0.06	0.01	—	1,600
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.21	0.17	1.50	1.65	< 0.005	0.07	—	0.07	0.07	—	0.07	—	264	264	0.01	< 0.005	—	265
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.31	4.88	4.40	80.6	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	12,794	12,794	0.53	0.45	45.6	12,988
Vendor	0.30	0.21	7.88	2.97	0.06	0.06	2.37	2.43	0.06	0.65	0.72	—	7,989	7,989	0.01	1.17	18.3	8,356
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.53	4.06	4.81	54.4	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	11,376	11,376	0.58	0.45	1.18	11,526
Vendor	0.28	0.20	8.31	3.06	0.07	0.06	2.37	2.43	0.06	0.65	0.72	—	7,998	7,998	0.01	1.17	0.48	8,347
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.25	2.02	2.58	30.2	0.00	0.00	5.88	5.88	0.00	1.38	1.38	—	5,794	5,794	0.28	0.22	9.73	5,878
Vendor	0.15	0.10	4.09	1.49	0.03	0.03	1.17	1.20	0.03	0.32	0.35	—	3,957	3,957	0.01	0.58	3.93	4,134
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.41	0.37	0.47	5.51	0.00	0.00	1.07	1.07	0.00	0.25	0.25	—	959	959	0.05	0.04	1.61	973
Vendor	0.03	0.02	0.75	0.27	0.01	0.01	0.21	0.22	0.01	0.06	0.06	—	655	655	< 0.005	0.10	0.65	684
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	2.29	1.91	16.6	18.3	0.03	0.79	—	0.79	0.73	—	0.73	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.29	1.91	16.6	18.3	0.03	0.79	—	0.79	0.73	—	0.73	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.13	0.95	8.21	9.05	0.02	0.39	—	0.39	0.36	—	0.36	—	1,595	1,595	0.06	0.01	—	1,600
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.21	0.17	1.50	1.65	< 0.005	0.07	—	0.07	0.07	—	0.07	—	264	264	0.01	< 0.005	—	265
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	5.31	4.88	4.40	80.6	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	12,794	12,794	0.53	0.45	45.6	12,988
Vendor	0.30	0.21	7.88	2.97	0.06	0.06	2.37	2.43	0.06	0.65	0.72	—	7,989	7,989	0.01	1.17	18.3	8,356
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.53	4.06	4.81	54.4	0.00	0.00	12.0	12.0	0.00	2.81	2.81	—	11,376	11,376	0.58	0.45	1.18	11,526

Vendor	0.28	0.20	8.31	3.06	0.07	0.06	2.37	2.43	0.06	0.65	0.72	—	7,998	7,998	0.01	1.17	0.48	8,347
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.25	2.02	2.58	30.2	0.00	0.00	5.88	5.88	0.00	1.38	1.38	—	5,794	5,794	0.28	0.22	9.73	5,878
Vendor	0.15	0.10	4.09	1.49	0.03	0.03	1.17	1.20	0.03	0.32	0.35	—	3,957	3,957	0.01	0.58	3.93	4,134
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.41	0.37	0.47	5.51	0.00	0.00	1.07	1.07	0.00	0.25	0.25	—	959	959	0.05	0.04	1.61	973
Vendor	0.03	0.02	0.75	0.27	0.01	0.01	0.21	0.22	0.01	0.06	0.06	—	655	655	< 0.005	0.10	0.65	684
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.43	1.20	10.9	15.8	0.02	0.45	—	0.45	0.42	—	0.42	—	2,391	2,391	0.10	0.02	—	2,399
Paving	—	7.57	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.08	0.07	0.60	0.86	< 0.005	0.02	—	0.02	0.02	—	0.02	—	131	131	0.01	< 0.005	—	131
Paving	—	0.42	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.11	0.16	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.14	0.13	0.12	2.20	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	349	349	0.01	0.01	1.24	355
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.09	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	17.5	17.5	< 0.005	< 0.005	0.03	17.8
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.90	2.90	< 0.005	< 0.005	< 0.005	2.94
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Paving (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.43	1.20	10.9	15.8	0.02	0.45	—	0.45	0.42	—	0.42	—	2,391	2,391	0.10	0.02	—	2,399
Paving	—	7.57	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.60	0.86	< 0.005	0.02	—	0.02	0.02	—	0.02	—	131	131	0.01	< 0.005	—	131
Paving	—	0.42	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.11	0.16	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.14	0.13	0.12	2.20	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	349	349	0.01	0.01	1.24	355
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.09	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	17.5	17.5	< 0.005	< 0.005	0.03	17.8
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.90	2.90	< 0.005	< 0.005	< 0.005	2.94
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.37	0.30	2.22	3.00	< 0.005	0.05	—	0.05	0.05	—	0.05	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	333	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.03	0.24	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	36.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.04	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	6.67	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.06	0.98	0.88	16.1	0.00	0.00	2.39	2.39	0.00	0.56	0.56	—	2,559	2,559	0.11	0.09	9.11	2,598
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.11	1.34	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	256	256	0.01	0.01	0.43	260

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.24	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	42.5	42.5	< 0.005	< 0.005	0.07	43.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.37	0.30	2.22	3.00	< 0.005	0.05	—	0.05	0.05	—	0.05	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	68.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.03	0.24	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	7.46	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.04	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	1.36	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.06	0.98	0.88	16.1	0.00	0.00	2.39	2.39	0.00	0.56	0.56	—	2,559	2,559	0.11	0.09	9.11	2,598
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.11	1.34	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	256	256	0.01	0.01	0.43	260
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.24	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	42.5	42.5	< 0.005	< 0.005	0.07	43.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.30	0.24	9.70	2.42	0.11	0.16	3.79	3.95	0.16	1.01	1.17	—	11,446	11,446	0.03	1.68	31.5	11,978
Unrefrigerated Warehouse-No Rail	5.77	4.66	182	46.1	2.02	3.07	70.8	73.9	2.94	19.0	21.9	—	212,683	212,683	0.62	31.1	590	222,562
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	40.5	37.0	21.4	465	0.85	0.36	83.8	84.2	0.33	21.2	21.5	—	85,705	85,705	3.16	2.17	301	86,733
Total	46.6	41.9	213	513	2.97	3.59	158	162	3.42	41.1	44.6	—	309,834	309,834	3.81	35.0	922	321,272
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.29	0.24	10.2	2.41	0.11	0.16	3.79	3.95	0.16	1.01	1.17	—	11,448	11,448	0.03	1.68	0.82	11,950

Unrefrigerated Warehou Rail	5.61	4.53	191	45.9	2.02	3.07	70.8	73.9	2.94	19.0	21.9	—	212,726	212,726	0.61	31.1	15.3	222,038
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	37.7	34.3	24.1	350	0.76	0.36	83.8	84.2	0.33	21.2	21.5	—	76,529	76,529	3.30	2.36	7.80	77,322
Total	43.6	39.0	225	398	2.88	3.59	158	162	3.42	41.1	44.6	—	300,703	300,703	3.94	35.2	23.9	311,310
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.04	0.03	1.48	0.35	0.02	0.02	0.54	0.57	0.02	0.14	0.17	—	1,494	1,494	< 0.005	0.22	1.77	1,561
Unrefrigerated Warehouse-No Rail	0.93	0.75	31.7	7.48	0.33	0.50	11.5	12.0	0.48	3.09	3.57	—	31,631	31,631	0.09	4.63	37.9	33,052
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	6.33	5.74	4.17	63.6	0.13	0.06	13.9	13.9	0.05	3.50	3.56	—	11,901	11,901	0.51	0.37	19.7	12,042
Total	7.30	6.53	37.3	71.4	0.48	0.59	25.9	26.5	0.56	6.73	7.29	—	45,026	45,026	0.60	5.22	59.3	46,655

4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.30	0.24	9.70	2.42	0.11	0.16	3.79	3.95	0.16	1.01	1.17	—	11,446	11,446	0.03	1.68	31.5	11,978
Unrefrigerated Warehouse-No Rail	5.77	4.66	182	46.1	2.02	3.07	70.8	73.9	2.94	19.0	21.9	—	212,683	212,683	0.62	31.1	590	222,562
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	40.5	37.0	21.4	465	0.85	0.36	83.8	84.2	0.33	21.2	21.5	—	85,705	85,705	3.16	2.17	301	86,733
Total	46.6	41.9	213	513	2.97	3.59	158	162	3.42	41.1	44.6	—	309,834	309,834	3.81	35.0	922	321,272
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.29	0.24	10.2	2.41	0.11	0.16	3.79	3.95	0.16	1.01	1.17	—	11,448	11,448	0.03	1.68	0.82	11,950
Unrefrigerated Warehouse-No Rail	5.61	4.53	191	45.9	2.02	3.07	70.8	73.9	2.94	19.0	21.9	—	212,726	212,726	0.61	31.1	15.3	222,038
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

User Defined Industrial	37.7	34.3	24.1	350	0.76	0.36	83.8	84.2	0.33	21.2	21.5	—	76,529	76,529	3.30	2.36	7.80	77,322
Total	43.6	39.0	225	398	2.88	3.59	158	162	3.42	41.1	44.6	—	300,703	300,703	3.94	35.2	23.9	311,310
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.04	0.03	1.48	0.35	0.02	0.02	0.54	0.57	0.02	0.14	0.17	—	1,494	1,494	< 0.005	0.22	1.77	1,561
Unrefrigerated Warehouse-No Rail	0.93	0.75	31.7	7.48	0.33	0.50	11.5	12.0	0.48	3.09	3.57	—	31,631	31,631	0.09	4.63	37.9	33,052
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	6.33	5.74	4.17	63.6	0.13	0.06	13.9	13.9	0.05	3.50	3.56	—	11,901	11,901	0.51	0.37	19.7	12,042
Total	7.30	6.53	37.3	71.4	0.48	0.59	25.9	26.5	0.56	6.73	7.29	—	45,026	45,026	0.60	5.22	59.3	46,655

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	1,251	1,251	0.12	0.01	—	1,258

Unrefrige Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	9,068	9,068	0.86	0.10	—	9,121
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	609	609	0.06	0.01	—	612
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,927	10,927	1.04	0.13	—	10,991
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	1,251	1,251	0.12	0.01	—	1,258
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	9,068	9,068	0.86	0.10	—	9,121
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	609	609	0.06	0.01	—	612
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,927	10,927	1.04	0.13	—	10,991
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	207	207	0.02	< 0.005	—	208

Unrefrigerated	—	—	—	—	—	—	—	—	—	—	—	—	1,501	1,501	0.14	0.02	—	1,510
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	101	101	0.01	< 0.005	—	101
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	1,809	1,809	0.17	0.02	—	1,820

4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	1,254	1,254	0.12	0.01	—	1,262
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	9,122	9,122	0.87	0.11	—	9,176
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	609	609	0.06	0.01	—	612
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00

Total	—	—	—	—	—	—	—	—	—	—	—	—	10,985	10,985	1.05	0.13	—	11,049
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	1,251	1,251	0.12	0.01	—	1,258
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	9,068	9,068	0.86	0.10	—	9,121
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	609	609	0.06	0.01	—	612
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,927	10,927	1.04	0.13	—	10,991
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	207	207	0.02	< 0.005	—	209
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	1,506	1,506	0.14	0.02	—	1,515
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	101	101	0.01	< 0.005	—	101
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00

Total	—	—	—	—	—	—	—	—	—	—	—	—	1,814	1,814	0.17	0.02	—	1,824

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Manufact	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Manufact	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	46.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	3.65	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	16.9	15.6	0.80	94.8	0.01	0.17	—	0.17	0.13	—	0.13	—	390	390	0.02	< 0.005	—	391

Total	16.9	66.1	0.80	94.8	0.01	0.17	—	0.17	0.13	—	0.13	—	390	390	0.02	< 0.005	—	391
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	46.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	3.65	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	50.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	8.55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.67	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	1.52	1.40	0.07	8.53	< 0.005	0.02	—	0.02	0.01	—	0.01	—	31.8	31.8	< 0.005	< 0.005	—	31.9
Total	1.52	10.6	0.07	8.53	< 0.005	0.02	—	0.02	0.01	—	0.01	—	31.8	31.8	< 0.005	< 0.005	—	31.9

4.3.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	46.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Architectural	—	0.75	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	47.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	46.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.75	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	47.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	8.55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.14	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	8.69	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	60.9	174	234	6.26	0.15	—	436

Unrefrige Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	905	2,610	3,515	93.1	2.24	—	6,507
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	60.9	174	234	6.26	0.15	—	436
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	905	2,610	3,515	93.1	2.24	—	6,507
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	10.1	28.7	38.8	1.04	0.02	—	72.2

Unrefrigerated	—	—	—	—	—	—	—	—	—	—	—	150	432	582	15.4	0.37	—	1,077
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	160	461	621	16.4	0.40	—	1,150

4.4.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	60.9	174	234	6.26	0.15	—	436
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	905	2,610	3,515	93.1	2.24	—	6,507
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

Total	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	60.9	174	234	6.26	0.15	—	436
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	905	2,610	3,515	93.1	2.24	—	6,507
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	966	2,783	3,749	99.3	2.39	—	6,943
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	10.1	28.7	38.8	1.04	0.02	—	72.2
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	150	432	582	15.4	0.37	—	1,077
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

Total	—	—	—	—	—	—	—	—	—	—	—	160	461	621	16.4	0.40	—	1,150

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	91.9	0.00	91.9	9.18	0.00	—	321
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	1,035	0.00	1,035	103	0.00	—	3,621
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	91.9	0.00	91.9	9.18	0.00	—	321

Unrefrigerated Warehou Rail	—	—	—	—	—	—	—	—	—	—	—	1,035	0.00	1,035	103	0.00	—	3,621
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	15.2	0.00	15.2	1.52	0.00	—	53.2
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	171	0.00	171	17.1	0.00	—	599
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	187	0.00	187	18.6	0.00	—	653

4.5.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	91.9	0.00	91.9	9.18	0.00	—	321
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	1,035	0.00	1,035	103	0.00	—	3,621
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	91.9	0.00	91.9	9.18	0.00	—	321
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	1,035	0.00	1,035	103	0.00	—	3,621
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,127	0.00	1,127	113	0.00	—	3,942
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	15.2	0.00	15.2	1.52	0.00	—	53.2
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	171	0.00	171	17.1	0.00	—	599
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	187	0.00	187	18.6	0.00	—	653

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.13	2.13
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.13	2.13

4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	12.9	12.9
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Manufacturing	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.13	2.13
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.13	2.13

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.08	0.07	0.21	0.19	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	34.3	34.3	< 0.005	< 0.005	0.00	34.4
Total	0.08	0.07	0.21	0.19	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	34.3	34.3	< 0.005	< 0.005	0.00	34.4

4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Total	3.25	2.95	8.26	7.53	0.01	0.43	0.00	0.43	0.43	0.00	0.43	0.00	1,511	1,511	0.06	0.01	0.00	1,516
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.08	0.07	0.21	0.19	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	34.3	34.3	< 0.005	< 0.005	0.00	34.4
Total	0.08	0.07	0.21	0.19	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	34.3	34.3	< 0.005	< 0.005	0.00	34.4

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	6/1/2026	7/10/2026	5.00	30.0	—
Grading	Grading	7/13/2026	9/11/2026	5.00	45.0	—
Building Construction	Building Construction	9/14/2026	9/10/2027	5.00	260	—
Paving	Paving	7/1/2027	7/28/2027	5.00	20.0	—
Architectural Coating	Architectural Coating	7/1/2027	8/25/2027	5.00	40.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40

Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Average	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Average	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 4 Interim	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Tier 4 Interim	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20

Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	32.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	48.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	916	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	277	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT

Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	183	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	32.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	48.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	916	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	277	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT

Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	183	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	3,270,228	1,090,076	151,118

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	—	—	180	0.00	—
Grading	—	—	428	0.00	—

Paving	0.00	0.00	0.00	0.00	57.8

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Manufacturing	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Parking Lot	16.8	100%
Other Asphalt Surfaces	41.0	100%
User Defined Industrial	0.00	0%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2026	0.00	346	0.03	< 0.005
2027	0.00	346	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Manufacturing	64.1	19.9	13.3	18,433	4,342	1,351	904	1,249,597

Unrefrigerated Warehouse-No Rail	250	21.9	8.66	66,738	16,924	1,480	586	4,520,174
Unrefrigerated Warehouse-No Rail	946	760	748	325,170	64,150	51,541	50,767	22,059,525
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	7,655	5,431	5,269	2,553,579	120,176	85,263	82,730	40,091,196

5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Manufacturing	64.1	19.9	13.3	18,433	4,342	1,351	904	1,249,597
Unrefrigerated Warehouse-No Rail	250	21.9	8.66	66,738	16,924	1,480	586	4,520,174
Unrefrigerated Warehouse-No Rail	946	760	748	325,170	64,150	51,541	50,767	22,059,525
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	7,655	5,431	5,269	2,553,579	120,176	85,263	82,730	40,091,196

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	3,270,228	1,090,076	151,118

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Manufacturing	1,318,502	346	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	1,929,910	346	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	7,630,686	346	0.0330	0.0040	0.00
Parking Lot	641,827	346	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	346	0.0330	0.0040	0.00

User Defined Industrial	0.00	346	0.0330	0.0040	0.00

5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Manufacturing	1,318,502	346	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	1,929,910	346	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	7,630,686	346	0.0330	0.0040	0.00
Parking Lot	641,827	346	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	346	0.0330	0.0040	0.00
User Defined Industrial	0.00	346	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Manufacturing	31,784,850	0.00
Unrefrigerated Warehouse-No Rail	95,354,088	0.00
Unrefrigerated Warehouse-No Rail	377,021,213	7,396,369
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)

Manufacturing	31,784,850	0.00
Unrefrigerated Warehouse-No Rail	95,354,088	0.00
Unrefrigerated Warehouse-No Rail	377,021,213	7,396,369
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Manufacturing	170	—
Unrefrigerated Warehouse-No Rail	388	—
Unrefrigerated Warehouse-No Rail	1,533	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Manufacturing	170	—
Unrefrigerated Warehouse-No Rail	388	—
Unrefrigerated Warehouse-No Rail	1,533	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Manufacturing	Other commercial A/C and heat pumps	User Defined	750	0.30	4.00	4.00	18.0

5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Manufacturing	Other commercial A/C and heat pumps	User Defined	750	0.30	4.00	4.00	18.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
Fire Pump	Diesel	3.00	1.00	50.0	300	0.73

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

5.17. User Defined

Equipment Type	Fuel Type

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	34.5	annual days of extreme heat
Extreme Precipitation	1.15	annual days with precipitation above 20 mm
Sea Level Rise	—	meters of inundation depth
Wildfire	0.35	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.0 meter, 1.41 meters
Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score

Temperature and Extreme Heat	5	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	1	1	4
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	88.7
AQ-PM	6.87
AQ-DPM	5.33
Drinking Water	—
Lead Risk Housing	—
Pesticides	70.6
Toxic Releases	99.9
Traffic	42.0
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	31.5
Haz Waste Facilities/Generators	92.5
Impaired Water Bodies	0.00
Solid Waste	0.00
Sensitive Population	—
Asthma	78.5
Cardio-vascular	44.0
Low Birth Weights	—
Socioeconomic Factor Indicators	—

Education	—
Housing	—
Linguistic	—
Poverty	—
Unemployment	—

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	—
Employed	—
Median HI	—
Education	—
Bachelor's or higher	—
High school enrollment	—
Preschool enrollment	—
Transportation	—
Auto Access	—
Active commuting	—
Social	—
2-parent households	—
Voting	—
Neighborhood	—
Alcohol availability	—
Park access	—
Retail density	—

Supermarket access	—
Tree canopy	—
Housing	—
Homeownership	—
Housing habitability	—
Low-inc homeowner severe housing cost burden	—
Low-inc renter severe housing cost burden	—
Uncrowded housing	—
Health Outcomes	—
Insured adults	—
Arthritis	32.9
Asthma ER Admissions	69.8
High Blood Pressure	84.3
Cancer (excluding skin)	80.0
Asthma	1.3
Coronary Heart Disease	40.3
Chronic Obstructive Pulmonary Disease	2.1
Diagnosed Diabetes	29.7
Life Expectancy at Birth	0.0
Cognitively Disabled	99.8
Physically Disabled	99.8
Heart Attack ER Admissions	91.2
Mental Health Not Good	0.3
Chronic Kidney Disease	73.0
Obesity	0.4
Pedestrian Injuries	0.0
Physical Health Not Good	1.8

Stroke	11.3
Health Risk Behaviors	—
Binge Drinking	75.2
Current Smoker	0.4
No Leisure Time for Physical Activity	14.6
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	99.4
Elderly	99.8
English Speaking	0.0
Foreign-born	0.0
Outdoor Workers	0.0
Climate Change Adaptive Capacity	—
Impervious Surface Cover	99.9
Traffic Density	0.0
Traffic Access	23.0
Other Indices	—
Hardship	0.0
Other Decision Support	—
2016 Voting	0.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	—
Healthy Places Index Score for Project Location (b)	—
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No

Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Land uses provided by client
Construction: Construction Phases	Client provided schedule
Construction: Off-Road Equipment	Client provided construction equipment Standard 8-hour workday T/L/B swapped for Crawler Tractors to account for dust disturbance"
Construction: Trips and VMT	Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, and Building Construction. Because Paving and Architectural Coating activities overlap with Building Construction, the analysis assumes that the vendor trips assigned to Building Construction cover Paving and Architectural Coating as well."
Operations: Vehicle Data	Trip Characteristics taken from Traffic Analysis Trip Length taken from VMT Truck Sup Memo Passenger vehicle trips modeled on User Defined Industrial land use"
Operations: Fleet Mix	Passenger Car Mix estimated based on CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, MCY). Truck Fleet Mix based on 2, 3 and 4 axle trucks
Operations: Energy Use	Natural gas will not be used

Operations: Refrigerants	Beginning 1 January 2025, all new air conditioning equipment may not use refrigerants with a GWP of 750 or greater

APPENDIX 3.3:

CALEEMOD PHASE 3 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS

This page intentionally left blank

14267-Phase 3 Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

1.2. Land Use Types

1.3. User-Selected Emission Reduction Measures by Emissions Sector

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

2.2. Construction Emissions by Year, Unmitigated

2.3. Construction Emissions by Year, Mitigated

2.4. Operations Emissions Compared Against Thresholds

2.5. Operations Emissions by Sector, Unmitigated

2.6. Operations Emissions by Sector, Mitigated

3. Construction Emissions Details

3.1. Site Preparation (2028) - Unmitigated

3.2. Site Preparation (2028) - Mitigated

3.3. Grading (2028) - Unmitigated

3.4. Grading (2028) - Mitigated

3.5. Building Construction (2028) - Unmitigated

3.6. Building Construction (2028) - Mitigated

3.7. Building Construction (2029) - Unmitigated

3.8. Building Construction (2029) - Mitigated

3.9. Paving (2029) - Unmitigated

3.10. Paving (2029) - Mitigated

3.11. Architectural Coating (2029) - Unmitigated

3.12. Architectural Coating (2029) - Mitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.1.2. Mitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.2. Electricity Emissions By Land Use - Mitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.2.4. Natural Gas Emissions By Land Use - Mitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.3.2. Mitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.4.2. Mitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.5.2. Mitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.6.2. Mitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.7.2. Mitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.8.2. Mitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.9.2. Mitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.2.2. Mitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.3.2. Mitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.9.2. Mitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.10.4. Landscape Equipment - Mitigated

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.11.2. Mitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.12.2. Mitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

5.18.2.2. Mitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	14267-Phase 3
Construction Start Date	6/1/2028
Operational Year	2029
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.640461, -118.119638
County	Los Angeles-Mojave Desert
City	Palmdale
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3655
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.20

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description

Unrefrigerated Warehouse-No Rail	867	1000sqft	19.9	867,432	355,967	—	—	High-Cube Fulfillment (Non-Sort)
Refrigerated Warehouse-No Rail	289	1000sqft	6.64	289,144	0.00	—	—	High-Cube Cold Storage Warehouse
Fast Food Restaurant w/o Drive Thru	2.50	1000sqft	0.06	2,500	0.00	—	—	Fast-Food Restaurant Without-Drive Thru
Fast Food Restaurant with Drive Thru	2.50	1000sqft	0.06	2,500	0.00	—	—	Fast-Food Restaurant With-Drive Thru
Fast Food Restaurant with Drive Thru	2.00	1000sqft	0.05	2,000	0.00	—	—	Coffe Shop With Drive Thru
Regional Shopping Center	54.0	1000sqft	1.24	53,984	0.00	—	—	Commercial Retail
Parking Lot	944	Space	5.53	0.00	0.00	—	—	—
Other Asphalt Surfaces	31.8	Acre	31.8	0.00	0.00	—	—	—
User Defined Industrial	1,157	User Defined Unit	0.00	0.00	0.00	—	—	Passenger Vehicles

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-5	Use Advanced Engine Tiers
Construction	C-13	Use Low-VOC Paints for Construction
Area Sources	LL-1	Replace Gas Powered Landscape Equipment with Zero-Emission Landscape Equipment
Area Sources	AS-2	Use Low-VOC Paints

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	8.77	199	60.3	87.3	0.16	2.60	10.0	12.6	2.40	4.62	7.00	—	18,735	18,735	0.70	0.98	34.3	19,077
Mit.	7.32	50.5	54.1	90.3	0.16	2.59	10.0	12.6	2.39	4.62	7.00	—	18,735	18,735	0.70	0.98	34.3	19,077
% Reduced	17%	75%	10%	-3%	—	< 0.5%	—	—	< 0.5%	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.75	4.08	22.5	48.1	0.07	0.73	7.94	8.67	0.68	1.92	2.60	—	13,761	13,761	0.44	0.90	0.83	14,041
Mit.	4.75	4.08	22.5	48.1	0.07	0.73	7.94	8.67	0.68	1.92	2.60	—	13,761	13,761	0.44	0.90	0.83	14,041
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	2.70	22.9	16.7	26.5	0.04	0.69	4.09	4.45	0.64	1.05	1.69	—	7,165	7,165	0.21	0.46	6.49	7,310
Mit.	2.44	6.71	15.0	26.5	0.04	0.41	4.09	4.45	0.38	1.05	1.44	—	7,165	7,165	0.21	0.46	6.49	7,310
% Reduced	10%	71%	10%	—	—	40%	—	—	40%	—	15%	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.49	4.19	3.06	4.84	0.01	0.13	0.75	0.81	0.12	0.19	0.31	—	1,186	1,186	0.04	0.08	1.08	1,210
Mit.	0.44	1.22	2.74	4.84	0.01	0.08	0.75	0.81	0.07	0.19	0.26	—	1,186	1,186	0.04	0.08	1.08	1,210
% Reduced	10%	71%	10%	—	—	40%	—	—	40%	—	15%	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	8.77	7.37	60.3	66.0	0.16	2.60	10.0	12.6	2.40	4.62	7.00	—	17,902	17,902	0.70	0.90	32.2	18,000
2029	7.02	199	33.9	87.3	0.09	1.07	9.59	10.7	0.99	2.30	3.29	—	18,735	18,735	0.60	0.98	34.3	19,077
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	4.75	4.08	22.5	48.1	0.07	0.73	7.94	8.67	0.68	1.92	2.60	—	13,761	13,761	0.44	0.90	0.83	14,041
2029	4.53	3.94	21.5	46.1	0.07	0.68	7.94	8.61	0.62	1.92	2.54	—	13,539	13,539	0.24	0.90	0.75	13,813
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	2.70	2.29	16.7	23.4	0.04	0.69	3.30	3.99	0.64	1.05	1.69	—	6,015	6,015	0.21	0.24	3.22	6,094
2029	2.44	22.9	11.7	26.5	0.04	0.36	4.09	4.45	0.33	0.99	1.32	—	7,165	7,165	0.13	0.46	6.49	7,310
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	0.49	0.42	3.06	4.27	0.01	0.13	0.60	0.73	0.12	0.19	0.31	—	996	996	0.04	0.04	0.53	1,009
2029	0.44	4.19	2.13	4.84	0.01	0.07	0.75	0.81	0.06	0.18	0.24	—	1,186	1,186	0.02	0.08	1.08	1,210

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	7.32	6.16	54.1	90.3	0.16	2.59	10.0	12.6	2.39	4.62	7.00	—	17,902	17,902	0.70	0.90	32.2	18,000
2029	7.02	50.5	33.9	87.3	0.09	1.07	9.59	10.7	0.99	2.30	3.29	—	18,735	18,735	0.60	0.98	34.3	19,077

Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	4.75	4.08	22.5	48.1	0.07	0.73	7.94	8.67	0.68	1.92	2.60	—	13,761	13,761	0.44	0.90	0.83	14,041
2029	4.53	3.94	21.5	46.1	0.07	0.68	7.94	8.61	0.62	1.92	2.54	—	13,539	13,539	0.24	0.90	0.75	13,813
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	1.89	1.65	15.0	26.4	0.04	0.41	3.30	3.71	0.38	1.05	1.44	—	6,015	6,015	0.21	0.24	3.22	6,094
2029	2.44	6.71	11.7	26.5	0.04	0.36	4.09	4.45	0.33	0.99	1.32	—	7,165	7,165	0.13	0.46	6.49	7,310
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2028	0.34	0.30	2.74	4.82	0.01	0.08	0.60	0.68	0.07	0.19	0.26	—	996	996	0.04	0.04	0.53	1,009
2029	0.44	1.22	2.13	4.84	0.01	0.07	0.75	0.81	0.06	0.18	0.24	—	1,186	1,186	0.02	0.08	1.08	1,210

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	38.2	63.0	80.4	327	1.16	1.69	75.5	77.2	1.60	19.5	21.1	1,184	131,911	133,095	123	12.6	642	140,560
Mit.	28.8	52.7	80.0	274	1.16	1.60	75.5	77.1	1.53	19.5	21.0	1,184	131,726	132,910	123	12.6	642	140,374
% Reduced	25%	16%	1%	16%	< 0.5%	6%	—	< 0.5%	4%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	26.8	52.3	84.6	214	1.11	1.60	75.5	77.1	1.53	19.5	21.0	1,184	126,596	127,780	123	12.7	308	134,944
Mit.	26.8	50.7	84.6	214	1.11	1.60	75.5	77.1	1.53	19.5	21.0	1,184	126,596	127,780	123	12.7	308	134,944
% Reduced	—	3%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	25.2	51.0	69.1	211	0.93	1.20	62.3	63.5	1.14	16.1	17.2	1,184	108,761	109,945	123	11.0	423	116,725
Mit.	20.6	45.1	68.9	185	0.93	1.15	62.3	63.4	1.10	16.1	17.2	1,184	108,669	109,853	123	11.0	423	116,633
% Reduced	18%	12%	< 0.5%	12%	< 0.5%	4%	—	< 0.5%	3%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	—	—	< 0.5%
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.60	9.30	12.6	38.5	0.17	0.22	11.4	11.6	0.21	2.93	3.14	196	18,007	18,203	20.3	1.83	70.0	19,325
Mit.	3.76	8.22	12.6	33.8	0.17	0.21	11.4	11.6	0.20	2.93	3.14	196	17,991	18,187	20.3	1.83	70.0	19,310
% Reduced	18%	12%	< 0.5%	12%	< 0.5%	4%	—	< 0.5%	3%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	26.6	24.1	74.1	269	1.14	1.28	75.5	76.8	1.22	19.5	20.7	—	118,720	118,720	2.18	11.1	343	122,439
Area	9.43	36.9	0.45	53.0	< 0.005	0.09	—	0.09	0.07	—	0.07	—	218	218	0.01	< 0.005	—	219
Energy	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	10,449	10,449	0.99	0.12	—	10,509
Water	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Waste	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	38.2	63.0	80.4	327	1.16	1.69	75.5	77.2	1.60	19.5	21.1	1,184	131,911	133,095	123	12.6	642	140,560

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	24.6	22.0	78.8	208	1.09	1.28	75.5	76.8	1.22	19.5	20.7	—	113,623	113,623	2.25	11.3	8.89	117,042
Area	—	28.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	10,449	10,449	0.99	0.12	—	10,509
Water	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Waste	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	26.8	52.3	84.6	214	1.11	1.60	75.5	77.1	1.53	19.5	21.0	1,184	126,596	127,780	123	12.7	308	134,944
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	20.3	18.1	67.8	184	0.93	1.09	62.3	63.4	1.04	16.1	17.1	—	96,549	96,549	1.86	9.62	124	99,587
Area	4.65	32.5	0.22	26.1	< 0.005	0.05	—	0.05	0.04	—	0.04	—	107	107	< 0.005	< 0.005	—	108
Energy	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	10,449	10,449	0.99	0.12	—	10,509
Water	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Waste	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Stationary	0.30	0.27	0.75	0.69	< 0.005	0.04	0.00	0.04	0.04	0.00	0.04	0.00	138	138	0.01	< 0.005	0.00	138
Total	25.2	51.0	69.1	211	0.93	1.20	62.3	63.5	1.14	16.1	17.2	1,184	108,761	109,945	123	11.0	423	116,725
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.70	3.31	12.4	33.6	0.17	0.20	11.4	11.6	0.19	2.93	3.12	—	15,985	15,985	0.31	1.59	20.6	16,488
Area	0.85	5.94	0.04	4.77	< 0.005	0.01	—	0.01	0.01	—	0.01	—	17.8	17.8	< 0.005	< 0.005	—	17.8
Energy	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1,730	1,730	0.16	0.02	—	1,740
Water	—	—	—	—	—	—	—	—	—	—	—	86.8	251	338	8.92	0.21	—	625
Waste	—	—	—	—	—	—	—	—	—	—	—	109	0.00	109	10.9	0.00	—	382

Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	49.5	49.5
Stationary	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	4.60	9.30	12.6	38.5	0.17	0.22	11.4	11.6	0.21	2.93	3.14	196	18,007	18,203	20.3	1.83	70.0	19,325

2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	26.6	24.1	74.1	269	1.14	1.28	75.5	76.8	1.22	19.5	20.7	—	118,720	118,720	2.18	11.1	343	122,439
Area	—	26.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	10,481	10,481	1.00	0.12	—	10,541
Water	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Waste	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	28.8	52.7	80.0	274	1.16	1.60	75.5	77.1	1.53	19.5	21.0	1,184	131,726	132,910	123	12.6	642	140,374
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	24.6	22.0	78.8	208	1.09	1.28	75.5	76.8	1.22	19.5	20.7	—	113,623	113,623	2.25	11.3	8.89	117,042
Area	—	26.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	10,449	10,449	0.99	0.12	—	10,509
Water	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Waste	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299

Stationar	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	26.8	50.7	84.6	214	1.11	1.60	75.5	77.1	1.53	19.5	21.0	1,184	126,596	127,780	123	12.7	308	134,944
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	20.3	18.1	67.8	184	0.93	1.09	62.3	63.4	1.04	16.1	17.1	—	96,549	96,549	1.86	9.62	124	99,587
Area	—	26.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	10,465	10,465	1.00	0.12	—	10,525
Water	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Waste	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Stationary	0.30	0.27	0.75	0.69	< 0.005	0.04	0.00	0.04	0.04	0.00	0.04	0.00	138	138	0.01	< 0.005	0.00	138
Total	20.6	45.1	68.9	185	0.93	1.15	62.3	63.4	1.10	16.1	17.2	1,184	108,669	109,853	123	11.0	423	116,633
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.70	3.31	12.4	33.6	0.17	0.20	11.4	11.6	0.19	2.93	3.12	—	15,985	15,985	0.31	1.59	20.6	16,488
Area	—	4.86	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1,733	1,733	0.16	0.02	—	1,743
Water	—	—	—	—	—	—	—	—	—	—	—	86.8	251	338	8.92	0.21	—	625
Waste	—	—	—	—	—	—	—	—	—	—	—	109	0.00	109	10.9	0.00	—	382
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	49.5	49.5
Stationary	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	3.76	8.22	12.6	33.8	0.17	0.21	11.4	11.6	0.20	2.93	3.14	196	17,991	18,187	20.3	1.83	70.0	19,310

3. Construction Emissions Details

3.1. Site Preparation (2028) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	7.14	6.00	53.5	51.4	0.09	2.59	—	2.59	2.38	—	2.38	—	9,339	9,339	0.38	0.08	—	9,371
Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.59	0.49	4.40	4.23	0.01	0.21	—	0.21	0.20	—	0.20	—	768	768	0.03	0.01	—	770
Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.11	0.09	0.80	0.77	< 0.005	0.04	—	0.04	0.04	—	0.04	—	127	127	0.01	< 0.005	—	128
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.16	0.14	0.13	2.48	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	412	412	0.02	0.01	1.37	418
Vendor	0.02	0.01	0.49	0.19	< 0.005	< 0.005	0.15	0.16	< 0.005	0.04	0.05	—	506	506	< 0.005	0.07	1.05	529
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.15	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	31.0	31.0	< 0.005	< 0.005	0.05	31.4
Vendor	< 0.005	< 0.005	0.04	0.02	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	41.6	41.6	< 0.005	0.01	0.04	43.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.12	5.12	< 0.005	< 0.005	0.01	5.20
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	6.89	6.89	< 0.005	< 0.005	0.01	7.19
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.2. Site Preparation (2028) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	7.14	6.00	53.5	51.4	0.09	2.59	—	2.59	2.38	—	2.38	—	9,339	9,339	0.38	0.08	—	9,371

Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.59	0.49	4.40	4.23	0.01	0.21	—	0.21	0.20	—	0.20	—	768	768	0.03	0.01	—	770
Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.11	0.09	0.80	0.77	< 0.005	0.04	—	0.04	0.04	—	0.04	—	127	127	0.01	< 0.005	—	128
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.16	0.14	0.13	2.48	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	412	412	0.02	0.01	1.37	418
Vendor	0.02	0.01	0.49	0.19	< 0.005	< 0.005	0.15	0.16	< 0.005	0.04	0.05	—	506	506	< 0.005	0.07	1.05	529
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.15	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	31.0	31.0	< 0.005	< 0.005	0.05	31.4
Vendor	< 0.005	< 0.005	0.04	0.02	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	41.6	41.6	< 0.005	0.01	0.04	43.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.12	5.12	< 0.005	< 0.005	0.01	5.20
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	6.89	6.89	< 0.005	< 0.005	0.01	7.19
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2028) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	8.55	7.19	59.4	62.9	0.15	2.60	—	2.60	2.39	—	2.39	—	16,662	16,662	0.68	0.14	—	16,719
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.05	0.89	7.32	7.75	0.02	0.32	—	0.32	0.29	—	0.29	—	2,054	2,054	0.08	0.02	—	2,061
Dust From Material Movement	—	—	—	—	—	—	0.71	0.71	—	0.25	0.25	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.16	1.34	1.41	< 0.005	0.06	—	0.06	0.05	—	0.05	—	340	340	0.01	< 0.005	—	341
Dust From Material Movement	—	—	—	—	—	—	0.13	0.13	—	0.05	0.05	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.18	0.17	0.15	2.89	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	480	480	0.02	0.02	1.60	488
Vendor	0.03	0.02	0.74	0.28	0.01	0.01	0.23	0.24	0.01	0.06	0.07	—	760	760	< 0.005	0.11	1.58	793
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.27	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	54.2	54.2	< 0.005	< 0.005	0.09	55.0
Vendor	< 0.005	< 0.005	0.10	0.03	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	93.7	93.7	< 0.005	0.01	0.08	97.7

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	8.97	8.97	< 0.005	< 0.005	0.01	9.10
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	15.5	15.5	< 0.005	< 0.005	0.01	16.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.4. Grading (2028) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.98	1.98	45.2	87.1	0.15	0.34	—	0.34	0.34	—	0.34	—	16,662	16,662	0.68	0.14	—	16,719
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.24	0.24	5.58	10.7	0.02	0.04	—	0.04	0.04	—	0.04	—	2,054	2,054	0.08	0.02	—	2,061
Dust From Material Movement	—	—	—	—	—	—	0.71	0.71	—	0.25	0.25	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	1.02	1.96	< 0.005	0.01	—	0.01	0.01	—	0.01	—	340	340	0.01	< 0.005	—	341
Dust From Material Movement	—	—	—	—	—	—	0.13	0.13	—	0.05	0.05	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.18	0.17	0.15	2.89	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	480	480	0.02	0.02	1.60	488
Vendor	0.03	0.02	0.74	0.28	0.01	0.01	0.23	0.24	0.01	0.06	0.07	—	760	760	< 0.005	0.11	1.58	793
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.27	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	54.2	54.2	< 0.005	< 0.005	0.09	55.0
Vendor	< 0.005	< 0.005	0.10	0.03	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	93.7	93.7	< 0.005	0.01	0.08	97.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	8.97	8.97	< 0.005	< 0.005	0.01	9.10
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	15.5	15.5	< 0.005	< 0.005	0.01	16.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Building Construction (2028) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.16	1.81	15.6	18.2	0.03	0.70	—	0.70	0.64	—	0.64	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.16	1.81	15.6	18.2	0.03	0.70	—	0.70	0.64	—	0.64	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.46	0.39	3.34	3.88	0.01	0.15	—	0.15	0.14	—	0.14	—	687	687	0.03	0.01	—	689
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.61	0.71	< 0.005	0.03	—	0.03	0.03	—	0.03	—	114	114	< 0.005	< 0.005	—	114
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.65	2.40	2.20	41.8	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,943	6,943	0.30	0.25	23.1	7,049
Vendor	0.17	0.12	4.25	1.62	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,361	4,361	0.01	0.62	9.07	4,555
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.43	2.16	2.43	28.3	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,175	6,175	0.31	0.25	0.60	6,258
Vendor	0.16	0.11	4.46	1.63	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,366	4,366	0.01	0.62	0.23	4,551
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.52	0.47	0.57	6.73	0.00	0.00	1.40	1.40	0.00	0.33	0.33	—	1,355	1,355	0.07	0.05	2.13	1,375
Vendor	0.04	0.02	0.95	0.34	0.01	0.01	0.28	0.29	0.01	0.08	0.09	—	931	931	< 0.005	0.13	0.83	971
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.10	1.23	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	224	224	0.01	0.01	0.35	228
Vendor	0.01	< 0.005	0.17	0.06	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	—	154	154	< 0.005	0.02	0.14	161
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.6. Building Construction (2028) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	2.16	1.81	15.6	18.2	0.03	0.70	—	0.70	0.64	—	0.64	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.16	1.81	15.6	18.2	0.03	0.70	—	0.70	0.64	—	0.64	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.46	0.39	3.34	3.88	0.01	0.15	—	0.15	0.14	—	0.14	—	687	687	0.03	0.01	—	689
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.61	0.71	< 0.005	0.03	—	0.03	0.03	—	0.03	—	114	114	< 0.005	< 0.005	—	114
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.65	2.40	2.20	41.8	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,943	6,943	0.30	0.25	23.1	7,049
Vendor	0.17	0.12	4.25	1.62	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,361	4,361	0.01	0.62	9.07	4,555
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.43	2.16	2.43	28.3	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,175	6,175	0.31	0.25	0.60	6,258

Vendor	0.16	0.11	4.46	1.63	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,366	4,366	0.01	0.62	0.23	4,551
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.52	0.47	0.57	6.73	0.00	0.00	1.40	1.40	0.00	0.33	0.33	—	1,355	1,355	0.07	0.05	2.13	1,375
Vendor	0.04	0.02	0.95	0.34	0.01	0.01	0.28	0.29	0.01	0.08	0.09	—	931	931	< 0.005	0.13	0.83	971
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.10	1.23	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	224	224	0.01	0.01	0.35	228
Vendor	0.01	< 0.005	0.17	0.06	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	—	154	154	< 0.005	0.02	0.14	161
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2029) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.08	1.74	15.0	18.2	0.03	0.64	—	0.64	0.59	—	0.59	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.08	1.74	15.0	18.2	0.03	0.64	—	0.64	0.59	—	0.59	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.04	0.87	7.50	9.06	0.02	0.32	—	0.32	0.29	—	0.29	—	1,608	1,608	0.07	0.01	—	1,613
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.16	1.37	1.65	< 0.005	0.06	—	0.06	0.05	—	0.05	—	266	266	0.01	< 0.005	—	267
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.54	2.30	1.99	39.1	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,822	6,822	0.28	0.25	21.1	6,925
Vendor	0.13	0.12	4.09	1.55	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,244	4,244	0.01	0.62	7.97	4,436
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.33	2.09	2.21	26.4	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,069	6,069	0.10	0.25	0.55	6,147
Vendor	0.12	0.11	4.30	1.59	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,248	4,248	0.01	0.62	0.21	4,434
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.17	1.04	1.21	14.8	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,115	3,115	0.05	0.13	4.55	3,158
Vendor	0.07	0.06	2.13	0.78	0.02	0.02	0.66	0.67	0.02	0.18	0.20	—	2,119	2,119	< 0.005	0.31	1.72	2,213
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.22	2.70	0.00	0.00	0.60	0.60	0.00	0.14	0.14	—	516	516	0.01	0.02	0.75	523

Vendor	0.01	0.01	0.39	0.14	< 0.005	< 0.005	0.12	0.12	< 0.005	0.03	0.04	—	351	351	< 0.005	0.05	0.28	366
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2029) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.08	1.74	15.0	18.2	0.03	0.64	—	0.64	0.59	—	0.59	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.08	1.74	15.0	18.2	0.03	0.64	—	0.64	0.59	—	0.59	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.04	0.87	7.50	9.06	0.02	0.32	—	0.32	0.29	—	0.29	—	1,608	1,608	0.07	0.01	—	1,613
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.16	1.37	1.65	< 0.005	0.06	—	0.06	0.05	—	0.05	—	266	266	0.01	< 0.005	—	267
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.54	2.30	1.99	39.1	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,822	6,822	0.28	0.25	21.1	6,925
Vendor	0.13	0.12	4.09	1.55	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,244	4,244	0.01	0.62	7.97	4,436
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.33	2.09	2.21	26.4	0.00	0.00	6.61	6.61	0.00	1.55	1.55	—	6,069	6,069	0.10	0.25	0.55	6,147
Vendor	0.12	0.11	4.30	1.59	0.03	0.03	1.33	1.36	0.03	0.37	0.40	—	4,248	4,248	0.01	0.62	0.21	4,434
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.17	1.04	1.21	14.8	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,115	3,115	0.05	0.13	4.55	3,158
Vendor	0.07	0.06	2.13	0.78	0.02	0.02	0.66	0.67	0.02	0.18	0.20	—	2,119	2,119	< 0.005	0.31	1.72	2,213
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.22	2.70	0.00	0.00	0.60	0.60	0.00	0.14	0.14	—	516	516	0.01	0.02	0.75	523
Vendor	0.01	0.01	0.39	0.14	< 0.005	< 0.005	0.12	0.12	< 0.005	0.03	0.04	—	351	351	< 0.005	0.05	0.28	366
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2029) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	1.30	1.09	10.2	15.7	0.02	0.36	—	0.36	0.33	—	0.33	—	2,390	2,390	0.10	0.02	—	2,398
Paving	—	4.89	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.56	0.86	< 0.005	0.02	—	0.02	0.02	—	0.02	—	131	131	0.01	< 0.005	—	131
Paving	—	0.27	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.10	0.16	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.05	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.11	0.10	1.93	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	337	337	0.01	0.01	1.04	342
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.01	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	16.9	16.9	< 0.005	< 0.005	0.02	17.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.80	2.80	< 0.005	< 0.005	< 0.005	2.84
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Paving (2029) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.30	1.09	10.2	15.7	0.02	0.36	—	0.36	0.33	—	0.33	—	2,390	2,390	0.10	0.02	—	2,398
Paving	—	4.89	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.56	0.86	< 0.005	0.02	—	0.02	0.02	—	0.02	—	131	131	0.01	< 0.005	—	131
Paving	—	0.27	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.10	0.16	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.05	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.11	0.10	1.93	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	337	337	0.01	0.01	1.04	342
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	16.9	16.9	< 0.005	< 0.005	0.02	17.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.80	2.80	< 0.005	< 0.005	< 0.005	2.84
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2029) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.33	0.27	2.12	2.97	< 0.005	0.03	—	0.03	0.03	—	0.03	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	188	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.03	0.23	0.33	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	20.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.04	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	3.75	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.51	0.46	0.40	7.83	0.00	0.00	1.32	1.32	0.00	0.31	0.31	—	1,364	1,364	0.06	0.05	4.22	1,385

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.05	0.05	0.65	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	137	137	< 0.005	0.01	0.20	139
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.12	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	22.7	22.7	< 0.005	< 0.005	0.03	23.0
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Architectural Coating (2029) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.33	0.27	2.12	2.97	< 0.005	0.03	—	0.03	0.03	—	0.03	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	39.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.03	0.23	0.33	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	4.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.04	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	0.79	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.51	0.46	0.40	7.83	0.00	0.00	1.32	1.32	0.00	0.31	0.31	—	1,364	1,364	0.06	0.05	4.22	1,385
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.05	0.05	0.65	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	137	137	< 0.005	0.01	0.20	139

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.12	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	22.7	22.7	< 0.005	< 0.005	0.03	23.0
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.87	0.70	28.1	6.85	0.32	0.49	12.0	12.5	0.47	3.20	3.67	—	34,025	34,025	0.09	4.97	84.6	35,594
Refrigerated Warehouse-No Rail	1.17	0.97	28.2	9.23	0.29	0.49	12.0	12.5	0.47	3.22	3.69	—	30,403	30,403	0.10	4.30	91.9	31,779
Fast Food Restaurant w/o Drive Thru	2.94	2.67	2.48	28.4	0.06	0.04	5.92	5.96	0.04	1.50	1.54	—	6,485	6,485	0.24	0.26	20.2	6,588

Fast Food Restaurant with Drive Thru	2.76	2.50	2.33	26.7	0.06	0.04	5.56	5.60	0.04	1.41	1.45	—	6,086	6,086	0.23	0.24	18.9	6,183
Regional Shopping Center	10.3	9.34	8.70	99.6	0.22	0.14	20.7	20.9	0.14	5.26	5.40	—	22,709	22,709	0.85	0.91	70.6	23,072
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	8.60	7.87	4.28	97.7	0.19	0.07	19.4	19.4	0.07	4.89	4.96	—	19,013	19,013	0.66	0.46	56.6	19,223
Total	26.6	24.1	74.1	269	1.14	1.28	75.5	76.8	1.22	19.5	20.7	—	118,720	118,720	2.18	11.1	343	122,439
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.84	0.68	29.5	6.83	0.32	0.49	12.0	12.5	0.47	3.20	3.67	—	34,032	34,032	0.09	4.98	2.19	35,520
Refrigerated Warehouse-No Rail	1.15	0.95	29.7	9.15	0.29	0.49	12.0	12.5	0.47	3.22	3.69	—	30,409	30,409	0.10	4.31	2.39	31,697
Fast Food Restaurant w/o Drive Thru	2.68	2.41	2.71	21.8	0.06	0.04	5.92	5.96	0.04	1.50	1.54	—	5,919	5,919	0.25	0.27	0.52	6,007

Fast Food Restaurant with Drive Thru	2.52	2.26	2.54	20.5	0.05	0.04	5.56	5.60	0.04	1.41	1.45	—	5,555	5,555	0.24	0.25	0.49	5,637
Regional Shopping Center	9.39	8.45	9.48	76.3	0.20	0.14	20.7	20.9	0.14	5.26	5.40	—	20,728	20,728	0.88	0.95	1.83	21,034
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	8.02	7.30	4.82	73.8	0.17	0.07	19.4	19.4	0.07	4.89	4.96	—	16,980	16,980	0.69	0.50	1.47	17,147
Total	24.6	22.0	78.8	208	1.09	1.28	75.5	76.8	1.22	19.5	20.7	—	113,623	113,623	2.25	11.3	8.89	117,042
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.13	0.11	4.64	1.06	0.05	0.08	1.85	1.92	0.07	0.49	0.57	—	4,798	4,798	0.01	0.70	5.15	5,012
Refrigerated Warehouse-No Rail	0.18	0.15	4.78	1.45	0.05	0.08	1.90	1.98	0.08	0.51	0.58	—	4,397	4,397	0.01	0.62	5.74	4,589
Fast Food Restaurant w/o Drive Thru	0.35	0.31	0.36	3.05	0.01	0.01	0.76	0.76	0.01	0.19	0.20	—	709	709	0.03	0.03	1.02	720
Fast Food Restaurant with Drive Thru	0.37	0.33	0.38	3.23	0.01	0.01	0.81	0.81	0.01	0.20	0.21	—	752	752	0.03	0.03	1.08	764

Regional Shopping Center	1.40	1.26	1.44	12.3	0.03	0.02	3.05	3.07	0.02	0.77	0.79	—	2,851	2,851	0.12	0.13	4.10	2,896
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	1.26	1.15	0.78	12.6	0.03	0.01	3.01	3.02	0.01	0.76	0.77	—	2,478	2,478	0.10	0.07	3.47	2,506
Total	3.70	3.31	12.4	33.6	0.17	0.20	11.4	11.6	0.19	2.93	3.12	—	15,985	15,985	0.31	1.59	20.6	16,488

4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.87	0.70	28.1	6.85	0.32	0.49	12.0	12.5	0.47	3.20	3.67	—	34,025	34,025	0.09	4.97	84.6	35,594
Refrigerated Warehouse-No Rail	1.17	0.97	28.2	9.23	0.29	0.49	12.0	12.5	0.47	3.22	3.69	—	30,403	30,403	0.10	4.30	91.9	31,779
Fast Food Restaurant w/o Drive Thru	2.94	2.67	2.48	28.4	0.06	0.04	5.92	5.96	0.04	1.50	1.54	—	6,485	6,485	0.24	0.26	20.2	6,588

Fast Food Restaurant with Drive Thru	2.76	2.50	2.33	26.7	0.06	0.04	5.56	5.60	0.04	1.41	1.45	—	6,086	6,086	0.23	0.24	18.9	6,183
Regional Shopping Center	10.3	9.34	8.70	99.6	0.22	0.14	20.7	20.9	0.14	5.26	5.40	—	22,709	22,709	0.85	0.91	70.6	23,072
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	8.60	7.87	4.28	97.7	0.19	0.07	19.4	19.4	0.07	4.89	4.96	—	19,013	19,013	0.66	0.46	56.6	19,223
Total	26.6	24.1	74.1	269	1.14	1.28	75.5	76.8	1.22	19.5	20.7	—	118,720	118,720	2.18	11.1	343	122,439
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.84	0.68	29.5	6.83	0.32	0.49	12.0	12.5	0.47	3.20	3.67	—	34,032	34,032	0.09	4.98	2.19	35,520
Refrigerated Warehouse-No Rail	1.15	0.95	29.7	9.15	0.29	0.49	12.0	12.5	0.47	3.22	3.69	—	30,409	30,409	0.10	4.31	2.39	31,697
Fast Food Restaurant w/o Drive Thru	2.68	2.41	2.71	21.8	0.06	0.04	5.92	5.96	0.04	1.50	1.54	—	5,919	5,919	0.25	0.27	0.52	6,007

Fast Food Restaurant with Drive Thru	2.52	2.26	2.54	20.5	0.05	0.04	5.56	5.60	0.04	1.41	1.45	—	5,555	5,555	0.24	0.25	0.49	5,637
Regional Shopping Center	9.39	8.45	9.48	76.3	0.20	0.14	20.7	20.9	0.14	5.26	5.40	—	20,728	20,728	0.88	0.95	1.83	21,034
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	8.02	7.30	4.82	73.8	0.17	0.07	19.4	19.4	0.07	4.89	4.96	—	16,980	16,980	0.69	0.50	1.47	17,147
Total	24.6	22.0	78.8	208	1.09	1.28	75.5	76.8	1.22	19.5	20.7	—	113,623	113,623	2.25	11.3	8.89	117,042
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.13	0.11	4.64	1.06	0.05	0.08	1.85	1.92	0.07	0.49	0.57	—	4,798	4,798	0.01	0.70	5.15	5,012
Refrigerated Warehouse-No Rail	0.18	0.15	4.78	1.45	0.05	0.08	1.90	1.98	0.08	0.51	0.58	—	4,397	4,397	0.01	0.62	5.74	4,589
Fast Food Restaurant w/o Drive Thru	0.35	0.31	0.36	3.05	0.01	0.01	0.76	0.76	0.01	0.19	0.20	—	709	709	0.03	0.03	1.02	720
Fast Food Restaurant with Drive Thru	0.37	0.33	0.38	3.23	0.01	0.01	0.81	0.81	0.01	0.20	0.21	—	752	752	0.03	0.03	1.08	764

Regional Shopping Center	1.40	1.26	1.44	12.3	0.03	0.02	3.05	3.07	0.02	0.77	0.79	—	2,851	2,851	0.12	0.13	4.10	2,896
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	1.26	1.15	0.78	12.6	0.03	0.01	3.01	3.02	0.01	0.76	0.77	—	2,478	2,478	0.10	0.07	3.47	2,506
Total	3.70	3.31	12.4	33.6	0.17	0.20	11.4	11.6	0.19	2.93	3.12	—	15,985	15,985	0.31	1.59	20.6	16,488

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	3,851	3,851	0.37	0.04	—	3,873
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	5,303	5,303	0.51	0.06	—	5,334

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	82.1	82.1	0.01	< 0.005	—	82.6
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	148	148	0.01	< 0.005	—	149
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	503	503	0.05	0.01	—	506
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	200	200	0.02	< 0.005	—	201
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,087	10,087	0.96	0.12	—	10,146
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	3,851	3,851	0.37	0.04	—	3,873
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	5,303	5,303	0.51	0.06	—	5,334

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	82.1	82.1	0.01	< 0.005	—	82.6
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	148	148	0.01	< 0.005	—	149
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	503	503	0.05	0.01	—	506
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	200	200	0.02	< 0.005	—	201
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,087	10,087	0.96	0.12	—	10,146
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	638	638	0.06	0.01	—	641
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	878	878	0.08	0.01	—	883
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	13.6	13.6	< 0.005	< 0.005	—	13.7

Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	24.5	24.5	< 0.005	< 0.005	—	24.6
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	83.3	83.3	0.01	< 0.005	—	83.7
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	33.1	33.1	< 0.005	< 0.005	—	33.3
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	1,670	1,670	0.16	0.02	—	1,680

4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	3,874	3,874	0.37	0.04	—	3,896
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	5,311	5,311	0.51	0.06	—	5,342

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	82.2	82.2	0.01	< 0.005	—	82.7
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	148	148	0.01	< 0.005	—	149
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	504	504	0.05	0.01	—	507
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	200	200	0.02	< 0.005	—	201
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,119	10,119	0.96	0.12	—	10,178
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	3,851	3,851	0.37	0.04	—	3,873
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	5,303	5,303	0.51	0.06	—	5,334

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	82.1	82.1	0.01	< 0.005	—	82.6
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	148	148	0.01	< 0.005	—	149
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	503	503	0.05	0.01	—	506
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	200	200	0.02	< 0.005	—	201
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	10,087	10,087	0.96	0.12	—	10,146
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	639	639	0.06	0.01	—	643
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	879	879	0.08	0.01	—	884
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	13.6	13.6	< 0.005	< 0.005	—	13.7

Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	24.5	24.5	< 0.005	< 0.005	—	24.6
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	83.4	83.4	0.01	< 0.005	—	83.9
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	33.1	33.1	< 0.005	< 0.005	—	33.3
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	1,673	1,673	0.16	0.02	—	1,682

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Fast Food Restaurant w/o Drive Thru	0.01	< 0.005	0.08	0.06	< 0.005	0.01	—	0.01	0.01	—	0.01	—	92.2	92.2	0.01	< 0.005	—	92.5
Fast Food Restaurant with Drive Thru	0.02	0.01	0.14	0.12	< 0.005	0.01	—	0.01	0.01	—	0.01	—	166	166	0.01	< 0.005	—	167
Regional Shopping Center	0.01	< 0.005	0.09	0.07	< 0.005	0.01	—	0.01	0.01	—	0.01	—	104	104	0.01	< 0.005	—	104
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	362	362	0.03	< 0.005	—	363
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Fast Food Restaurant w/o Drive Thru	0.01	< 0.005	0.08	0.06	< 0.005	0.01	—	0.01	0.01	—	0.01	—	92.2	92.2	0.01	< 0.005	—	92.5
Fast Food Restaurant with Drive Thru	0.02	0.01	0.14	0.12	< 0.005	0.01	—	0.01	0.01	—	0.01	—	166	166	0.01	< 0.005	—	167
Regional Shopping Center	0.01	< 0.005	0.09	0.07	< 0.005	0.01	—	0.01	0.01	—	0.01	—	104	104	0.01	< 0.005	—	104
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	362	362	0.03	< 0.005	—	363
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Fast Food Restaurant w/o Drive Thru	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	15.3	15.3	< 0.005	< 0.005	—	15.3

Fast Food Restaurant with Drive Thru	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	27.5	27.5	< 0.005	< 0.005	—	27.6
Regional Shopping Center	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	17.1	17.1	< 0.005	< 0.005	—	17.2
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	59.9	59.9	0.01	< 0.005	—	60.1

4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Fast Food Restaurant w/o Drive Thru	0.01	< 0.005	0.08	0.06	< 0.005	0.01	—	0.01	0.01	—	0.01	—	92.2	92.2	0.01	< 0.005	—	92.5
Fast Food Restaurant with Drive Thru	0.02	0.01	0.14	0.12	< 0.005	0.01	—	0.01	0.01	—	0.01	—	166	166	0.01	< 0.005	—	167
Regional Shopping Center	0.01	< 0.005	0.09	0.07	< 0.005	0.01	—	0.01	0.01	—	0.01	—	104	104	0.01	< 0.005	—	104
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	362	362	0.03	< 0.005	—	363
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Fast Food Restaurant w/o Drive Thru	0.01	< 0.005	0.08	0.06	< 0.005	0.01	—	0.01	0.01	—	0.01	—	92.2	92.2	0.01	< 0.005	—	92.5
Fast Food Restaurant with Drive Thru	0.02	0.01	0.14	0.12	< 0.005	0.01	—	0.01	0.01	—	0.01	—	166	166	0.01	< 0.005	—	167
Regional Shopping Center	0.01	< 0.005	0.09	0.07	< 0.005	0.01	—	0.01	0.01	—	0.01	—	104	104	0.01	< 0.005	—	104
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.03	0.02	0.30	0.25	< 0.005	0.02	—	0.02	0.02	—	0.02	—	362	362	0.03	< 0.005	—	363
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Fast Food Restaurant w/o Drive Thru	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	15.3	15.3	< 0.005	< 0.005	—	15.3

Fast Food Restaurant with Drive Thru	< 0.005	< 0.005	0.03	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	27.5	27.5	< 0.005	< 0.005	—	27.6
Regional Shopping Center	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	17.1	17.1	< 0.005	< 0.005	—	17.2
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	< 0.005	0.06	0.05	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	59.9	59.9	0.01	< 0.005	—	60.1

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	26.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	2.06	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Landscape Equipment	9.43	8.70	0.45	53.0	< 0.005	0.09	—	0.09	0.07	—	0.07	—	218	218	0.01	< 0.005	—	219
Total	9.43	36.9	0.45	53.0	< 0.005	0.09	—	0.09	0.07	—	0.07	—	218	218	0.01	< 0.005	—	219
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	26.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	2.06	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	28.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	4.78	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.38	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.85	0.78	0.04	4.77	< 0.005	0.01	—	0.01	0.01	—	0.01	—	17.8	17.8	< 0.005	< 0.005	—	17.8
Total	0.85	5.94	0.04	4.77	< 0.005	0.01	—	0.01	0.01	—	0.01	—	17.8	17.8	< 0.005	< 0.005	—	17.8

4.3.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Consum Products	—	26.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architect ural Coatings	—	0.43	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	26.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consum er Products	—	26.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architect ural Coatings	—	0.43	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	26.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consum er Products	—	4.78	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architect ural Coatings	—	0.08	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	4.86	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	384	1,119	1,503	39.5	0.95	—	2,774
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	128	365	493	13.2	0.32	—	917
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	1.45	4.14	5.60	0.15	< 0.005	—	10.4
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	2.62	7.46	10.1	0.27	0.01	—	18.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	7.66	21.8	29.5	0.79	0.02	—	54.8
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unrefrige Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	384	1,119	1,503	39.5	0.95	—	2,774
Refrigera ted Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	128	365	493	13.2	0.32	—	917
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	1.45	4.14	5.60	0.15	< 0.005	—	10.4
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	2.62	7.46	10.1	0.27	0.01	—	18.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	7.66	21.8	29.5	0.79	0.02	—	54.8
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrige rated Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	63.6	185	249	6.54	0.16	—	459

Refrigerated	—	—	—	—	—	—	—	—	—	—	—	21.2	60.5	81.7	2.18	0.05	—	152
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	0.24	0.69	0.93	0.02	< 0.005	—	1.72
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	0.43	1.24	1.67	0.04	< 0.005	—	3.10
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	1.27	3.62	4.88	0.13	< 0.005	—	9.08
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	86.8	251	338	8.92	0.21	—	625

4.4.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unrefrigerated Warehouse-No	—	—	—	—	—	—	—	—	—	—	—	384	1,119	1,503	39.5	0.95	—	2,774
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	128	365	493	13.2	0.32	—	917
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	1.45	4.14	5.60	0.15	< 0.005	—	10.4
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	2.62	7.46	10.1	0.27	0.01	—	18.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	7.66	21.8	29.5	0.79	0.02	—	54.8
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	384	1,119	1,503	39.5	0.95	—	2,774
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	128	365	493	13.2	0.32	—	917
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	1.45	4.14	5.60	0.15	< 0.005	—	10.4
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	2.62	7.46	10.1	0.27	0.01	—	18.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	7.66	21.8	29.5	0.79	0.02	—	54.8
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	524	1,517	2,042	53.9	1.29	—	3,775
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	63.6	185	249	6.54	0.16	—	459

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	21.2	60.5	81.7	2.18	0.05	—	152
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	0.24	0.69	0.93	0.02	< 0.005	—	1.72
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	0.43	1.24	1.67	0.04	< 0.005	—	3.10
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	1.27	3.62	4.88	0.13	< 0.005	—	9.08
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	86.8	251	338	8.92	0.21	—	625

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unrefrige Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	439	0.00	439	43.9	0.00	—	1,537
Refrigera ted Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	146	0.00	146	14.6	0.00	—	512
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	15.5	0.00	15.5	1.55	0.00	—	54.3
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	27.9	0.00	27.9	2.79	0.00	—	97.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	30.5	0.00	30.5	3.05	0.00	—	107
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrige rated Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	439	0.00	439	43.9	0.00	—	1,537

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	146	0.00	146	14.6	0.00	—	512
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	15.5	0.00	15.5	1.55	0.00	—	54.3
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	27.9	0.00	27.9	2.79	0.00	—	97.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	30.5	0.00	30.5	3.05	0.00	—	107
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	72.8	0.00	72.8	7.27	0.00	—	255
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	24.3	0.00	24.3	2.42	0.00	—	84.8

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	2.57	0.00	2.57	0.26	0.00	—	8.99
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	4.63	0.00	4.63	0.46	0.00	—	16.2
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	5.06	0.00	5.06	0.51	0.00	—	17.7
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	109	0.00	109	10.9	0.00	—	382

4.5.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	439	0.00	439	43.9	0.00	—	1,537

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	146	0.00	146	14.6	0.00	—	512
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	15.5	0.00	15.5	1.55	0.00	—	54.3
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	27.9	0.00	27.9	2.79	0.00	—	97.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	30.5	0.00	30.5	3.05	0.00	—	107
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	439	0.00	439	43.9	0.00	—	1,537
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	146	0.00	146	14.6	0.00	—	512

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	15.5	0.00	15.5	1.55	0.00	—	54.3
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	27.9	0.00	27.9	2.79	0.00	—	97.7
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	30.5	0.00	30.5	3.05	0.00	—	107
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	660	0.00	660	66.0	0.00	—	2,309
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	72.8	0.00	72.8	7.27	0.00	—	255
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	24.3	0.00	24.3	2.42	0.00	—	84.8
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	2.57	0.00	2.57	0.26	0.00	—	8.99

Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	4.63	0.00	4.63	0.46	0.00	—	16.2
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	5.06	0.00	5.06	0.51	0.00	—	17.7
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	109	0.00	109	10.9	0.00	—	382

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	295	295

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.40	1.40
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.52	2.52
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.21	0.21
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	295	295
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.40	1.40
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.52	2.52
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.21	0.21
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	48.8	48.8
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.23	0.23
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.42	0.42
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	49.5	49.5

4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	295	295
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.40	1.40

Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.52	2.52
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.21	0.21
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	295	295
Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1.40	1.40
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.52	2.52
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.21	0.21
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	299	299
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	48.8	48.8

Fast Food Restaurant w/o Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.23	0.23
Fast Food Restaurant with Drive Thru	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.42	0.42
Regional Shopping Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	49.5	49.5

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9

4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Sequest	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	6/1/2028	7/12/2028	5.00	30.0	—
Grading	Grading	7/13/2028	9/13/2028	5.00	45.0	—
Building Construction	Building Construction	9/14/2028	9/12/2029	5.00	260	—
Paving	Paving	7/2/2029	7/27/2029	5.00	20.0	—
Architectural Coating	Architectural Coating	7/2/2029	8/24/2029	5.00	40.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Average	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Average	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 4 Interim	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Tier 4 Interim	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	87.0	0.43

Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	18.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	27.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	506	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	155	10.2	HHDT,MHDT

Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	101	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	18.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	27.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	506	18.5	LDA,LDT1,LDT2

Building Construction	Vendor	155	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	101	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	1,826,340	608,780	97,540

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)

Site Preparation	—	—	180	0.00	—
Grading	—	—	428	0.00	—
Paving	0.00	0.00	0.00	0.00	37.3

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Unrefrigerated Warehouse-No Rail	0.00	0%
Refrigerated Warehouse-No Rail	0.00	0%
Fast Food Restaurant w/o Drive Thru	0.00	0%
Fast Food Restaurant with Drive Thru	0.00	0%
Fast Food Restaurant with Drive Thru	0.00	0%
Regional Shopping Center	0.00	0%
Parking Lot	5.53	100%
Other Asphalt Surfaces	31.8	100%
User Defined Industrial	0.00	0%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2028	0.00	346	0.03	< 0.005
2029	0.00	346	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	202	99.8	94.6	62,825	13,685	6,754	6,402	4,253,881
Refrigerated Warehouse-No Rail	218	124	119	69,504	13,650	7,766	7,440	4,351,647
Fast Food Restaurant w/o Drive Thru	345	532	383	137,557	5,411	8,359	6,005	2,159,641
Fast Food Restaurant with Drive Thru	368	485	372	140,687	5,780	7,618	5,843	2,208,780
Fast Food Restaurant with Drive Thru	14.5	14.5	14.5	5,300	228	228	228	83,207
Regional Shopping Center	1,553	1,865	981	553,180	24,376	29,274	15,408	8,684,929
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	1,768	913	865	553,741	27,764	14,327	13,582	8,693,726

5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	202	99.8	94.6	62,825	13,685	6,754	6,402	4,253,881
Refrigerated Warehouse-No Rail	218	124	119	69,504	13,650	7,766	7,440	4,351,647

Fast Food Restaurant w/o Drive Thru	345	532	383	137,557	5,411	8,359	6,005	2,159,641
Fast Food Restaurant with Drive Thru	368	485	372	140,687	5,780	7,618	5,843	2,208,780
Fast Food Restaurant with Drive Thru	14.5	14.5	14.5	5,300	228	228	228	83,207
Regional Shopping Center	1,553	1,865	981	553,180	24,376	29,274	15,408	8,684,929
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	1,768	913	865	553,741	27,764	14,327	13,582	8,693,726

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	1,826,340	608,780	97,540

5.10.3. Landscape Equipment

Season	Unit	Value

Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	4,059,897	346	0.0330	0.0040	0.00
Refrigerated Warehouse-No Rail	5,591,485	346	0.0330	0.0040	0.00
Fast Food Restaurant w/o Drive Thru	86,576	346	0.0330	0.0040	287,829
Fast Food Restaurant with Drive Thru	86,576	346	0.0330	0.0040	287,829
Fast Food Restaurant with Drive Thru	69,261	346	0.0330	0.0040	230,263
Regional Shopping Center	530,197	346	0.0330	0.0040	323,199
Parking Lot	211,017	346	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	346	0.0330	0.0040	0.00
User Defined Industrial	0.00	346	0.0330	0.0040	0.00

5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	4,059,897	346	0.0330	0.0040	0.00
Refrigerated Warehouse-No Rail	5,591,485	346	0.0330	0.0040	0.00
Fast Food Restaurant w/o Drive Thru	86,576	346	0.0330	0.0040	287,829
Fast Food Restaurant with Drive Thru	86,576	346	0.0330	0.0040	287,829
Fast Food Restaurant with Drive Thru	69,261	346	0.0330	0.0040	230,263
Regional Shopping Center	530,197	346	0.0330	0.0040	323,199
Parking Lot	211,017	346	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	346	0.0330	0.0040	0.00
User Defined Industrial	0.00	346	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Unrefrigerated Warehouse-No Rail	200,593,650	5,761,075
Refrigerated Warehouse-No Rail	66,864,550	0.00
Fast Food Restaurant w/o Drive Thru	758,834	0.00
Fast Food Restaurant with Drive Thru	758,834	0.00
Fast Food Restaurant with Drive Thru	607,067	0.00
Regional Shopping Center	3,998,731	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Unrefrigerated Warehouse-No Rail	200,593,650	5,761,075
Refrigerated Warehouse-No Rail	66,864,550	0.00
Fast Food Restaurant w/o Drive Thru	758,834	0.00
Fast Food Restaurant with Drive Thru	758,834	0.00
Fast Food Restaurant with Drive Thru	607,067	0.00
Regional Shopping Center	3,998,731	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Unrefrigerated Warehouse-No Rail	815	—
Refrigerated Warehouse-No Rail	272	—
Fast Food Restaurant w/o Drive Thru	28.8	—
Fast Food Restaurant with Drive Thru	28.8	—
Fast Food Restaurant with Drive Thru	23.0	—
Regional Shopping Center	56.7	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Unrefrigerated Warehouse-No Rail	815	—
Refrigerated Warehouse-No Rail	272	—
Fast Food Restaurant w/o Drive Thru	28.8	—
Fast Food Restaurant with Drive Thru	28.8	—
Fast Food Restaurant with Drive Thru	23.0	—
Regional Shopping Center	56.7	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0
Fast Food Restaurant w/o Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
Fast Food Restaurant w/o Drive Thru	Other commercial A/C and heat pumps	User Defined	750	1.80	4.00	4.00	18.0
Fast Food Restaurant w/o Drive Thru	Walk-in refrigerators and freezers	User Defined	150	< 0.005	7.50	7.50	20.0
Fast Food Restaurant with Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
Fast Food Restaurant with Drive Thru	Other commercial A/C and heat pumps	User Defined	750	1.80	4.00	4.00	18.0

Fast Food Restaurant with Drive Thru	Walk-in refrigerators and freezers	User Defined	150	< 0.005	7.50	7.50	20.0
Fast Food Restaurant with Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
Fast Food Restaurant with Drive Thru	Other commercial A/C and heat pumps	User Defined	750	1.80	4.00	4.00	18.0
Fast Food Restaurant with Drive Thru	Walk-in refrigerators and freezers	User Defined	150	< 0.005	7.50	7.50	20.0
Regional Shopping Center	Other commercial A/C and heat pumps	User Defined	750	< 0.005	4.00	4.00	18.0
Regional Shopping Center	Stand-alone retail refrigerators and freezers	R-134a	1,430	0.04	1.00	0.00	1.00

5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0
Fast Food Restaurant w/o Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
Fast Food Restaurant w/o Drive Thru	Other commercial A/C and heat pumps	User Defined	750	1.80	4.00	4.00	18.0
Fast Food Restaurant w/o Drive Thru	Walk-in refrigerators and freezers	User Defined	150	< 0.005	7.50	7.50	20.0
Fast Food Restaurant with Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00
Fast Food Restaurant with Drive Thru	Other commercial A/C and heat pumps	User Defined	750	1.80	4.00	4.00	18.0
Fast Food Restaurant with Drive Thru	Walk-in refrigerators and freezers	User Defined	150	< 0.005	7.50	7.50	20.0
Fast Food Restaurant with Drive Thru	Household refrigerators and/or freezers	R-134a	1,430	0.00	0.60	0.00	1.00

Fast Food Restaurant with Drive Thru	Other commercial A/C and heat pumps	User Defined	750	1.80	4.00	4.00	18.0
Fast Food Restaurant with Drive Thru	Walk-in refrigerators and freezers	User Defined	150	< 0.005	7.50	7.50	20.0
Regional Shopping Center	Other commercial A/C and heat pumps	User Defined	750	< 0.005	4.00	4.00	18.0
Regional Shopping Center	Stand-alone retail refrigerators and freezers	R-134a	1,430	0.04	1.00	0.00	1.00

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
Fire Pump	Diesel	2.00	1.00	50.0	300	0.73

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

5.17. User Defined

Equipment Type	Fuel Type

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	34.5	annual days of extreme heat
Extreme Precipitation	1.15	annual days with precipitation above 20 mm
Sea Level Rise	—	meters of inundation depth
Wildfire	0.35	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.0 meter, 1.41 meters
Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A

Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	1	1	4
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	88.7
AQ-PM	6.87
AQ-DPM	5.33
Drinking Water	—
Lead Risk Housing	—
Pesticides	70.6
Toxic Releases	99.9
Traffic	42.0
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	31.5
Haz Waste Facilities/Generators	92.5
Impaired Water Bodies	0.00
Solid Waste	0.00
Sensitive Population	—
Asthma	78.5
Cardio-vascular	44.0
Low Birth Weights	—
Socioeconomic Factor Indicators	—
Education	—
Housing	—
Linguistic	—
Poverty	—
Unemployment	—

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	—
Employed	—
Median HI	—
Education	—
Bachelor's or higher	—
High school enrollment	—
Preschool enrollment	—
Transportation	—
Auto Access	—
Active commuting	—
Social	—
2-parent households	—
Voting	—
Neighborhood	—
Alcohol availability	—
Park access	—
Retail density	—
Supermarket access	—
Tree canopy	—
Housing	—
Homeownership	—
Housing habitability	—
Low-inc homeowner severe housing cost burden	—

Low-inc renter severe housing cost burden	—
Uncrowded housing	—
Health Outcomes	—
Insured adults	—
Arthritis	32.9
Asthma ER Admissions	69.8
High Blood Pressure	84.3
Cancer (excluding skin)	80.0
Asthma	1.3
Coronary Heart Disease	40.3
Chronic Obstructive Pulmonary Disease	2.1
Diagnosed Diabetes	29.7
Life Expectancy at Birth	0.0
Cognitively Disabled	99.8
Physically Disabled	99.8
Heart Attack ER Admissions	91.2
Mental Health Not Good	0.3
Chronic Kidney Disease	73.0
Obesity	0.4
Pedestrian Injuries	0.0
Physical Health Not Good	1.8
Stroke	11.3
Health Risk Behaviors	—
Binge Drinking	75.2
Current Smoker	0.4
No Leisure Time for Physical Activity	14.6
Climate Change Exposures	—

Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	99.4
Elderly	99.8
English Speaking	0.0
Foreign-born	0.0
Outdoor Workers	0.0
Climate Change Adaptive Capacity	—
Impervious Surface Cover	99.9
Traffic Density	0.0
Traffic Access	23.0
Other Indices	—
Hardship	0.0
Other Decision Support	—
2016 Voting	0.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	—
Healthy Places Index Score for Project Location (b)	—
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Land uses provided by client
Construction: Construction Phases	Client provided schedule
Construction: Off-Road Equipment	Client provided construction equipment Standard 8-hour work day T/L/B swapped for Crawler Tractors to account for dust disturbance"
Construction: Trips and VMT	Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, and Building Construction. Because Paving and Architectural Coating activities overlap with Building Construction, the analysis assumes that the vendor trips assigned to Building Construction cover Paving and Architectural Coating as well."
Operations: Vehicle Data	Trip Characteristics taken from Traffic Analysis Trip Length taken from VMT Truck Sup Memo Passenger vehicle trips for Industrial use modeled on User Defined Industrial land use
Operations: Fleet Mix	Passenger Car Mix estimated based on CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, MCY). Truck Fleet Mix based on 2, 3 and 4 axle trucks
Operations: Energy Use	Industrial portion of the site will not use Natural Gas
Operations: Refrigerants	Beginning 1 January 2025, all new air conditioning equipment may not use refrigerants with a GWP of 750 or greater As of 1 January 2022, new commercial refrigeration equipment may not use refrigerants with a GWP of 150 or greater. Further, R-404A (the CalEEMod default) is unacceptable for new supermarket and cold storage systems as of 1 January 2019 and 2023, respectively

APPENDIX 3.4:

CALEEMOD PHASE 4 CONSTRUCTION AND OPERATIONAL EMISSIONS MODEL OUTPUTS

This page intentionally left blank

14267-Phase 4 Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

1.2. Land Use Types

1.3. User-Selected Emission Reduction Measures by Emissions Sector

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

2.2. Construction Emissions by Year, Unmitigated

2.3. Construction Emissions by Year, Mitigated

2.4. Operations Emissions Compared Against Thresholds

2.5. Operations Emissions by Sector, Unmitigated

2.6. Operations Emissions by Sector, Mitigated

3. Construction Emissions Details

3.1. Site Preparation (2030) - Unmitigated

3.2. Site Preparation (2030) - Mitigated

3.3. Grading (2030) - Unmitigated

3.4. Grading (2030) - Mitigated

3.5. Grading (2031) - Unmitigated

3.6. Grading (2031) - Mitigated

3.7. Building Construction (2031) - Unmitigated

3.8. Building Construction (2031) - Mitigated

3.9. Building Construction (2032) - Unmitigated

3.10. Building Construction (2032) - Mitigated

3.11. Paving (2031) - Unmitigated

3.12. Paving (2031) - Mitigated

3.13. Architectural Coating (2031) - Unmitigated

3.14. Architectural Coating (2031) - Mitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.1.2. Mitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.2. Electricity Emissions By Land Use - Mitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.2.4. Natural Gas Emissions By Land Use - Mitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.3.2. Mitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.4.2. Mitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.5.2. Mitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.6.2. Mitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.7.2. Mitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.8.2. Mitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.9.2. Mitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.2.2. Mitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.3.2. Mitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.9.2. Mitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.10.4. Landscape Equipment - Mitigated

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.11.2. Mitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.12.2. Mitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

5.18.2.2. Mitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	14267-Phase 4
Construction Start Date	10/1/2030
Operational Year	2032
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.640393, -118.119263
County	Los Angeles-Mojave Desert
City	Palmdale
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3655
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.20

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description

Refrigerated Warehouse-No Rail	639	1000sqft	14.7	638,889	0.00	—	—	High-Cube Cold Storage
Unrefrigerated Warehouse-No Rail	1,917	1000sqft	44.0	1,916,667	261,654	—	—	High-Cube Fulfillment (Non-Sort)
Other Asphalt Surfaces	56.3	Acre	56.3	0.00	0.00	—	—	—
User Defined Industrial	2,556	User Defined Unit	0.00	0.00	0.00	—	—	Passenger Vehicles

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-5	Use Advanced Engine Tiers
Construction	C-13	Use Low-VOC Paints for Construction
Area Sources	LL-1	Replace Gas Powered Landscape Equipment with Zero-Emission Landscape Equipment
Area Sources	AS-2	Use Low-VOC Paints

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	6.81	6.39	25.9	94.1	0.11	0.65	16.8	17.5	0.60	4.06	4.66	—	25,587	25,587	0.29	1.76	49.5	26,169
Mit.	6.81	6.39	25.9	94.1	0.11	0.65	16.8	17.5	0.60	4.06	4.66	—	25,587	25,587	0.29	1.76	49.5	26,169
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	8.87	403	53.7	99.9	0.17	2.36	19.9	20.9	2.17	4.79	6.83	—	29,586	29,586	0.68	1.90	1.50	30,165
Mit.	8.87	91.8	50.0	99.9	0.17	2.36	19.9	20.9	2.17	4.79	6.83	—	29,586	29,586	0.68	1.90	1.50	30,165
% Reduced	—	77%	7%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.85	47.3	20.6	56.6	0.08	0.52	12.0	12.5	0.48	2.90	3.39	—	17,750	17,750	0.26	1.25	15.1	18,145
Mit.	4.69	13.1	20.5	57.3	0.08	0.47	12.0	12.5	0.44	2.90	3.34	—	17,750	17,750	0.26	1.25	15.1	18,145
% Reduced	3%	72%	1%	-1%	—	9%	—	< 0.5%	9%	—	1%	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.88	8.64	3.76	10.3	0.01	0.10	2.19	2.28	0.09	0.53	0.62	—	2,939	2,939	0.04	0.21	2.50	3,004
Mit.	0.86	2.40	3.74	10.4	0.01	0.09	2.19	2.27	0.08	0.53	0.61	—	2,939	2,939	0.04	0.21	2.50	3,004
% Reduced	3%	72%	1%	-1%	—	9%	—	< 0.5%	9%	—	1%	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2031	6.81	6.39	25.9	94.1	0.11	0.65	16.8	17.5	0.60	4.06	4.66	—	25,587	25,587	0.29	1.76	49.5	26,169
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2030	8.25	6.94	53.7	64.2	0.17	2.36	10.2	12.6	2.17	4.66	6.83	—	18,561	18,561	0.68	0.36	0.10	18,686

2031	8.87	403	50.9	99.9	0.17	2.27	19.9	20.9	2.09	4.79	5.71	—	29,586	29,586	0.68	1.90	1.50	30,165
2032	6.17	5.32	25.6	67.0	0.11	0.61	16.8	17.4	0.57	4.06	4.62	—	23,608	23,608	0.31	1.69	1.14	24,120
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2030	1.38	1.16	9.36	10.7	0.02	0.42	1.49	1.91	0.39	0.60	0.99	—	2,697	2,697	0.10	0.05	0.26	2,717
2031	4.85	47.3	20.6	56.6	0.08	0.52	12.0	12.5	0.48	2.90	3.39	—	17,750	17,750	0.26	1.25	15.1	18,145
2032	0.15	0.13	0.60	1.70	< 0.005	0.01	0.39	0.41	0.01	0.09	0.11	—	562	562	0.01	0.04	0.45	575
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2030	0.25	0.21	1.71	1.95	< 0.005	0.08	0.27	0.35	0.07	0.11	0.18	—	447	447	0.02	0.01	0.04	450
2031	0.88	8.64	3.76	10.3	0.01	0.10	2.19	2.28	0.09	0.53	0.62	—	2,939	2,939	0.04	0.21	2.50	3,004
2032	0.03	0.02	0.11	0.31	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	93.1	93.1	< 0.005	0.01	0.07	95.2

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2031	6.81	6.39	25.9	94.1	0.11	0.65	16.8	17.5	0.60	4.06	4.66	—	25,587	25,587	0.29	1.76	49.5	26,169
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2030	6.91	5.82	50.0	89.4	0.17	2.36	10.2	12.6	2.17	4.66	6.83	—	18,561	18,561	0.68	0.36	0.10	18,686
2031	8.87	91.8	46.8	99.9	0.17	0.99	19.9	20.9	0.92	4.79	5.71	—	29,586	29,586	0.68	1.90	1.50	30,165
2032	6.17	5.32	25.6	67.0	0.11	0.61	16.8	17.4	0.57	4.06	4.62	—	23,608	23,608	0.31	1.69	1.14	24,120
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2030	0.78	0.69	8.70	13.2	0.02	0.23	1.49	1.72	0.21	0.60	0.82	—	2,697	2,697	0.10	0.05	0.26	2,717
2031	4.69	13.1	20.5	57.3	0.08	0.47	12.0	12.5	0.44	2.90	3.34	—	17,750	17,750	0.26	1.25	15.1	18,145

2032	0.15	0.13	0.60	1.70	< 0.005	0.01	0.39	0.41	0.01	0.09	0.11	—	562	562	0.01	0.04	0.45	575
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2030	0.14	0.13	1.59	2.40	< 0.005	0.04	0.27	0.31	0.04	0.11	0.15	—	447	447	0.02	0.01	0.04	450
2031	0.86	2.40	3.74	10.4	0.01	0.09	2.19	2.27	0.08	0.53	0.61	—	2,939	2,939	0.04	0.21	2.50	3,004
2032	0.03	0.02	0.11	0.31	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	93.1	93.1	< 0.005	0.01	0.07	95.2

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	42.7	98.0	123	336	1.64	2.61	95.3	97.9	2.46	24.9	27.3	2,427	188,930	191,357	249	22.7	1,034	205,393
Mit.	22.9	76.4	122	225	1.64	2.41	95.3	97.7	2.31	24.9	27.2	2,427	188,524	190,951	249	22.7	1,034	204,986
% Reduced	46%	22%	1%	33%	< 0.5%	8%	—	< 0.5%	6%	—	1%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	21.7	78.6	129	178	1.59	2.41	95.3	97.7	2.31	24.9	27.2	2,427	184,248	186,675	250	22.8	661	200,365
Mit.	21.7	75.2	129	178	1.59	2.41	95.3	97.7	2.31	24.9	27.2	2,427	184,248	186,675	250	22.8	661	200,365
% Reduced	—	4%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	26.9	83.5	109	215	1.38	1.96	81.4	83.3	1.86	21.2	23.1	2,427	161,409	163,836	249	20.1	794	176,842
Mit.	17.2	71.1	108	160	1.37	1.87	81.4	83.2	1.78	21.2	23.0	2,427	161,209	163,636	249	20.1	794	176,641
% Reduced	36%	15%	< 0.5%	26%	< 0.5%	5%	—	< 0.5%	4%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%

Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.91	15.2	19.8	39.2	0.25	0.36	14.8	15.2	0.34	3.88	4.22	402	26,723	27,125	41.3	3.32	131	29,278
Mit.	3.13	13.0	19.7	29.2	0.25	0.34	14.8	15.2	0.33	3.88	4.20	402	26,690	27,092	41.3	3.32	131	29,245
% Reduced	36%	15%	< 0.5%	26%	< 0.5%	5%	—	< 0.5%	4%	—	< 0.5%	—	< 0.5%	< 0.5%	< 0.5%	< 0.5%	—	< 0.5%

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	20.7	18.7	117	220	1.63	2.12	95.3	97.4	2.02	24.9	26.9	—	169,785	169,785	1.66	19.7	382	176,067
Area	19.8	77.4	0.94	111	0.01	0.20	—	0.20	0.15	—	0.15	—	457	457	0.02	< 0.005	—	459
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,237	15,237	1.93	0.23	—	15,355
Water	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Waste	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	42.7	98.0	123	336	1.64	2.61	95.3	97.9	2.46	24.9	27.3	2,427	188,930	191,357	249	22.7	1,034	205,393
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	19.5	17.5	123	173	1.59	2.12	95.3	97.4	2.02	24.9	26.9	—	165,560	165,560	1.71	19.8	9.92	171,499
Area	—	59.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,237	15,237	1.93	0.23	—	15,355
Water	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Waste	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530

Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	21.7	78.6	129	178	1.59	2.41	95.3	97.7	2.31	24.9	27.2	2,427	184,248	186,675	250	22.8	661	200,365
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	16.9	15.1	107	159	1.37	1.83	81.4	83.2	1.74	21.2	23.0	—	143,365	143,365	1.48	17.0	142	148,621
Area	9.76	68.1	0.46	54.8	< 0.005	0.10	—	0.10	0.07	—	0.07	—	225	225	0.01	< 0.005	—	226
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,237	15,237	1.93	0.23	—	15,355
Water	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Waste	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Stationary	0.30	0.27	0.75	0.69	< 0.005	0.04	0.00	0.04	0.04	0.00	0.04	0.00	138	138	0.01	< 0.005	0.00	138
Total	26.9	83.5	109	215	1.38	1.96	81.4	83.3	1.86	21.2	23.1	2,427	161,409	163,836	249	20.1	794	176,842
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.08	2.75	19.6	29.1	0.25	0.33	14.8	15.2	0.32	3.88	4.19	—	23,736	23,736	0.25	2.82	23.6	24,606
Area	1.78	12.4	0.08	10.0	< 0.005	0.02	—	0.02	0.01	—	0.01	—	37.3	37.3	< 0.005	< 0.005	—	37.5
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	2,523	2,523	0.32	0.04	—	2,542
Water	—	—	—	—	—	—	—	—	—	—	—	187	405	592	19.3	0.46	—	1,212
Waste	—	—	—	—	—	—	—	—	—	—	—	214	0.00	214	21.4	0.00	—	750
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	108	108
Stationary	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	4.91	15.2	19.8	39.2	0.25	0.36	14.8	15.2	0.34	3.88	4.22	402	26,723	27,125	41.3	3.32	131	29,278

2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	20.7	18.7	117	220	1.63	2.12	95.3	97.4	2.02	24.9	26.9	—	169,785	169,785	1.66	19.7	382	176,067
Area	—	55.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,288	15,288	1.93	0.23	—	15,406
Water	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Waste	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	22.9	76.4	122	225	1.64	2.41	95.3	97.7	2.31	24.9	27.2	2,427	188,524	190,951	249	22.7	1,034	204,986
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	19.5	17.5	123	173	1.59	2.12	95.3	97.4	2.02	24.9	26.9	—	165,560	165,560	1.71	19.8	9.92	171,499
Area	—	55.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,237	15,237	1.93	0.23	—	15,355
Water	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Waste	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Stationary	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	21.7	75.2	129	178	1.59	2.41	95.3	97.7	2.31	24.9	27.2	2,427	184,248	186,675	250	22.8	661	200,365
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	16.9	15.1	107	159	1.37	1.83	81.4	83.2	1.74	21.2	23.0	—	143,365	143,365	1.48	17.0	142	148,621
Area	—	55.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	15,262	15,262	1.93	0.23	—	15,380
Water	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321

Waste	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Stationary	0.30	0.27	0.75	0.69	< 0.005	0.04	0.00	0.04	0.04	0.00	0.04	0.00	138	138	0.01	< 0.005	0.00	138
Total	17.2	71.1	108	160	1.37	1.87	81.4	83.2	1.78	21.2	23.0	2,427	161,209	163,636	249	20.1	794	176,641
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.08	2.75	19.6	29.1	0.25	0.33	14.8	15.2	0.32	3.88	4.19	—	23,736	23,736	0.25	2.82	23.6	24,606
Area	—	10.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	2,527	2,527	0.32	0.04	—	2,546
Water	—	—	—	—	—	—	—	—	—	—	—	187	405	592	19.3	0.46	—	1,212
Waste	—	—	—	—	—	—	—	—	—	—	—	214	0.00	214	21.4	0.00	—	750
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	108	108
Stationary	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	3.13	13.0	19.7	29.2	0.25	0.34	14.8	15.2	0.33	3.88	4.20	402	26,690	27,092	41.3	3.32	131	29,245

3. Construction Emissions Details

3.1. Site Preparation (2030) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	6.75	5.67	48.9	51.5	0.09	2.35	—	2.35	2.16	—	2.16	—	9,335	9,335	0.38	0.08	—	9,367

Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.55	0.47	4.02	4.23	0.01	0.19	—	0.19	0.18	—	0.18	—	767	767	0.03	0.01	—	770
Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.10	0.09	0.73	0.77	< 0.005	0.04	—	0.04	0.03	—	0.03	—	127	127	0.01	< 0.005	—	127
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.12	0.12	1.47	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	354	354	0.01	0.01	0.03	358
Vendor	0.03	0.03	1.02	0.38	0.01	0.01	0.33	0.33	0.01	0.09	0.10	—	1,011	1,011	< 0.005	0.14	0.04	1,054
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.13	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	29.9	29.9	< 0.005	< 0.005	0.04	30.3
Vendor	< 0.005	< 0.005	0.08	0.03	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	83.1	83.1	< 0.005	0.01	0.06	86.6
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	4.95	4.95	< 0.005	< 0.005	0.01	5.02
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	13.8	13.8	< 0.005	< 0.005	0.01	14.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.2. Site Preparation (2030) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	6.75	5.67	48.9	51.5	0.09	2.35	—	2.35	2.16	—	2.16	—	9,335	9,335	0.38	0.08	—	9,367
Dust From Material Movement	—	—	—	—	—	—	9.48	9.48	—	4.48	4.48	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.55	0.47	4.02	4.23	0.01	0.19	—	0.19	0.18	—	0.18	—	767	767	0.03	0.01	—	770

Dust From Material Movement	—	—	—	—	—	—	0.78	0.78	—	0.37	0.37	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.10	0.09	0.73	0.77	< 0.005	0.04	—	0.04	0.03	—	0.03	—	127	127	0.01	< 0.005	—	127
Dust From Material Movement	—	—	—	—	—	—	0.14	0.14	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.12	0.12	1.47	0.00	0.00	0.39	0.39	0.00	0.09	0.09	—	354	354	0.01	0.01	0.03	358
Vendor	0.03	0.03	1.02	0.38	0.01	0.01	0.33	0.33	0.01	0.09	0.10	—	1,011	1,011	< 0.005	0.14	0.04	1,054
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.13	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	29.9	29.9	< 0.005	< 0.005	0.04	30.3
Vendor	< 0.005	< 0.005	0.08	0.03	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	—	83.1	83.1	< 0.005	0.01	0.06	86.6
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	4.95	4.95	< 0.005	< 0.005	0.01	5.02
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	13.8	13.8	< 0.005	< 0.005	0.01	14.3

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2030) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	8.05	6.76	52.0	61.9	0.15	2.32	—	2.32	2.14	—	2.14	—	16,658	16,658	0.68	0.14	—	16,715
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.79	0.66	5.09	6.06	0.02	0.23	—	0.23	0.21	—	0.21	—	1,630	1,630	0.07	0.01	—	1,635
Dust From Material Movement	—	—	—	—	—	—	0.56	0.56	—	0.20	0.20	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.14	0.12	0.93	1.11	< 0.005	0.04	—	0.04	0.04	—	0.04	—	270	270	0.01	< 0.005	—	271

Dust From Material Movement	—	—	—	—	—	—	0.10	0.10	—	0.04	0.04	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.16	0.14	0.14	1.72	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	413	413	0.01	0.02	0.03	418
Vendor	0.04	0.04	1.51	0.56	0.01	0.01	0.48	0.49	0.01	0.13	0.14	—	1,490	1,490	< 0.005	0.21	0.07	1,554
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.01	0.19	0.00	0.00	0.04	0.04	0.00	0.01	0.01	—	41.5	41.5	< 0.005	< 0.005	0.06	42.1
Vendor	< 0.005	< 0.005	0.15	0.05	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.01	—	146	146	< 0.005	0.02	0.11	152
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.88	6.88	< 0.005	< 0.005	0.01	6.97
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	24.1	24.1	< 0.005	< 0.005	0.02	25.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.4. Grading (2030) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.98	1.98	45.2	87.1	0.15	0.34	—	0.34	0.34	—	0.34	—	16,658	16,658	0.68	0.14	—	16,715
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.19	0.19	4.43	8.52	0.02	0.03	—	0.03	0.03	—	0.03	—	1,630	1,630	0.07	0.01	—	1,635
Dust From Material Movement	—	—	—	—	—	—	0.56	0.56	—	0.20	0.20	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	0.81	1.55	< 0.005	0.01	—	0.01	0.01	—	0.01	—	270	270	0.01	< 0.005	—	271
Dust From Material Movement	—	—	—	—	—	—	0.10	0.10	—	0.04	0.04	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.16	0.14	0.14	1.72	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	413	413	0.01	0.02	0.03	418
Vendor	0.04	0.04	1.51	0.56	0.01	0.01	0.48	0.49	0.01	0.13	0.14	—	1,490	1,490	< 0.005	0.21	0.07	1,554
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.01	0.19	0.00	0.00	0.04	0.04	0.00	0.01	0.01	—	41.5	41.5	< 0.005	< 0.005	0.06	42.1
Vendor	< 0.005	< 0.005	0.15	0.05	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.01	—	146	146	< 0.005	0.02	0.11	152
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.88	6.88	< 0.005	< 0.005	0.01	6.97
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	24.1	24.1	< 0.005	< 0.005	0.02	25.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Grading (2031) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	7.89	6.63	49.3	61.3	0.15	2.26	—	2.26	2.08	—	2.08	—	16,658	16,658	0.68	0.14	—	16,715

Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.20	0.17	1.25	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	424	424	0.02	< 0.005	—	425
Dust From Material Movement	—	—	—	—	—	—	0.15	0.15	—	0.05	0.05	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.03	0.23	0.28	< 0.005	0.01	—	0.01	0.01	—	0.01	—	70.2	70.2	< 0.005	< 0.005	—	70.4
Dust From Material Movement	—	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.14	0.13	0.12	1.60	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	406	406	0.01	0.02	0.03	411
Vendor	0.04	0.04	1.45	0.55	0.01	0.01	0.48	0.49	0.01	0.13	0.14	—	1,444	1,444	< 0.005	0.21	0.06	1,507
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.6	10.6	< 0.005	< 0.005	0.01	10.8
Vendor	< 0.005	< 0.005	0.04	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	36.7	36.7	< 0.005	0.01	0.02	38.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.76	1.76	< 0.005	< 0.005	< 0.005	1.78
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	6.08	6.08	< 0.005	< 0.005	< 0.005	6.35
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.6. Grading (2031) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.98	1.98	45.2	87.1	0.15	0.34	—	0.34	0.34	—	0.34	—	16,658	16,658	0.68	0.14	—	16,715
Dust From Material Movement	—	—	—	—	—	—	5.75	5.75	—	2.00	2.00	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.15	2.22	< 0.005	0.01	—	0.01	0.01	—	0.01	—	424	424	0.02	< 0.005	—	425

Dust From Material Movement	—	—	—	—	—	—	0.15	0.15	—	0.05	0.05	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.21	0.40	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	70.2	70.2	< 0.005	< 0.005	—	70.4
Dust From Material Movement	—	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.14	0.13	0.12	1.60	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	406	406	0.01	0.02	0.03	411
Vendor	0.04	0.04	1.45	0.55	0.01	0.01	0.48	0.49	0.01	0.13	0.14	—	1,444	1,444	< 0.005	0.21	0.06	1,507
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.6	10.6	< 0.005	< 0.005	0.01	10.8
Vendor	< 0.005	< 0.005	0.04	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	36.7	36.7	< 0.005	0.01	0.02	38.3
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.76	1.76	< 0.005	< 0.005	< 0.005	1.78
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	6.08	6.08	< 0.005	< 0.005	< 0.005	6.35

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2031) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.96	1.64	14.2	18.0	0.03	0.57	—	0.57	0.53	—	0.53	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.96	1.64	14.2	18.0	0.03	0.57	—	0.57	0.53	—	0.53	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.35	1.13	9.78	12.4	0.02	0.39	—	0.39	0.36	—	0.36	—	2,219	2,219	0.09	0.02	—	2,227
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.25	0.21	1.79	2.27	< 0.005	0.07	—	0.07	0.07	—	0.07	—	367	367	0.01	< 0.005	—	369
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.57	4.50	3.70	72.9	0.00	0.00	14.0	14.0	0.00	3.29	3.29	—	13,997	13,997	0.14	0.51	36.7	14,189
Vendor	0.28	0.25	7.98	3.08	0.07	0.07	2.78	2.85	0.07	0.77	0.84	—	8,368	8,368	0.01	1.23	12.9	8,747
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.19	4.09	3.75	49.1	0.00	0.00	14.0	14.0	0.00	3.29	3.29	—	12,458	12,458	0.19	0.51	0.95	12,615
Vendor	0.26	0.23	8.42	3.17	0.07	0.07	2.78	2.85	0.07	0.77	0.84	—	8,379	8,379	0.01	1.23	0.33	8,745
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.90	2.84	2.89	37.9	0.00	0.00	9.58	9.58	0.00	2.25	2.25	—	8,826	8,826	0.13	0.37	10.9	8,949
Vendor	0.19	0.17	5.76	2.16	0.05	0.05	1.90	1.95	0.05	0.53	0.58	—	5,767	5,767	0.01	0.84	3.81	6,023
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.53	0.52	0.53	6.93	0.00	0.00	1.75	1.75	0.00	0.41	0.41	—	1,461	1,461	0.02	0.06	1.81	1,482
Vendor	0.03	0.03	1.05	0.39	0.01	0.01	0.35	0.36	0.01	0.10	0.11	—	955	955	< 0.005	0.14	0.63	997
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2031) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	1.96	1.64	14.2	18.0	0.03	0.57	—	0.57	0.53	—	0.53	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.96	1.64	14.2	18.0	0.03	0.57	—	0.57	0.53	—	0.53	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.35	1.13	9.78	12.4	0.02	0.39	—	0.39	0.36	—	0.36	—	2,219	2,219	0.09	0.02	—	2,227
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.25	0.21	1.79	2.27	< 0.005	0.07	—	0.07	0.07	—	0.07	—	367	367	0.01	< 0.005	—	369
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.57	4.50	3.70	72.9	0.00	0.00	14.0	14.0	0.00	3.29	3.29	—	13,997	13,997	0.14	0.51	36.7	14,189
Vendor	0.28	0.25	7.98	3.08	0.07	0.07	2.78	2.85	0.07	0.77	0.84	—	8,368	8,368	0.01	1.23	12.9	8,747
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.19	4.09	3.75	49.1	0.00	0.00	14.0	14.0	0.00	3.29	3.29	—	12,458	12,458	0.19	0.51	0.95	12,615

Vendor	0.26	0.23	8.42	3.17	0.07	0.07	2.78	2.85	0.07	0.77	0.84	—	8,379	8,379	0.01	1.23	0.33	8,745
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	2.90	2.84	2.89	37.9	0.00	0.00	9.58	9.58	0.00	2.25	2.25	—	8,826	8,826	0.13	0.37	10.9	8,949
Vendor	0.19	0.17	5.76	2.16	0.05	0.05	1.90	1.95	0.05	0.53	0.58	—	5,767	5,767	0.01	0.84	3.81	6,023
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.53	0.52	0.53	6.93	0.00	0.00	1.75	1.75	0.00	0.41	0.41	—	1,461	1,461	0.02	0.06	1.81	1,482
Vendor	0.03	0.03	1.05	0.39	0.01	0.01	0.35	0.36	0.01	0.10	0.11	—	955	955	< 0.005	0.14	0.63	997
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Building Construction (2032) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.91	1.60	13.7	18.0	0.03	0.54	—	0.54	0.49	—	0.49	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	0.32	0.42	< 0.005	0.01	—	0.01	0.01	—	0.01	—	75.6	75.6	< 0.005	< 0.005	—	75.9

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.06	0.08	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.5	12.5	< 0.005	< 0.005	—	12.6
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.00	3.49	3.70	46.0	0.00	0.00	14.0	14.0	0.00	3.29	3.29	—	12,274	12,274	0.17	0.51	0.85	12,430
Vendor	0.26	0.23	8.17	3.10	0.07	0.07	2.78	2.85	0.07	0.77	0.84	—	8,113	8,113	0.01	1.15	0.29	8,458
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.08	0.09	1.21	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	296	296	< 0.005	0.01	0.33	300
Vendor	0.01	0.01	0.19	0.07	< 0.005	< 0.005	0.06	0.07	< 0.005	0.02	0.02	—	190	190	< 0.005	0.03	0.11	199
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	49.1	49.1	< 0.005	< 0.005	0.06	49.7
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	31.5	31.5	< 0.005	< 0.005	0.02	32.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Building Construction (2032) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.91	1.60	13.7	18.0	0.03	0.54	—	0.54	0.49	—	0.49	—	3,221	3,221	0.13	0.03	—	3,232
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	0.32	0.42	< 0.005	0.01	—	0.01	0.01	—	0.01	—	75.6	75.6	< 0.005	< 0.005	—	75.9
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.06	0.08	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	12.5	12.5	< 0.005	< 0.005	—	12.6
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	4.00	3.49	3.70	46.0	0.00	0.00	14.0	14.0	0.00	3.29	3.29	—	12,274	12,274	0.17	0.51	0.85	12,430
Vendor	0.26	0.23	8.17	3.10	0.07	0.07	2.78	2.85	0.07	0.77	0.84	—	8,113	8,113	0.01	1.15	0.29	8,458
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.08	0.09	1.21	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	296	296	< 0.005	0.01	0.33	300
Vendor	0.01	0.01	0.19	0.07	< 0.005	< 0.005	0.06	0.07	< 0.005	0.02	0.02	—	190	190	< 0.005	0.03	0.11	199
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	49.1	49.1	< 0.005	< 0.005	0.06	49.7
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	31.5	31.5	< 0.005	< 0.005	0.02	32.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Paving (2031) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.22	1.02	9.75	15.7	0.02	0.32	—	0.32	0.29	—	0.29	—	2,390	2,390	0.10	0.02	—	2,398
Paving	—	7.38	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.53	0.86	< 0.005	0.02	—	0.02	0.02	—	0.02	—	131	131	0.01	< 0.005	—	131
Paving	—	0.40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.10	0.16	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.10	0.09	1.14	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	290	290	< 0.005	0.01	0.02	294
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.07	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	16.4	16.4	< 0.005	< 0.005	0.02	16.6
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.71	2.71	< 0.005	< 0.005	< 0.005	2.75
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Paving (2031) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.22	1.02	9.75	15.7	0.02	0.32	—	0.32	0.29	—	0.29	—	2,390	2,390	0.10	0.02	—	2,398
Paving	—	7.38	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.53	0.86	< 0.005	0.02	—	0.02	0.02	—	0.02	—	131	131	0.01	< 0.005	—	131
Paving	—	0.40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.10	0.16	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	21.7	21.7	< 0.005	< 0.005	—	21.8
Paving	—	0.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.10	0.10	0.09	1.14	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	290	290	< 0.005	0.01	0.02	294
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.07	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	16.4	16.4	< 0.005	< 0.005	0.02	16.6
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	2.71	2.71	< 0.005	< 0.005	< 0.005	2.75
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.13. Architectural Coating (2031) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.31	0.25	2.07	2.94	< 0.005	0.03	—	0.03	0.02	—	0.02	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	387	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	0.23	0.32	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	42.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.04	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	7.75	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.84	0.82	0.75	9.83	0.00	0.00	2.81	2.81	0.00	0.66	0.66	—	2,492	2,492	0.04	0.10	0.19	2,523
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.09	0.09	1.21	0.00	0.00	0.30	0.30	0.00	0.07	0.07	—	281	281	< 0.005	0.01	0.35	285
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	46.5	46.5	< 0.005	< 0.005	0.06	47.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.14. Architectural Coating (2031) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.31	0.25	2.07	2.94	< 0.005	0.03	—	0.03	0.02	—	0.02	—	356	356	0.01	< 0.005	—	357
Architectural Coatings	—	76.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	0.23	0.32	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	39.0	39.0	< 0.005	< 0.005	—	39.2
Architectural Coatings	—	8.36	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.01	0.01	0.04	0.06	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.46	6.46	< 0.005	< 0.005	—	6.48
Architectural Coatings	—	1.53	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.84	0.82	0.75	9.83	0.00	0.00	2.81	2.81	0.00	0.66	0.66	—	2,492	2,492	0.04	0.10	0.19	2,523
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.09	0.09	1.21	0.00	0.00	0.30	0.30	0.00	0.07	0.07	—	281	281	< 0.005	0.01	0.35	285
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	46.5	46.5	< 0.005	< 0.005	0.06	47.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	2.08	1.73	54.0	15.6	0.58	0.99	26.3	27.3	0.94	7.06	8.01	—	61,517	61,517	0.19	8.72	155	64,276
Unrefrigerated Warehouse-No Rail	1.59	1.28	54.8	12.0	0.65	0.99	26.2	27.2	0.95	7.01	7.96	—	68,406	68,406	0.19	10.0	141	71,538
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	17.1	15.7	7.91	192	0.39	0.14	42.8	42.9	0.13	10.8	10.9	—	39,862	39,862	1.29	0.92	86.9	40,254
Total	20.7	18.7	117	220	1.63	2.12	95.3	97.4	2.02	24.9	26.9	—	169,785	169,785	1.66	19.7	382	176,067
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	2.03	1.68	56.8	15.5	0.58	0.99	26.3	27.3	0.94	7.06	8.01	—	61,531	61,531	0.19	8.73	4.02	64,142

Unrefrigerated Warehouse-No Rail	1.54	1.24	57.6	12.1	0.65	0.99	26.2	27.2	0.95	7.01	7.96	—	68,421	68,421	0.18	10.0	3.65	71,418
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	16.0	14.6	8.91	146	0.35	0.14	42.8	42.9	0.13	10.8	10.9	—	35,608	35,608	1.34	0.99	2.25	35,939
Total	19.5	17.5	123	173	1.59	2.12	95.3	97.4	2.02	24.9	26.9	—	165,560	165,560	1.71	19.8	9.92	171,499
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.33	0.27	9.13	2.46	0.09	0.16	4.17	4.32	0.15	1.12	1.27	—	8,895	8,895	0.03	1.26	9.67	9,282
Unrefrigerated Warehouse-No Rail	0.24	0.20	9.03	1.86	0.10	0.15	4.04	4.20	0.15	1.08	1.23	—	9,645	9,645	0.03	1.41	8.57	10,076
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	2.51	2.29	1.45	24.7	0.06	0.02	6.64	6.66	0.02	1.68	1.70	—	5,195	5,195	0.19	0.14	5.33	5,248
Total	3.08	2.75	19.6	29.1	0.25	0.33	14.8	15.2	0.32	3.88	4.19	—	23,736	23,736	0.25	2.82	23.6	24,606

4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	2.08	1.73	54.0	15.6	0.58	0.99	26.3	27.3	0.94	7.06	8.01	—	61,517	61,517	0.19	8.72	155	64,276
Unrefrigerated Warehouse-No Rail	1.59	1.28	54.8	12.0	0.65	0.99	26.2	27.2	0.95	7.01	7.96	—	68,406	68,406	0.19	10.0	141	71,538
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	17.1	15.7	7.91	192	0.39	0.14	42.8	42.9	0.13	10.8	10.9	—	39,862	39,862	1.29	0.92	86.9	40,254
Total	20.7	18.7	117	220	1.63	2.12	95.3	97.4	2.02	24.9	26.9	—	169,785	169,785	1.66	19.7	382	176,067
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	2.03	1.68	56.8	15.5	0.58	0.99	26.3	27.3	0.94	7.06	8.01	—	61,531	61,531	0.19	8.73	4.02	64,142
Unrefrigerated Warehouse-No Rail	1.54	1.24	57.6	12.1	0.65	0.99	26.2	27.2	0.95	7.01	7.96	—	68,421	68,421	0.18	10.0	3.65	71,418
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

User Defined Industrial	16.0	14.6	8.91	146	0.35	0.14	42.8	42.9	0.13	10.8	10.9	—	35,608	35,608	1.34	0.99	2.25	35,939
Total	19.5	17.5	123	173	1.59	2.12	95.3	97.4	2.02	24.9	26.9	—	165,560	165,560	1.71	19.8	9.92	171,499
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.33	0.27	9.13	2.46	0.09	0.16	4.17	4.32	0.15	1.12	1.27	—	8,895	8,895	0.03	1.26	9.67	9,282
Unrefrigerated Warehouse-No Rail	0.24	0.20	9.03	1.86	0.10	0.15	4.04	4.20	0.15	1.08	1.23	—	9,645	9,645	0.03	1.41	8.57	10,076
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	2.51	2.29	1.45	24.7	0.06	0.02	6.64	6.66	0.02	1.68	1.70	—	5,195	5,195	0.19	0.14	5.33	5,248
Total	3.08	2.75	19.6	29.1	0.25	0.33	14.8	15.2	0.32	3.88	4.19	—	23,736	23,736	0.25	2.82	23.6	24,606

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigerated Warehouse-No	—	—	—	—	—	—	—	—	—	—	—	—	8,827	8,827	1.12	0.14	—	8,896
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	6,409	6,409	0.81	0.10	—	6,459
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,237	15,237	1.93	0.23	—	15,355
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,827	8,827	1.12	0.14	—	8,896
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	6,409	6,409	0.81	0.10	—	6,459
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,237	15,237	1.93	0.23	—	15,355
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	1,461	1,461	0.18	0.02	—	1,473
Unrefrige rated Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	1,061	1,061	0.13	0.02	—	1,069
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	2,523	2,523	0.32	0.04	—	2,542

4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigera ted Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,840	8,840	1.12	0.14	—	8,909
Unrefrige rated Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	6,448	6,448	0.82	0.10	—	6,498
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00

User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,288	15,288	1.93	0.23	—	15,406
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	8,827	8,827	1.12	0.14	—	8,896
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	6,409	6,409	0.81	0.10	—	6,459
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	15,237	15,237	1.93	0.23	—	15,355
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	1,463	1,463	0.19	0.02	—	1,474
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	1,064	1,064	0.13	0.02	—	1,073

Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	2,527	2,527	0.32	0.04	—	2,546

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigera Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Unrefrigerated Warehouse-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Consum Products	—	54.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	4.24	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	19.8	18.3	0.94	111	0.01	0.20	—	0.20	0.15	—	0.15	—	457	457	0.02	< 0.005	—	459
Total	19.8	77.4	0.94	111	0.01	0.20	—	0.20	0.15	—	0.15	—	457	457	0.02	< 0.005	—	459
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	54.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	4.24	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	59.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	10.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.77	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	1.78	1.64	0.08	10.0	< 0.005	0.02	—	0.02	0.01	—	0.01	—	37.3	37.3	< 0.005	< 0.005	—	37.5
Total	1.78	12.4	0.08	10.0	< 0.005	0.02	—	0.02	0.01	—	0.01	—	37.3	37.3	< 0.005	< 0.005	—	37.5

4.3.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	54.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.84	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	55.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	54.9	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.84	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	55.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	10.0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	10.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	283	608	891	29.1	0.70	—	1,827
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	849	1,836	2,686	87.3	2.10	—	5,494
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	283	608	891	29.1	0.70	—	1,827

Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	849	1,836	2,686	87.3	2.10	—	5,494
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	46.9	101	148	4.82	0.12	—	302
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	141	304	445	14.5	0.35	—	910
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	187	405	592	19.3	0.46	—	1,212

4.4.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	283	608	891	29.1	0.70	—	1,827
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	849	1,836	2,686	87.3	2.10	—	5,494
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	283	608	891	29.1	0.70	—	1,827
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	849	1,836	2,686	87.3	2.10	—	5,494
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,132	2,444	3,577	116	2.80	—	7,321
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	46.9	101	148	4.82	0.12	—	302
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	141	304	445	14.5	0.35	—	910
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	187	405	592	19.3	0.46	—	1,212

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigerated Warehouse-No	—	—	—	—	—	—	—	—	—	—	—	324	0.00	324	32.3	0.00	—	1,132
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	971	0.00	971	97.0	0.00	—	3,397
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	324	0.00	324	32.3	0.00	—	1,132
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	971	0.00	971	97.0	0.00	—	3,397
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigera Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	53.6	0.00	53.6	5.36	0.00	—	187
Unrefrige rated Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	161	0.00	161	16.1	0.00	—	562
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	214	0.00	214	21.4	0.00	—	750

4.5.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigera ted Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	324	0.00	324	32.3	0.00	—	1,132
Unrefrige rated Warehou se-No Rail	—	—	—	—	—	—	—	—	—	—	—	971	0.00	971	97.0	0.00	—	3,397
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00

User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	324	0.00	324	32.3	0.00	—	1,132
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	971	0.00	971	97.0	0.00	—	3,397
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	1,295	0.00	1,295	129	0.00	—	4,530
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	53.6	0.00	53.6	5.36	0.00	—	187
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	161	0.00	161	16.1	0.00	—	562

Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
User Defined Industrial	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	214	0.00	214	21.4	0.00	—	750

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Refrigerated	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	108	108
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	108	108

4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	651	651
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Refrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	108	108
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	108	108

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9

4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Total	2.16	1.97	5.50	5.02	0.01	0.29	0.00	0.29	0.29	0.00	0.29	0.00	1,007	1,007	0.04	0.01	0.00	1,011
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Fire Pump	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9
Total	0.05	0.05	0.14	0.13	< 0.005	0.01	0.00	0.01	0.01	0.00	0.01	0.00	22.8	22.8	< 0.005	< 0.005	0.00	22.9

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	10/1/2030	11/11/2030	5.00	30.0	—
Grading	Grading	11/12/2030	1/13/2031	5.00	45.0	—
Building Construction	Building Construction	1/14/2031	1/12/2032	5.00	260	—
Paving	Paving	11/3/2031	11/28/2031	5.00	20.0	—
Architectural Coating	Architectural Coating	11/3/2031	12/26/2031	5.00	40.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40

Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Average	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Average	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Average	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Average	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	5.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Average	7.00	8.00	87.0	0.43
Grading	Excavators	Diesel	Tier 4 Interim	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 4 Interim	3.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	2.00	8.00	367	0.40
Grading	Scrapers	Diesel	Tier 4 Interim	6.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	87.0	0.43
Building Construction	Cranes	Diesel	Average	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20

Building Construction	Generator Sets	Diesel	Average	3.00	8.00	14.0	0.74
Building Construction	Crawler Tractors	Diesel	Average	3.00	8.00	87.0	0.43
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	4.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	4.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	2.00	8.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	38.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	56.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	1,073	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	325	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT

Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	215	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	30.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	38.0	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	35.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	56.0	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	1,073	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	325	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT

Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	25.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	215	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	3,833,334	1,277,778	147,172

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	—	—	180	0.00	—
Grading	—	—	428	0.00	—

Paving	0.00	0.00	0.00	0.00	56.3

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Refrigerated Warehouse-No Rail	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Other Asphalt Surfaces	56.3	100%
User Defined Industrial	0.00	0%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2031	0.00	261	0.03	< 0.005
2032	0.00	261	0.03	< 0.005
2030	0.00	261	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Refrigerated Warehouse-No Rail	480	273	261	152,942	30,050	17,086	16,366	9,578,774

Unrefrigerated Warehouse-No Rail	443	219	207	137,618	29,996	14,803	14,024	9,323,624
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	3,905	2,011	1,906	1,222,339	61,307	31,576	29,931	19,190,720

5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Refrigerated Warehouse-No Rail	480	273	261	152,942	30,050	17,086	16,366	9,578,774
Unrefrigerated Warehouse-No Rail	443	219	207	137,618	29,996	14,803	14,024	9,323,624
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
User Defined Industrial	3,905	2,011	1,906	1,222,339	61,307	31,576	29,931	19,190,720

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	3,833,334	1,277,778	147,172

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Refrigerated Warehouse-No Rail	12,354,875	261	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	8,970,697	261	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	261	0.0330	0.0040	0.00
User Defined Industrial	0.00	261	0.0330	0.0040	0.00

5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Refrigerated Warehouse-No Rail	12,354,875	261	0.0330	0.0040	0.00
Unrefrigerated Warehouse-No Rail	8,970,697	261	0.0330	0.0040	0.00

Other Asphalt Surfaces	0.00	261	0.0330	0.0040	0.00
User Defined Industrial	0.00	261	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Refrigerated Warehouse-No Rail	147,743,081	0.00
Unrefrigerated Warehouse-No Rail	443,229,244	4,234,686
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Refrigerated Warehouse-No Rail	147,743,081	0.00
Unrefrigerated Warehouse-No Rail	443,229,244	4,234,686
Other Asphalt Surfaces	0.00	0.00
User Defined Industrial	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Refrigerated Warehouse-No Rail	601	—
Unrefrigerated Warehouse-No Rail	1,802	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Refrigerated Warehouse-No Rail	601	—
Unrefrigerated Warehouse-No Rail	1,802	—
Other Asphalt Surfaces	0.00	—
User Defined Industrial	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Refrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
Fire Pump	Diesel	2.00	1.00	50.0	300	0.73

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

5.17. User Defined

Equipment Type	Fuel Type

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	34.5	annual days of extreme heat
Extreme Precipitation	1.15	annual days with precipitation above 20 mm
Sea Level Rise	—	meters of inundation depth
Wildfire	0.35	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.0 meter, 1.41 meters

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	5	1	1	4
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A

Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	88.7
AQ-PM	6.87
AQ-DPM	5.33
Drinking Water	—
Lead Risk Housing	—
Pesticides	70.6
Toxic Releases	99.9
Traffic	42.0
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	31.5
Haz Waste Facilities/Generators	92.5
Impaired Water Bodies	0.00
Solid Waste	0.00

Sensitive Population	—
Asthma	78.5
Cardio-vascular	44.0
Low Birth Weights	—
Socioeconomic Factor Indicators	—
Education	—
Housing	—
Linguistic	—
Poverty	—
Unemployment	—

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	—
Employed	—
Median HI	—
Education	—
Bachelor's or higher	—
High school enrollment	—
Preschool enrollment	—
Transportation	—
Auto Access	—
Active commuting	—
Social	—
2-parent households	—

Voting	—
Neighborhood	—
Alcohol availability	—
Park access	—
Retail density	—
Supermarket access	—
Tree canopy	—
Housing	—
Homeownership	—
Housing habitability	—
Low-inc homeowner severe housing cost burden	—
Low-inc renter severe housing cost burden	—
Uncrowded housing	—
Health Outcomes	—
Insured adults	—
Arthritis	32.9
Asthma ER Admissions	69.8
High Blood Pressure	84.3
Cancer (excluding skin)	80.0
Asthma	1.3
Coronary Heart Disease	40.3
Chronic Obstructive Pulmonary Disease	2.1
Diagnosed Diabetes	29.7
Life Expectancy at Birth	0.0
Cognitively Disabled	99.8
Physically Disabled	99.8
Heart Attack ER Admissions	91.2

Mental Health Not Good	0.3
Chronic Kidney Disease	73.0
Obesity	0.4
Pedestrian Injuries	0.0
Physical Health Not Good	1.8
Stroke	11.3
Health Risk Behaviors	—
Binge Drinking	75.2
Current Smoker	0.4
No Leisure Time for Physical Activity	14.6
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	99.4
Elderly	99.8
English Speaking	0.0
Foreign-born	0.0
Outdoor Workers	0.0
Climate Change Adaptive Capacity	—
Impervious Surface Cover	99.9
Traffic Density	0.0
Traffic Access	23.0
Other Indices	—
Hardship	0.0
Other Decision Support	—
2016 Voting	0.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	—
Healthy Places Index Score for Project Location (b)	—
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Construction: Construction Phases	Client provided schedule
Construction: Off-Road Equipment	Client provided construction equipment Standard 8-hour work day T/L/B swapped for Crawler Tractors to account for dust disturbance
Construction: Trips and VMT	Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, and Building Construction. Because Paving and Architectural Coating activities overlap with Building Construction, the analysis assumes that the vendor trips assigned to Building Construction cover Paving and Architectural Coating as well.

Operations: Vehicle Data	Trip Characteristics taken from Traffic Analysis Trip Length taken from VMT Truck Sup Memo Passenger vehicle trips modeled on User Defined Industrial land use
Operations: Fleet Mix	Passenger Car Mix estimated based on CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, MCY). Truck Fleet Mix based on 2, 3 and 4 axle trucks
Operations: Energy Use	Natural gas will not be used
Operations: Refrigerants	As of 1 January 2022, new commercial refrigeration equipment may not use refrigerants with a GWP of 150 or greater. Further, R-404A (the CalEEMod default) is unacceptable for new supermarket and cold storage systems as of 1 January 2019 and 2023, respectively